



**INTERNATIONAL STANDARD ISO 4364:1997
TECHNICAL CORRIGENDUM 1**

Published 2000-08-01

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

**Measurement of liquid flow in open channels — Bed material
sampling**

TECHNICAL CORRIGENDUM 1

Mesure de débit des liquides dans les canaux découverts — Échantillonnage des matériaux du lit

RECTIFICATIF TECHNIQUE 1

Technical Corrigendum 1 to International Standard ISO 4364:1997 was prepared by Technical Committee ISO/TC 113, *Hydrometric determinations*, Subcommittee SC 6, *Sediment transport*.

Page iii, Introduction

In the third line of the third paragraph, replace “particle size finer than 30 µm is cohesive.” with:

“particle size finer than 0,062 5 mm is cohesive, e.g. silt and clays.”

Page 2, Clause 5

Replace the third paragraph by the following text:

“For investigations of bed material transport rates, it is recommended that one sample be taken at each vertical of the cross-section where suspended sediment sample is to be taken.”

This material is reproduced from ISO documents under International Organization for Standardization (ISO) Copyright License Number IHS/CC/1996. Not for resale. No part of these ISO documents may be reproduced in any form, electronic retrieval System or otherwise, except written consent of ISO (Case postal 56,1211 Geneva 20, Switzerland, FAX +41 22 734 10 79), IHS or the ISO Licensor's members

INTERNATIONAL STANDARD

ISO 4364

Second edition
1997-10-15

Measurement of liquid flow in open channels — Bed material sampling

*Mesure de débit des liquides dans les canaux découverts —
Échantillonnage des matériaux du lit*

This material is reproduced from ISO documents under International Organization for Standardization (ISO) Copyright License number IHS/ICC/1996. Not for resale. No part of these ISO documents may be reproduced in any form, electronic retrieval system or otherwise, except as allowed in the copyright law of the country of use, or with the prior written consent of ISO (Case postale 56, 1211 Geneva 20, Switzerland, Fax +41 22 734 10 79), IHS or the ISO Licensor's members.



Reference number
ISO 4364:1997(E)

ISO 4364:1997(E)**Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 4364 was prepared by Technical Committee ISO/TC 113, *Hydrometric determinations*, Subcommittee SC 6, *Sediment transport*.

This second edition cancels and replaces the first edition (ISO 4364:1977), which has been technically revised.

Annex A of this International Standard is for information only.

© ISO 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet central@iso.ch
X.400 c=ch; a=400net; p=iso; o=isocs; s=central

Printed in Switzerland

Introduction

Bed material samplers are used to obtain samples of sediment from the bed of a watercourse. They are not to be confused with bed-load discharge samplers which are used to determine the discharge of sediment as bed load.

Particle size data derived from bed samples, together with hydraulic data, are necessary for the computation of bed-material load and for flow estimation.

This International Standard covers methods for sampling both non-cohesive and cohesive bed material. Sediment composed of material with a particle size finer than 30 μm is cohesive. However, coarser material can also be cohesive if it contains a small proportion of this finer fraction.

Measurement of liquid flow in open channels — Bed material sampling

1 Scope

This International Standard gives guidance on methods for sampling of both non-cohesive sand bed material and cohesive bed material (both of which may contain some fine gravel), principally for the purpose of determining the grain size frequency distribution of the bed material in open channels.

NOTE — Other publications of relevance to samplers and sampling techniques are listed in the bibliography in annex A.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 772:1996, *Hydrometric determinations — Vocabulary and symbols*.

ISO 4363:1993, *Measurement of liquid flow in open channels — Methods for measurement of suspended sediment*.

ISO 4365:1985, *Liquid flow in open channels — Sediment in streams and canals — Determination of concentration, particle size distribution and relative density*.

ISO 9195:1992, *Liquid flow measurement in open channels — Sampling and analysis of gravel bed material*.

3 Definitions

For the purposes of this International standard, the definitions given in ISO 772 apply, together with the following.

3.1 sand

Sediment having a particle diameter between 0,0625 mm and 2 mm.

4 Sampling procedure

Ideally, the size composition of the bed material should be determined for various stages of flow, as composition can change due to scour and fill activities.

In cases where information is required on the composition of layers located more than, approximately 0,05 m below the surface of the bed, the use of core-type samplers is recommended.

Precautions should be taken to prevent fine particles escaping from the sample

5 Selection of site

The site for sampling bed material for the purpose of computing bed material load or for flow estimation should be located as near as possible to the site where hydraulic measurements are made or need to be estimated. Equations for estimating bed load transport and flow resistance usually need measurements from a straight uniform section of channel. Site conditions should be selected that are suitable for the estimating equations which are to be used.

When estimates of total load are to be made, it is also essential that the site conforms to the conditions specified for the measurements of suspended sediment loads in ISO 4363.

For investigations of bed material transport rates it is recommended that as a minimum a sample should be taken at each vertical in the cross-section where sediment transport is to be measured.

6 Selection of sampler

In order to sample successfully, the sampler and the sampling method need to be chosen for their suitability for the particular circumstances. Results obtained using different methods may not necessarily be comparable.

When bed material is sampled, the sample inevitably suffers some form of disturbance. This can result in loss of fines, in which case the sample is referred to as 'disturbed', or in loss of fabric, which is referred to as 'structural disturbance'. Structural disturbance of the sample does not affect the assessment of the erodability of non-cohesive sediments, whereas it does affect the results of tests on the erodability of cohesive sediments.

The construction and use of different types of samplers are described in clauses 7, 8 and 9.

7 Hand-held samplers

7.1 General

Hand-held samplers are lightweight devices which can be operated by an individual while wading or, in deeper water, by a Scuba diver. Hand-held samplers include bed surface samplers and core samplers.

7.2 Bed surface samplers

7.2.1 *Sampling cylinders*

7.2.1.1 *Construction*

A sampling cylinder comprises a metal cylinder which encloses the area of bed to be sampled, and which is heavy enough to resist the flow. If practicable, the cylinder should break the water surface.

7.2.1.2 *Deployment*

Digging tools are used to remove samples from within the enclosed volume. The cylinder helps to minimize the washout of fines.

7.2.1.3 *Sample type*

This method yields disturbed samples. The top 0,1 m approximately of the bed is sampled.

7.2.2 *Pipe scoops*

7.2.2.1 *Construction*

A pipe scoop comprises a pipe, one end of which is closed and the other end of which is bevelled to form a cutting edge, attached to a wading rod. A hinged cover plate, held closed by a spring, is mounted over the open end. The plate is opened by a rope (see figure 1).

7.2.2.2 *Deployment*

The pipe is pushed along the bed into the current. The plate is opened to sample then immediately closed, thus minimizing washout.

7.2.2.3 *Sample type*

This method yields disturbed samples. Samples of mass up to 3 kg can be obtained. The top 0,05 m approximately of the bed is sampled.

7.2.3 Bag scoops

7.2.3.1 Construction

A bag scoop comprises a metal ring with an attached flexible bag, mounted on a wading rod (see figure 2).

7.2.3.2 Deployment

The ring is forced into the bed and dragged upstream until the bag is full (see figure 2a). As the sampler is raised the bag seals automatically (see figure 2b).

7.2.3.3 Sample type

This method yields disturbed samples. Samples of mass up to 3 kg can be obtained. The top 0,05 m approximately of the bed is sampled.

7.3 Core samplers

7.3.1 Push or hammer corers and boxes

7.3.1.1 Construction

These include metal or plastics corers up to 150 mm in diameter and boxes of up to 0,25 m side.

7.3.1.2 Deployment

The cylinder or box of the corer is pushed or hammered into the bed and dug or pulled out. Sample retention can be ensured by use of one or more of the following methods.

A plate is slid beneath the corer and the cylinder or box is dug out.

A partial vacuum can be created above the sample.

After the insertion of the cylinder or box, the water-filled space above the sample can be sealed off by means of a screw cap, thus forming a partial vacuum when the sampler is withdrawn (see figure 3).

Alternatively, in the case of cylinder samplers the cylinder can be fitted with a piston which rises on the surface of the sample and is locked when the sampler has been pushed or hammered to the desired depth. A partial vacuum develops below the piston and helps to hold the sample in the cylinder as it is withdrawn from the bed (see figure 4).

In the case of cylinder samplers a core catcher (sphincter) of flexible stainless steel petals can be located at the bottom opening of the cylinder (see figure 5).

7.3.1.3 *Sample type*

This method disturbs the texture and structure of the sample, although the gross particle population may be preserved. Maximum penetration is approximately 0,5 m.

7.3.2 *Freeze-core samplers*

7.3.2.1 *Construction*

A freeze-core sampler comprises a thin walled copper or mild steel tube with a hardened steel tip. A probe, through which liquid carbon dioxide, liquid nitrogen or solid carbon dioxide mixed with acetone can be injected, is inserted into the tube. In the case of liquid carbon dioxide, delivery is from a pressurized cylinder via fine nozzles in the probe (see figure 6).

7.3.2.2 *Deployment*

The outer tube is hammered into the bed and the probe, connected to the coolant, inserted into it. After a suitable period, which depends on the sediment properties and the ambient temperature, the tube is pulled out of the bed with the adjacent sediment frozen to it.

7.3.2.3 *Sample type*

This method yields a spindle-shaped frozen 'core' up to 0,5 m in length and with a maximum diameter of approximately 0,3 m. Sedimentary structures are disturbed but recognizable.

7.3.2.4 *Limitations*

The method is not suitable for Scuba use or for water depths in excess of 3,5 m.

8 **Lightweight remotely-operated samplers**

8.1 **General**

These samplers can be hand-operated and can be deployed from small boats. They include bed surface samplers and core samplers.

8.2 **Bed surface samplers**

8.2.1 *Pipe scoops and bag scoops*

8.2.1.1 *Construction*

Pipe scoops and bag scoops are constructed as described in 7.2.2.1 and 7.2.3.1, respectively. The scoop is attached to pole up to 4 m in length.

8.2.1.2 Deployment

The scoops are deployed as described in 7.2.2.2 and 7.2.3.2, respectively. Normally it is necessary for the boat to be anchored.

8.2.1.3 Sample type

This method yields disturbed samples. Samples of mass up to 3 kg can be obtained. The top 0,05 m approximately of the bed is sampled.

8.2.1.4 Limitations

Use of this method is limited to water depths of less than 4 m and velocities of less than $1,0 \text{ m}\cdot\text{s}^{-1}$.

8.2.2 Drag buckets

NOTE. These are also known as dredges.

8.2.2.1 Construction

The sampler comprises a weighted bucket or cylinder with a flared cutting edge at one end and a sample collecting receptacle at the other. A drag rope is attached to a pivoting bridle towards the cutting end of the cylinder (see figure 7).

8.2.2.2 Deployment

The device is lowered to the bed and dragged along it from a boat moving slowly into the current. To ensure contact of the cutting edge with the bed a streamlined weight can be attached to the rope.

8.2.2.3 Sample type

This method yields disturbed samples. Samples of mass up to 1 kg can be obtained. The top 0,05 m approximately of the bed is sampled.

8.2.2.4 Limitations

Samples are liable to be affected by washing-out of material.

8.2.3 Grab samplers with 90° closure

8.2.3.1 Construction

Two quarter-cylinder shaped buckets are hinged to each other, forming a half-cylinder when closed. Arms are attached to each bucket to which a rope and pulley system is fastened. A latching system holds the buckets open until the grab reaches the bed. The slackening of the

rope releases the latch, and the tightening of the rope as the grab is retrieved closes the buckets (see figure 8).

8.2.3.2 Deployment

The grab is latched open and lowered slowly to the bed from a slowly drifting or anchored boat. The rope is allowed to slacken momentarily then a steady pull is applied and the grab retrieved.

8.2.3.3 Sample type

The samples obtained are often relatively undisturbed. Samples of mass up to 3 kg can be obtained. The top 0,05 m approximately of the bed is sampled.

8.2.3.4 Limitations

This method is not suitable for use in sand when amounts of coarse gravel are present as stones wedge open the jaws allowing the sample to wash out.

The grab may be too light to use when water velocities exceed $1,0 \text{ m}\cdot\text{s}^{-1}$.

8.2.4 Grab samplers with 180° closure

8.2.4.1 Construction

A half-cylinder shaped bucket is pivoted and spring-mounted within a streamlined housing with a flat base. The spring is tensioned when the bucket is rotated into the housing. A latching system keeps the bucket in this position until the bed is reached and the tension goes out of the support rope, at which point the bucket snaps shut enclosing the sample. The sampler has a mass of approximately 15 kg (see figure 9).

8.2.4.2 Deployment

The bucket is rotated into the housing and, keeping a steady tension on the rope, the grab is lowered slowly to the bed. The rope is slackened to close the bucket, then the grab is retrieved.

WARNING. This device can maim if accidentally triggered whilst it is being handled.

8.2.4.3 Sample type

This method yields disturbed samples. Samples of mass up to 1 kg can be obtained. The top 0,05 m approximately of the bed is sampled.

8.2.4.4 *Advantages and limitations*

This equipment can be used to sample sediment containing stones up to approximately 30 mm in diameter without serious wash-out of material. However, stones caught between the bucket and the body of the sampler, keeping the bucket wedged open, can allow some material to fall out. The sampler has been observed to bounce off the bed on hard-packed sands.

8.3 Corer samplers

8.3.1 *General*

The samplers are as described in 7.3, but are restricted to push or hammer corers (see 7.3.1) 100 mm or less in diameter.

8.3.2 *Push or hammer corers*

8.3.2.1 *Construction*

The sampler comprises a corer up to 100 mm in diameter attached to pole up to 4 m in length, with a vacuum or core-catcher sample retention mechanism as described in 7.3.1.2.

8.3.2.2 *Deployment*

The sampler is deployed from a boat which needs to be anchored fore and aft.

8.3.2.3 *Sample type*

Samples of non-cohesive material are undisturbed. Samples of cohesive material suffer structural disturbance. The corer has a maximum penetration of approximately 0,5 m, and yields samples of up to 1,5 kg mass per 0,1 m penetration.

8.3.2.4 *Limitations*

This type of sampler is difficult to use if water velocities exceed $1,5 \text{ m}\cdot\text{s}^{-1}$.

9 Remotely-operated samplers requiring handling machinery

9.1 General

To obtain larger samples, either in terms of surface area or depth of penetration of the bed, or for sampling under conditions with high flow velocities ($> 1,5 \text{ m}\cdot\text{s}^{-1}$) heavier equipment has to be deployed. Derricks and winches need to be mounted on a reasonably sized vessel ($> 5 \text{ m}$ length), the draft of which generally makes it impracticable to work in water depths of less than 1,2 m.

9.2 Bed surface samplers

9.2.1 Anchor dredges

9.2.1.1 Construction

An anchor dredge comprises a cylindrical or rectangular-section open-ended box of up to 0,5 m diameter or length of side. A large heavy-duty flexible bag is laced to one end, and the other end is flared to provide a cutting edge. A bridle spans the open end, pivoted from the centre of the box, to which a tow line is fastened (see figure 10).

9.2.1.2 Deployment

The dredge is deployed as described in 8.2.2.2.

9.2.1.3 Sample type

This method yields disturbed samples. Samples of mass up to 0,5 t can be obtained. The top 0,1 m approximately of the bed is sampled.

9.2.1.4 Limitations

Considerable power is needed to pull the equipment.

9.2.2 Grab samplers with 90° closure

9.2.2.1 Construction

A variety of designs are in use, ranging from larger versions of the simple grab described in 8.2.3.1 to devices where the buckets are mounted in a frame and triggering is effected via contact plates protruding below the grab base. One type uses a spring system to force the open buckets partially into the bed prior to the jaws being wound shut. The mass of the grabs is of the order of 0,5 t, but can be doubled by the addition of lead. An example is shown in figure 11.

9.2.2.2 Deployment

The grabs are deployed as described in 8.2.3.2.

Grabs with trigger plates protruding from the base need special tables to land upon.

9.2.2.3 Sample type

The samples obtained are often relatively undisturbed. This equipment can take samples of up to 0,1 m² to a depth of approximately 0,15 m.

9.2.2.4 Limitations

This equipment is not effective in sand if amounts of gravel are present as stones wedge open the jaws allowing the sample to wash out.

9.2.3 Grab samplers with 180° closure

9.2.3.1 Construction

These grabs are larger versions of grab described in 8.2.4.1. Examples are shown in figures 12 and 13. One design does not employ a spring but uses the suspension cable to wind the bucket shut prior to retrieval (see figure 13). On striking the bed, the gripping claw is released. When the suspension cable is tensioned, the sleeve is raised. The bucket, which is connected to the sleeve by the bucket cable, is then closed prior to the grab being raised from the bed.

9.2.3.2 Deployment

Deployment is as described in 8.2.3.2.

9.2.3.3 Sample type

The samples obtained are disturbed. This equipment can take samples of up to 0,05 m² to depth of approximately 0,1 m.

9.2.3.4 Advantages and limitations

See 8.2.4.4.

9.3 Core samplers

9.3.1 Free fall gravity corers: Circular barrel corer

9.3.1.1 Construction

A barrel of 50 mm to 100 mm internal diameter and up to approximately 2 m in length is attached at one end to a structure fitted with the following:

- a) a system for attaching lead weights;
- b) a flap valve connecting the interior of the barrel to the outside environment;
- c) a swivel for the attachment of a heavy rope or wire.

A hardened steel cutting shoe is screwed onto the other end of the barrel, where provision may also be made for the fastening of a core-catcher (see figure 5).

The mass of the weights it is necessary to attach to obtain reasonable penetration depends largely upon the hardness of the substrate, and may be up to 1,0 t. (See figure 14.)

9.3.1.2 Deployment

The corer is lowered until the cutting shoe lies approximately 3 m above the bed, then it is allowed to free fall. The corer is then winched out of the sediment, sample retention depending upon both the core-catcher and the vacuum set up under the flap valve. During retrieval the pull has to be vertical; thus it is essential that the boat is anchored.

9.3.1.3 Sample type

Fine layers can be lost. Penetration rarely exceeds 1 m. Samples can be obtained of mass up to 1,5 kg per 0,1 m penetration.

9.3.1.4 Limitations

This equipment usually cannot be used to sample hard-packed sand or material with an appreciable stone content.

9.3.2 Free fall gravity corers: Square barrel corer

9.3.2.1 Construction

Construction is similar to that of the circular barrel corer (see 9.3.1.1) except that the barrel corer and sample retention systems have a square cross-section and are typically 150 mm long.

The corer barrel has a square cross-section and is divided longitudinally into two halves. Each half comprises two sides of the square and they are joined by overlapping flanges held together by clips and bolts (see figure 15).

At the top of the barrel is an adaptor which connects to the weight chassis above it and to the square section barrel below. Weights can be added to the weight chassis as required.

At the bottom of the barrel is a cutting shoe with two spring loaded closure flaps. These flaps are folded back and held against release levers during the coring exercise (see figure 15).

9.3.2.2 Deployment

The square barrel type corer is deployed in the same way as the circular barrel type (see 9.3.1.2). As the corer is withdrawn from the bed the release levers are activated and the closure flaps close to retain the core.

9.3.2.3 Sample type

The cores obtained are relatively undisturbed. Samples can be obtained of mass up to 4 kg per 0,1 m penetration. The sampled area is 0,0225 m².

9.3.2.4 Limitations

Penetration in mud is limited by barrel length and the mass of the corer. This type of corer cannot be used to sample sand.

9.3.3 Frame-guided gravity corers: Circular barrel corer

9.3.3.1 Construction

The basic construction is the same as for a free-fall gravity corer (see 9.3.1.1), with the addition of a frame guide consisting of a tapered vertical frame and a circular horizontal frame (see figure 16), which rests on the bed prior to core penetration, thus guiding the barrel squarely into the sediment.

The barrel and the unit consisting of lead weights and a hinged sealing cover, gimbals and slide freely within the frame guide. The barrel length is usually restricted to less than 1 m. Additional features can be a triggered ball or plate closure which seals the base of the barrel immediately after withdrawal from the sediment, and a hydraulic system controlling the rate of barrel penetration (see figure 16).

9.3.3.2 Deployment

The corer is deployed in the same way as a free-fall gravity corer (see 9.3.1.2) except that the corer is lowered slowly all the way to the bed, then the rope allowed to remain slack whilst penetration occurs solely as a result of the deadweight of the corer.

9.3.3.3 Sample type

See 9.3.1.3.

9.3.3.4 Limitations

See 9.3.1.4.

9.3.4 Frame-guided gravity corers: Square barrel corer

9.3.4.1 Construction

The construction is similar to the circular barrel corer (see 9.3.3.1) except that the barrel has a square cross-section. A cutting blade is mounted on a pair of arms pivoted at the level of the top of the barrel. The arms are operated by a pulley system involving the hoisting cable, and come into action when the latter slackens and activates a release mechanism. The cutting blade is winched down to seal off the sample before the barrel is pulled from the sediment. The barrel is 0,3 m deep (see figure 17).

9.3.4.2 Deployment

See 9.3.3.2.

9.3.4.3 Sample type

This equipment yields undisturbed samples. Samples of mass up to 25 kg can be obtained. Up to 0,05 m² of bed is sampled.

9.3.4.4 Limitations

This type of sampler gives poor penetration in hard sands. Blade action often tilts the barrel before closure is complete.

9.3.5 Vibrocorers

9.3.5.1 Construction

A vibrocorer has the same construction as a frame-guided barrel corer, with the addition of an electric vibrator motor at the top of the barrel to aid penetration into sands and gravels. An electrical umbilical is necessary for connecting the corer to the power supply and control unit on board the boat. Small vibrocorers have been constructed with a core barrel diameter of 15 mm and a length of 0,3 m. Longer corers are commonly in use with a core barrel diameter of 100 mm and core barrel lengths of 3 m or more. A penetrometer (e.g. an echo-sounder attached to the barrel top) is usually employed to monitor coring progress (see figure 18).

9.3.5.2 Deployment

The boat needs to be anchored. The corer is lowered slowly to the bed and the vibrator switched on, keeping power at a minimum.

9.3.5.3 Sample type

Relatively undisturbed samples can be obtained from non-cohesive sediments, unless over vibrated, but samples of cohesive sediments can suffer severe structural disturbance .

9.3.5.4 Advantages

This method gives the best penetration in sands and gravelly sands of all coring techniques.

10 Subsurface sampling

If an armour layer of gravel overlies a bed of finer material, then it may be possible to sample the armour layer by surface sampling techniques (see ISO 9195). The underlying material can be sampled by routine bulk sampling techniques.

11 Choice of sampler for muds

Samplers used for taking samples of mud should maintain, as far as possible, the structural integrity of the sample and its pore water content. To achieve this a sampler should be selected which has a minimum surface area : volume ratio for a given diameter and which closes effectively to minimize pore water drainage. Introduction of the sampler into the mud inevitably destroys the structure near the walls and so a subsample which discards the 5 mm to 10 mm nearest the walls should be the final portion used for testing or analysis.

The most serious disturbance to the sample is produced by the use of petal type core catchers which are fitted to most cylindrical barrel corers. Flap type retainers as are fitted to square barrel free-fall gravity corers cause less disturbance and externally closing cutting blades, as are fitted to square barrel frame-guided corers cause the least disturbance.

Cylindrical samplers are generally unsuitable and square barrel samplers without a guiding frame can also have unacceptable effects. The most appropriate sampler appears to be a frame-guided square barrel sampler. In soft sediments the sampler needs to be supported by a frame to prevent tilting during sampling unless sufficient penetration is achieved to support the driving weight of the sampler.

The two most suitable devices which provide minimal structural disturbance and effective closure, and permit subsampling are:

- a) a free fall gravity square barrel corer (see 9.3.2);
- b) a frame-guided gravity square barrel corer (see 9.3.4).

12 Determination of sample mass and number of samples

12.1 General

The mass of an individual bulk sample that needs to be taken at a single location needs to be determined. Much larger samples are needed for sand than for silt and clay and these materials need to be considered separately.

As the bed material is likely to vary spatially, it is also necessary to determine the number of similar sized bulk samples that are needed to enable accurate assessment of the grain size characteristics of the reach or area under investigation.

12.2 Mass of individual bulk sand samples

12.2.1 In general, the sample mass needed depends on the acceptable error.

If p_i is the proportion of the bulk sample, by mass, of a particular fraction having a grain diameter of D_i , in millimetres, and r_{p_i} is the acceptable relative error in p_i , then the mass m , in kilograms, of the bulk sample to be analysed should be:

$$m > f(D_i) \times r_{p_i}^{-2} \times p_i^{-1} \quad (1)$$

where

$f(D_i)$ is a specified function of D_i as given in equation (2);

in order to reproduce the coarse tail of the particle size distribution with sufficient accuracy.

Using a $\sqrt{2}$ series of sieves and assuming a specific gravity of 2,65, the function $f(D_i)$, in kilograms, has been determined to be:

$$f(D_i) \approx 2,2 \times D_i^3 \times 10^{-6} \quad (2)$$

where

D_i is the grain diameter (in mm)

For particle sizes less than D_i the error is less than r_{p_i} , the acceptable relative error.

D_{84} (i.e. the particle diameter which 84 % by mass of the sample falls below) is often used to characterize the coarse tail of the particle size distribution. It is often appropriate to use this diameter in the determination of the required sample mass. To determine the sample mass required to estimate p_i for a particular particle diameter (e.g. D_{84} or D_{50}) that particle diameter should be substituted for D_i in equations (1) and (2).

12.2.2 The mass, m , of the bulk sample to be analysed, as a function of the characteristic diameter D_i , can therefore be derived using equations (1) and (2), leading to design curves as shown in figure 19.

If a value of p_i is chosen, this value can be combined with various values of r_{p_i} to give different levels of accuracy, as shown in table 1.

Table 1. Examples of combinations of r_{p_i} and p_i		
r_{p_i} %	$r_{p_i}^{-2} \times p_i$	Accuracy
1	10^{-5}	High
3	10^{-4}	Normal
10	10^{-3}	Low

The accuracy required depends on the circumstances. In cases where the composition of the bed material differs considerably from location to location, there may be little benefit in pursuing high accuracy.

If the composition of the bed material is more homogeneous normal accuracy can be taken.

12.2.3 In the example illustrated in figure 19, it was known from samples taken previously that the composition of the bed material differed substantially from place to place.

From analysis of previous samples, it was known that D_{84} was approximately 5 mm.

This gives a sample mass, m , of approximately 0,2 kg for low accuracy and of approximately 2 kg for normal accuracy.

12.2.4 The size of the samples taken with most of the conventional samplers varies between 0,2 kg and 1 kg. From figure 19 it can be seen that, especially for coarse bed material, the analysis of large samples is needed. If necessary, a number of bulk samples, taken at the same location, should be aggregated to obtain a total sample of the required mass.

12.3 Mass of individual bulk silt and clay samples

For sediments consisting entirely of silts and clays the sample size need not exceed 10 g.

12.4 Number of bulk samples

12.4.1 If bed material size appears to be the same everywhere within the reach under investigation, a single bulk sample from any location should be representative. However, in many channels bed material size is not spatially uniform and it is necessary to take bulk samples from more than one location.

12.4.2 If the bed material size varies spatially, the number of bulk samples required depends on the variability of the bed material and the desired accuracy.

To calculate the required number of bulk samples it is first necessary to take a number (x) of equal volume bulk samples from within the reach. The D_i value, in millimetres, for each bulk sample is determined by sieving and the standard deviation s_b , in millimetres, of the sample D_i values is calculated using the following equation:

$$s_b = \sqrt{\frac{\sum_i^x (D_i - \bar{D}_i)^2}{(x - 1)}} \quad (3)$$

where

\bar{D}_i is the mean of the x sample D_i values (in mm).

Where the variability is relatively low, the number of bulk samples (N_b) required to obtain an acceptable level of accuracy for the sample D_i value for the reach, at the 95 % confidence level is given by:

$$N_b = \left(\frac{tSh}{d} \right)^2 \quad (4)$$

where d , the acceptable error, is the difference between the sample and population D_i values, in millimetres, for the reach and t is Student's t , obtained from table 2 for the particular number of initial bulk samples (x).

Table 2. Student's t values at the 95 % confidence limit for different numbers of initial bulk samples (x)	
Number of initial bulk samples (x)	Student's t value
2	12.71
3	4.30
4	3.18
5	2.78
10	2.26
20	2.09

13 Errors

13.1 General

When bed material sampling is used in the determination of the particle size distribution of bed material, errors in the final results can arise from the sources detailed in 13.2 to 13.4.

13.2 Inadequate sampling

The loss of fine particles results in a systematic uncertainty, the magnitude of which depends on the operating system and the characteristics of the particular sampler employed.

The influence of this uncertainty, which cannot be expressed quantitatively, can only be minimized by careful sampling and by excluding that part of the sample which could have lost some of its material during retrieval.

13.3 Sample mass (sand samples)

While the sample mass needed depends on the acceptable error (see 12.2.1), for a given sample mass, m , (in kg) the relative error, r_{pi} , associated with that sample mass can be expressed by:

$$r_{pi}^2 = \frac{1}{p_i m} \left\{ f(D_i) - \frac{p_i}{\sum p_i / q(D_i)} \right\} \quad (5)$$

For sand, using a $\sqrt{2}$ series of sieves and assuming a specific gravity of 2,65, the functions $f(D_i)$ and $q(D_i)$ have been determined to be as follows:

$$f(D_i) = 2,2 \times D_i^3 \times 10^{-6}$$

$$q(D_i) = 1,69 \times D_i^3 \times 10^{-6}$$

where

D_i is the grain diameter (in mm).

For the coarser fractions the $f(D_i)$ term dominates the expression for r_{pi}^2 , but for the finer

fractions the $\frac{p_i}{\sum p_i / q(D_i)}$ term dominates.

13.4 Particle size analysis

The particle size analysis (for example by sieving) can introduce errors.

To minimize these errors the analysis should be carried out in accordance with one of the methods described in ISO 4365.

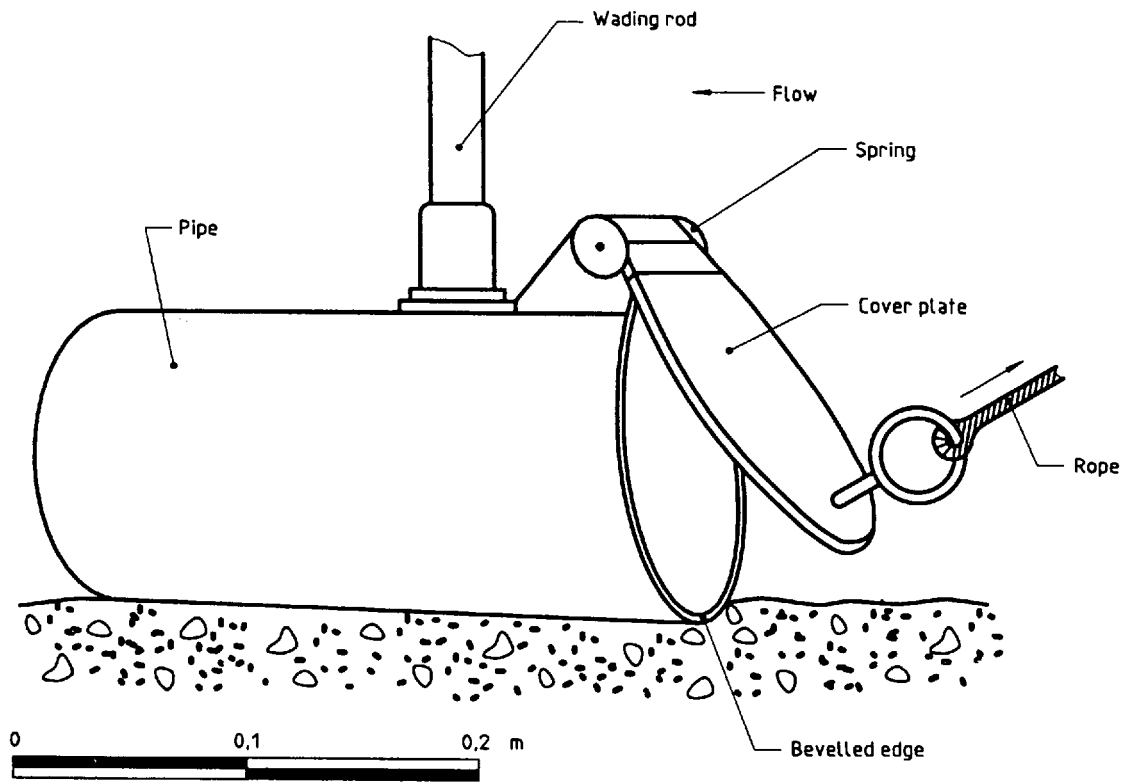


Figure 1 — Pipe scoop sampler with hinged cover

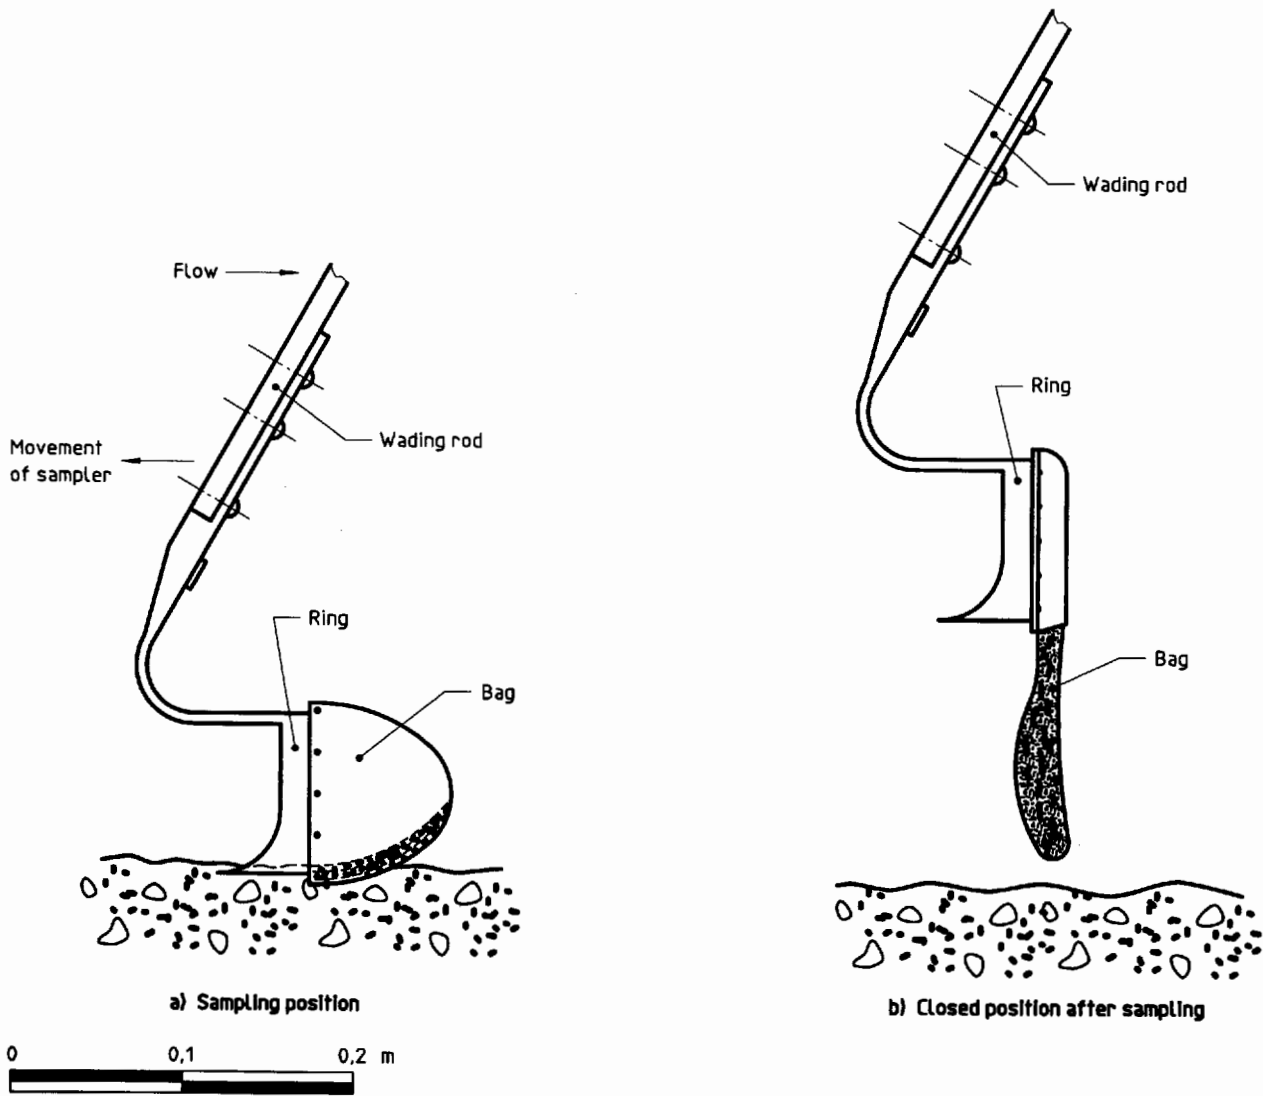


Figure 2 — Bag scoop sampler with canvas bag

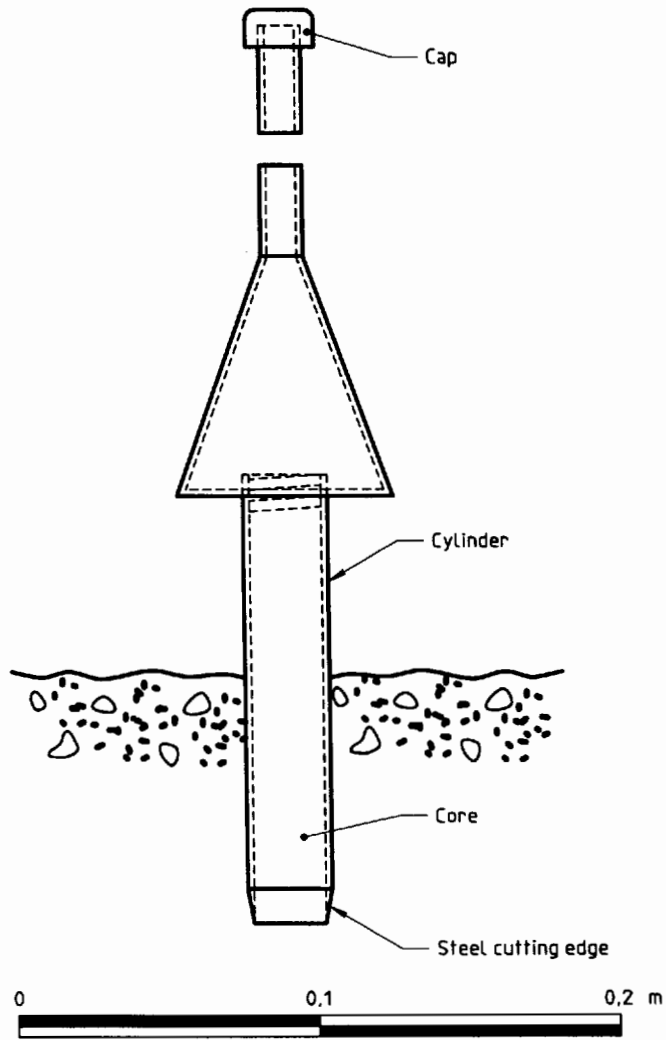


Figure 3 — Push or hammer corer sampler

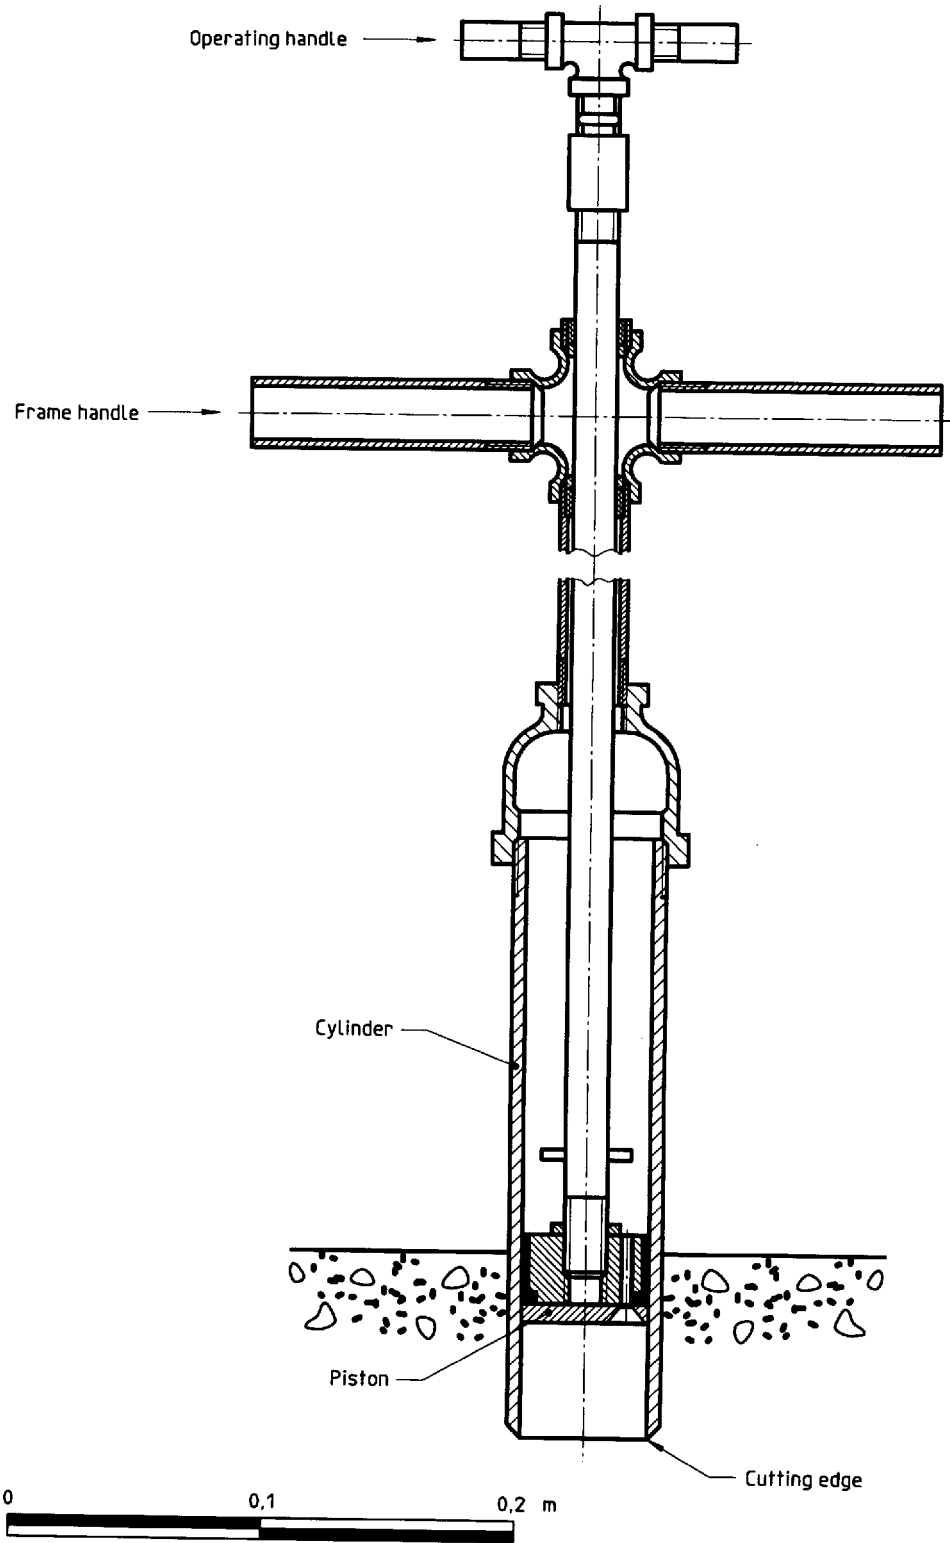


Figure 4 — Push or hammer cylinder corer sampler with piston

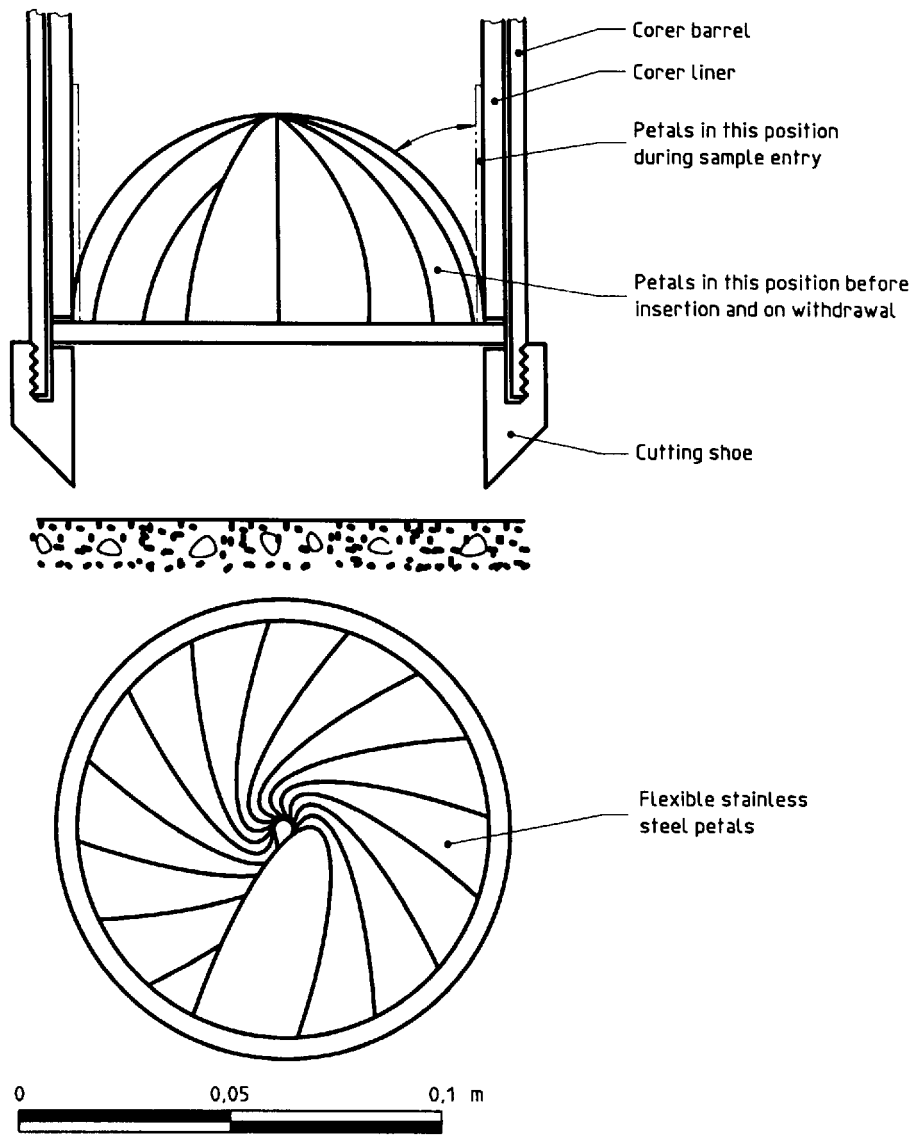


Figure 5 — Core catcher

Dimensions in metres

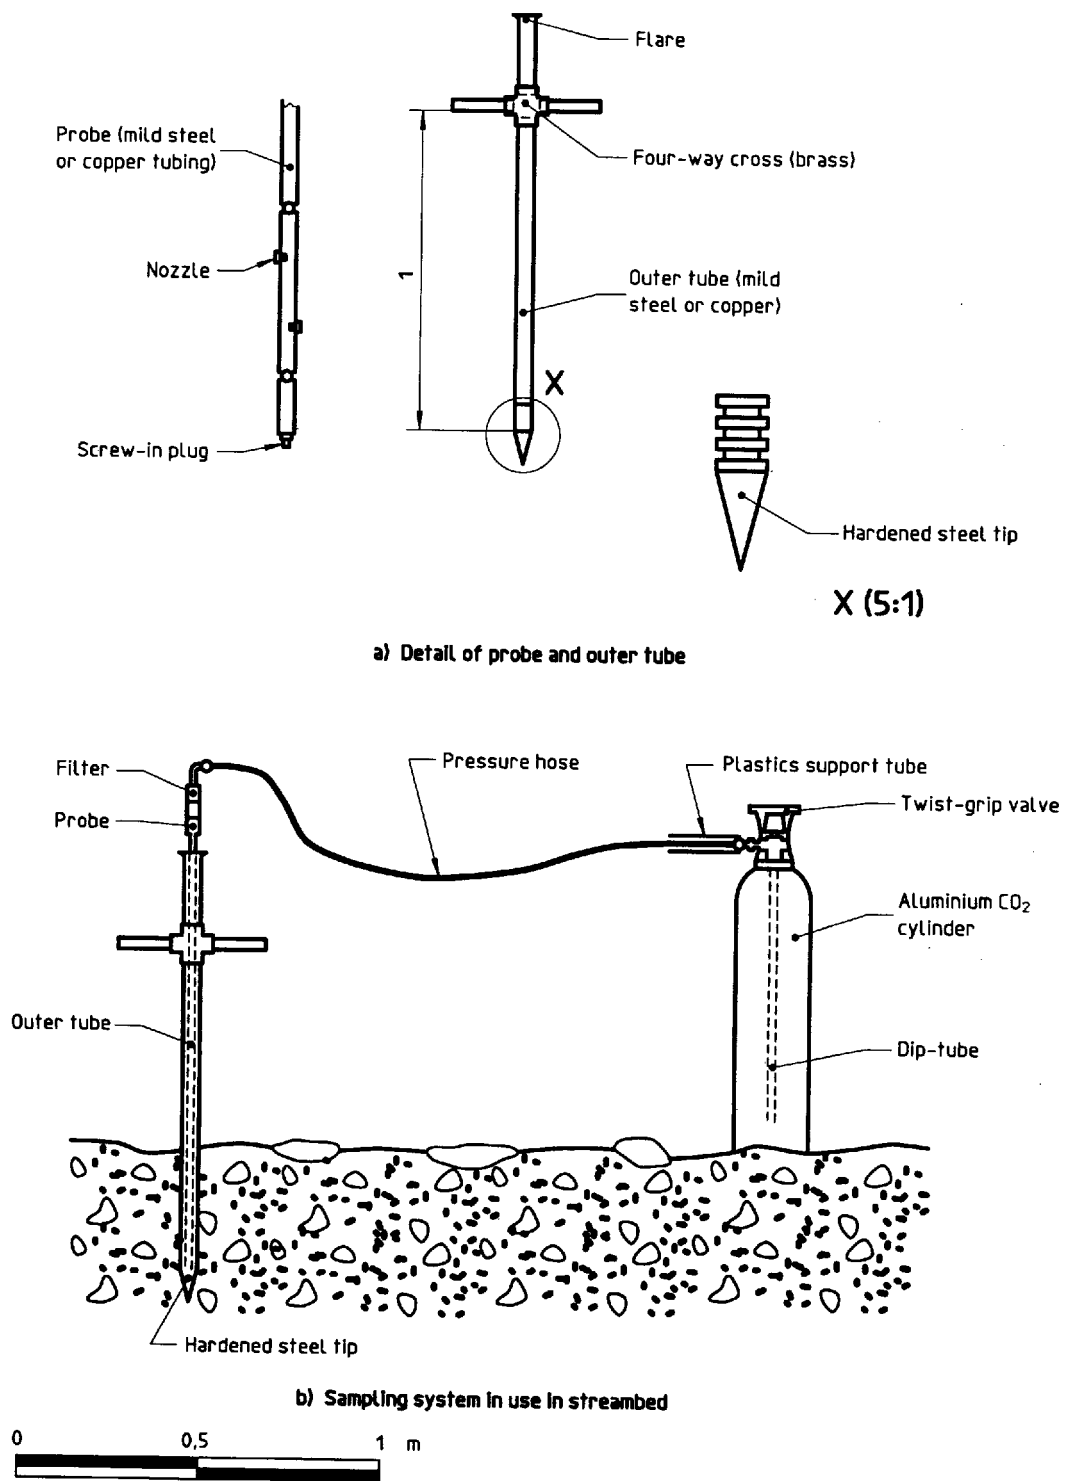


Figure 6 — Liquid carbon dioxide freeze-core sampler

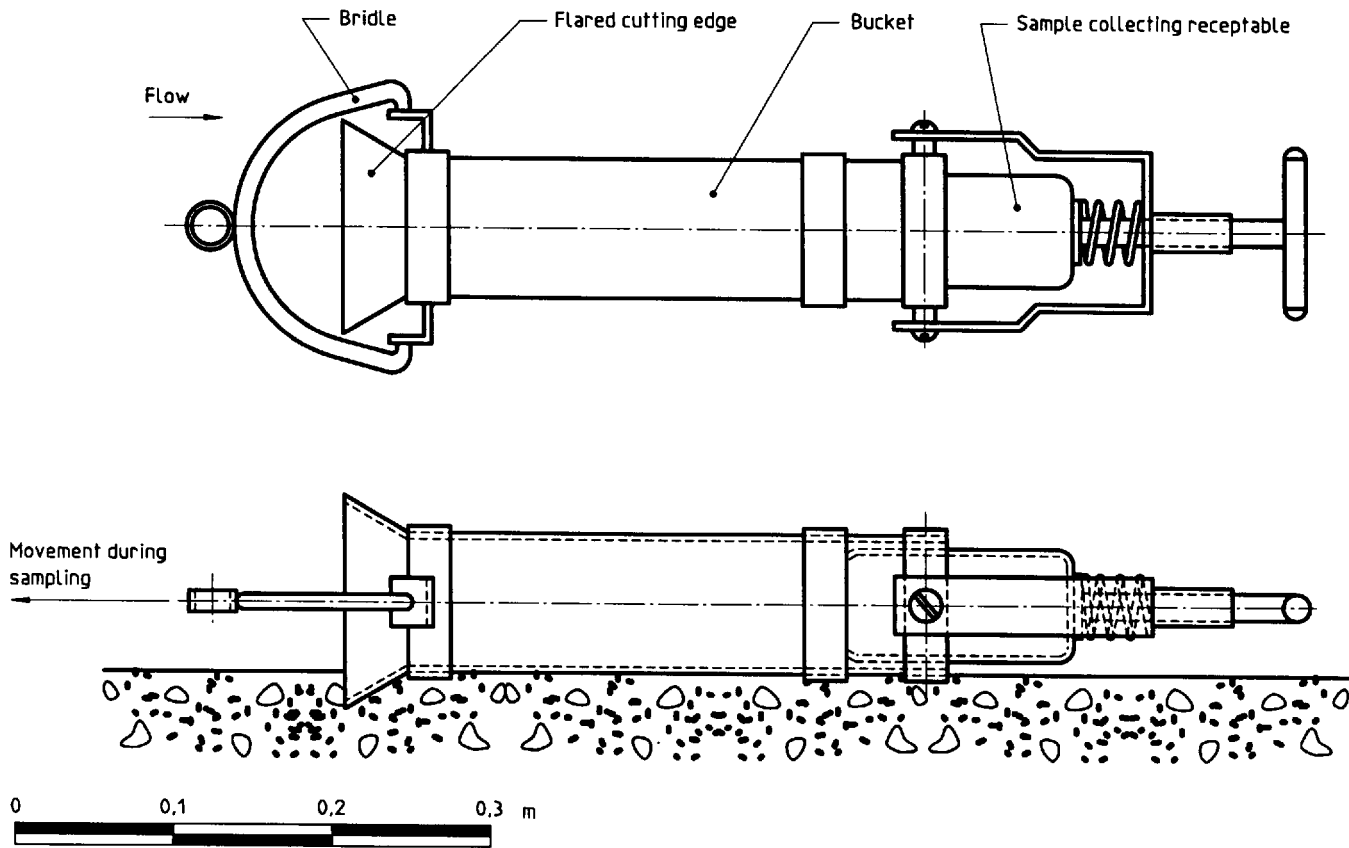


Figure 7 — Drag bucket sampler

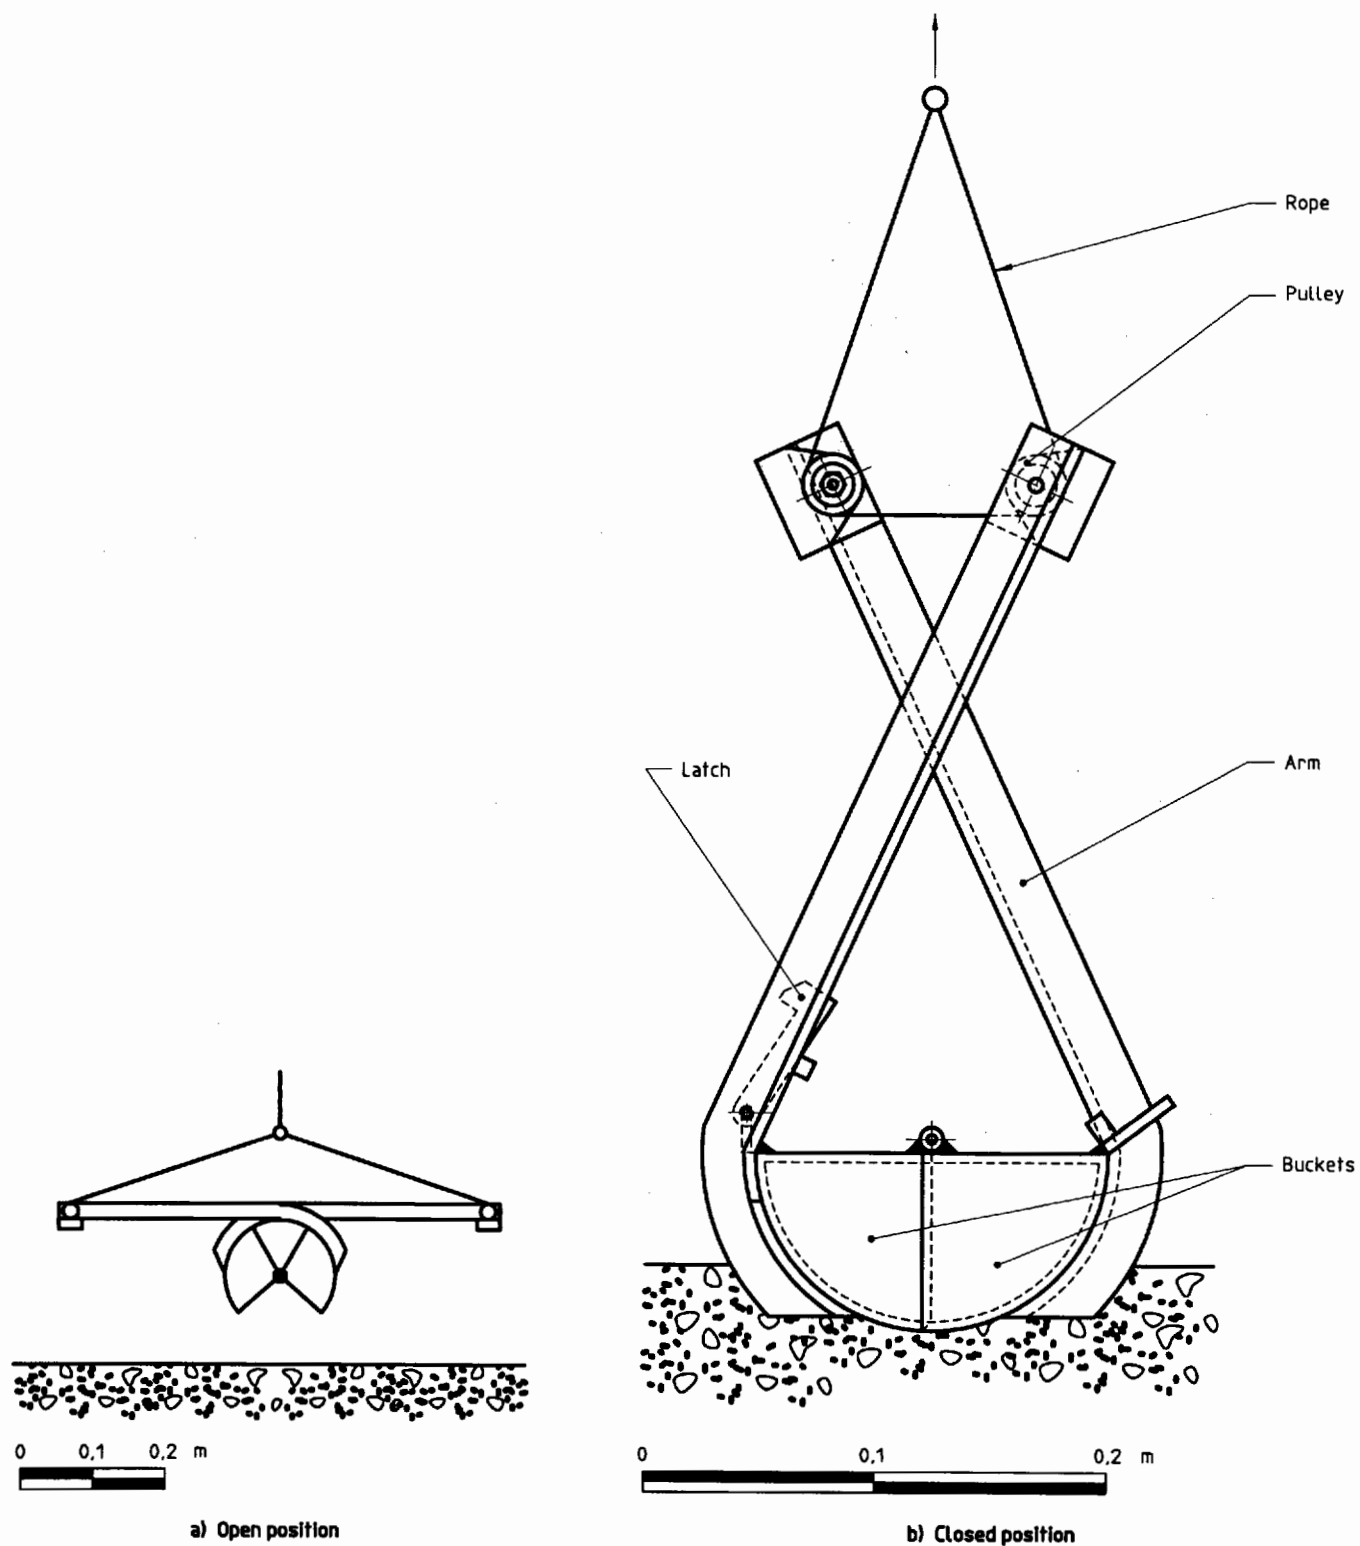


Figure 8 — Lightweight grab sampler with 90° closure

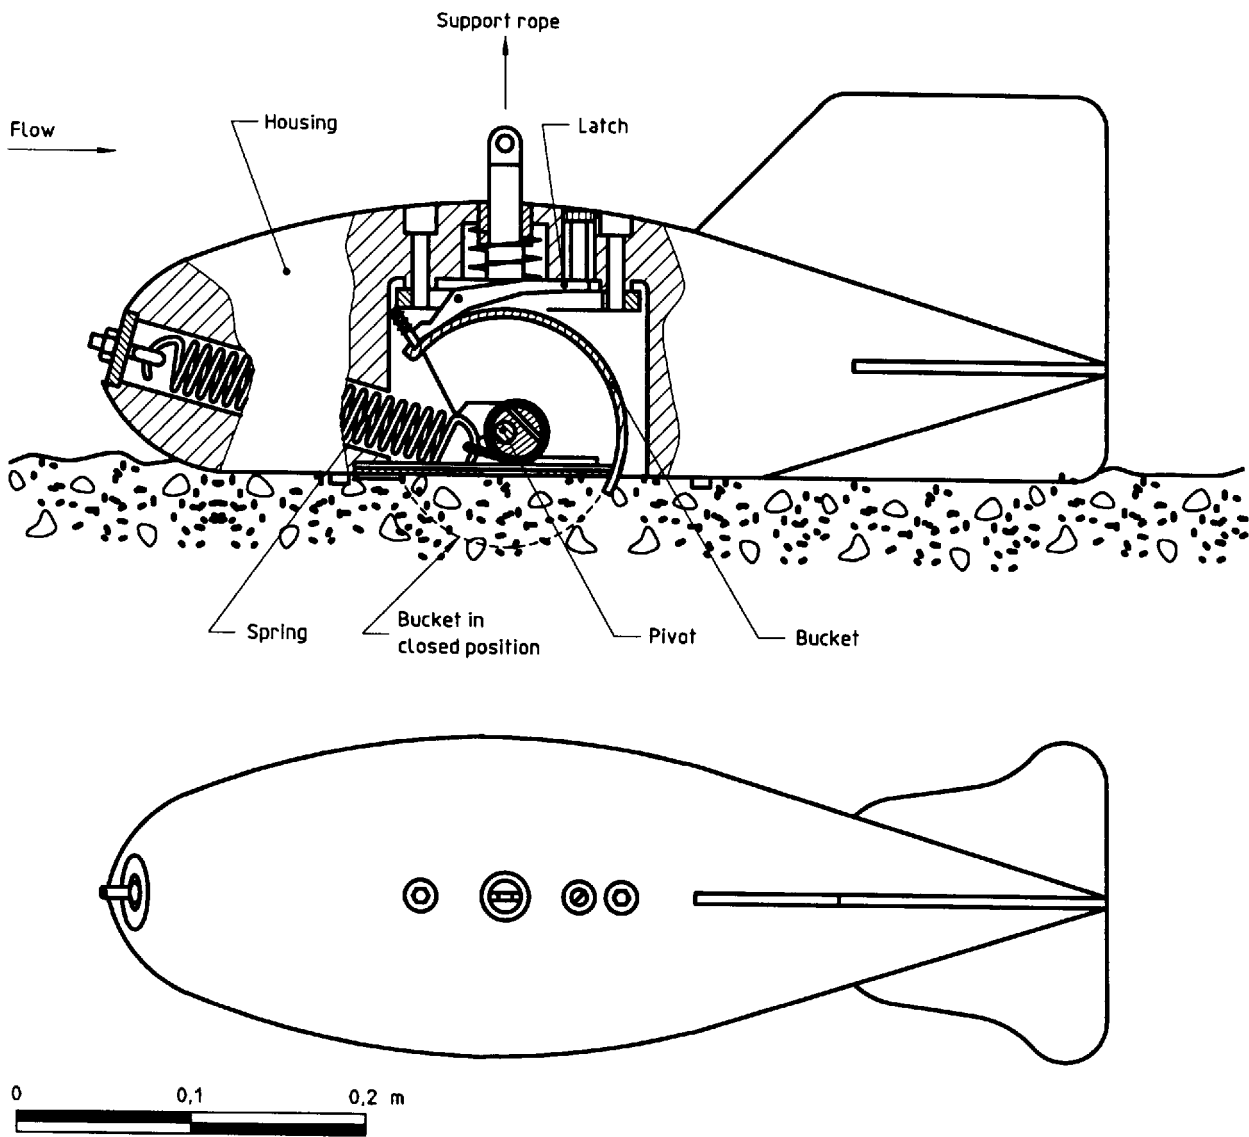


Figure 9 — Lightweight grab sampler with 180° closure

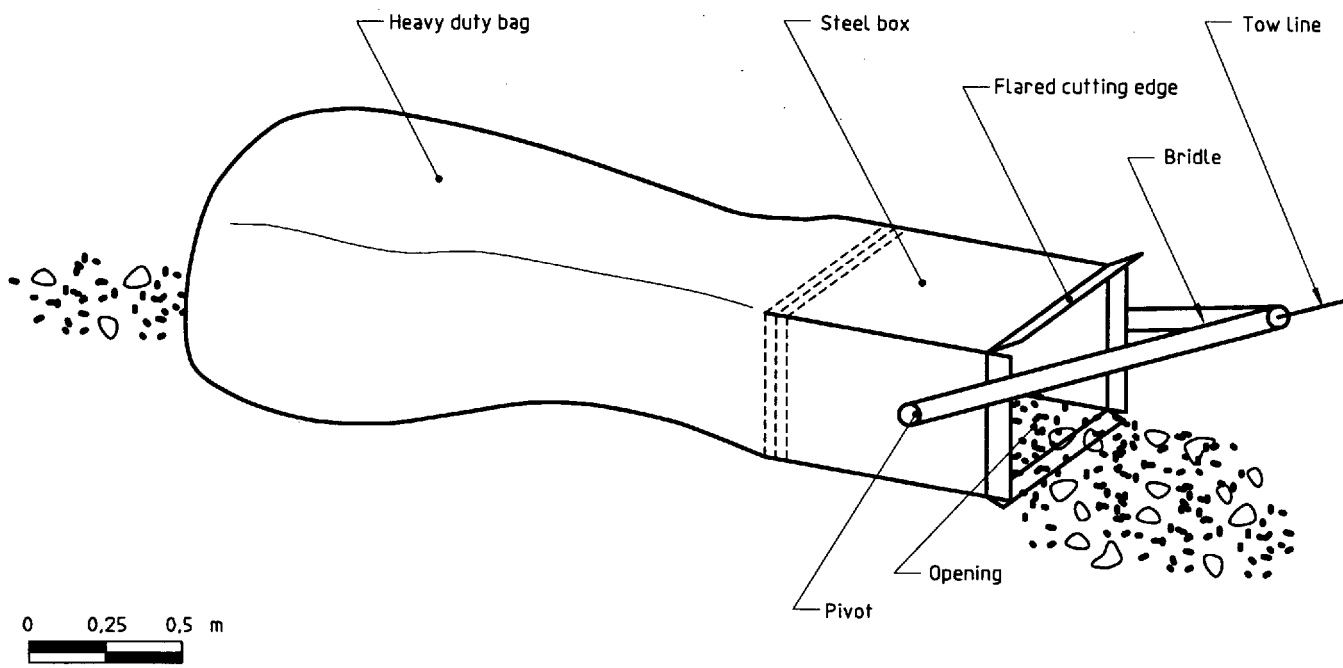


Figure 10 — Anchor dredge

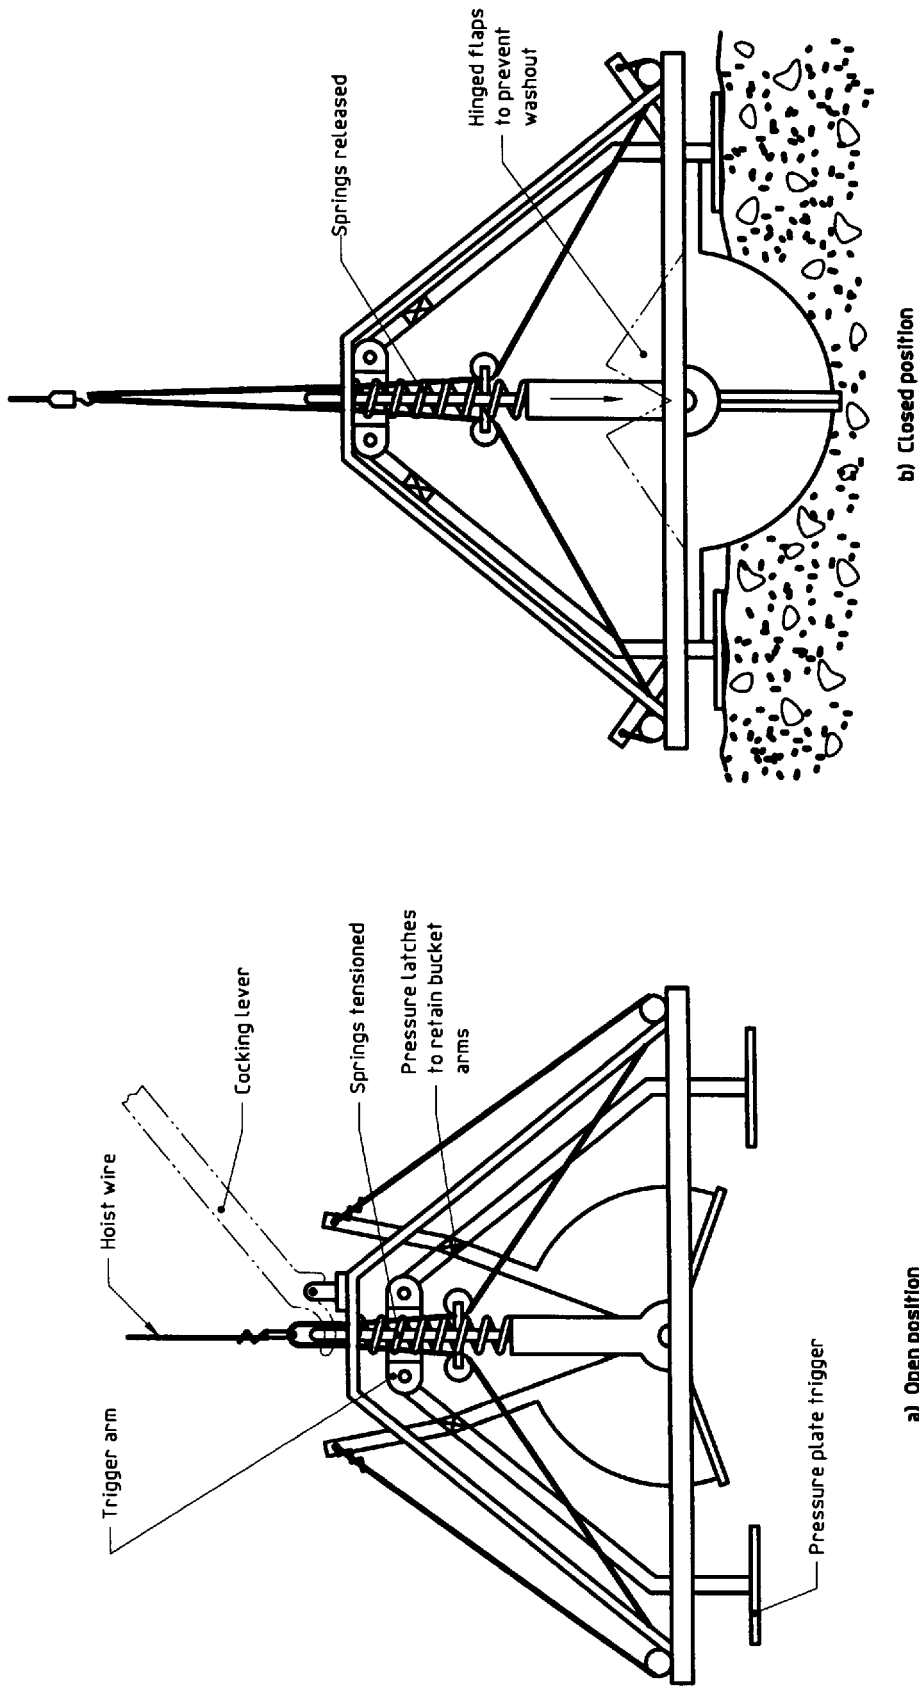


Figure 11 — Grab sampler with 90° closure

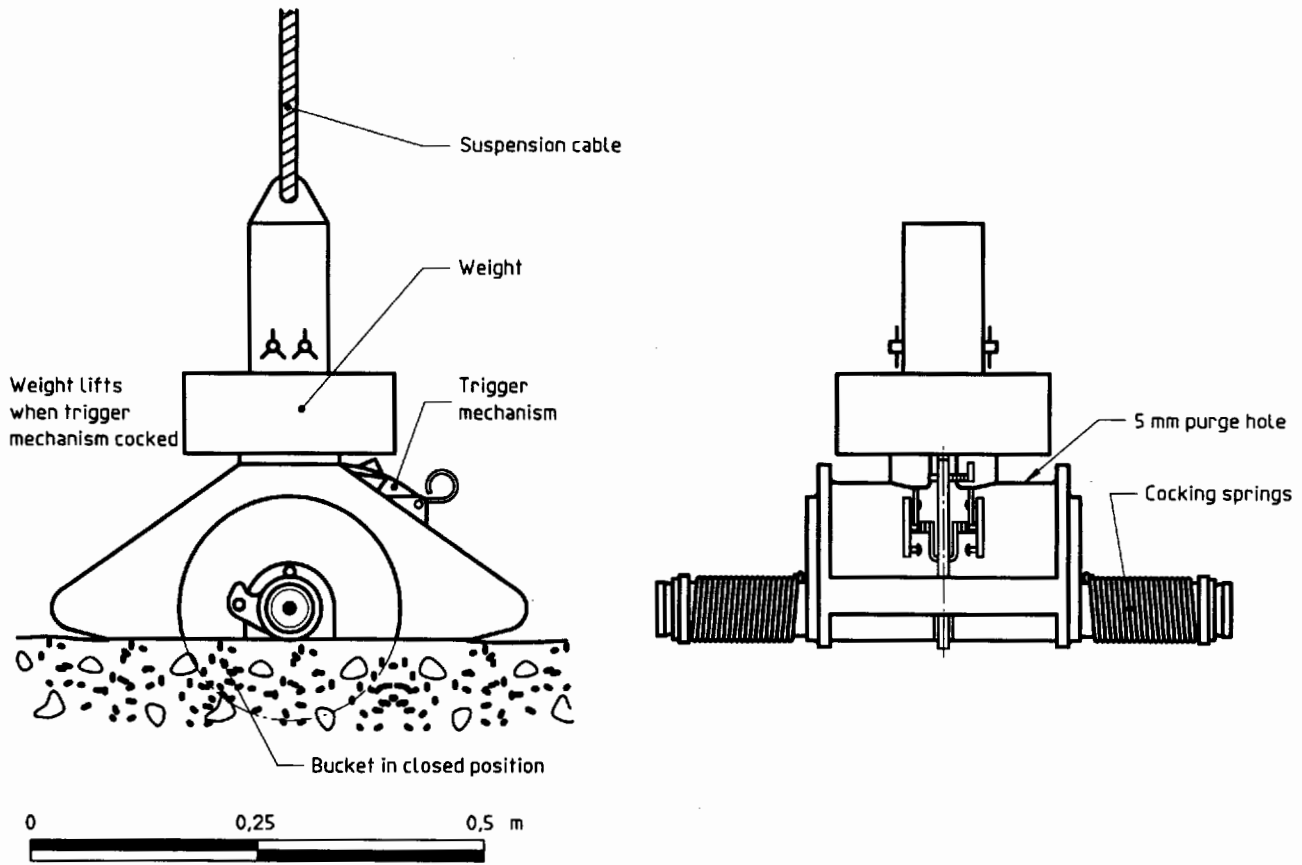


Figure 12 — Heavyweight grab sampler with 180° closure

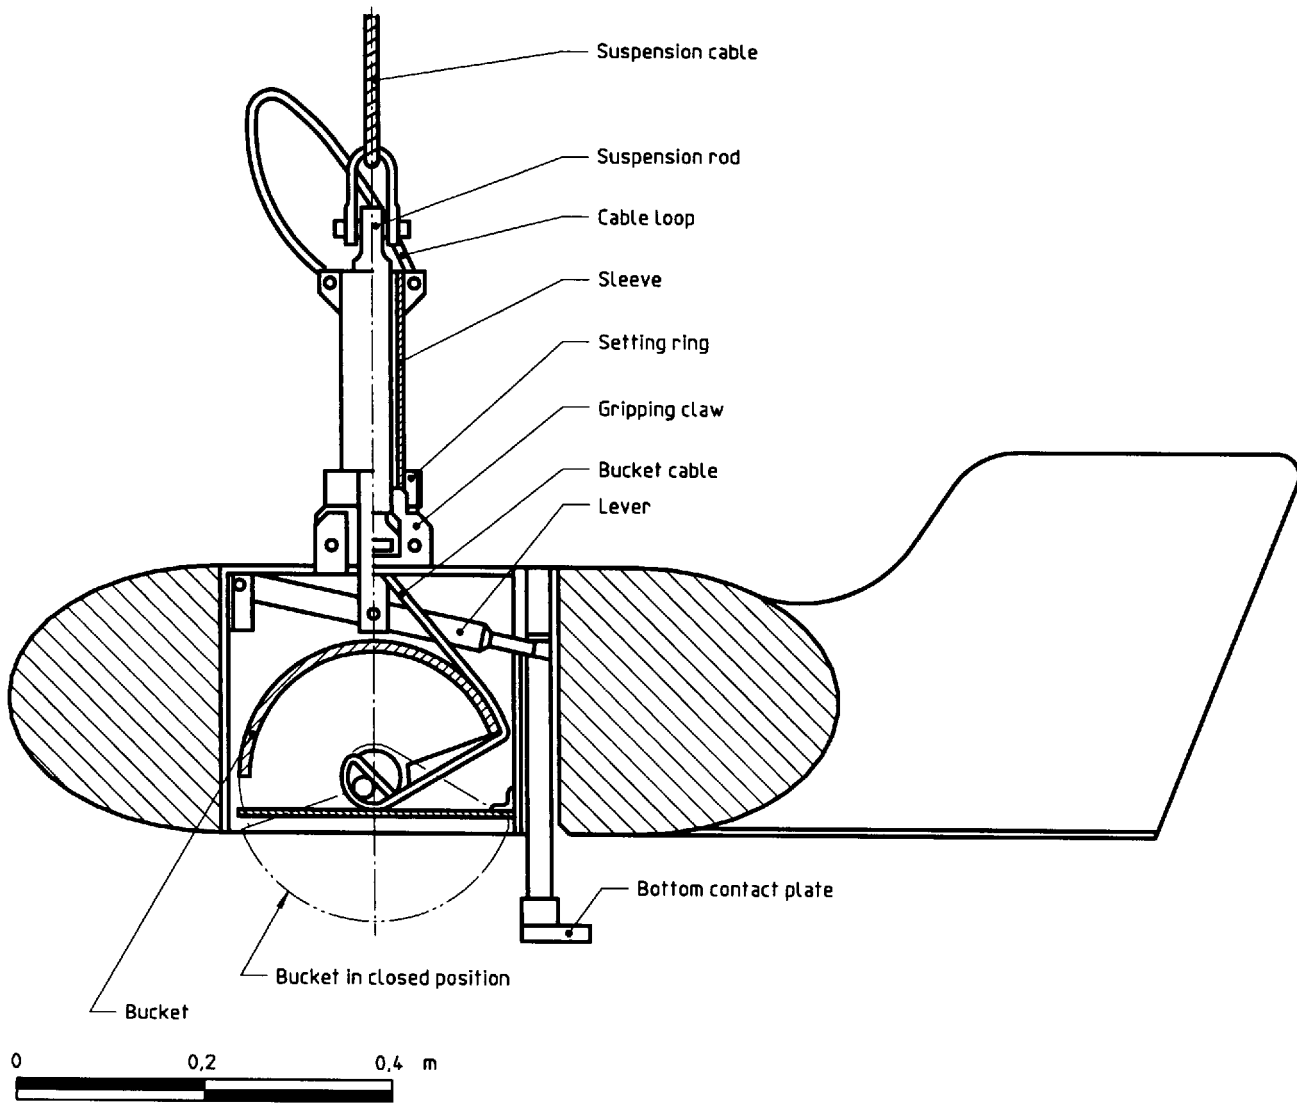


Figure 13 — Heavyweight grab sampler with 180° closure

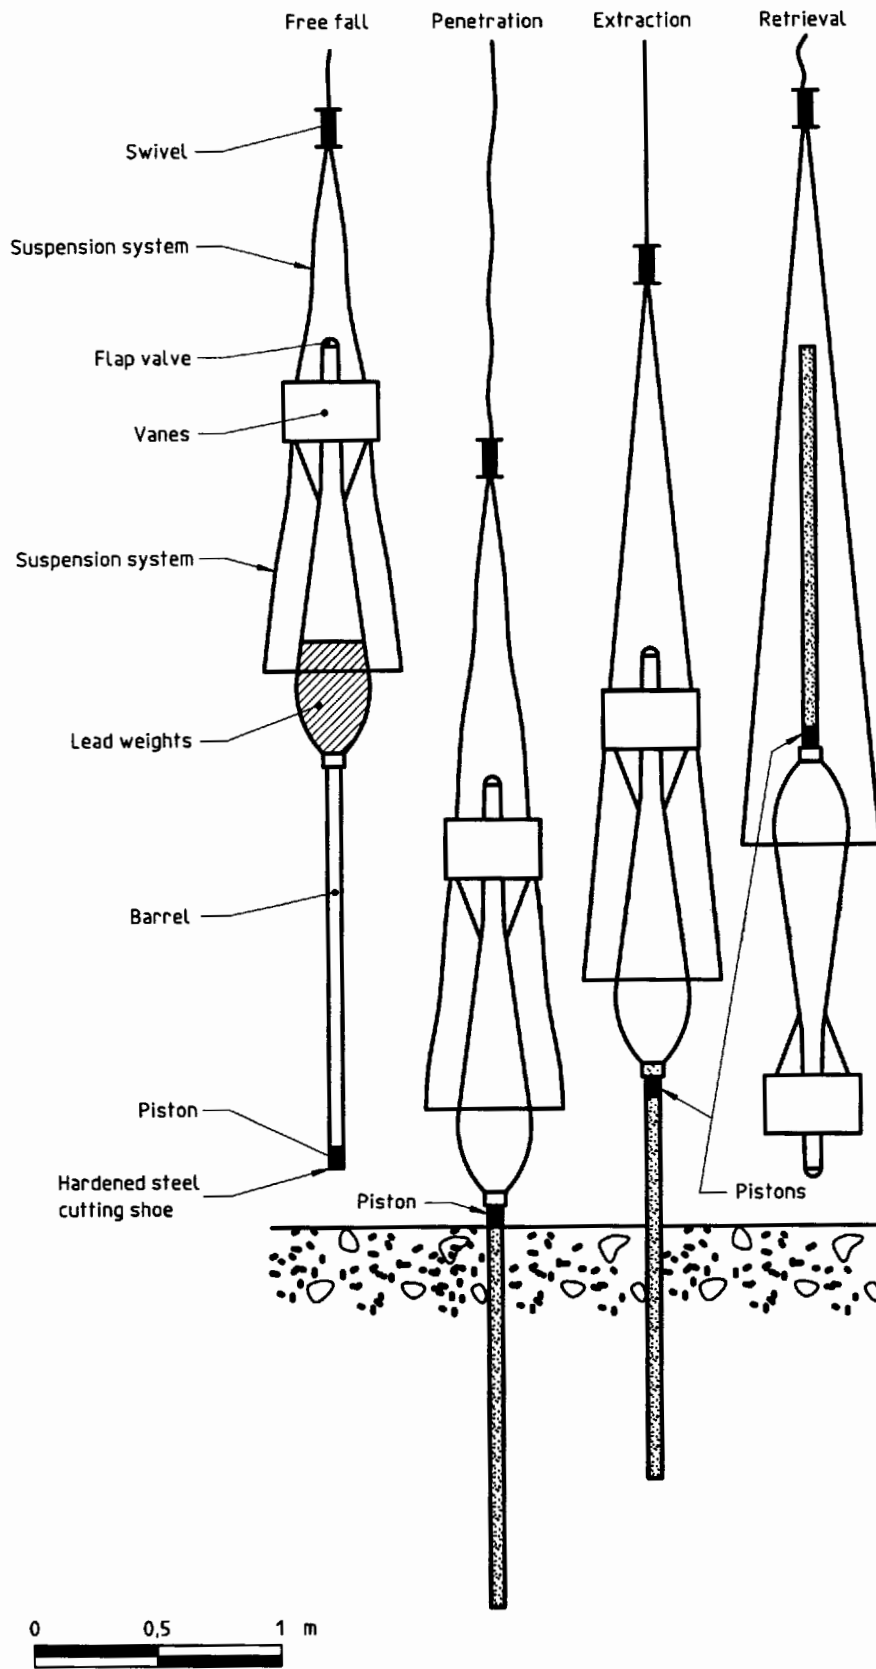


Figure 14 — Free fall gravity corer — Circular barrel corer

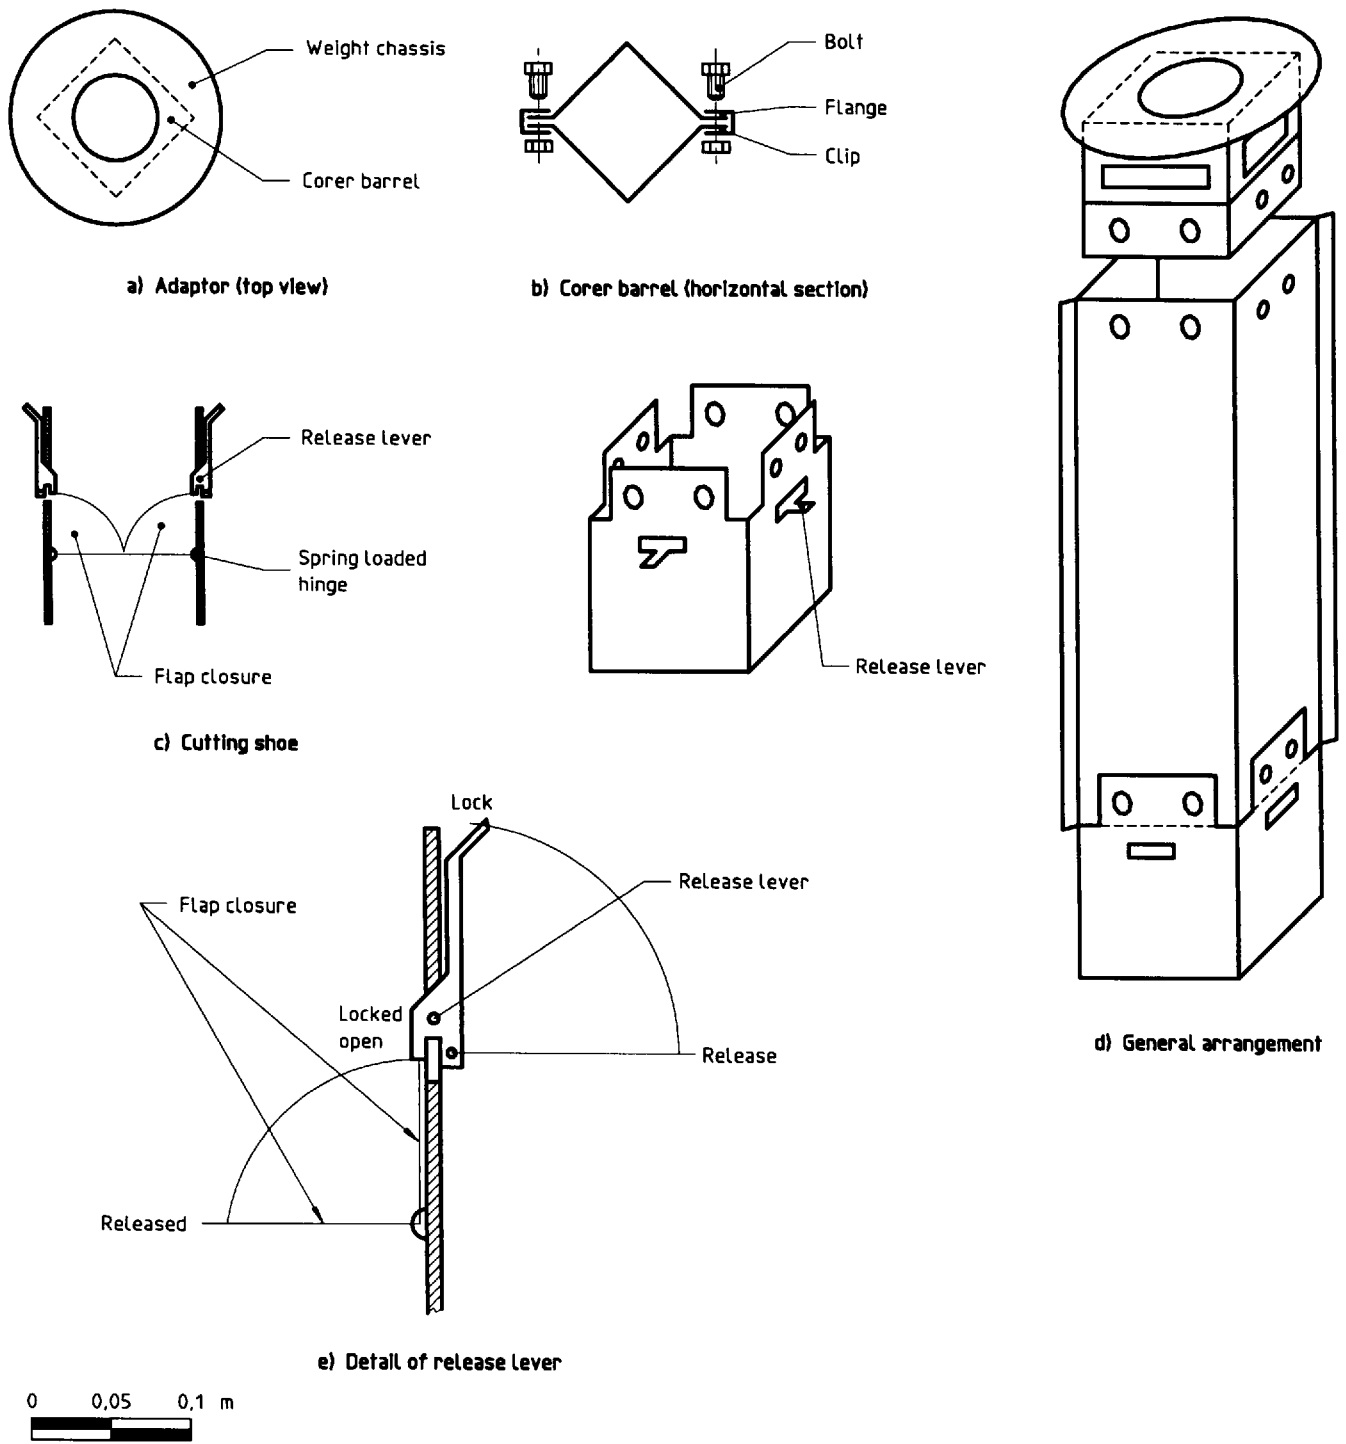


Figure 15 — Free fall gravity corer — Square barrel corer

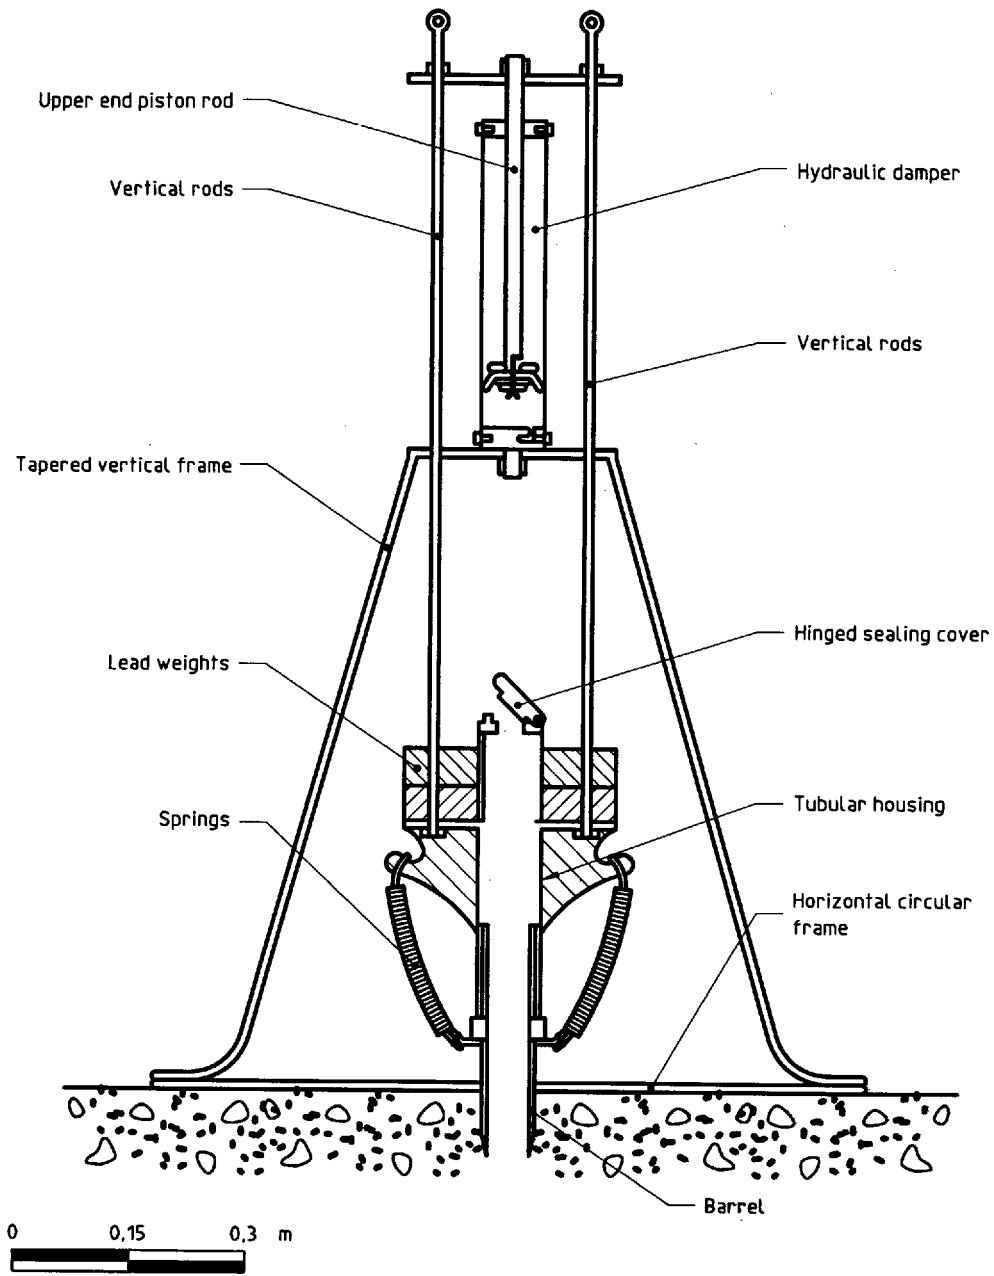


Figure 16 — Frame-guided gravity corer — Circular barrel corer



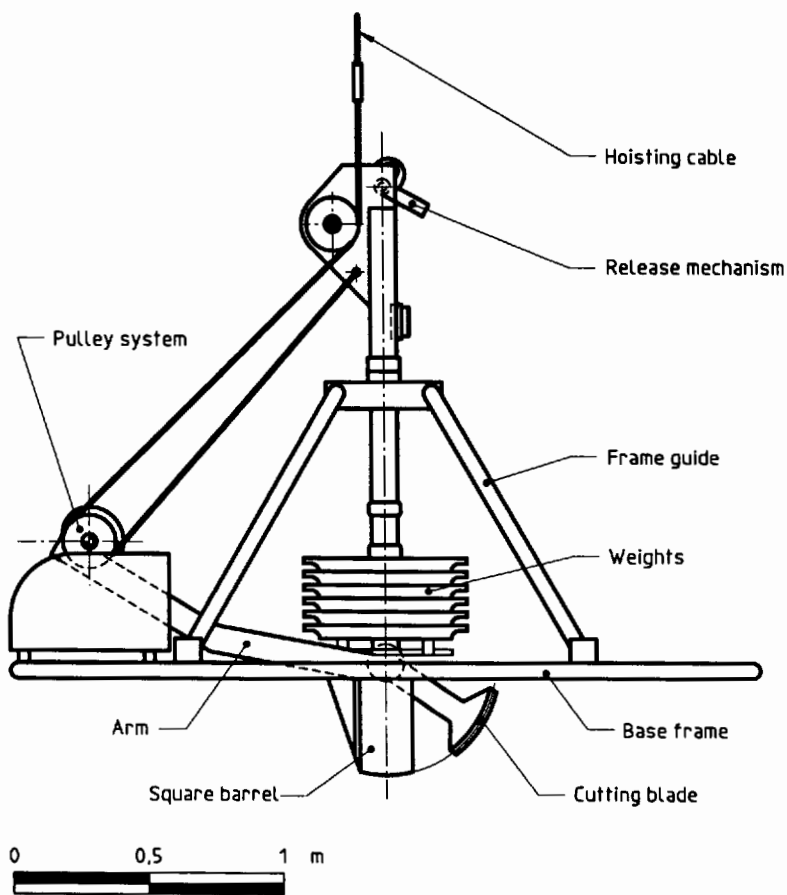


Figure 17 — Frame-guided gravity corer — Square barrel corer

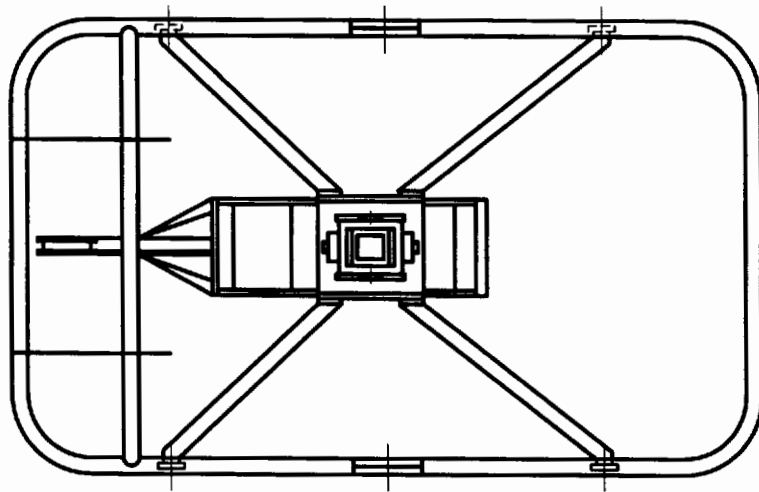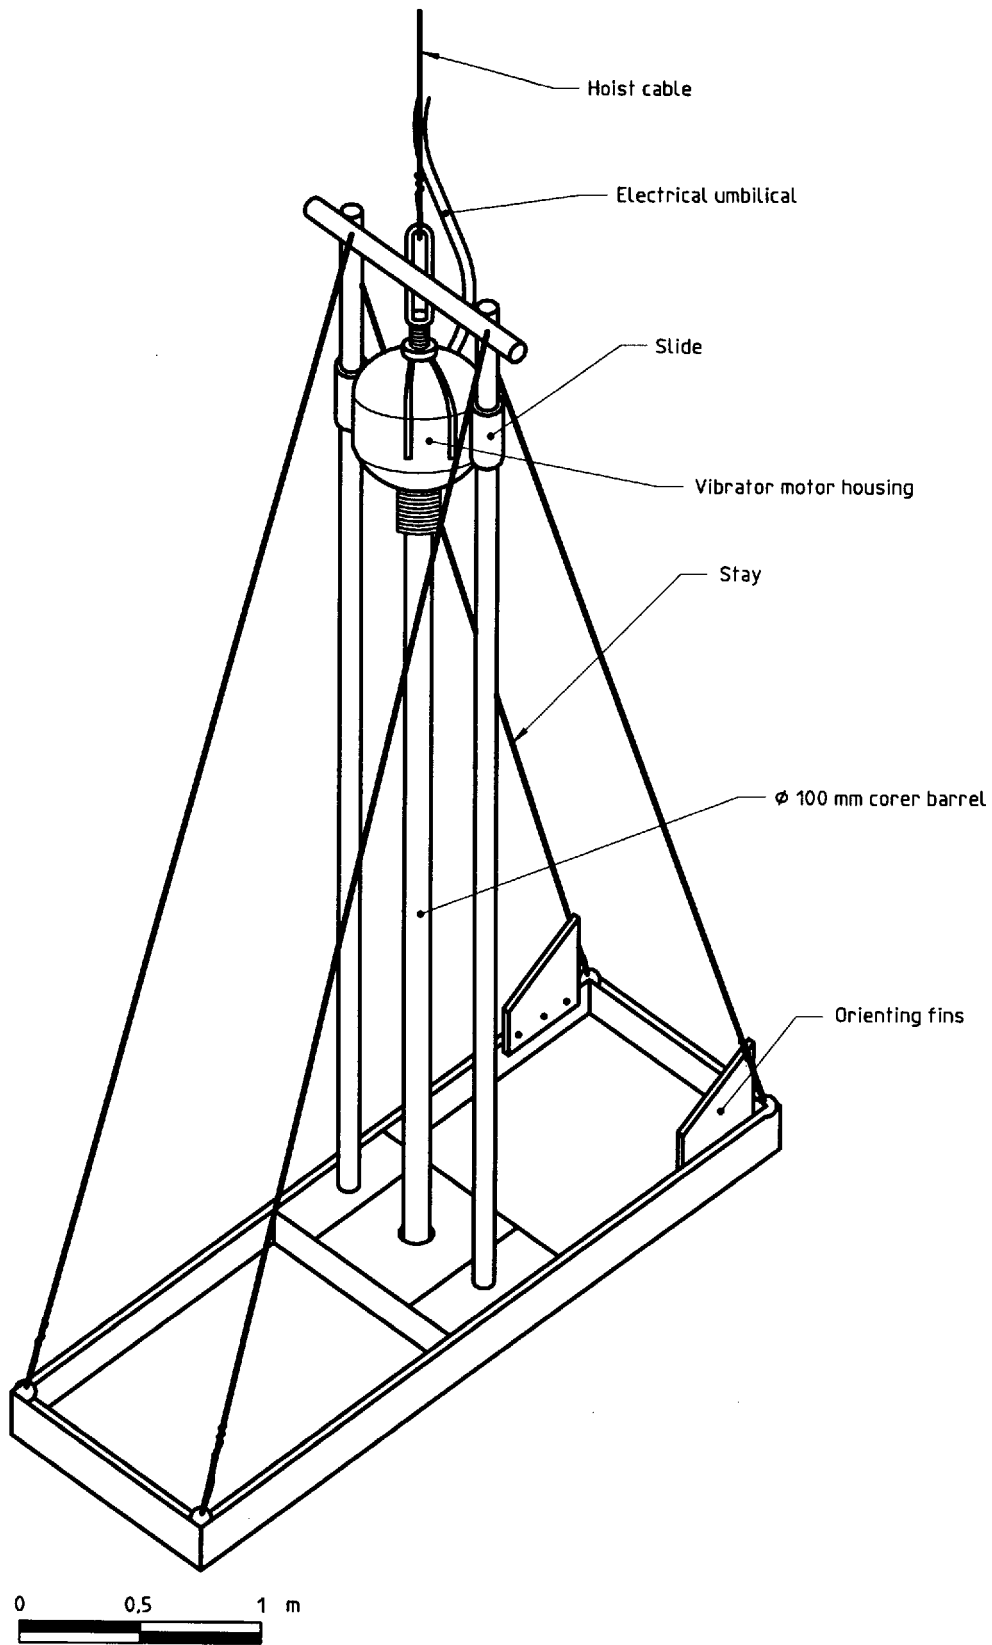

NOTE - The mass of the equipment is approximately 0,75 t.

Figure 18 — Vibrocorer

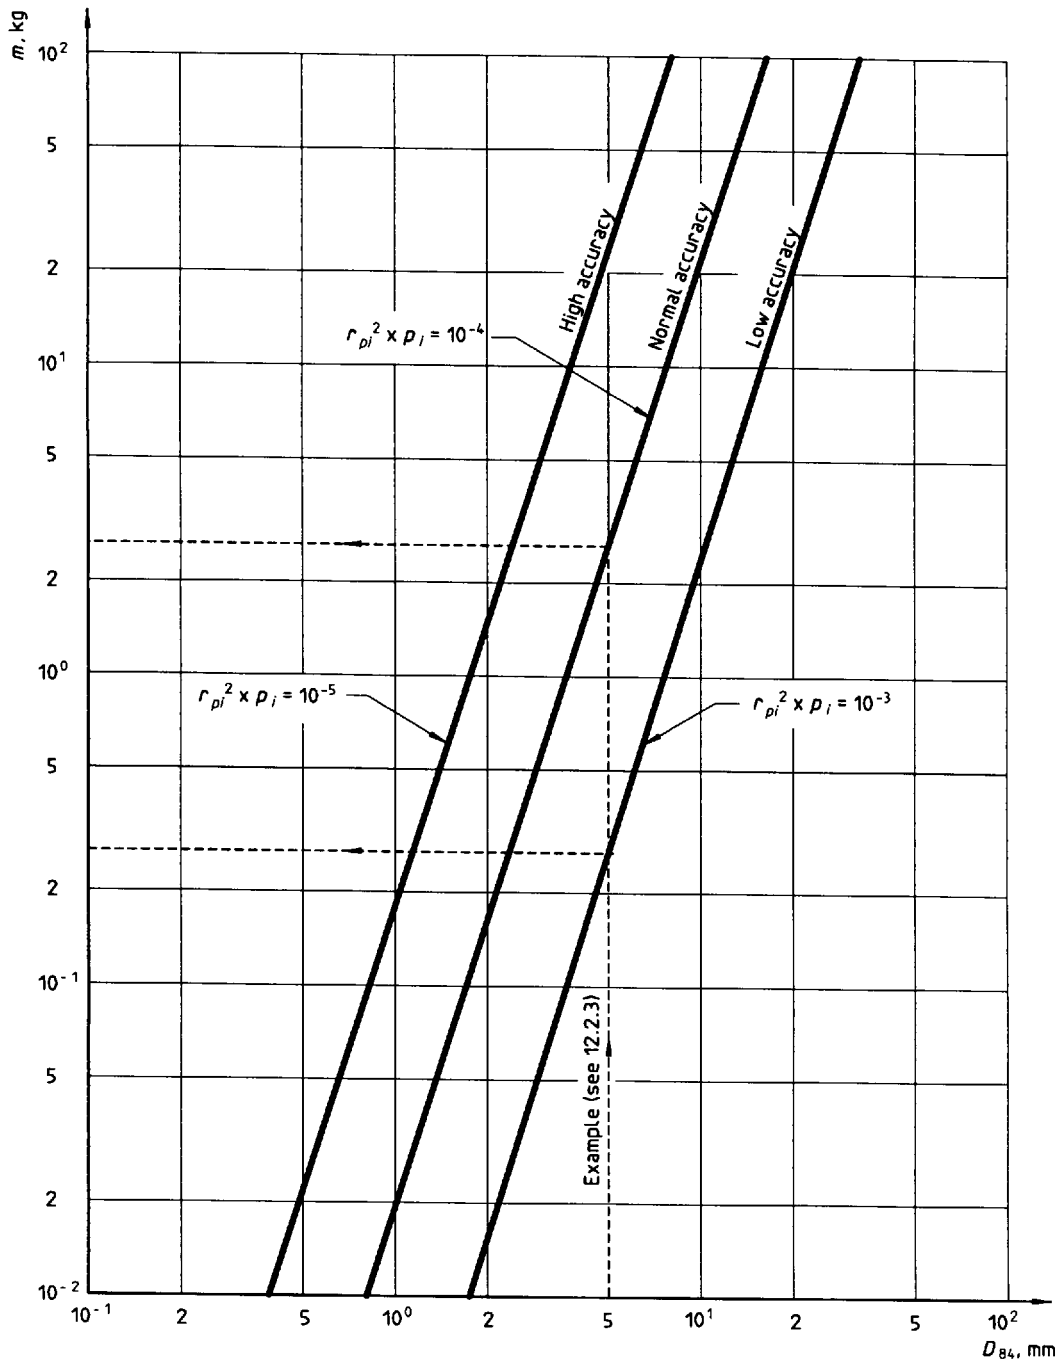


Figure 19 — Design curves for samples of mass m

Annex A (informative)**Bibliography**

BLOMQUIST, S. Core sampling in soft bottom sediment _ An in-situ study. *Sedimentology*. 1985, **32**, 605-612.

BOUMA, A.H. *Methods for the study of sedimentary structures*. Wiley Interscience, 1969.

CARLING, P.A. and READER, N.A. A freeze-sampling technique suitable for coarse river bed-material. *Sedimentary Geology*. 1981, **29**, 233-239.

NOTE. The method described uses liquid carbon dioxide.

DAY, G. *The Day grab - a simple seabed sampler*. IOS Report No. 52, 1978, Institute of Oceanographic Sciences ¹⁾.

DE VRIES, M. On the accuracy of bed material sampling. *Journal of Hydraulic Research*. **8**, 523-533.

EAGLE, R.A., NORTON M.G., NUNNY R.S. and ROLFE M.S. *The field assessment of the effects of dumping wastes at sea: 2. Methods*. Fisheries Research Technical Report No. 47, 1978 ²⁾

HOLME, N.A. and McINTYRE, A.D. *Methods for the study of marine benthos*. IBP Handbook No. 16. Oxford: Blackwell, 1971.

KOGLER, F.C. Das Kastenlot. *Meyniana*. 1963, **13**, 1-7.

PARKER, W.R. Quality control in mud coring. *GeoMarine letters*. 1991, **11**, 132-137.

PARKER, W.R. and SILLS, G.C. Observations of corer penetration and sample entry in gravity coring. *Marine Geophysical Researches*. 1970, **12**, 101-107.

PETTS, G.E., THOMAS, M.C., BRITTAN, K. and ATKIN, B. A freeze-coring technique applied to pollution by fine sediments in gravel-bed rivers. *Science of the Total Environment*. 1989, **84**, 259-272.

NOTE. The method described uses liquid carbon dioxide.

¹⁾ Available from the Institute of Oceanographic Sciences, Wormley, Godalming, Surrey GU8 5UB.

²⁾ Available from the Ministry of Agriculture, Fisheries and Food, Directorate of Fisheries Research, Fisheries Laboratory, Pakefield Road, Lowestoft, Suffolk NT33 0HT.

RYAN, P. *Design and operation of an in situ frozen core gravel sampler* Canadian Department of Fisheries, Forest Fish Service Pacific Region, Technical Report 12, 1970.

NOTE. The method described uses a solid carbon dioxide/acetone mixture.

STOCKER, Z.S.J. and WILLIAMS D.D. A freeze core method for describing the vertical distribution of sediments in a stream bed. *Limnology and Oceanography*. 1972, **17**, 136-138.

NOTE. The method described uses liquid nitrogen.

THOMAS, M.C. A comparison of grab- and freeze-sampling techniques in the collection of gravel-bed river sediment. *Sedimentary Geology*. 1992, **78**, 191-200.

NOTE. This paper deals with the statistics of sampling.

ICS 17.120.20

Descriptors: liquid flow, open channel flow, flow measurement, sediments, sampling, sampling equipment, samplers.

Price based on 39 pages
