

INTERNATIONAL STANDARD

ISO 6802

Third edition
2005-10-01

Rubber and plastics hoses and hose assemblies with wire reinforcements — Hydraulic impulse test with flexing

*Tuyaux et flexibles en caoutchouc et en plastique renforcés par des fils
métalliques — Essai d'impulsions hydrauliques avec flexions*



Reference number
ISO 6802:2005(E)

© ISO 2005

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Test methods	1
4 Apparatus	1
5 Test piece	3
6 Procedure	3
7 Test report	3

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 6802 was prepared by Technical Committee ISO/TC 45, *Rubber and rubber products*, Subcommittee SC 1, *Hoses (rubber and plastics)*.

This third edition cancels and replaces the second edition (ISO 6802:1991), which has been technically revised.

Introduction

Hydraulic hoses and hose assemblies are frequently flexed in service. As there may be a need to take this into account during testing, this International Standard provides a standard method of flexing during impulse testing.

.....

.....

Rubber and plastics hoses and hose assemblies with wire reinforcements — Hydraulic impulse test with flexing

1 Scope

This International Standard describes a pressure impulse test with flexing for wire-reinforced rubber and plastics hydraulic hoses and hose assemblies.

The test is applicable to high-pressure hydraulic hoses and hose assemblies, which are subject to pulsating pressure in service.

This International Standard describes two methods of flexing the hose or hose assembly. The actual pressure impulse test is described in ISO 6803.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6803, *Rubber or plastics hoses and hose assemblies — Hydraulic-pressure impulse test without flexing*


3 Test methods

Two methods of flexing are described: method 1 which uses a revolving manifold as shown in Figure 1, and method 2 which uses a horizontally sliding manifold as shown in Figure 2. When no requirement is stated in the product standard, use method 1.

4 Apparatus

The apparatus consists of a flex test rig, on which the test pieces can be installed, capable of producing flexing in the ways shown in Figures 1 and 2. The rig comprises a stationary manifold and a movable manifold, the latter being capable of either executing a revolving motion (see Figure 1) or executing a horizontally reciprocating (to-and-fro) motion (see Figure 2). The centreline of the stationary manifold is at the same height as, and parallel to, the centre of rotation of the revolving manifold or at the same height as the centre of the horizontally reciprocating manifold. The movable manifold is geared so that it stays parallel to the stationary manifold at all times. The number of revolving or to-and-fro cycles executed per minute by the movable manifold shall be within 34 % to 38 % of the number of impulse cycles produced per minute, i.e. the number of flex cycles executed during any given length of time is in a definite proportion to the number of impulse cycles.


The vertical centreline through the stationary manifold at each coupling is a distance l from the centre of rotation or centre of reciprocating motion of the movable manifold. In each case, the hose is subjected to a back-bending motion, with its inside radius being bent to a radius smaller than the minimum bend radius and the radius near each coupling being bent to a radius larger than the minimum bend radius.

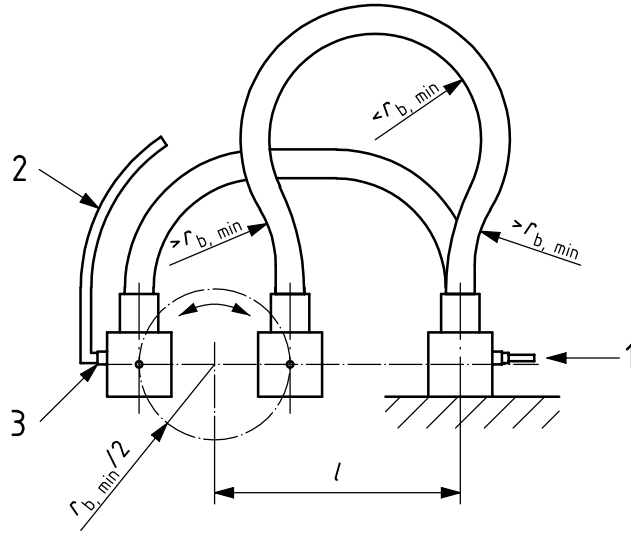

Key

- 1 test pressure inlet
- 2 fluid circulation line
- 3 check valve

Figure 1 — Apparatus for hydraulic impulse test with flexing using a revolving manifold

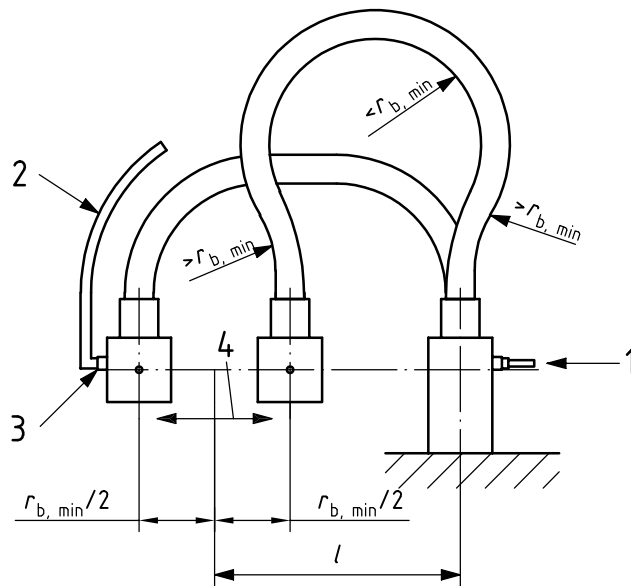

Key

- 1 test pressure inlet
- 2 fluid circulation line
- 3 check valve
- 4 horizontal reciprocating motion

Figure 2 — Apparatus for hydraulic impulse test with flexing using a horizontally reciprocating manifold

The distance l shall be calculated, to an accuracy of ± 2 mm, using the equation

$$l = 1,75r_{b, \min} + d_{\text{ext}}$$

where

$r_{b, \min}$ is the minimum bend radius;

d_{ext} is the external diameter of the hose.

5 Test piece

The free length of hose L measured between the couplings shall be calculated, to an accuracy of ± 15 mm, using the equation

$$L = 4,14r_{b, \min} + 3,57d_{\text{ext}}$$

where $r_{b, \min}$ and d_{ext} are as defined in Clause 4.

A minimum of four test pieces shall be tested. The minimum bend radius will be specified in the International Standard for the product concerned.

6 Procedure

Attach one end of the test piece assembly to the movable manifold of the apparatus and attach the other end to the stationary manifold. Carry out the pressure impulse test by the method described in ISO 6803.

Start the test and continue until failure or until the number of cycles specified in the relevant product standard has been completed.

If a failure occurs within 25 mm of one of the end couplings, it shall be regarded as a coupling failure and recorded as such.

7 Test report

The test report shall include the following information:

- a) a reference to this International Standard;
- b) a full description of the hose or hose assembly tested;
- c) the method used (method 1 or method 2);
- d) the test temperature;
- e) the test pressure;
- f) the test fluid;
- g) the rate of pressure rise;
- h) the impulse cycle rate;
- i) the flexing frequency;

ISO 6802:2005(E)

- j) the number of impulse cycles to failure, or the number of impulse cycles completed, for each test piece;
- k) the position of the failure and the mode of failure for each test piece, or the condition of each test piece on completion of the test;
- l) the date of the test.

.....

Vertical line of dots on the right side of the page.

ICS 23.040.70

Price based on 4 pages