

INTERNATIONAL  
STANDARD

ISO  
7079

Second edition  
2016-10-15

---

---

## Core drills with parallel shanks and with Morse taper shanks

*Forets-aléseurs à queue cylindrique et à queue cône Morse*



Reference number  
ISO 7079:2016(E)

© ISO 2016



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

# Contents

Page

Foreword .....	iv
<b>1 Scope .....</b>	<b>1</b>
<b>2 Normative references .....</b>	<b>1</b>
<b>3 Core drills with parallel shanks .....</b>	<b>1</b>
<b>4 Core drills with Morse taper shanks .....</b>	<b>4</b>
<b>5 Core drills for pre-finishing operations .....</b>	<b>7</b>
<b>Annex A (informative) Relationship between designations in this International Standard and ISO 13399 (all parts) .....</b>	<b>8</b>
<b>Bibliography .....</b>	<b>9</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

The committee responsible for this document is ISO/TC 29, *Small tools*, Subcommittee SC 2, *Holding tools, adaptive items and interfaces*.

This second edition cancels and replaces the first edition (ISO 7079:1981), of which it constitutes a minor revision, notably with the addition of [Annex A](#), which gives the relationship between the designations of this International Standard and the ISO 13399 series.

# Core drills with parallel shanks and with Morse taper shanks

## 1 Scope

This International Standard specifies the dimensions of core drills with parallel shanks and with Morse taper shanks.

It includes two tables for each of the above specified types, giving respectively

- the dimensions for the preferred diameter (see [Tables 1](#) and [2](#)), and
- the corresponding lengths defined in terms of diameter ranges (see [Tables 3](#) and [4](#)).

The tables show only metric dimensions which are alone recommended in the future for this type of drill.

Unless otherwise stated, these drills will be right-hand cutting drills.


## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 296, *Machine tools — Self-holding tapers for tool shanks*

## 3 Core drills with parallel shanks

See [Figure 1](#) and [Tables 1](#) and [2](#).

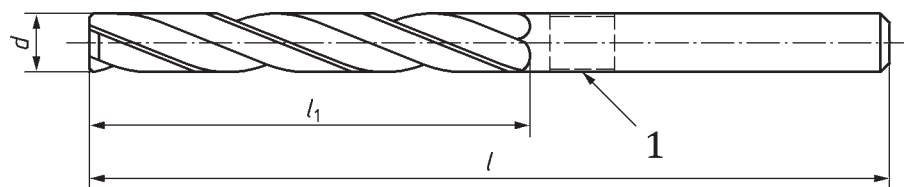

### Key

1 optional recess

Figure 1

**Table 1 — Dimensions for the preferred diameters**

Dimensions in millimetres

$d$ h8	$l_1$	$l$
3,00	33	61
3,30	36	65
3,50	39	70
3,80	43	75
4,00		
4,30	47	80
4,50		
4,80		
5,00	52	86
5,80		
6,00		
6,80		
7,00	69	109
7,80		
8,00		
8,80		
9,00	81	125
9,80		
10,00		
10,75		
11,00		
11,75	101	151
12,00		
12,75		
13,00		
13,75	108	160
14,00		
14,75		
15,00	114	169
15,75		
16,00		
16,75		
17,00	120	178
17,75		
18,00		
18,00	125	184
17,75		
17,00	130	191
16,75		
16,00	125	184
15,75		
15,00	114	169
14,75		
14,00	108	160
13,75		
13,00	101	151
12,75		
12,00	94	142
11,75		
11,00	87	133
10,75		
10,00	81	125
9,80		
9,00	75	117
8,80		
8,00	69	109
7,80		
7,00	61	93
6,80		
6,00	57	86
5,80		
5,00	52	80
4,80		
4,50	47	75
4,30		
4,00	43	70
3,80		
3,50	36	65
3,30		
3,00	33	61
h8		

When intermediate sizes are needed, reference should be made to [Table 2](#) for the corresponding lengths.

Flute portion:

- Tolerance on diameter,  $d$ , measured near the point: h8;
- Back taper: at the manufacturer's discretion.

Shank: These drills are normally made without driving tenon.

See [Table 2](#).

Table 1 (continued)

$d$ h8	$l_1$	$l$
18,70	135	198
19,00		
19,70	140	205

When intermediate sizes are needed, reference should be made to [Table 2](#) for the corresponding lengths.

Flute portion:

- Tolerance on diameter,  $d$ , measured near the point: h8;
- Back taper: at the manufacturer's discretion.

Shank: These drills are normally made without driving tenon.

See [Table 2](#).

Table 2 — Corresponding lengths set out as a function of diameter ranges

Dimensions in millimetres

Diameter ranges $d$		Corresponding lengths	
over	Up to and including	$l_1$	$l$
—	3,00	33	61
3,00	3,35	36	65
3,35	3,75	39	70
3,75	4,25	43	75
4,25	4,75	47	80
4,75	5,30	52	86
5,30	6,00	57	93
6,00	6,70	63	101
6,70	7,50	69	109
7,50	8,50	75	117
8,50	9,50	81	125
9,50	10,60	87	133
10,60	11,80	94	142
11,80	13,20	101	151
13,20	14,00	108	160
14,00	15,00	114	169
15,00	16,00	120	178
16,00	17,00	125	184
17,00	18,00	130	191
18,00	19,00	135	198
19,00	20,00	140	205


Tolerance on lengths

Lengths,  $l$  and  $l_1$ , may vary within one diameter range, between the minimum and maximum limits corresponding respectively to the figures given for the nearest lower or upper range.

EXAMPLE For diameter 4 mm, length  $l_1$  may vary between 39 mm and 47 mm about nominal value 43 mm, and length  $l$  may vary between 70 mm and 80 mm about nominal value 75 mm.

#### 4 Core drills with Morse taper shanks

See [Figure 2](#) and [Tables 3](#) and [4](#).

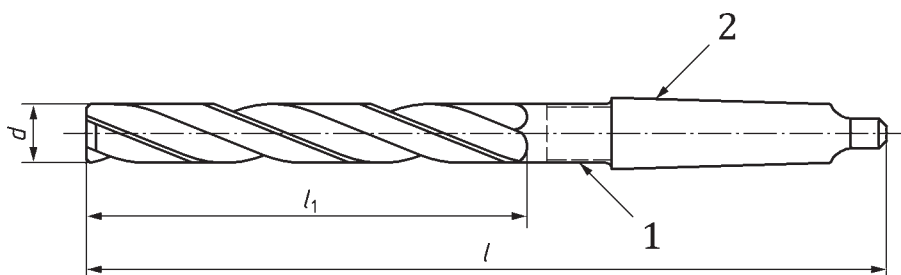

**Key**

- 1 optional recess
- 2 Morse taper (ISO 296)

**Figure 2**

**Table 3 — Dimensions for the preferred diameters**

Dimensions in millimetres

$d$ h8	$l_1$	$l$	Morse taper no.
7,80	75	156	1
8,00			
8,80	81	162	
9,00			
9,80	87	168	
10,00			
10,75	94	175	
11,00			
11,75			
12,00	101	182	
12,75			
13,00			
13,75			
14,00	108	189	
14,75			
15,00	114	212	2
15,75			
16,00			
16,75			
17,00			
17,00	120	218	
16,00			
16,75	125	223	
17,00			

When intermediate sizes are needed, reference should be made to [Table 4](#) for the corresponding lengths.

Flute portion:

- Tolerance on diameter  $d$  measured near the point: h8;
- Back taper : at the manufacturer's discretion.

Shank: In accordance with ISO 296.

See [Table 4](#).



Table 3 (continued)

$d$ h8	$l_1$	$l$	Morse taper no.
17,75	130	228	
18,00			
18,70	135	233	
19,00			
19,70	140	238	
20,00			
20,70	145	243	
21,00			
21,70	150	248	
22,00			
22,70	155	253	
23,00			
23,70	160	281	3
24,00			
24,70			
25,00			
25,70	165	286	
26,00			
27,70	170	291	
28,00			
29,70	175	296	
30,00			
31,60	185	306	
32,00			
33,60	190	339	4
34,00			
34,60			
35,00			
35,60	195	344	
36,00			
37,60	200	349	
38,00			
39,60			
40,00			
41,60	205	354	
42,00			

When intermediate sizes are needed, reference should be made to [Table 4](#) for the corresponding lengths.

Flute portion:

- Tolerance on diameter  $d$  measured near the point: h8;
- Back taper : at the manufacturer's discretion.

Shank: In accordance with ISO 296.

See [Table 4](#).

**Table 3** (continued)

$d$ h8	$l_1$	$l$	Morse taper no.
43,60	210	359	
44,00			
44,60			
45,00			
45,60	215	364	
46,00			
47,60	220	369	
48,00			
49,60			
50,00			

When intermediate sizes are needed, reference should be made to [Table 4](#) for the corresponding lengths.

Flute portion:

- Tolerance on diameter  $d$  measured near the point: h8;
- Back taper : at the manufacturer's discretion.

Shank: In accordance with ISO 296.

See [Table 4](#).

**Table 4 — Corresponding lengths set out as a function of diameter ranges**

Dimensions in millimetres

Diameter ranges <i>d</i>		Corresponding lengths			Diameter ranges <i>d</i>		Corresponding lengths		
over	Up to and including	$l_1$	$l$	Morse taper no.	over	Up to and including	$l_1$	$l$	Morse taper no.
7,50	8,50	75	156	1	23,02	23,60	155	276	3
8,50	9,50	81	162		23,60	25,00	160	281	
9,50	10,60	87	168		25,00	26,60	165	286	
10,60	11,80	94	175		26,50	28,00	170	291	
11,80	13,20	101	182		28,00	30,00	175	296	
13,20	14,00	108	189		30,00	31,50	180	301	
14,00	15,00	114	212	2	31,50	31,75	185	306	4
15,00	16,00	120	218		31,75	33,50		334	
16,00	17,00	125	223		33,50	35,50	190	339	
17,00	18,00	130	228		35,50	37,50	195	344	
18,00	19,00	135	233		37,50	40,00	200	349	
19,00	20,00	140	238		40,00	42,50	205	354	
20,00	21,20	145	243		42,50	45,00	210	359	
21,20	22,40	150	248		45,00	47,50	215	364	
22,40	23,02	155	253	47,50	50,00	220	369		

**Tolerance on lengths**

Lengths,  $l$  and  $l_1$ , may vary within one diameter step, between the minimum and maximum limits corresponding respectively to the figures given for the nearest lower or upper step (increased or reduced, as far as the total length is concerned, by the difference between the lengths of the two tapers, if the taper, if the taper combined with one of the two adjacent steps is larger or smaller than that of the step in question).

EXAMPLE For diameter 15 mm, length  $l_1$  may vary between 108 mm and 120 mm from the nominal value 114 mm, with a tolerance  $\pm 6$ . As the tolerance for  $l$  is the same as that for  $l_1$  ( $\pm 6$ ),  $l$  can vary between 206 mm and 218 mm from the nominal value 212 mm.

## 5 Core drills for pre-finishing operations

The amount of stock removal according to [Table 5](#) is recommended, with the diameters of the core drills calculated accordingly.

**Table 5 — Stock removal and diameters for core drill pre-finishing**

Dimensions in millimetres

Diameters <i>d</i>		Stock removal
over	up to and including	
—	10	0,20
10	18	0,25
18	30	0,30
30	50	0,40

## Annex A (informative)

### Relationship between designations in this International Standard and ISO 13399 (all parts)

For relationship between designations in this International Standard and preferred symbols according to ISO 13399 (all parts), see [Table A.1](#).

**Table A.1 — Relationship between designations in this International Standard and  
ISO 13399 (all parts)**

Symbol in ISO 7079	Reference in ISO 7079	Property name in ISO 13399 (all parts)	Symbol in ISO 13399 (all parts)	Reference in ISO 13399 (all parts)
<i>d</i>	<a href="#">Figures 1 and 2</a> <a href="#">Tables 1 and 2</a> <a href="#">Tables 3 and 4</a>	cutting diameter	DC	71D084653E57F
<i>l<sub>1</sub></i>	<a href="#">Figures 1 and 2</a> <a href="#">Tables 1 and 2</a> <a href="#">Tables 3 and 4</a>	length chip flute	LCF	71DCCC27DEF53
<i>l</i>	<a href="#">Figures 1 and 2</a> <a href="#">Tables 1 and 2</a> <a href="#">Tables 3 and 4</a>	overall length	OAL	71D078EB7C086

## Bibliography

- [1] ISO 13399 (all parts), *Cutting tool data representation and exchange*

