



INTERNATIONAL STANDARD ISO 9100-14:2005
TECHNICAL CORRIGENDUM 1

Published 2008-10-15

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Glass containers — Vacuum lug finishes —

Part 14:
110 regular

TECHNICAL CORRIGENDUM 1

Récipients en verre — Bagues à crans pour bouchage sous vide —

Partie 14: 110 regular


RECTIFICATIF TECHNIQUE 1

Technical Corrigendum 1 to ISO 9100-14:2005 was prepared by Technical Committee ISO/TC 63, *Glass containers*.

Page 3, Figure 3

Replace dimension “0,8” at the top left of the figure with “0,85”. The amended figure is given on the next page.

Dimensions in millimetres

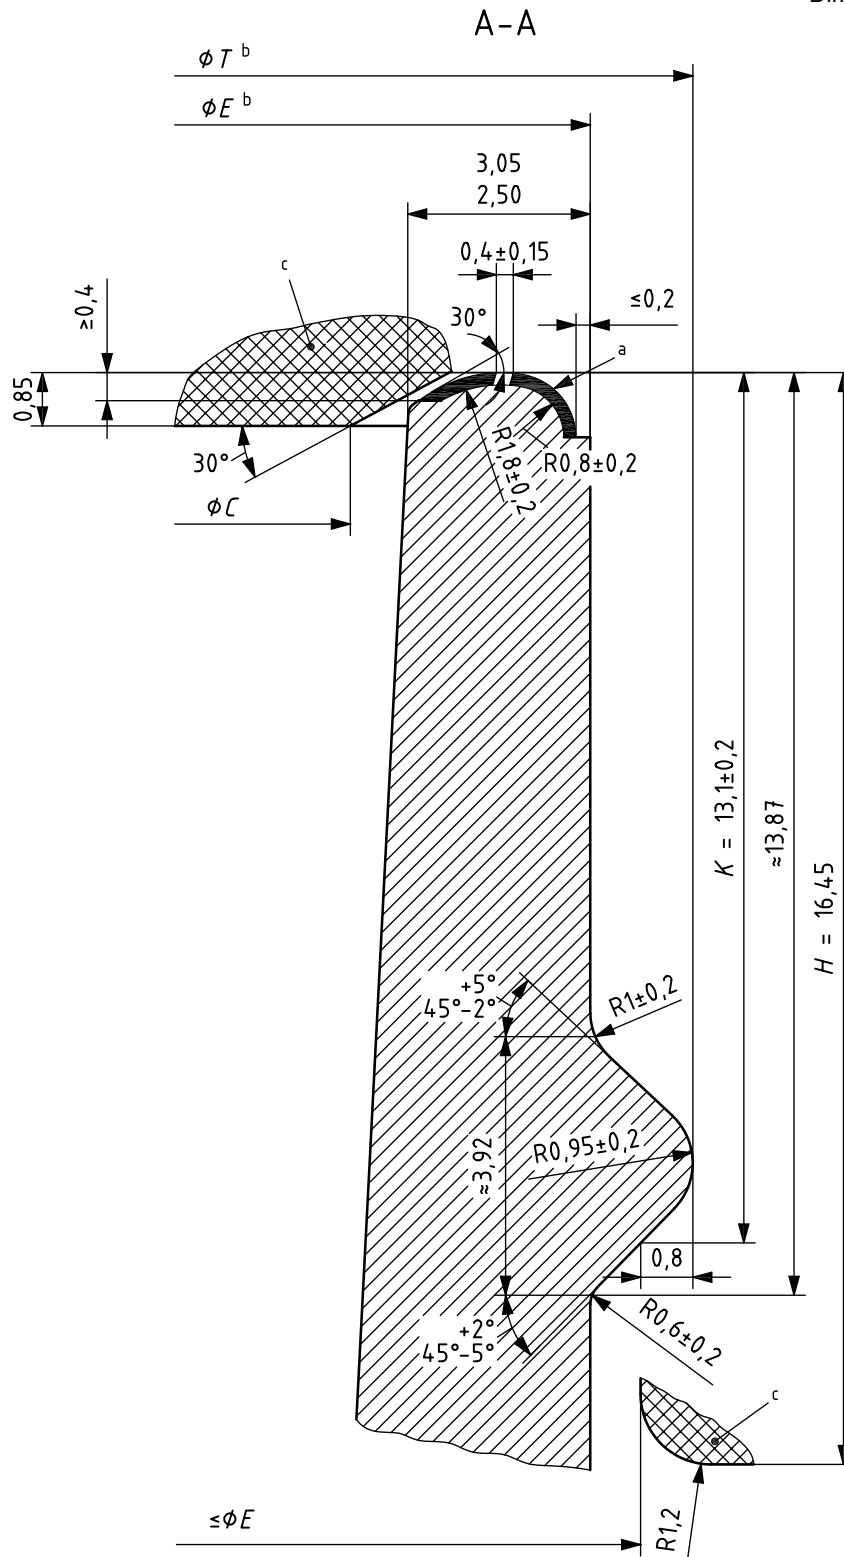

Key

- a) The sealing surface shall be free of checks, dips, crizzles and other defects which may affect proper functioning.
- b) Proper system functioning calls for keeping the ovality in the finish diameters to a minimum. E and T diameters should be concentric in relation to one another.
- c) Cross-hatched areas of C diameter and H height show the closure position. Glass shall clear cap limits shown. The contour below the H dimension as well as the design of a possible bead are optional. Sufficient free space shall be provided between the bead and the cross-hatched area.

Figure 3 — Enlarged view section A-A