
**Industrial automation systems and
integration — Product data
representation and exchange —**

Part 227:

**Application protocol: Plant spatial
configuration**

*Systèmes d'automatisation industrielle et intégration — Représentation
et échange de données de produits —*

Partie 227: Protocole d'application: Configuration spatiale d'usine



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

CONTENTS	PAGE
Overview of this document.....	xii
Changes from the previous edition	xiv
1 Scope.....	1
2 Normative references	4
3 Terms, definitions, and abbreviations	5
3.1 Terms defined in ISO 10303-1.....	5
3.2 Terms defined in ISO 10303-31.....	5
3.3 Other definitions	6
3.4 Abbreviations.....	14
4 Information requirements.....	15
4.1 Units of functionality	16
4.1.1 associative_schematics UoF	16
4.1.2 cableway_component_characterization UoF	17
4.1.3 change_information UoF	18
4.1.4 connection UoF.....	20
4.1.5 connector UoF.....	20
4.1.6 hvac_component_characterization UoF.....	21
4.1.7 hvac_system_functional_characterization UoF	23
4.1.8 hybrid_shape_representation UoF	24
4.1.9 mechanical_component_characterization UoF	24
4.1.10 mechanical_system_functional_characterization UoF.....	25
4.1.11 piping_component_characterization UoF	26
4.1.12 piping_inspection UoF.....	29
4.1.13 piping_system_functional_characterization UoF.....	29
4.1.14 plant_characterization UoF	30
4.1.15 plant_csg_shape_representation UoF.....	31
4.1.16 plant_item_characterization UoF	32
4.1.17 shape UoF	35
4.1.18 site_characterization UoF	36
4.2 Application objects	37
4.3 Application assertions	234
5 Application interpreted model	270
5.1 Mapping specification.....	270
5.2 AIM EXPRESS short listing.....	1029
6 Conformance requirements.....	1184
6.1 Conformance class 1, piping system functional information.....	1185
6.2 Conformance class 2, equipment and component spatial information.....	1185
6.3 Conformance class 3, plant layout and piping design information along with HVAC, cableway, and mechanical system information	1185
6.4 Conformance class 4, piping fabrication and installation information	1188
6.5 Conformance class 5, piping inspection information.....	1188
6.6 Conformance class 6, HVAC system functional information.....	1189
6.7 Conformance class 7, HVAC spatial information.....	1190
6.8 Conformance class 8, cableway spatial information.....	1191

ISO 10303-227:2005(E)

6.9 Conformance class 9, piping and HVAC analysis information	1192
6.10 Conformance class 10, mechanical system functional information	1192
6.11 Conformance class 11, mechanical system spatial information	1192
6.12 Options within a conformance class	1193
Annex A (normative) AIM EXPRESS expanded listing	1212
Annex B (normative) AIM short names of entities	1384
Annex C (normative) Implementation method-specific requirements	1402
Annex D (normative) Protocol Information Conformance Statement (PICS) proforma	1403
Annex E (normative) Information object registration	1405
Annex F (informative) Application activity model	1406
Annex G (informative) Application reference model	1452
Annex H (informative) AIM EXPRESS-G	1500
Annex J (informative) AIM EXPRESS listing	1556
Annex K (informative) Application protocol usage guide	1557
Annex L (informative) Technical discussions	1558
Bibliography	1564
INDEX	1565

Figures

Figure 1 — Data planning model	xii
Figure 2 — Process plant life cycle activity coverage	1
Figure 3 — Base_elbow_support	40
Figure 4 — Base_line_support	41
Figure 5 — Bent_pipe	42
Figure 6 — Blind flange	43
Figure 7 — Boss	45
Figure 8 — Bushing	46
Figure 9 — Cap	49
Figure 10 — Pipe clamp	58
Figure 11 — Socket weld coupling	66
Figure 12 — Sleeve	67
Figure 13 — Butt-weld cross	67
Figure 14 — Cross_section_flat_oval	69
Figure 15 — Cross_section_radiused_corner	70

Figure 16 — Dummy_leg	74
Figure 17 — Eccentric_base_elbow_support	74
Figure 18 — Eccentric_reducer	75
Figure 19 — Elbow.....	76
Figure 20 — Expander_flange.....	80
Figure 21 — Female_end.....	83
Figure 22 — Ferrule.....	84
Figure 23 — Hole_straddle_centreline_orientation.....	86
Figure 24 — Flanged_end	87
Figure 25 — Raised face flange	88
Figure 26 — Flat face flange	88
Figure 27 — Ring type joint flange	88
Figure 28 — Male and female flange	88
Figure 29 — Tongue and groove flange	89
Figure 30 — Grooved_end	94
Figure 31 — Gusset	95
Figure 32 — Hangers both without_spring and with_spring.....	96
Figure 33 — Hvac_elbow_90deg_reducing	107
Figure 34 — Hvac_elbow_centred	108
Figure 35 — Hvac_elbow_mitre.....	109
Figure 36 — Hvac_offset_ogee_centred	116
Figure 37 — Transition - rectangular to round.....	124
Figure 38 — Transition - rectangle to round slanted.....	125
Figure 39 — Insert_fitting	127
Figure 40 — Lap_joint_flange.....	131
Figure 41 — Lap_joint_stub_end	131
Figure 42 — Lateral.....	133
Figure 43 — Lug.....	137
Figure 44 — Mitre_bend_pipe.....	147
Figure 45 — Nipple	148
Figure 46 — Olet	149
Figure 47 — Orifice_flange.....	151
Figure 48 — Orifice_plate	152

ISO 10303-227:2005(E)

Figure 49 — Pad	154
Figure 50 — Paddle_blank	155
Figure 51 — Paddle_spacer	155
Figure 52 — Perforated_cap	156
Figure 53 — Butt-weld Pipe Cap.....	158
Figure 54 — Plate	186
Figure 55 — Plug.....	187
Figure 56 — Reducer.....	190
Figure 57 — Reducing_flange.....	191
Figure 58 — Reinforcing_plate	192
Figure 59 — Reinforcing_ring.....	193
Figure 60 — Ring_spacer	194
Figure 61 — Forward and aft pointing ship's axes	203
Figure 62 — Shoe	205
Figure 63 — Slip_on_flange.....	208
Figure 64 — Slip_on_jacket_flange	209
Figure 65 — Socket	209
Figure 66 — Socket_weld_flange.....	210
Figure 67 — Spectacle_blind.....	212
Figure 68 — Stay	214
Figure 69 — Stopper.....	215
Figure 70 — Stub_in.....	219
Figure 71 — Tee	224
Figure 72 — Threaded	225
Figure 73 — Threaded_flange	226
Figure 74 — Trunnion	228
Figure 75 — Union	229
Figure 76 — Weld_neck_flange	231
Figure 77 — Weld_neck_jacket_flange	232
Figure 78 — Y_type_lateral	233
Figure F.1 — IDEF0 basic notation.....	1425
Figure F.2 — A-0: Process plants.....	1426
Figure F.3 — A0: Perform process plant life-cycle activities	1427

Figure F.4 — A1: Manage and plan project	1428
Figure F.5 — A2: Design and engineer plant	1429
Figure F.6 — A21: Produce conceptual process design	1430
Figure F.7 — A22: Produce conceptual plant design	1431
Figure F.8 — A23: Produce final process design	1432
Figure F.9 — A24: Produce final plant design	1433
Figure F.10 — A242: Finalize layout and spatial design.....	1434
Figure F.11 — A2426: Finalize piping.....	1435
Figure F.12 — A24262: Finalize 3D piping details.....	1436
Figure F.13 — A3: Procure goods and services	1437
Figure F.14 — A4: Construct and commission plant	1438
Figure F.15 — A42: Obtain construction services.....	1439
Figure F.16 — A423: Obtain piping systems	1440
Figure F.17 — A4233: Shop fabricate piping.....	1441
Figure F.18 — A42331: Prepare shop fabrication piping.....	1442
Figure F.19 — A42332: Shop fabricate piping.....	1443
Figure F.20 — A42333: Inspect shop fabricated piping.....	1444
Figure F.21 — A42334: Complete and ship shop fabricated piping	1445
Figure F.22 — A5: Manage, operate, and maintain plant.....	1446
Figure F.23 — A6: Decommission and dispose of plant.....	1447
Figure G.1 — Off-page connectors.....	1452
Figure G.2 — ARM diagram 1 of 47.....	1453
Figure G.3 — ARM diagram 2 of 47.....	1454
Figure G.4 — ARM diagram 3 of 47.....	1455
Figure G.5 — ARM diagram 4 of 47.....	1456
Figure G.6 — ARM diagram 5 of 47.....	1457
Figure G.7 — ARM diagram 6 of 47.....	1458
Figure G.8 — ARM diagram 7 of 47.....	1459
Figure G.9 — ARM diagram 8 of 47.....	1460
Figure G.10 — ARM diagram 9 of 47.....	1461
Figure G.11 — ARM diagram 10 of 47.....	1462
Figure G.12 — ARM diagram 11 of 47.....	1463
Figure G.13 — ARM diagram 12 of 47.....	1464

ISO 10303-227:2005(E)

Figure G.14 — ARM diagram 13 of 47.....	1465
Figure G.15 — ARM diagram 14 of 47.....	1466
Figure G.16 — ARM diagram 15 of 47.....	1467
Figure G.17 — ARM diagram 16 of 47.....	1468
Figure G.18 — ARM diagram 17 of 47.....	1469
Figure G.19 — ARM diagram 18 of 47.....	1470
Figure G.20 — ARM diagram 19 of 47.....	1471
Figure G.21 — ARM diagram 20 of 47.....	1472
Figure G.22 — ARM diagram 21 of 47.....	1473
Figure G.23 — ARM diagram 22 of 47.....	1474
Figure G.24 — ARM diagram 23 of 47.....	1475
Figure G.25 — ARM diagram 24 of 47.....	1476
Figure G.26 — ARM diagram 25 of 47.....	1477
Figure G.27 — ARM diagram 26 of 47.....	1478
Figure G.28 — ARM diagram 27 of 47.....	1479
Figure G.29 — ARM diagram 28 of 47.....	1480
Figure G.30 — ARM diagram 29 of 47.....	1481
Figure G.31 — ARM diagram 30 of 47.....	1482
Figure G.32 — ARM diagram 31 of 47.....	1483
Figure G.33 — ARM diagram 32 of 47.....	1484
Figure G.34 — ARM diagram 33 of 47.....	1485
Figure G.35 — ARM diagram 34 of 47.....	1486
Figure G.36 — ARM diagram 35 of 47.....	1487
Figure G.37 — ARM diagram 36 of 47.....	1488
Figure G.38 — ARM diagram 37 of 47.....	1489
Figure G.39 — ARM diagram 38 of 47.....	1490
Figure G.40 — ARM diagram 39 of 47.....	1491
Figure G.41 — ARM diagram 40 of 47.....	1492
Figure G.42 — ARM diagram 41 of 47.....	1493
Figure G.43 — ARM diagram 42 of 47.....	1494
Figure G.44 — ARM diagram 43 of 47.....	1495
Figure G.45 — ARM diagram 44 of 47.....	1496
Figure G.46 — ARM diagram 45 of 47.....	1497

Figure G.47 — ARM diagram 46 of 47.....	1498
Figure G.48 — ARM diagram 47 of 47.....	1499
Figure H.1 — AIM EXPRESS-G diagram 1 of 55.....	1501
Figure H.2 — AIM EXPRESS-G diagram 2 of 55.....	1502
Figure H.3 — AIM EXPRESS-G diagram 3 of 55.....	1503
Figure H.4 — AIM EXPRESS-G diagram 4 of 55.....	1504
Figure H.5 — AIM EXPRESS-G diagram 5 of 55.....	1505
Figure H.6 — AIM EXPRESS-G diagram 6 of 55.....	1506
Figure H.7 — AIM EXPRESS-G diagram 7 of 55.....	1507
Figure H.8 — AIM EXPRESS-G diagram 8 of 55.....	1508
Figure H.9 — AIM EXPRESS-G diagram 9 of 55.....	1509
Figure H.10 — AIM EXPRESS-G diagram 10 of 55.....	1510
Figure H.11 — AIM EXPRESS-G diagram 11 of 55.....	1511
Figure H.12 — AIM EXPRESS-G diagram 12 of 55.....	1512
Figure H.13 — AIM EXPRESS-G diagram 13 of 55.....	1513
Figure H.14 — AIM EXPRESS-G diagram 14 of 55.....	1514
Figure H.15 — AIM EXPRESS-G diagram 15 of 55.....	1515
Figure H.16 — AIM EXPRESS-G diagram 16 of 55.....	1516
Figure H.17 — AIM EXPRESS-G diagram 17 of 55.....	1517
Figure H.18 — AIM EXPRESS-G diagram 18 of 55.....	1518
Figure H.19 — AIM EXPRESS-G diagram 19 of 55.....	1519
Figure H.20 — AIM EXPRESS-G diagram 20 of 55.....	1520
Figure H.21 — AIM EXPRESS-G diagram 21 of 55.....	1521
Figure H.22 — AIM EXPRESS-G diagram 22 of 55.....	1522
Figure H.23 — AIM EXPRESS-G diagram 23 of 55.....	1523
Figure H.24 — AIM EXPRESS-G diagram 24 of 55.....	1524
Figure H.25 — AIM EXPRESS-G diagram 25 of 55.....	1525
Figure H.26 — AIM EXPRESS-G diagram 26 of 55.....	1526
Figure H.27 — AIM EXPRESS-G diagram 27 of 55.....	1527
Figure H.28 — AIM EXPRESS-G diagram 28 of 55.....	1528
Figure H.29 — AIM EXPRESS-G diagram 29 of 55.....	1529
Figure H.30 — AIM EXPRESS-G diagram 30 of 55.....	1530
Figure H.31 — AIM EXPRESS-G diagram 31 of 55.....	1531

ISO 10303-227:2005(E)

Figure H.32 — AIM EXPRESS-G diagram 32 of 55.....	1532
Figure H.33 — AIM EXPRESS-G diagram 33 of 55.....	1533
Figure H.34 — AIM EXPRESS-G diagram 34 of 55.....	1534
Figure H.35 — AIM EXPRESS-G diagram 35 of 55.....	1535
Figure H.36 — AIM EXPRESS-G diagram 36 of 55.....	1536
Figure H.37 — AIM EXPRESS-G diagram 37 of 55.....	1537
Figure H.38 — AIM EXPRESS-G diagram 38 of 55.....	1538
Figure H.39 — AIM EXPRESS-G diagram 39 of 55.....	1539
Figure H.40 — AIM EXPRESS-G diagram 40 of 55.....	1540
Figure H.41 — AIM EXPRESS-G diagram 41 of 55.....	1541
Figure H.42 — AIM EXPRESS-G diagram 42 of 55.....	1542
Figure H.43 — AIM EXPRESS-G diagram 43 of 55.....	1543
Figure H.44 — AIM EXPRESS-G diagram 44 of 55.....	1544
Figure H.45 — AIM EXPRESS-G diagram 45 of 55.....	1545
Figure H.46 — AIM EXPRESS-G diagram 46 of 55.....	1546
Figure H.47 — AIM EXPRESS-G diagram 47 of 55.....	1547
Figure H.48 — AIM EXPRESS-G diagram 48 of 55.....	1548
Figure H.49 — AIM EXPRESS-G diagram 49 of 55.....	1549
Figure H.50 — AIM EXPRESS-G diagram 50 of 55.....	1550
Figure H.51 — AIM EXPRESS-G diagram 51 of 55.....	1551
Figure H.52 — AIM EXPRESS-G diagram 52 of 55.....	1552
Figure H.53 — AIM EXPRESS-G diagram 53 of 55.....	1553
Figure H.54 — AIM EXPRESS-G diagram 54 of 55.....	1554
Figure H.55 — AIM EXPRESS-G diagram 55 of 55.....	1555
Figure L.1 — Relationship between logical connectivity and physical connectivity.....	1563

Tables

Table 1 — Plant_item_shape interference clash detection.....	183
Table 2 — Conformance classes.....	1195
Table 3 — Conformance class (1 –11) elements.....	1197
Table B. 1 — Short names of entities.....	1384
Table F.1 — AAM ICOM to ARM UoF/entity mapping.....	1449

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

Draft International Standards adopted by technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75% of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 10303-227 was prepared by Technical Committee ISO/TC 184, *Industrial automation systems and integration*, Subcommittee SC4, *Industrial data*.

This second edition of ISO 10303-227 cancels and replaces the first edition (ISO 10303-227:2001), of which it constitutes a technical revision.

This International Standard is organized as a series of parts, each published separately. The structure of this international standard is described in ISO 10303-1.

Each part of this International Standard is a member of one of the following series: description methods, implementation methods, conformance testing methodology and framework, integrated generic resources, integrated application resources, application protocols, abstract test suites, application interpreted constructs, and application modules. This part is a member of the application protocols series.

A complete list of parts of ISO 10303 is available from the Internet:

http://www.tc184-sc4.org/titles/STEP_titles.htm

Should further parts of ISO 10303 be published, they will follow the same numbering pattern.

Introduction

ISO 10303 is an International Standard for the computer-interpretable representation of product information and for the exchange of product data. The objective is to provide a neutral mechanism capable of describing products throughout their life cycle. This mechanism is suitable not only for neutral file exchange, but also as a basis for implementing and sharing product databases, and as a basis for archiving.

Overview of this document

This part of ISO 10303 is a member of the application protocol series. This part of ISO 10303 specifies an application protocol (AP) for the exchange of the spatial configuration information of industrial facilities, for example, process plants, ships and their supporting systems. This information includes the shape, spatial arrangement and connection characteristics of piping, HVAC (heating, ventilation and air-conditioning), mechanical, and cableway system components as well as the shape and spatial arrangement characteristics of other related plant systems (for example, instrumentation and controls, and structural systems). Users of this standard should understand the basic principles and concepts of plant design, and piping, HVAC, cableway, and mechanical system design.

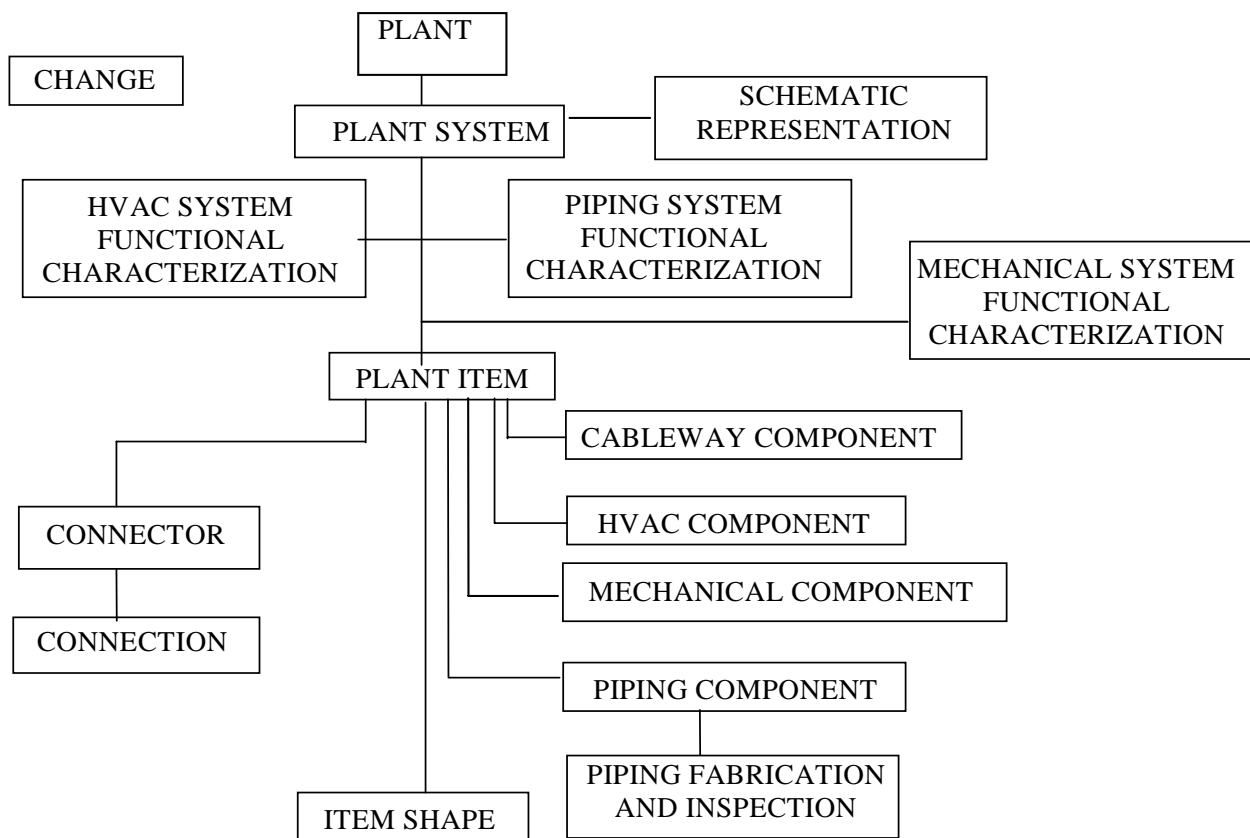


Figure 1 — Data planning model

This AP specifies requirements for the exchange of information required for the design, analysis, fabrication and installation of piping components and piping systems and information on the inspection of

fabricated piping. This AP specifies requirements for the exchange of information required for the design, analysis and installation of HVAC components and HVAC systems. This AP specifies requirements for the exchange of information required for the design, analysis and installation of mechanical components and mechanical systems. This AP specifies requirements for the exchange of information required for the design and installation of cableway components and cableway systems. This AP also specifies requirements for the exchange of functional characteristics for HVAC, mechanical, and piping components and systems. This AP also specifies requirements for the exchange of schematic representations of this data. A Piping and Instrumentation Diagram (P&ID) is a type of drawing that could be developed from the Associated Schematic representation.

The design information for a piping system may specify a pump capable of maintaining a pressure and flow rate. The design may also specify the shape limitations or requirements and the location of the pump in the system, but the design will not include sufficient information for the fabrication of the pump.

Figure 1 contains a data planning model that provides a high level description of the requirements for this application protocol, as well as the relationships between the basic data concepts. The data planning model illustrates that a plant consists of plant systems, plant systems consist of plant items and plant items may be connected to one another using connectors on the plant item. The shape and spatial arrangement of plant items are represented by the item shape. The shape representation may use constructive solid geometry (CSG), solid boundary representation (Brep) geometry, wireframe geometry, or combinations of these. The plant item shape may be represented at various levels of abstraction, from an encompassing envelope to a detailed design description. The data planning model further illustrates that the concept of change is a requirement for this application protocol. Change is applicable to each individual plant item, the relationships between plant items, and to groupings of plant items. It applies to all the concepts noted on the data planning model.

NOTE This part of ISO 10303 may be used in conjunction with ISO 13584 [13] to identify catalogue items and classifications.

This application protocol defines the context, scope, and information requirements for the exchange of design and layout information for a process plant, plant systems, ship systems, system components and equipment between different agents over the life cycle of the facility and specifies the integrated resources necessary to satisfy these requirements. The reasons for exchanging this information include:

- exchange of requirements from an owner to an engineering firm;
- exchange of cableway, HVAC, mechanical, piping and equipment designs between a design engineer and a system engineer;
- exchange of cableway, HVAC, mechanical, piping and equipment designs between a design engineer and a fabricator;
- exchange of changes to cableway, HVAC, mechanical, piping and equipment designs between a design engineer and a system engineer or a fabricator;
- exchange of piping fabrication information, fabricated piping inspection results and installation information between engineering, fabrication and construction firms;
- integration of designs created by different engineers;

ISO 10303-227:2005(E)

- detection of physical interferences of systems and components with components of other systems;
- exchange of cableway, HVAC, mechanical, and piping installation information between engineering and construction firms and with owner organizations;
- exchange of as-built facility and system configurations among owners, engineering firms and construction firms.

Application protocols provide the basis for developing implementations of ISO 10303 and an AP227 Edition 2 Usage Guide [16] has been developed to aid in the conformance testing of AP implementations.

Clause 1 defines the scope of the application protocol and summarizes the functionality and data covered by the AP. Clause 3 lists the words defined in this part of ISO 10303 and gives pointers to words defined elsewhere. An application activity model that is the basis for the definition of the scope is provided in annex F. The information requirements of the application are specified in clause 4 using terminology appropriate to the application. A graphical representation of the information requirements, referred to as the application reference model, is given in annex G.

Resource constructs are interpreted to meet the information requirements. This interpretation produces the application interpreted model (AIM). This interpretation, given in 5.1, shows the correspondence between the information requirements and the AIM. The short listing of the AIM specifies the interface to the integrated resources and is given in 5.2. Note that the definitions and EXPRESS provided in the integrated resources for constructs used in the AIM may include select list items and subtypes which are not imported into the AIM. The expanded listing given in annex A contains the complete EXPRESS for the AIM without annotation. A graphical representation of the AIM is given in annex H. Additional requirements for specific implementation methods are given in annex C.

Changes from the previous edition

This edition incorporates modifications that are upwardly compatible with the previous edition. Modifications to EXPRESS specification are upwardly compatible if:

- instances encoded according to ISO 10303-21, and that conform to an ISO 10303 application protocol based on the previous edition of this part, also conform to a revision of that application protocol based on this edition;
- interfaces that conform to ISO 10303-22 and to an ISO 10303 application protocol based on the previous edition of this part, also conform to a revision of that application protocol based on this edition;
- the mapping table of ISO 10303 application protocols based on the previous edition of this part remain valid in a revision of that application protocol based on this edition.

This edition provides an extension of ISO 10303-227:2001 to include the representation and exchange of piping configurations and properties specific to support prefabrication and inspection of piping assembled in a shop and the installation of the prefabricated piping. It extends the AP 227 support for information about HVAC (heating, ventilation, and air-conditioning) components and systems, mechanical components and systems, cableway spatial information, analysis data, and adds refinements to make AP 227 more useful to the general building and shipbuilding industries. It also extends AP227 to support the information required for a schematic representation of the distributed system.

Industrial automation systems and integration — Product data representation and exchange —

Part 227:

Application protocol: Plant spatial configuration

1 Scope

This part of ISO 10303 specifies the use of the integrated resources necessary for the scope and information requirements for the exchange of spatial configuration information of industrial facilities, for example, process plants, ships and their supporting systems. The spatial configuration information focuses on the shape and spatial arrangement of the components of the systems. The spatial configuration information principally supports the engineering, fabrication and installation life-cycle phases, but may be useful in the downstream life-cycle phases of operations and maintenance. This part accommodates the disciplines of plant design, system design, fabrication, inspection, installation and construction.

NOTE 1 The application activity model in annex F provides a graphical representation of the processes and information flows that are the basis for the definition of the scope of this part of ISO 10303.

NOTE 2 Figure 2 illustrates the basic life-cycle stages of a process plant. Plant life-cycle phases for which AP 227 is useful are enclosed in the rounded rectangles labeled “AP 227 ed2”.

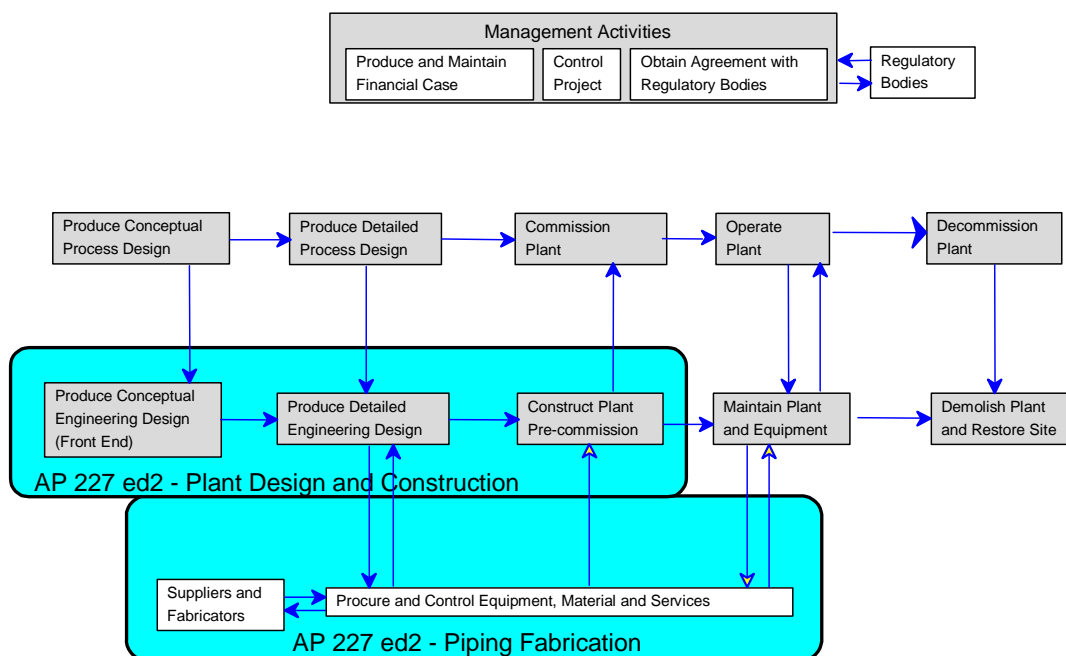


Figure 2 — Process plant life cycle activity coverage

The following are within the scope of this part of ISO 10303:

— the shape and spatial arrangement of items in systems within a process plant or ship;

ISO 10303-227:2005(E)

- explicit representation of the 3D shape of systems and components;
- explicit representation of the 3D external shape of system components and equipment.

The representation may include envelope, outline and detailed representations as well as a parametric representation of the external shape.

- the functional configuration of HVAC, mechanical, and piping systems and the relationship of the functional configurations to the physical system design;
- information required for the design, analysis, fabrication and installation of piping components and piping systems;
- information required for the design, analysis, fabrication and installation of mechanical components and mechanical systems;
- information on the inspection of fabricated piping;

NOTE 3 The functional configuration entails connectivity, sequencing, component size, and schedule, and may include other information, such as equipment tag numbers and requirements to perform consistency checks between the functional and physical representations of the design.

- basic engineering data as needed for spatial layout and configuration of systems;
- references to functional requirements of plant systems, such as stream data and operational characteristics;
- references to or designation of functional characteristics of components and connected equipment as required for system design;
- the identification, shape, location, and orientation of reserved areas, volumes, and space-occupying elements of a plant;
- references to specifications, standards, guidelines, or regulations for the systems, components, or connected equipment that may specify physical characteristics or performance characteristics of the system or component;

EXAMPLE 1 Physical characteristics include material and welding requirements.

EXAMPLE 2 References to standards include ISO 10303-221 [3] and ISO 13584 [13].

- the identification of catalogue information associated with a component;
- the identification of catalogues that contain component definitions;
- status of components and connected equipment and of their spatial arrangement;

NOTE 4 Status labels are used by project management to monitor and control the execution of the project. Labels such as "preliminary", "in-work", and "released for fabrication" are used to designate the degree of completeness or suitability for further action of the design or layout that the label is applied to.

- connections and connection requirements for cableway, HVAC, mechanical, and piping components and equipment;
- definition of components in sufficient detail to support the acquisition of the components;
- change request approval, notification, and verification, tracking of differences between versions of system information, and tracking of changes to plant items and attributes of plant items;

NOTE 5 Only the specific change information described in this part of ISO 10303 is in scope. The change process itself is not in scope.

- specification of the chemical composition of the streams carried by the piping and HVAC systems in sufficient detail to evaluate the suitability of components for the desired process;
- data exchange;
- external reference to classification systems;
- external reference to standard parts;
- external reference to representations of standard parts;
- information necessary to exchange schematic representation of the distributed systems.

EXAMPLE 3 Schematic representations include P&IDs and process flow diagrams (PFDs).

NOTE 6 Only the information to generate Associated Schematics described in this part of ISO 10303 is in scope. The actual P&ID drawing itself is not in the scope.

The following are outside the scope of this part of ISO 10303:

- the contents of specifications, standards, guidelines, or regulations;
- preparation of piping specifications;
- logistics and materials management;
- specification of the chemical composition of the streams carried by the piping system in sufficient detail for process flow design;
- process design and conceptual engineering;

EXAMPLE 4 Process design includes activities such as process material and heat balances, process flow diagram development, and determination of equipment sizes.

- testing, commissioning, hand over, maintenance, and disposal of a plant;
- plant operating procedures;
- commercial aspects of procurement and contracting;

EXAMPLE 5 Commercial aspects include pricing, terms and conditions, and payment schedules.

- information necessary to manage the evolution and growth of data sets through the life-cycle of a product or project other than indications of changes and approvals;
- history data;
- internal design and maintenance of equipment.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 8824-1, *Information technology — Abstract Syntax Notation One (ASN.1): Specification of basic notation — Part 1*

ISO 10303-1, *Industrial automation systems and integration — Product data representation and exchange — Part 1: Overview and fundamental principles*

ISO 10303-11/Cor 1, *Industrial automation systems and integration — Product data representation and exchange — Part 11: Description methods: The EXPRESS language reference manual — Technical Corrigendum 1*

ISO 10303-21/Cor 1, *Industrial automation systems and integration — Product data representation and exchange — Part 21: Implementation methods: Clear text encoding of the exchange structure — Technical Corrigendum 1*

ISO 10303-28, *Industrial automation systems and integration — Product data representation and exchange — Part 28: Implementation methods: XML representations of EXPRESS schemas and data*

ISO 10303-31, *Industrial automation systems and integration — Product data representation and exchange — Part 31: Conformance testing methodology and framework: General concepts*

ISO 10303-41, *Industrial automation systems and integration — Product data representation and exchange — Part 41: Integrated generic resource: Fundamentals of product description and support*

ISO 10303-42, *Industrial automation systems and integration — Product data representation and exchange — Part 42: Integrated generic resource: Geometric and topological representation*

ISO 10303-43, *Industrial automation systems and integration — Product data representation and exchange — Part 43: Integrated generic resource: Representation structures*

ISO 10303-44, *Industrial automation systems and integration — Product data representation and exchange — Part 44: Integrated generic resource: Product structure configuration*

ISO 10303-45, *Industrial automation systems and integration — Product data representation and exchange — Part 45: Integrated generic resource: Materials*

ISO 10303-46, *Industrial automation systems and integration — Product data representation and exchange — Part 46: Integrated generic resource: Visual presentation*

ISO 10303-47, *Industrial automation systems and integration — Product data representation and exchange — Part 47: Integrated generic resource: Shape variation tolerances*

ISO 10303-101, *Industrial automation systems and integration — Product data representation and exchange — Part 101: Integrated application resources: Draughting*

ISO 10303-511, *Industrial automation systems and integration — Product data representation and exchange — Part 511: Application interpreted construct: Topologically bounded surface*

ISO 13584-24, *Industrial automation systems and integration — Parts library — Part 24: Logical resource: Logical model of supplier library*

ISO 13584-42, *Industrial automation systems and integration — Parts library — Part 42: Description methodology: Methodology for structuring part families*

3 Terms, definitions, and abbreviations

3.1 Terms defined in ISO 10303-1

This part of ISO 10303 makes use of the following terms defined in ISO 10303-1:

- abstract test suite (ATS);
- application;
- application activity model (AAM);
- application interpreted model (AIM);
- application protocol (AP);
- application reference model (ARM);
- conformance class;
- implementation method;
- integrated resource;
- product;
- product data;
- protocol information and conformance statement (PICS);
- unit of functionality (UoF).

3.2 Terms defined in ISO 10303-31

This part of ISO 10303 makes use of the following terms defined in ISO 10303-31:

- conformance testing;
- implementation under test (IUT).

ISO 10303-227:2005(E)

3.3 Other definitions

For the purposes of this part of ISO 10303, the following definitions apply:

3.3.1 actual

descriptive adjective that, when applied to an item, indicates that the item exists at some time in the real world. An actual plant item (see 3.3.38) has properties that can be measured or observed

NOTE 1 The terms actual, planned (see 3.3.38), and required (see 3.3.48) loosely reflect life-cycle stages of an item.

NOTE 2 Within the scope of this part of ISO 10303, being actual can be specified for an item that is:

- a plant item;
- an association between plant items such as a connection;
- an activity or an association between a plant item and an activity;
- a possession of a property by a plant item or activity.

NOTE 3 An item cannot be both actual and planned (see 3.3.38). An actual item can be the realization of an planned item.

3.3.2 arrangement

a logical component of a system. An arrangement is composed of a collection of interconnected segments which together form a (logical) part of a system.

NOTE 1 Within the scope of this part of ISO 10303, an arrangement may refer to the layout of either the functional or physical design of a mechanical system.

NOTE 2 An arrangement is analagous to that of a line (see 3.3.23) within a piping system (see 3.3.37).

3.3.3 arrangement less

an arrangement consisting of no segments. It is an arrangement without any logical segmentation of it's components.

NOTE An arrangement less system is analagous to that of a line less one used to represent a piping system (see 3.3.37).

3.3.4 arrangement segment

an element of an arrangement (see 3.3.2).

NOTE An arrangement segment is analagous to that of a line segment (see 3.3.24) within a piping system (see 3.3.37).

3.3.5 arrangement segment termination

one of two logical end points of an arrangement segment (see 3.3.4).

NOTE An arrangement segment termination is analogous to that of a line segment termination (see 3.3.25) within a piping system (see 3.3.37).

3.3.6 arrangement segment termination connection

a logical linkage between two arrangement segments (see 3.3.4) or between an arrangement segment and a plant item (see 3.3.39).

NOTE An arrangement segment termination connection is analogous to that of a line segment termination connection (see 3.3.26) within a piping system (see 3.3.37).

3.3.7 assembly

a set of items that have a relationship to each other apart from being members of the same set

NOTE Within the scope of this part of ISO 10303, an assembly can be items that are plant items (see 3.3.39)

3.3.8 basic engineering data

parameters and descriptions that specify design (see 3.3.16) characteristics and boundaries for the plant item (see 3.3.39) that are required to support piping system (see 3.3.37) design

EXAMPLE Piping system design parameters and descriptions include design temperature, design pressure, design codes, and weights.

3.3.9 branch

a portion of a piping system (see 3.3.37) that diverges or divides from the main flow path

NOTE A branch may have a different identifier from that of the main flow path.

3.3.10 catalogue

a collection (see 3.3.11) of items or an electronic or paper document that contains information about a collection of items

NOTE Within the scope of this part of ISO 10303, a catalogue can be a collection of typical or reference plant items (see 3.3.39), that the definition of a specific occurrence of a plant item in the design (see 3.3.16) of a process plant (see 3.3.44) can be selected from.

3.3.11 collection

a set of things that do not have any relationship to each other apart from being members of the same set

NOTE Within the scope of this part of ISO 10303, a collection can be items that are plant items (see 3.3.39).

3.3.12 component

an item that may be part of another item

ISO 10303-227:2005(E)

NOTE 1 Within the scope of this part of ISO 10303, an item that is a component can be part of a functional (see 3.3.18) or physical (see 3.3.29) plant item (see 3.3.39) or part of a process material (see 3.3.43) that is a mixture.

NOTE 2 A component can itself have components.

3.3.13 connection

an association between two items that enables the flow of process material (see 3.3.43), energy, mechanical loads, or signals between them or constrains their relative positions

NOTE 1 Within the scope of this part of ISO 10303, a connection can be between either functional (see 3.3.18) or physical (see 3.3.29) plant items (see 3.3.39).

NOTE 2 A connection can be the result of a physical (see 3.3.29) joining.

NOTE 3 A functional connection can exist between two plant items (see 3.3.39) without a physical (see 3.3.29) joining of the plant items.

3.3.14 connector

a physical (see 3.3.29) or functional (see 3.3.18) property of a plant item (see 3.3.39) that links it to another plant item, or to a compatible connector on another plant item. This linkage enables the flow of energy, mechanical loads, process material (see 3.3.43), or signals through the connected plant items

3.3.15 construction material

the substance or substances that a physical (see 3.3.29) plant item (see 3.3.39) is made from

3.3.16 design

a representation (see 3.3.47) of a process plant (see 3.3.44), portion of a process plant, or plant item (see 3.3.39), that is created for a specific purpose and uses a consistent syntax and symbology

NOTE A PFD is a design that represents the flow and reaction of process materials (see 3.3.43). A P&ID is a design that represents the logical functionality of a piping system (see 3.3.37). A three-dimensional geometric model is a design that represents the physical (see 3.3.29) shape and arrangement of the components (see 3.3.12) of a process plant (see 3.3.44) or plant system (see 3.3.40).

3.3.17 equipment

a plant item (see 3.3.39) that carries out an operation and that is treated as a single item for the purpose of design (see 3.3.16), acquisition, or operation

NOTE An equipment has both physical (see 3.3.29) and functional (see 3.3.18) aspects.

3.3.18 functional

descriptive adjective that, when applied to an item, refers to the actions, activities, or capabilities, that the item provides or may provide to fulfill a purpose

NOTE In the process plant industry, a plant item (see 3.3.39) that provides functional capability in a process plant (see 3.3.44) is typically denoted by a tag number.

3.3.19 functional characteristics

nomenclature, codes, and named values that describe or specify the performance or behaviour of a plant item (see 3.3.39)

EXAMPLE Functional characteristics include flow rates, operating pressure, and maximum temperature.

3.3.20 functional requirements

nomenclature, codes, and named values that describe or specify the performance or behaviour to be met by a plant item (see 3.3.39)

3.3.21 instrument

an individually identifiable plant item (see 3.3.39) or combination of plant items, that is part of a system that monitors or controls a process plant (see 3.3.44)

EXAMPLE Instruments include items such as control valves, sensors, and gauges.

3.3.22 insulation

a quantity of matter or space that provides resistance to the flow of heat, electricity, sound, or mechanical vibration

3.3.23 line

a logical component (see 3.3.12) of a piping system (see 3.3.37) that is composed of a collection (see 3.3.11) of line segments (see 3.3.24)

NOTE Further explanation of lines is provided in K.7.

3.3.24 line segment

an element of a line (see 3.3.23)

NOTE Further explanation of line segments is provided in K.7.

3.3.25 line segment termination

one of two logical end-points of a line segment (see 3.3.24)

NOTE Lines (see 3.3.23) are composed of line segments (see 3.3.24). Line segments are connected through line segment terminations.

3.3.26 line segment termination connection

a logical linkage between two line segments (see 3.3.24) or between a line segment and a plant item (see 3.3.39)

ISO 10303-227:2005(E)

3.3.27 material

a quantity of matter

3.3.28 material stream

a flow of process material (see 3.3.43) past a defined point along a path

3.3.29 mechanical arrangement specification

the design specification of various aspects of a mechanical system (see 3.3.30). It may include component parameters, materials, design notes, fabrication notes and layout drawings. It is also used to refer to a document or electronic file that contains such information.

3.3.30 mechanical system

a type of plant system (see 3.3.40), that is a system of interconnected plant item (see 3.3.39) objects that conveys mechanical power or control for a specific function.

EXAMPLE Functions that require the conveyence of power distribution include (but is not limited to), power trains, propulsion systems, steering gear systems, mechanical separation systems, cranes, winches, and lifts.

3.3.31 physical

descriptive adjective that, when applied to an item, refers to a set of characteristics, properties, or traits of the item

EXAMPLE Characteristics include weight, size, and location and orientation of the item.

NOTE In the process plant industry, a physical object that is, or may be, installed as a plant item (see 3.3.39), and can be identified by a serial number.

3.3.32 pipe

a plant item (see 3.3.39) that is hollow and approximately cylindrical, that may have a constant cross-section along its extent, and that conveys fluid, vapour, or particulate material (see 3.3.27)

NOTE Heating, ventilation, and air conditioning (HVAC) duct that has a rectangular cross section is not a pipe.

3.3.33 pipe fitting

a plant item (see 3.3.39) that is used, or is intended to be used, to join or terminate pipes (see 3.3.32) or other items in a piping system (see 3.3.37) or equipment (see 3.3.17) connectors (see 3.3.14), or to provide changes of pipe direction or branching within a piping system

3.3.34 piping and instrumentation diagram

a piping and instrumentation diagram schematic representation (see 3.3.47) that consists, as a minimum, of the functional (see 3.3.18) connection (see 3.3.13) and assembly (see 3.3.7) of plant items (see 3.3.39), and the identification of principal plant items

NOTE The piping and instrumentation diagram can also present the functional (see 3.3.18) and physical (see 3.3.29) aspects of plant items (see 3.3.39).

3.3.35 piping class

a functional (see 3.3.18) performance envelope defined by a set or range of common physical (see 3.3.29) properties, and an identification of the pipes (see 3.3.32), pipe fittings (see 3.3.33), and valves that have these properties

EXAMPLE 1 Piping classes include stainless steel, cast iron, and carbon steel.

EXAMPLE 2 Physical properties of a piping class include diameter, pressure, and temperature.

3.3.36 piping specification

a definition of various aspects of a piping system (see 3.3.37). It is also used to refer to a document or electronic file that contains such a definition

NOTE Piping system (see 3.3.37) aspects that may be included in a piping specification include design (see 3.3.16) pressures and temperatures, piping construction materials (see 3.3.15), pipe wall thicknesses or schedules, types of fittings to be used, types of valves and flanges, valve and flange pressure rating requirements, and fabrication, examination, testing, inspection, cleaning, and installation requirements, including the requirements for seismic installations, where applicable.

3.3.37 piping system

a plant system (see 3.3.40) that performs a transport function, and that is composed primarily of pipes (see 3.3.32), pipe fittings (see 3.3.33), and valves subject to the same set or sets of design (see 3.3.16) conditions

3.3.38 planned

descriptive adjective that, when applied to an item, indicates that an item that has been designed or predicted

NOTE 1 The terms actual (see 3.3.1), planned (see 3.3.38), and required (see 3.3.48) loosely reflect life-cycle stages of an item.

NOTE 2 Within the scope of this part of ISO 10303, being planned can be specified for an item that is:

- a plant item (see 3.3.39);
- an association between plant items such as a connection (see 3.3.13);
- an activity or an association between a plant item and an activity;

a possession of a property by a plant item or activity.

NOTE 3 An item cannot be both actual (see 3.3.1) and planned. An actual item can be the realization of a planned item.

ISO 10303-227:2005(E)

3.3.39 plant item

a physical (see 3.3.29) object or volume of space that is, or is intended to be, a part of a process plant (see 3.3.44). A plant item can be an assembly (see 3.3.7) of other plant items. A plant item has both physical (see 3.3.29) and functional (see 3.3.18) aspects

NOTE If a plant item is a volume of space, it may or may not contain other plant items.

3.3.40 plant system

a part of a process plant (see 3.3.44) that provides or performs, or is intended to provide or perform, a service or function contributing to, or enabling the operation of, a process plant. A plant system consists of an assembly (see 3.3.7) of one or more plant items (see 3.3.39). A plant system has both physical (see 3.3.29) and functional (see 3.3.18) aspects

3.3.41 process activity

an activity that transforms or transports process material (see 3.3.43) between its input to a process plant (see 3.3.44) as feed stock and its output from a process plant as a product or waste

NOTE The transformation can be a change of physical (see 3.3.29) state, a physical separation or mixing, or a biological or chemical process.

3.3.42 process flow diagram

a schematic representation (see 3.3.47) that consists, as a minimum, of the connection of process activities (see 3.3.41) by material streams (see 3.3.28) and the identification of plant items (see 3.3.39) that perform the process activities

NOTE 1 The process activities (see 3.3.41) shown on a process flow diagram can also be called unit operations.

NOTE 2 The process flow diagram can also present:

- properties of process activities (see 3.3.41) and material streams (see 3.3.28) for particular cases;
- measurements that are made upon process activities and material streams;
- the flow of signals between sensors, controllers, and actuators;
- the control logic that is implemented by a controller.

3.3.43 process material

the material (see 3.3.27) that is transformed or transported by a process activity (see 3.3.41)

3.3.44 process plant

an assembly (see 3.3.7) of one or more plant systems (see 3.3.40) and plant items (see 3.3.39) that can, or is intended to perform, a chemical, physical (see 3.3.29) or transport process. A process plant is identified as a single unit for the purposes of management and ownership. A process plant has both physical and functional (see 3.3.18) aspects

3.3.45 range of values

a specification of a value range for a given dimension, parameter, or nominal size, for the purpose of defining a family of plant items (see 3.3.39)

NOTE This is done by specifying two dimensional values for a given parameter. One dimension has a name with a value of minimum_<parameter name>, such as minimum_flange_inside_diameter. The other dimension has a name with a value of maximum_<parameter name>, such as maximum_flange_inside_diameter.

3.3.46 range value

an indication of variation of a dimension, parameter, or nominal size on an actual physical (see 3.3.29) plant item (see 3.3.39). A range value is not a toleranced dimension. A range value, like the range of values (see 3.3.45), has a minimum and maximum value. It does not, however, indicate a family of plant items

NOTE The attributes that use range values in 4.2 are differentiated from those attributes that use range of values (see 3.3.45) by an explanatory note that follows the attribute definition.

EXAMPLE Insulation (see 3.3.22) may be described as 6 inches thick, but in reality it may be 5-7 inches thick. Range values permit this to be specified.

3.3.47 representation

a description, drawing, or depiction of something

3.3.48 required

descriptive adjective that, when applied to an item, indicates that an item is essential or necessary, i.e., it has to be provided to satisfy a functional (see 3.3.18) need

NOTE 1 The terms actual (see 3.3.1), planned (see 3.3.38), and required loosely reflect life-cycle stages of an item.

NOTE 2 Within the scope of this part of ISO 10303, being required can be specified for an item that is:

- a plant item (see 3.3.39);
- an association between plant items such as a connection (see 3.3.13);
- an activity or an association between a plant item and an activity;
- a possession of a property by a plant item or activity.

3.3.49 site

an area of land or water that one or more process plants (see 3.3.44) is or may be situated on

3.3.50 spatial configuration

the location, orientation, and relative position of the components (see 3.3.12) of a plant system (see 3.3.40)

ISO 10303-227:2005(E)

3.4 Abbreviations

For the purposes of this part of ISO 10303, the following abbreviations apply:

3D	three dimensional
AAM	application activity model
AE	architectural engineering
AEC	architecture, engineering, and construction
AIC	application interpreted construct
AIM	application interpreted model
AISC	American Institute of Steel Construction
ANSI	American National Standards Institute
AP	application protocol
ARM	application reference model
ASTM	American Society for Testing and Materials
ATS	abstract test suite
Brep	boundary representation
BOP	bottom of pipe
CAD	computer-aided design
CC	conformance class
COP	centre of pipe
COM	Center of Machine
CSG	constructive solid geometry
ECN	engineering change notice
EPA	Environmental Protection Agency
FDA	Food and Drug Administration
GIS	geographic information system

GUID	globally unambiguous identifier
HVAC	heating, ventilation, and air conditioning
id	identifier
ICOM	input, control, output, or mechanism
IEC	International Electrotechnical Commission
ISO	International Organization for Standardization
IUT	Implementation under Test
OSHA	Occupational Safety and Health Administration
PFD	process flow diagram
P&ID	pipng and instrumentation diagram
PICS	protocol information and conformance statement
PIEBASE	Process Industry Executive for achieving Business Advantage using Standards for data Exchange
PSI	pounds per square inch
UoF	unit of functionality
UTM	universal transverse mercator

4 Information requirements

This clause specifies the information required for the exchange of plant spatial configuration information between application systems.

The information requirements are specified as a set of units of functionality, application objects, and application assertions. These assertions pertain to individual application objects and to relationships between application objects. The information requirements are defined using the terminology of the subject area of this application protocol.

NOTE 1 A graphical representation of the information requirements is given in annex G.

NOTE 2 The information requirements correspond to those of the activities identified as being in the scope of this application protocol in annex F.

NOTE 3 The mapping table specified in 5.1 shows how the integrated resources are used to meet the information requirements of this application protocol. The use of the integrated resources introduces additional requirements that are common to application protocols.

ISO 10303-227:2005(E)

4.1 Units of functionality

This subclause specifies the UoFs for the plant spatial configuration application protocol. This part of ISO 10303 specifies the following units of functionality:

- associative_schematics UoF;
- cableway_component_characterization UoF;
- change_information UoF;
- connection UoF;
- connector UoF;
- hvac_component_characterization UoF;
- hvac_system_functional_characterization UoF;
- hybrid_shape_representation UoF;
- mechanical_component_characterization UoF;
- mechanical_system_functional_characterization UoF;
- piping_component_characterization UoF;
- piping_inspection UoF
- piping_system_functional_characterization UoF;
- plant_characterization UoF;
- plant_csg_shape_representation UoF;
- plant_item_characterization UoF;
- shape UoF;
- site_characterization UoF.

The units of functionality and a description of the functions that each UoF supports are given below. The application objects included in the UoFs are defined in 4.2.

4.1.1 associative_schematics UoF

The associative_schematics UoF describes the physical representation needed to define Piping and Instrumentation Diagrams.

The following application objects are used by the associative_schematics UoF:

- Schematic;
- Schematic_callout;
- Schematic_callout_dependency;
- Schematic_curve;
- Schematic_element;
- Schematic_point;
- Schematic_presentation_component;
- Schematic_presentation_component_composition;
- Schematic_symbol_definition;
- Schematic_symbol_occurrence;
- Schematic_text;
- Title_block.

4.1.2 cableway_component_characterization UoF

The `cableway_component_characterization` UoF describes the physical representation of cableway systems and elements. This UoF extends the `plant_characterization` UoF for characterization of cableway systems and extends the `plant_item_characterization` UoF for representation of cableway components. The geometry of cableway components is specified using the `shape` UoF.

The following application objects are used by the `cableway_component_characterization` UoF:

- Cable;
- Cableway_component;
- Cableway_connector;
- Cableway_fitting;
- Cableway_piece;
- Cableway_size_description;
- Conduit;
- Conduit_size_description;
- Raceway;

ISO 10303-227:2005(E)

- Raceway_lane;
- Raceway_size_description.

4.1.3 change_information UoF

The change_information UoF describes information such as the design change requests and approvals for modifications to Plant objects, Plant_item objects, Plant_system objects, and other components associated with the Plant.

The following application objects are used by the change_information UoF:

- Change;
- Change_approval;
- Change_item;
- Change_life_cycle_stage;
- Change_life_cycle_stage_sequence;
- Change_life_cycle_stage_usage;
- Changed_cableway_size_description;
- Changed_component_size_description;
- Changed_document;
- Changed_hvac_access_opening;
- Changed_hvac_branch_connection;
- Changed_hvac_component_thickness;
- Changed_hvac_connector_service_characteristic;
- Changed_hvac_cross_section;
- Changed_hvac_plant_item_branch_connection;
- Changed_hvac_run;
- Changed_hvac_section;
- Changed_hvac_section_insulation;
- Changed_hvac_section_to_section_connection;
- Changed_hvac_specification;

- Changed_line_assignment;
- Changed_line_branch_connection;
- Changed_line_plant_item_branch_connection;
- Changed_line_plant_item_connection;
- Changed_line_to_line_connection;
- Changed_piping_specification;
- Changed_piping_system_line;
- Changed_piping_system_line_segment;
- Changed_piping_system_line_segment_termination;
- Changed_planned_physical_plant;
- Changed_plant;
- Changed_plant_item;
- Changed_plant_item_collection;
- Changed_plant_item_connection;
- Changed_plant_item_connector;
- Changed_plant_item_location;
- Changed_plant_item_shape;
- Changed_plant_process_capability;
- Changed_plant_system;
- Changed_reference_geometry;
- Changed_required_material_description;
- Changed_site;
- Changed_site_feature;
- Changed_sited_plant;
- Changed_sub_plant_relationship.

ISO 10303-227:2005(E)

4.1.4 connection UoF

The connection UoF describes the physical linkage or connectivity between Plant_item objects. Plant_item objects have connectors. Two connectors of a compatible type are attached to form a connection. The sequence of connections establishes the physical connectivity of items within Plant_system objects.

The following application objects are used by the connection UoF:

- Connection_definition;
- Electricity_transference;
- Flexible_connection;
- Fluid_transference;
- Functional_connection_definition_satisfaction;
- Functional_connection_occurrence_satisfaction;
- Load_transference;
- Locked_orientation_connection;
- Plant_item_connection;
- Plant_item_connection_occurrence.

4.1.5 connector UoF

The connector UoF is the information about the part of a Plant_item that is intended to interconnect with another Plant_item. This UoF describes the physical features of Plant_item objects that are designed to connect or mate with a similar physical feature on another Plant_item object.

The following application objects are used by the connector UoF:

- Branch_hole;
- Buttweld;
- Catalogue_connector;
- Clamped;
- Connector_definition;
- Electrical_connector;
- Female_end;

- Flanged;
- Flanged_end;
- Flared_end;
- Functional_connector;
- Functional_connector_definition_satisfaction;
- Functional_connector_occurrence_satisfaction;
- Grooved_end;
- Male_end;
- Mechanical_connector;
- Node;
- Physical_connector;
- Piping_connector;
- Piping_connector_service_characteristic;
- Plant_item_connector;
- Plant_item_connector_occurrence;
- Pressure_fit;
- Service_operating_case;
- Socket;
- Structural_load_connector;
- Stub_in;
- Threaded.

4.1.6 hvac_component_characterization UoF

The hvac_component_characterization UoF describes the physical representation of HVAC systems and elements. This UoF extends the plant_item_characterization UoF for representation of Hvac_component objects. The geometry of Hvac_component objects is specified using the shape UoF.

ISO 10303-227:2005(E)

The following application objects are used by the hvac_component_characterization UoF:

- Cross_section_flat_oval;
- Cross_section_non_standard;
- Cross_section_radiused_corner;
- Cross_section_rectangular;
- Cross_section_round;
- Hvac_access_opening;
- Hvac_band_support;
- Hvac_bend;
- Hvac_component;
- Hvac_component_thickness;
- Hvac_connector;
- Hvac_connector_service_characteristic;
- Hvac_coupling;
- Hvac_cross_section;
- Hvac_ducting;
- Hvac_elbow_90deg_reducing;
- Hvac_elbow_centred;
- Hvac_elbow_mitre;
- Hvac_end_fitting;
- Hvac_equipment;
- Hvac_fitting;
- Hvac_flow_control_device;
- Hvac_gasket;
- Hvac_hanger;
- Hvac_instrument;

- Hvac_intermediate_reinforcement;
- Hvac_joint_reinforcement;
- Hvac_offset_centred;
- Hvac_offset_ogee_centred;
- Hvac_plant_item_branch_connector;
- Hvac_plant_item_connector;
- Hvac_plenum;
- Hvac_reinforcement;
- Hvac_single_wire_support;
- Hvac_support;
- Hvac_takeoff;
- Hvac_transition;
- Hvac_transition_slanted;
- Hvac_trapeze_bar;
- Hvac_trapeze_support;
- Splitter.

4.1.7 hvac_system_functional_characterization UoF

The hvac_system_functional_characterization UoF describes the functional representation of HVAC systems and elements. It extends the plant_characterization UoF.

The following application objects are used by the hvac_system_functional_characterization UoF:

- Hvac_branch_connection;
- Hvac_plant_item_branch_connection;
- Hvac_plant_item_connection;
- Hvac_plant_item_termination;
- Hvac_run;
- Hvac_run_termination;

ISO 10303-227:2005(E)

- Hvac_section;
- Hvac_section_branch_termination;
- Hvac_section_component_assignment;
- Hvac_section_insulation;
- Hvac_section_termination;
- Hvac_section_to_section_connection;
- Hvac_section_to_section_termination;
- Hvac_specification.

4.1.8 hybrid_shape_representation UoF

The hybrid_shape UoF specifies the representation of Plant_item shapes using Brep geometry and topology.

The following application objects are used by the hybrid_shape UoF:

- B_rep_element;
- Conic;
- Curve;
- Free_form_curve;
- Line;
- Point;
- Polygon;
- Surface;
- Vector;
- Wire_and_surface_element.

4.1.9 mechanical_component_characterization UoF

The mechanical_component_characterization UoF describes the basic elements of the mechanical_system within a Plant. This UoF provides a number of generic objects that enables the regulation, control or conveyance of mechanical power.

NOTE 1 The conveyance of mechanical power may be for (but not limited to) purposes such as propulsion, manoeuvring or lifting.

NOTE 2 This UoF is similar to the `pipng_component_characterization` and to the `hvac_component_characterization` UoF.

The following application objects are used by the `mechanical_component_characterization` UoF:

- `Component_size_description`;
- `Mechanical_component`;
- `Mechanical_family_definition`.

4.1.10 `mechanical_system_functional_characterization` UoF

The `mechanical_system_functional_characterization` UoF describes the functional connectivity of mechanical systems and elements. It extends the `plant_characterization` UoF. This UoF provides the information that describes the functional links and properties of a mechanical system arrangement. It includes information about the segments in the arrangement and the specifications for these segments, such as design criteria, load conditions, and arrangement identifier.

NOTE This UoF is similar to the `pipng_system_functional_characterization` and to the `hvac_system_functional_characterization` UoF.

The following application objects are used by the `mechanical_system_functional_characterization` UoF:

- `Arrangement_branch_connection`;
- `Arrangement_branch_termination`;
- `Arrangement_load`;
- `Arrangement_mechanical_system_component_assignment`;
- `Arrangement_plant_item_branch_connection`;
- `Arrangement_plant_item_branch_connector`;
- `Arrangement_plant_item_connection`;
- `Arrangement_plant_item_connector`;
- `Arrangement_plant_item_termination`;
- `Arrangement_to_arrangement_connection`;
- `Arrangement_to_arrangement_termination`;
- `Design_arrangement_performance`;
- `Mechanical_system_arrangement`;
- `Mechanical_system_arrangement_segment`;

ISO 10303-227:2005(E)

- Mechanical_arrangement_specification;
- Mechanical_system_arrangement_termination;
- Mechanical_system_arrangement_segment_termination.

4.1.11 piping_component_characterization UoF

The piping_component_characterization UoF describes the individual elements of the Piping_system within a Plant. Piping_component objects include pipes, fittings, valves, in-line equipment, and other elements that regulate, control, or convey Piping_system fluids.

The following application objects are used by the piping_component_characterization UoF:

- Base_elbow_support;
- Base_line_support;
- Bent_pipe;
- Blank;
- Blind_flange;
- Boss;
- Bushing;
- Cap;
- Coupling;
- Cross;
- Dummy_leg;
- Eccentric_base_elbow_support;
- Eccentric_reducer;
- Elbow;
- Expander_flange;
- Family_definition;
- Ferrule;
- Fitting;
- Flange;

- Gasket;
- Gusset;
- Hanger;
- Inline_equipment;
- Inline_instrument;
- Insert_fitting;
- Inside_and_thickness;
- Lap_joint_flange;
- Lap_joint_stub_end;
- Lateral;
- Lined_piping;
- Lug;
- Mitre_bend_pipe;
- Nipple;
- Olet;
- Orifice_flange;
- Orifice_plate;
- Outside_and_thickness;
- Pad;
- Paddle_blank;
- Paddle_spacer;
- Perforated_cap;
- Perforated_plate;
- Pipe;
- Pipe_closure;
- Piping_component;

ISO 10303-227:2005(E)

- Piping_size_description;
- Piping_spool;
- Piping_support;
- Plate;
- Plug;
- Pressure_class;
- Reducer;
- Reducing_flange;
- Reinforcing_component;
- Reinforcing_plate;
- Reinforcing_ring;
- Ring_spacer;
- Schedule;
- Shoe;
- Slip_on_flange;
- Slip_on_jacket_flange;
- Socket_weld_flange;
- Spacer;
- Specialty_item;
- Spectacle_blind;
- Stay;
- Stopper;
- Straight_pipe;
- Swept_bend_pipe;
- Tee;
- Threaded_flange;

- Union;
- Valve;
- Weld_neck_flange;
- Weld_neck_jacket_flange;
- Y_type_lateral.

4.1.12 piping_inspection UoF

The `piping_inspection` UoF describes inspection information and inspection documentation for `Piping_component` objects and `Piping_spool` objects.

The following application objects are used by the `hvac_component_characterization` UoF:

- `Connection_inspection_record`;
- `Inspection_condition`;
- `Piping_component_inspection_record`;
- `Piping_spool_inspection_record`;
- `Shape_inspection_record`.

4.1.13 piping_system_functional_characterization UoF

The `piping_system_functional_characterization` UoF describes the functional connectivity of a `Piping_system` and the functional connectivity among `Plant_item` objects in that system. This UoF provides the information that describes the functional links and properties of a flow stream in a `Piping_system`. It includes information about the segments in the line and the specifications for these segments, such as design criteria, service conditions, and line identifier.

The following application objects are used by the `piping_system_functional_characterization` UoF:

- `Line_branch_connection`;
- `Line_branch_termination`;
- `Line_piping_system_component_assignment`;
- `Line_plant_item_branch_connection`;
- `Line_plant_item_branch_connector`;
- `Line_plant_item_connection`;
- `Line_plant_item_connector`;

ISO 10303-227:2005(E)

- Line_plant_item_termination;
- Line_to_line_connection;
- Line_to_line_termination;
- Piping_specification;
- Piping_system_line;
- Piping_system_line_segment;
- Piping_system_line_segment_termination;
- Piping_system_line_termination;
- Segment_insulation;
- Stream_design_case;
- Stream_phase.

4.1.14 plant_characterization UoF

The plant_characterization UoF describes identifiable collections of Plant_item objects that perform specific functions within a plant. The Plant_item objects are functionally dependent on one another for the performance of the system and are interrelated through physical connections. The collection of Plant_system objects as a whole enables the Plant to operate.

The following application objects are used by the plant_characterization UoF

- Arrangement_less_mechanical_system;
- Cableway_system;
- Ducting_system;
- Electrical_system;
- External_classification;
- Functional_plant;
- Functional_plant_satisfaction;
- Hvac_system;
- Instrumentation_and_control_system;
- Line_less_piping_system;

- Location_in_plant;
- Location_in_ship;
- Manufacturing_line;
- Mechanical_system;
- Piping_system;
- Planned_physical_plant;
- Plant;
- Plant_process_capability;
- Plant_system;
- Plant_system_assembly;
- Ship;
- Structural_system;
- Sub_plant_relationship;
- Train;
- Unit.

4.1.15 plant_csg_shape_representation UoF

The plant_csg_shape UoF specifies the representation of Plant_item shapes using CSG primitives.

The following application objects are used by the plant_csg_shape UoF:

- Block;
- Circular_ellipsoid;
- Cone;
- Csg_element;
- Cylinder;
- Eccentric_cone;
- Eccentric_cylinder;
- Eccentric_pyramid;

ISO 10303-227:2005(E)

- Extrusion;
- Faceted_brep;
- Hemisphere;
- Pyramid;
- Reducing_torus;
- Solid_of_revolution;
- Sphere;
- Square_to_round;
- Torus;
- Trimmed_block;
- Trimmed_cone;
- Trimmed_cylinder;
- Trimmed_pyramid;
- Trimmed_sphere;
- Trimmed_torus.

4.1.16 plant_item_characterization UoF

The plant_item_characterization UoF describes major elements that Plant objects and Plant_system objects are comprised of. These are items within a Plant that occupy space and possess physical, measurable characteristics. This UoF specifies spatial and physical information about Piping_system_component objects and Equipment, but only spatial characteristics of components of other Plant_system objects, such as hvac and instrumentation. This UoF describes the information and options associated with the specification of the substance or substances that a Plant_item is composed of. It also describes specification and catalogue information concerning piping components.

This UoF describes the spatial shape and position of volumes of space in a Plant.

NOTE 1 Physical plant_items are things that can be touched.

NOTE 2 As used in this part of ISO 10303, material does not refer to the products that flow within plant systems.

The following application objects are used by the plant_item_characterization UoF:

- Analysis_data_point;
- Bolt;

- Bolt_and_nut_component;
- Bolt_and_nut_set;
- Bolt_with_head;
- Cable_support;
- Catalogue_definition;
- Catalogue_item;
- Catalogue_item_substitute;
- Clamp;
- Clamp_set;
- Connected_collection;
- Connection_component;
- Connection_material;
- Design_project;
- Document;
- Ducting_component;
- Electrical_component;
- Equipment;
- Equipment_breaching;
- Equipment_trim_piping;
- External_schema_context;
- Externally_defined_document;
- Externally_defined_user_defined_attribute_value;
- Functional_design_view;
- Functional_plant_item_satisfaction;
- Hierarchically_organized_collection;
- Hull_applicability;

ISO 10303-227:2005(E)

- Installed_physical_design_view;
- Instrument;
- Instrumentation_and_control_component;
- Insulation;
- Material_specification_selection;
- Material_specification_subset_reference;
- Mechanical_system_component;
- Nozzle;
- Nut;
- Offline_instrument;
- Physical_design_view;
- Piping_assembly;
- Piping_assembly_assignment;
- Piping_system_component;
- Plain_washer;
- Planned_physical_plant_item;
- Plant_item;
- Plant_item_collection;
- Plant_item_definition;
- Plant_item_design_view;
- Plant_item_instance;
- Plant_item_location;
- Plant_item_weight;
- Plant_volume;
- Process_ducting;
- Project_design_assignment;

- Relative_item_location;
- Required_material_description;
- Reserved_space;
- Route;
- Spare_plant_item_usage;
- Spring_washer;
- Structural_component;
- Stud_bolt;
- Supplied_equipment;
- Supplier;
- Support_component;
- Support_constraints;
- Support_usage;
- Support_usage_connection;
- System_space;
- Toothed_lock_washer;
- Trunnion;
- User_defined_attribute_value;
- Washer.

4.1.17 shape UoF

The shape UoF specifies the external shapes of components, assemblies of components, and volumes of a Plant. The external shape of a component can be specified as an envelope of the space occupied by a component, as an outline of the component, or as a detailed definition of the shape of a component.

The following application objects are used by the shape UoF:

- Detail_shape;
- Envelope_shape;
- Hybrid_shape_representation;

ISO 10303-227:2005(E)

- Interfering_shape_element;
- Outline_shape;
- Plant_csg_shape_representation;
- Plant_item_centrelines;
- Plant_item_interference;
- Plant_item_interference_status;
- Plant_item_shape;
- Reference_geometry;
- Shape_interference_zone_usage;
- Shape_parameter;
- Shape_representation;
- Shape_representation_element;
- Shape_representation_element_usage.

4.1.18 site_characterization UoF

The site_characterization UoF describes the significant features of the Site where the Plant is located. It includes information about the site location, infrastructure like roads and sewers, buildings, and other structures located on the Site, and the shape of the terrain where a Building or Site_feature is located.

The following application objects are used by the site_characterization UoF:

- Breakline;
- Building;
- Facet_trigon;
- Faceted_surface_representation;
- Gis_position;
- Location_in_building;
- Location_in_site;
- Point_and_line_representation;
- Site;

- Site_feature;
- Site_shape_representation;
- Sited_plant;
- Survey_point.

4.2 Application objects

This subclause specifies the application objects for the plant spatial configuration application protocol. Each application object is an atomic element that embodies a unique application concept and contains attributes specifying the data elements of the object. The application objects and their definitions are given below.

Each application object attribute need not be present unless the attribute is specifically identified as required for an application object.

4.2.1 Analysis_data_point

An Analysis_data_point is an identifiable point in space that has a relationship to some Plant_item (see 4.2.313). Analysis_data_point serves as an anchor for contexts external to this part of ISO 10303 allowing information from these external contexts to reference data that is within the scope and format specified in this part of ISO 10303.

The data associated with an Analysis_data_point are the following:

- id;
- name;
- location;
- value.

4.2.1.1 id

The id specifies a unique identifier for the Analysis_data_point.

4.2.1.2 name

The name specifies a textual label given to the Analysis_data_point.

4.2.1.3 location

The location specifies the relative position of the Analysis_data_point within the Plant (see 4.2.311). This location need not be within the envelope of the Plant_item (see 4.2.313) with which this Analysis_data_point is associated.

4.2.1.4 value

The value specifies the data for the Analysis_data_point.

ISO 10303-227:2005(E)

4.2.2 Arrangement_branch_connection

An Arrangement_branch_connection is a connection between the logical termination of one Mechanical_system_arrangement_segment (see 4.2.267) and a point on another Mechanical_system_arrangement_segment other than a termination. The former Mechanical_system_arrangement_segment branches from the latter Mechanical_system_arrangement_segment.

The data associated with an Arrangement_branch_connection are the following:

— branch_sequence_id.

4.2.2.1 branch_sequence_id

The branch_sequence_id specifies an alphanumeric identifier that indicates the order that branches extend from the main Mechanical_system_arrangement_segment (see 4.2.267). A branch_sequence_id need not be specified for a particular Arrangement_branch_connection.

4.2.3 Arrangement_branch_termination

An Arrangement_branch_termination is a type of Mechanical_system_arrangement_segment_termination (see 4.2.268) that connects to a Mechanical_system_arrangement_segment (see 4.2.267) at a point other than a termination.

4.2.4 Arrangement_less_mechanical_system

An Arrangement_less_mechanical_system is a type of Mechanical_system (see 4.2.265) that does not have an arrangement designation as defined in Mechanical_system_arrangement (see 4.2.266).

4.2.5 Arrangement_load

An Arrangement_load is the set of power performance characteristics under a specific circumstance that may be composed into a Design_arrangement_performance (see 4.2.114).

The data associated with an Arrangement_load are the following:

— constituent_loads.

4.2.5.1 constituent_loads

The constituent_loads specifies a textual description of the type of Arrangement_load. A constituent_loads need not be specified for an Arrangement_load.

4.2.6 Arrangement_mechanical_system_component_assignment

An Arrangement_mechanical_system_component_assignment is the relationship between a Mechanical_system_arrangement_segment (see 4.2.267) and a Mechanical_system_component (see 4.2.270) that is part of a Mechanical_system_arrangement (see 4.2.266).

4.2.7 Arrangement_plant_item_branch_connection

An Arrangement_plant_item_branch_connection is a connection between an Arrangement_plant_item_branch_connector (see 4.2.8) and a point on a Mechanical_system_arrangement_segment (see 4.2.267) other than a termination. The Arrangement_plant_item_branch_connector branches from the Mechanical_system_arrangement_segment.

The data associated with an Arrangement_plant_item_branch_connection are the following:

— branch_sequence_id.

4.2.7.1 branch_sequence_id

The branch_sequence_id specifies an alphanumeric identifier that indicates the order that branches extend from the main Mechanical_system_arrangement_segment (see 4.2.267).

4.2.8 Arrangement_plant_item_branch_connector

An Arrangement_plant_item_branch_connector is a type of Functional_connector (see 4.2.157) that participates in a Arrangement_plant_item_branch_connection (see 4.2.7).

4.2.9 Arrangement_plant_item_connection

An Arrangement_plant_item_connection is a connection between the logical termination of a Mechanical_system_arrangement_segment (see 4.2.267) and an Arrangement_plant_item_connector (see 4.2.10).

4.2.10 Arrangement_plant_item_connector

An Arrangement_plant_item_connector is a type of Functional_connector (see 4.2.157) that participates in an Arrangement_plant_item_connection (see 4.2.9).

4.2.11 Arrangement_plant_item_termination

An Arrangement_plant_item_termination is a type of Mechanical_system_arrangement_segment_termination (see 4.2.268) that connects to other Arrangement_plant_item_termination objects.

4.2.12 Arrangement_to_arrangement_connection

An Arrangement_to_arrangement_connection is a connection between the logical terminations of two or more Mechanical_system_arrangement_segment (see 4.2.267) objects.

4.2.13 Arrangement_to_arrangement_termination

An Arrangement_to_arrangement_termination is a type of Mechanical_system_arrangement_segment_termination (see 4.2.268) that connects to other Arrangement_to_arrangement_termination objects.

4.2.14 B_rep_element

A B_rep_element is a type of Shape_representation_element (see 4.2.375) that is composed of geometric and topological elements.

NOTE A B_rep_element need not represent a solid shape.

4.2.15 Base_elbow_support

A Base_elbow_support is a Piping_support (see 4.2.301) that is attached to a corner of bent part. The main body of the Base_elbow_support is a pipe with a base plate that is attached at the foot of the main body of the support. The Base_elbow_support is placed vertically and supports the weight of the piping assembly at the base plate.

NOTE Figure 3 depicts a non-adjustable and an adjustable Base_elbow_support.

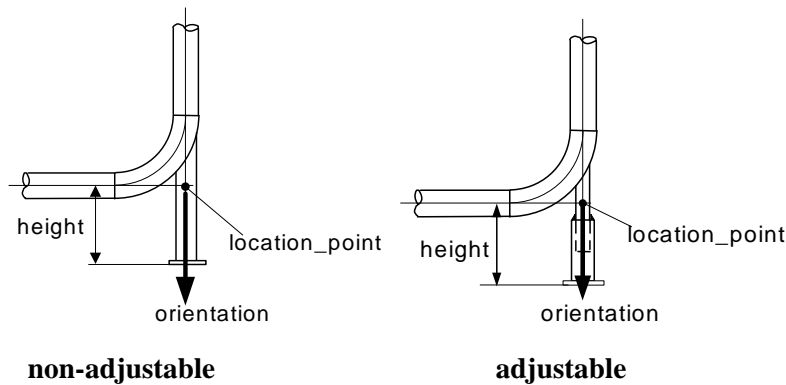


Figure 3 — Base_elbow_support

The data associated with a Base_elbow_support are the following:

- height;
- adjustability.

4.2.15.1 height

The height is the distance between the supporting face of the base plate of Base_elbow_support and the location_point.

4.2.15.2 adjustability

The adjustability specifies a designation that classifies a Base_elbow_support based on variability of its height.

The value of adjustability shall be one of the following:

- adjustable;
- non adjustable.

4.2.15.2.1 adjustable

adjustable specifies that the height of the Base_elbow_support can be adjusted when installed.

4.2.15.2.2 non adjustable

non adjustable specifies that the height of the Base_elbow_support is fixed.

4.2.16 Base_line_support

A Base_line_support is a type of Piping_support (see 4.2.301) that is attached to a horizontal pipe. The main body of the Base_line_support is usually a pipe, but shape steel or plate is occasionally used as the material of the support. The base plate is attached at the foot of the main body of the Base_line_support. The Base_line_support is placed vertically and supports the weight of the piping assembly to which it is attached, at the base plate.

NOTE Figure 4 depicts a typical Base_line_support.




Figure 4 — Base_line_support

The data associated with a Base_line_support are the following:

- height;
- spring.

4.2.16.1 height

The height specifies the distance between the supporting face of the base plate of the Base_line_support and the location_point.

4.2.16.2 spring

The spring specifies whether the Base_line_support contains a spring. The value of spring is one of the following:

- with_spring;
- without_spring.

4.2.16.2.1 4.2.16.2.1 with_spring

with_spring specifies that the Base_line_support contains a spring to absorb excessive stress.

4.2.16.2.2 4.2.16.2.2 without_spring

without_spring specifies that the Base_line_support does not contain a spring.

4.2.17 Bent_pipe

A Bent_pipe is a type of Pipe (see 4.2.289) that is comprised of one or more of the following items grouped together and treated as a single Piping_component (see 4.2.293).

- Straight_pipe (see 4.2.398)
- Swept_bend_pipe (see 4.2.415)
- Mitre_bend_pipe (see 4.2.271)

The Bent_pipe shall include at least one Swept_bend_pipe or Mitre_bend_pipe.

The relationship between the Bent_pipe and its constituents shall be established using Connected_collection (see 4.2.98).

NOTE 1 Swept_bend_pipe (see 4.2.415) is generally only used as part of a Bent_pipe

ISO 10303-227:2005(E)

NOTE 2 Figure 5 depicts a typical Bent_pipe.

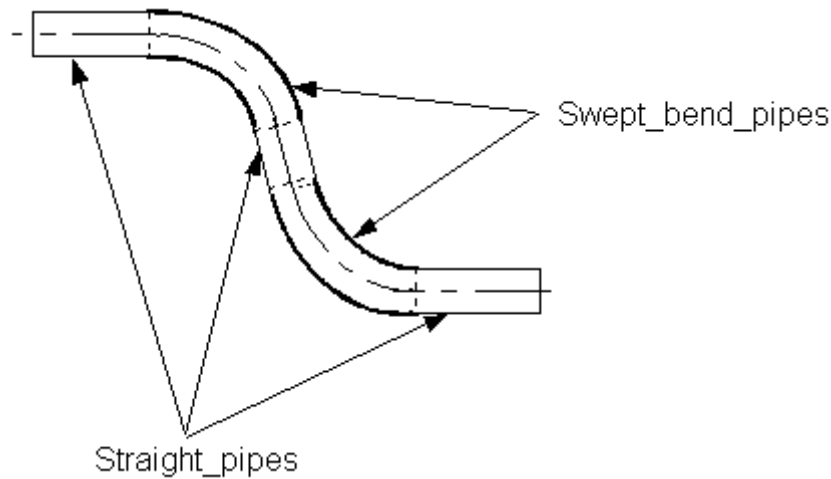


Figure 5 — Bent_pipe

4.2.18 Blank

A Blank is a type of Fitting (see 4.2.147) that is placed between two Flange (see 4.2.148) objects to block the flow of material between the pipelines on either side of the Blank. Each Blank may be one of the following: a Paddle_blank (see 4.2.283) or a Spectacle_blind (see 4.2.391).

The data associated with a Blank are the following:

- outside_diameter;
- thickness.

4.2.18.1 outside_diameter

The outside_diameter specifies the external diameter of the Blank. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.18.2 thickness

The thickness specifies the distance between the two faces of the Blank. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.19 Blind_flange

A Blind_flange is a type of Flange (see 4.2.148) that is used to block material flow at a flanged connection.

NOTE Figure 6 depicts a typical Blind_flange.




Figure 6 — Blind flange

4.2.20 Block

A Block is a type of Csg_element (see 4.2.111) that is a 3D right rectangular solid.

NOTE The size and shape of a Block is described by three real values representing the dimensions of the Block.

4.2.21 Bolt

A Bolt is a type of Bolt_and_nut_component (see 4.2.22) that is used to fasten two or more Plant_items (see 4.2.313) together. The Bolt is a rod with a hexagonal, square or round head at one end and a screw thread on the other, or a rod with screw threads on both ends.

4.2.22 Bolt_and_nut_component

A Bolt_and_nut_component is a type of Connection_component (see 4.2.99) that is a constituent element of a Bolt_and_nut_set (see 4.2.23). Each Bolt_and_nut_component may be one of the following: a Bolt (see 4.2.21), a Nut (see 4.2.275), or a Washer (see 4.2.436).

The data associated with a Bolt_and_nut_component are the following:

- nominal_size;
- quantity.

4.2.22.1 nominal_size

The nominal_size specifies a standard size designation of the Bolt_and_nut_component. It may be specified as a single value or as a range of values.

NOTE 1 The nominal size need not represent an actual dimension.

NOTE 2 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.22.2 quantity

The quantity specifies the number of Bolt_and_nut_components used in a Bolt_and_nut_set (see 4.2.23).

4.2.23 Bolt_and_nut_set

A Bolt_and_nut_set is a Connection_material (see 4.2.102) that consists of Bolt_and_nut_components (see 4.2.22). The Bolt_and_nut_set shall contain at least one Bolt_and_nut_component such as a Bolt (see 4.2.21), a Nut (see 4.2.275), or a Washer (see 4.2.436). The Bolt_and_nut_set is used to connect Piping_components (see 4.2.293).

ISO 10303-227:2005(E)

The data associated with a Bolt_and_nut_set are the following:

- set_id;
- quantity_used.

4.2.23.1 set_id

The set_id specifies a unique identifier for the Bolt_and_nut_set. The set_id is required for each Bolt_and_nut_set.

4.2.23.2 quantity_used

The quantity_used specifies the number of Bolt_and_nut_sets used at a Plant_item_connection (see 4.2.316).

4.2.24 Bolt_with_head

A Bolt_with_head is a type of Bolt (see 4.2.21) that is used to fasten two or more Plant_items (see 4.2.313) together. The Bolt_with_head is a rod with a hexagonal, square or round head at one end and a screw thread on the other.

The data associated with a Bolt_with_head are the following:

- length;
- type_of_head.

4.2.24.1 length

The length specifies the distance from the inner face of the head to the tip of the screw thread. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.24.2 type_of_head

The type_of_head specifies the shape of the bolt head.

Example: Hex head, Square head, Round head, Round head Square neck, T-Head, Countersunk head

4.2.25 Boss

A Boss is an Olet (see 4.2.277) that is welded onto a pipe perpendicular to the straight run of the pipe. The Boss consists of a counter-bored shape with a Socket (see 4.2.385) on the outside.

NOTE Figure 7 depicts a typical Boss with two different welding types. The depth of the counterbore as shown in the Figure 7 is defined by the female_end end_type.

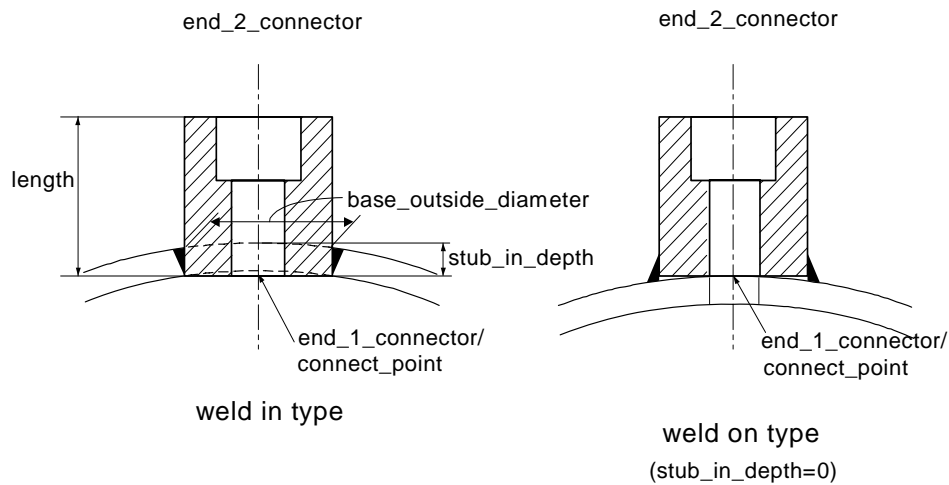


Figure 7 — Boss

The outside diameter for a Boss is the `base_outside_diameter` from the Olet supertype. `Skirt_outside_diameter` will be ignored for a Boss.

4.2.26 Branch_hole

A `Branch_hole` is a type of `Piping_connector` (see 4.2.295) end type that is a hole cut in a pipe for a branch connection.

NOTE A `Branch_hole` is not typically a design feature of the pipe, but rather is added after the fact to create a branch from the pipe. The hole may be used for stub-in connections, olets, or nipples can be welded or screwed to it.

The data associated with a `Branch_hole` are the following:

- diameter.

4.2.26.1 diameter

The diameter specifies the diameter value of the `Branch_hole`. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.27 Breakline

A `Breakline` is a contiguous set of straight line segments that designate a path across a `Site_shape_representation` (see 4.2.381).

NOTE The path is a constraint on the mathematical interpolation of the surface of the terrain.

4.2.28 Building

A `Building` is a partially or totally enclosed structure located on a `Site` (see 4.2.379) that contains `Plant_system` (see 4.2.329) objects or provides supporting infrastructure within its boundaries. The z-axis of the local coordinate system of the `Building` shall be considered the elevation of the coordinate space.

The data associated with a `Building` are the following:

- `building_id`;

ISO 10303-227:2005(E)

- location_and_orientation;
- name;
- shape.

4.2.28.1 building_id

The building_id specifies a unique number used to identify the Building. Building_id is required for each Building.

4.2.28.2 location_and_orientation

The location_and_orientation specifies the position of the Building relative to the site coordinate system and the orientation of the Building relative to a specified direction.

EXAMPLE E5704.35', N5912.87' are coordinates. They can be used to locate a known point in the Building (e.g., centrelines of column row 1A).

4.2.28.3 name

The name specifies a textual label given to the Building.

4.2.28.4 shape

The shape specifies the outline or characteristic surface configuration or contour of the Building.

4.2.29 Bushing

A Bushing is a type of Fitting (see 4.2.147) with one external and one smaller internal end.

NOTE Figure 8 depicts a typical threaded hexagon Bushing. It is typically used to connect a smaller Pipe (see 4.2.289) to a larger Fitting or Nozzle (see 4.2.274).

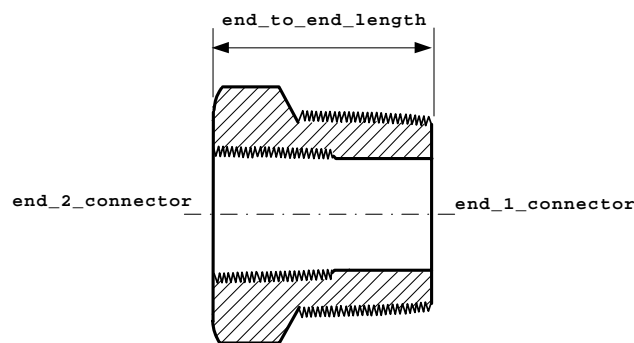


Figure 8 — Bushing

The data associated with a Bushing are the following:

- end_1_connector;
- end_2_connector;
- end_to_end_length.

4.2.29.1 end_1_connector

The end_1_connector specifies the Piping_connector (see 4.2.295) Male_end (see 4.2.257).

4.2.29.2 end_2_connector

The end_2_connector specifies the Piping_connector (see 4.2.295) Female_end (see 4.2.145).

4.2.29.3 end_to_end_length

The end_to_end_length specifies the external length of the Bushing from the end-one face to the end-two face. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.30 Buttweld

A Buttweld is a type of Piping_connector (see 4.2.295) that consists of the welding of two Piping_component (see 4.2.293) objects where they are aligned edge to edge.

The data associated with a Buttweld are the following:

— root_gap.

4.2.30.1 root_gap

The root_gap specifies the distance between the end faces of two Piping_components (see 4.2.293) that are buttwelded. It may be specified as a single value or as a range of values.

NOTE 1 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

NOTE 2 The attribute for root_gap will only be used when the Piping_component participates in a connection.

4.2.31 Cable

A Cable is a group of one or more electrical conductors bound together to follow the same path through space, and insulated from each other.

EXAMPLE Multi-conductor power cables, bus bars, twisted-pair ethernet cables, fiber-optic cables, telephone cables, hook-up wire.

4.2.32 Cable_support

A Cable_support is a type of Support_component (see 4.2.409) that provides support to Electrical_component (see 4.2.127) objects.

4.2.33 Cableway_component

A Cableway_component is a type of Plant_item (see 4.2.313) that is a part of a Cableway_system (see 4.2.38). Each Cableway_component may be a Cableway_piece (see 4.2.36), a Cableway_fitting (see 4.2.35), or a Raceway_lane (see 4.2.343).

4.2.34 Cableway_connector

A Cableway_connector is a type of Plant_item_connector (see 4.2.318) that establishes a link between two Cableway_component (see 4.2.33) objects.

ISO 10303-227:2005(E)

The data associated with a `Cableway_connector` are the following:

— `type`.

4.2.34.1 type

The `type` specifies the kind of `Cableway_connector`.

4.2.35 Cableway_fitting

A `Cableway_fitting` is a type of `Cableway_component` (see 4.2.33) that joins or fits two other `Cableway_`-components together.

4.2.36 Cableway_piece

A `Cableway_piece` is a type of `Cableway_component` (see 4.2.33) that has one or more channels through which `Cable` (see 4.2.31) objects may be run. Each `Cableway_piece` is either a `Raceway` (see 4.2.342) or a `Conduit` (see 4.2.93).

4.2.37 Cableway_size_description

A `Cableway_size_description` is used to explain or summarize the physical size of a `Cableway_`-component (see 4.2.33) or `Cableway_connector` (see 4.2.34), based on a set of dimensional characteristics. Each `Cableway_size_description` is either a `Raceway_size_description` (see 4.2.344) or a `Conduit_size_description` (see 4.2.95).

The data associated with a `Cableway_size_description` are the following:

— `fill_area`.

4.2.37.1 fill_area

The `fill_area` specifies the cross-sectional area of the usable portion of the cavity within a `Cableway_component` (see 4.2.33) that is available to be filled with `Cable` (see 4.2.31) objects.

4.2.38 Cableway_system

A `Cableway_system` is a type of `Plant_system` (see 4.2.329) that is a system of interconnected `Cableway_component` (see 4.2.33) objects that form a series of channels to hold `Cable` (see 4.2.31) objects.

4.2.39 Cap

A `Cap` is a type of `Pipe_closure` (see 4.2.290) which closes the end of the pipe.

NOTE Figure 9 depicts a typical welded round `Cap`.

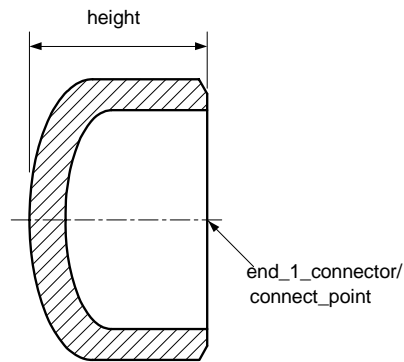


Figure 9 — Cap

The data associated with a Cap are the following:

— height.

4.2.39.1 height

The height is the distance between the end and the top of the Cap.

4.2.40 Catalogue_connector

A Catalogue_connector is the definition or the reference of a Connector_definition (see 4.2.103). A Connector_definition may appear in a catalogue, or the properties of a Connector_definition may be drawn from a catalogue.

NOTE A Catalogue_connector is analogous to a Catalogue_item (see 4.2.42) in that both have standardized characteristics.

4.2.41 Catalogue_definition

A Catalogue_definition is the identification of a document that lists Catalogue_item (see 4.2.42) objects.

NOTE 1 Catalogue_definition may reference either an electronic or printed catalogue.

NOTE 2 A Catalogue_definition may be defined by ISO 13584 [13]. ISO 13584 will be considered a normative reference when it has reached the DIS level.

The data associated with a Catalogue_definition are the following:

- catalogue_id;
- catalogue_name;
- catalogue_version.

4.2.41.1 catalogue_id

The catalogue_id specifies a unique identifier given to a catalogue. Catalogue_id is required for each Catalogue_definition.

4.2.41.2 catalogue_name

The catalogue_name specifies a textual label given to the catalogue.

ISO 10303-227:2005(E)

4.2.41.3 catalogue_version

The `catalogue_version` specifies a particular release of a catalogue within a sequence of catalogue releases.

4.2.42 Catalogue_item

A `Catalogue_item` is an item whose characteristics are standardized and have been categorized in a library or catalogue. A `Catalogue_item` that is defined by a `Plant_item_definition` (see 4.2.320) must be defined by a `Plant_item_definition` in which the `Plant_item` (see 4.2.313) is defined as a `Physical_design_view` (see 4.2.288).

The data associated with a `Catalogue_item` are the following:

- `item_name`;
- `item_version`;
- `model_number`.

4.2.42.1 item_name

The `item_name` specifies a textual label that is used by the supplier to refer to the `Catalogue_item`.

4.2.42.2 item_version

The `item_version` specifies a particular release of a `Catalogue_item` within a sequence of `Catalogue_item` releases.

NOTE This attribute accommodates the possibility of revision pages to a supplier catalogue.

4.2.42.3 model_number

The `model_number` is the identifier assigned by the supplier to one or more `Catalogue_item` objects.

4.2.43 Catalogue_item_substitute

A `Catalogue_item_substitute` is an alternate `Catalogue_item` (see 4.2.42) that can be used instead of the specified `Catalogue_item`.

4.2.44 Change

A `Change` is the modification or requested modification of a `Plant_item` (see 4.2.313).

NOTE A `Change` may be a request to make a change or an approved change.

The data associated with a `Change` are the following:

- `business_unit`;
- `change_id`;
- `change_reason`;
- `change_summary`;
- `date`;
- `project_number`;

- revision;
- title.

4.2.44.1 business_unit

The `business_unit` specifies the organization(s), company(s), or functional group(s) responsible for the Change.

4.2.44.2 change_id

The `change_id` specifies a unique identifier for the Change.

4.2.44.3 change_reason

The `change_reason` specifies the rationale for the Change.

4.2.44.4 change_summary

The `change_summary` specifies a general description of the Change.

4.2.44.5 date

The `date` specifies the calendar day-month-year and time that the Change was initiated on.

NOTE A specific ordering of the day, month, and year within the date is not required.

4.2.44.6 project_number

The `project_number` specifies a designation assigned to identify projects within an organization. More than one project (and therefore more than one `project_number`) may be associated with a Change.

EXAMPLE Identification of a `project_number` is used to allow tracking of items such as costs and job hours associated with a Change.

NOTE A `project_number` may or may not be the same as the designation of a `Design_project` (see 4.2.115).

4.2.44.7 revision

The `revision` specifies the particular amendment of the Change within a sequence of amendments.

4.2.44.8 title

The `title` specifies a descriptive label for the Change.

4.2.45 Change_approval

A `Change_approval` is the endorsement by an authority of the change in status of a specific Change (see 4.2.44).

The data associated with a `Change_approval` are the following:

- `approval_date`;
- `approver`;
- `approver_role`.

ISO 10303-227:2005(E)

4.2.45.1 approval_date

The approval_date specifies the specific calendar day-month-year and time when the approval authority signed the Change as approved.

NOTE : A specific ordering of the day, month, and year within the date is not required.

4.2.45.2 approver

The approver specifies the name of the individual who endorsed the Change.

4.2.45.3 approver_role

The approver_role specifies the purpose or function of the approver that approves a change.

4.2.46 Change_item

A Change_item is an item that may be modified, for which there is a request to modify, or is the result of a modification to a Change_item. Each Change_item is either: a Changed_component_size_description (see 4.2.51), a Changed_line_assignment (see 4.2.64), a Changed_line_branch_connection (see 4.2.65), a Changed_line_plant_item_branch_connection (see 4.2.66), a Changed_line_plant_item_connection (see 4.2.67), a Changed_line_to_line_connection (see 4.2.68), a Changed_piping_system_line (see 4.2.70), a Changed_piping_system_line_segment (see 4.2.71), a Changed_piping_system_line_segment_termination (see 4.2.72), a Changed_planned_physical_plant (see 4.2.73), a Changed_plant (see 4.2.74), a Changed_plant_item (see 4.2.75), a Changed_plant_item_collection (see 4.2.76), a Changed_plant_item_connection (see 4.2.77), a Changed_plant_item_connector (see 4.2.78), a Changed_plant_item_shape (see 4.2.80), a Changed_plant_process_capability (see 4.2.81), a Changed_plant_system (see 4.2.82), a Changed_reference_geometry (see 4.2.83), a Changed_required_material_description (see 4.2.84), a Changed_sited_plant (see 4.2.87), or a Changed_sub_plant_relationship (see 4.2.88).

The data associated with a Change_item are the following:

- creation_date;
- description;
- from_or_to;
- item_owner;
- supersedence_status.

4.2.46.1 creation_date

The creation_date specifies the calendar day-month-year and time that the Change_item is created on.

NOTE A specific ordering of the day, month, and year within the date is not required.

4.2.46.2 description

The description specifies a textual explanation or summary of the item being changed.

4.2.46.3 from_or_to

The from_or_to specifies whether the Change_item object is to be interpreted as the successor or predecessor in a change. The from_or_to shall have one of the following values:

- from;
- to.

4.2.46.3.1 from

from specifies that the Change_item is the predecessor in a change relationship.

4.2.46.3.2 to

to specifies that the Change_item is the successor in a change relationship.

4.2.46.4 item_owner

The item_owner specifies the name of the person or organization that owns the item being changed and is responsible for implementing or approving the change.

4.2.46.5 supersedence_status

The status specifies the textual description of the existence condition of a Change_item.

EXAMPLE Examples of Change_item status include Current, Superseded, and Deleted.

4.2.47 Change_life_cycle_stage

A Change_life_cycle_stage is a state in the life cycle of the change that indicates or classifies the status or disposition of the change.

The data associated with a Change_life_cycle_stage are the following:

- name.

4.2.47.1 name

The name specifies a textual label given to the stage.

EXAMPLE Examples of names include requested, pending, and implemented.

4.2.48 Change_life_cycle_stage_sequence

A Change_life_cycle_stage_sequence is the mechanism that specifies the sequence of life-cycle stages.

4.2.49 Change_life_cycle_stage_usage

A Change_life_cycle_stage_usage is the assignment of a Change (see 4.2.44) to a particular Change_life_cycle_stage (see 4.2.47).

The data associated with a Change_life_cycle_stage_usage are the following:

- date_of_activation;
- date_of_completion;
- description.

ISO 10303-227:2005(E)

4.2.49.1 date_of_activation

The `date_of_activation` specifies the calendar day-month-year and time when the Change was assigned to the `Change_life_cycle_stage`. A specific ordering of the day, month, and year within the date is not required.

4.2.49.2 date_of_completion

The `date_of_completion` specifies the calendar day-month-year and time when the Change was released from, or completed, the assigned `life_cycle` stage.

4.2.49.3 description

The `description` specifies a textual explanation or summary of the assignment of the Change to a particular stage.

4.2.50 Changed_cableway_size_description

A `Changed_cableway_size_description` is a type of `Change_item` (see 4.2.46) that identifies a `Cableway_size_description` (see 4.2.37) that is being changed or is the result of a Change (see 4.2.44).

4.2.51 Changed_component_size_description

A `Changed_component_size_description` is a type of `Change_item` (see 4.2.46) that identifies a `Component_size_description` (see 4.2.93) that is being changed or is the result of a Change (see 4.2.44).

4.2.52 Changed_document

A `Changed_document` is a type of `Change_item` (see 4.2.46) that identifies a `Document` (see 4.2.117) that is being changed or is the result of a Change (see 4.2.44).

4.2.53 Changed_hvac_access_opening

A `Changed_hvac_access_opening` is a type of `Change_item` (see 4.2.46) that identifies an `Hvac_access_opening` (see 4.2.172) that is being changed or is the result of a Change (see 4.2.44).

4.2.54 Changed_hvac_branch_connection

A `Changed_hvac_branch_connection` is a type of `Change_item` (see 4.2.46) that identifies an `Hvac_branch_connection` (see 4.2.175) that is being changed or is the result of a Change (see 4.2.44).

4.2.55 Changed_hvac_component_thickness

A `Changed_hvac_component_thickness` is a type of `Change_item` (see 4.2.46) that identifies an `Hvac_component_thickness` (see 4.2.177) that is being changed or is the result of a Change (see 4.2.44).

4.2.56 Changed_hvac_connector_service_characteristic

A `Changed_hvac_connector_service_characteristic` is a type of `Change_item` (see 4.2.46) that identifies an `Hvac_connector_service_characteristic` (see 4.2.179) that is being changed or is the result of a Change (see 4.2.44).

4.2.57 Changed_hvac_cross_section

A Changed_hvac_cross_section is a type of Change_item (see 4.2.46) that identifies an Hvac_cross_section (see 4.2.181) that is being changed or is the result of a Change (see 4.2.44).

4.2.58 Changed_hvac_plant_item_branch_connection

A Changed_hvac_plant_item_branch_connection is a type of Change_item (see 4.2.46) that identifies an Hvac_plant_item_branch_connection (see 4.2.197) that is being changed or is the result of a Change (see 4.2.44).

4.2.59 Changed_hvac_run

A Changed_hvac_run is a type of Change_item (see 4.2.46) that identifies an Hvac_run (see 4.2.204) that is being changed or is the result of a Change (see 4.2.44).

4.2.60 Changed_hvac_section

A Changed_hvac_section is a type of Change_item (see 4.2.46) that identifies an Hvac_section (see 4.2.206) that is being changed or is the result of a Change (see 4.2.44).

4.2.61 Changed_hvac_section_insulation

A Changed_hvac_section_insulation is a type of Change_item (see 4.2.46) that identifies an Hvac_section_insulation (see 4.2.209) that is being changed or is the result of a Change (see 4.2.44).

4.2.62 Changed_hvac_section_to_section_connection

A Changed_hvac_section_to_section_connection is a type of Change_item (see 4.2.46) that identifies an Hvac_section_to_section_connection (see 4.2.211) that is being changed or is the result of a Change (see 4.2.44).

4.2.63 Changed_hvac_specification

A Changed_hvac_specification is a type of Change_item (see 4.2.46) that identifies an Hvac_specification (see 4.2.214) that is being changed or is the result of a Change (see 4.2.44).

4.2.64 Changed_line_assignment

A Changed_line_assignment is a type of Change_item (see 4.2.46) that identifies a Line_piping_system_component_assignment (see 4.2.241) that is being changed or is the result of a Change (see 4.2.44).

4.2.65 Changed_line_branch_connection

A Changed_line_branch_connection is a type of Change_item (see 4.2.46) that identifies a Line_branch_connection (see 4.2.238) that is being changed or is the result of a Change (see 4.2.44).

4.2.66 Changed_line_plant_item_branch_connection

A Changed_line_plant_item_branch_connection is a type of Change_item (see 4.2.46) that identifies a Line_plant_item_branch_connection (see 4.2.242) that is being changed or is the result of a Change (see 4.2.44).

ISO 10303-227:2005(E)

4.2.67 Changed_line_plant_item_connection

A `Changed_line_plant_item_connection` is a type of `Change_item` (see 4.2.46) that identifies a `Line_plant_item_connection` (see 4.2.244) that is being changed or is the result of a `Change` (see 4.2.44).

4.2.68 Changed_line_to_line_connection

A `Changed_line_to_line_connection` is a type of `Change_item` (see 4.2.46) that identifies a `Line_to_line_connection` (see 4.2.247) that is being changed or is the result of a `Change` (see 4.2.44).

4.2.69 Changed_piping_specification

A `Changed_piping_specification` is a type of `Change_item` (see 4.2.46) that identifies a `Piping_specification` (see 4.2.298) that is being changed or is the result of a `Change` (see 4.2.44).

4.2.70 Changed_piping_system_line

A `Changed_piping_system_line` is a type of `Change_item` (see 4.2.46) that identifies a `Piping_system_line` (see 4.2.304) that is being changed or is the result of a `Change` (see 4.2.44).

4.2.71 Changed_piping_system_line_segment

A `Changed_piping_system_line_segment` is a type of `Change_item` (see 4.2.46) that identifies a `Piping_system_line_segment` (see 4.2.305) that is being changed or is the result of a `Change` (see 4.2.44).

4.2.72 Changed_piping_system_line_segment_termination

A `Changed_piping_system_line_segment_termination` is a type of `Change_item` (see 4.2.46) that identifies a `Piping_system_line_segment_termination` (see 4.2.306) that is being changed or is the result of a `Change` (see 4.2.44).

4.2.73 Changed_planned_physical_plant

A `Changed_planned_physical_plant` is a type of `Change_item` (see 4.2.46) that identifies a `Planned_physical_plant` (see 4.2.309) that is being changed or is the result of a `Change` (see 4.2.44).

4.2.74 Changed_plant

A `Changed_plant` is a type of `Change_item` (see 4.2.46) that identifies a `Plant` (see 4.2.311) that is being changed or is the result of a `Change` (see 4.2.44).

4.2.75 Changed_plant_item

A `Changed_plant_item` is a type of `Change_item` (see 4.2.46) that identifies a `Plant_item` (see 4.2.313) that is being changed or is the result of a `Change` (see 4.2.44).

4.2.76 Changed_plant_item_collection

A `Changed_plant_item_collection` is a type of `Change_item` (see 4.2.46) that identifies a `Plant_item_collection` (see 4.2.315) that is being changed or is the result of a `Change` (see 4.2.44).

4.2.77 Changed_plant_item_connection

A `Changed_plant_item_connection` is a type of `Change_item` (see 4.2.46) that identifies a `Plant_item_connection` (see 4.2.316) that is being changed or is the result of a `Change` (see 4.2.44).

4.2.78 Changed_plant_item_connector

A Changed_plant_item_connector is a type of Change_item (see 4.2.46) that identifies a Plant_item_connector (see 4.2.318) that is being changed or is the result of a Change (see 4.2.44).

4.2.79 Changed_plant_item_location

A Changed_plant_item_location is a type of Change_item (see 4.2.46) that identifies a Plant_item_location (see 4.2.325) that is being changed or is the result of a Change (see 4.2.44).

4.2.80 Changed_plant_item_shape

A Changed_plant_item_shape is a type of Change_item (see 4.2.46) that identifies a Plant_item_shape (see 4.2.326) that is being changed or is the result of a Change (see 4.2.44).

4.2.81 Changed_plant_process_capability

A Changed_plant_process_capability is a type of Change_item (see 4.2.46) that identifies a Plant_process_capability (see 4.2.328) that is being changed or is the result of a Change (see 4.2.44).

4.2.82 Changed_plant_system

A Changed_plant_system is a type of Change_item (see 4.2.46) that identifies a Plant_system (see 4.2.329) that is being changed or is the result of a Change (see 4.2.44).

4.2.83 Changed_reference_geometry

A Changed_reference_geometry is a type of Change_item (see 4.2.46) that identifies a Reference_geometry (see 4.2.348) that is being changed or is the result of a Change (see 4.2.44).

4.2.84 Changed_required_material_description

A Changed_required_material_description is a type of Change_item (see 4.2.46) that identifies a Required_material_description (see 4.2.353) that is being changed or is the result of a Change (see 4.2.44).

4.2.85 Changed_site

A Changed_site is a type of Change_item (see 4.2.46) that identifies a Site (see 4.2.379) that is being changed or is the result of a Change (see 4.2.44).

4.2.86 Changed_site_feature

A Changed_site_feature is a type of Change_item (see 4.2.46) that identifies a Site_feature (see 4.2.380) that is being changed or is the result of a Change (see 4.2.44).

4.2.87 Changed_sited_plant

A Changed_sited_plant is a type of Change_item (see 4.2.46) that identifies a Sited_plant (see 4.2.382) that is being changed or is the result of a Change (see 4.2.44).

4.2.88 Changed_sub_plant_relationship

A Changed_sub_plant_relationship is a type of Change_item (see 4.2.46) that identifies a Sub_plant_relationship (see 4.2.406) that is being changed or is the result of a Change (see 4.2.44).

ISO 10303-227:2005(E)

4.2.89 Circular_ellipsoid

A **Circular_ellipsoid** is a type of **Csg_element** (see 4.2.111) that has the following geometric characteristics: it is axial symmetric; cross sections taken in a plane normal to the axis are circular; cross sections taken in plane containing the axis are elliptical; it is trimmed with a plane that is normal to an axis.

NOTE The shape of a **Circular_ellipsoid** may be described as a hemisphere that has been compressed along the circular axis.

4.2.90 Clamp

A **Clamp** is a set of devices used to join, grip, support, or compress mechanical or structural parts with opposing, often adjustable sides or parts for use in suspending pipe or for fastening hose to an end of pipe or fitting.

NOTE Figure 10 depicts a typical Pipe Clamp.




Figure 10 — Pipe clamp

4.2.91 Clamp_set

A **Clamp_set** is the collection of fasteners and items to be fully used with a **Clamp** (see 4.2.90).

The data associated with a **Clamp_set** are the following:

- **set_id**;
- **quantity**.

4.2.91.1 set_id

The **set_id** specifies a unique identifier for the **Clamp_set**. The **set_id** is required for each **Clamp_set**.

4.2.91.2 quantity

The **quantity** is the number of items in the **Clamp_set**.

4.2.92 Clamped

A **Clamped** is a type of **Piping_connector** (see 4.2.295) that is a physical feature of a **Plant_item** (see 4.2.313) at which a **Pipe Clamp** (see 4.2.90) is attached.

4.2.93 Component_size_description

A Component_size_description is used to explain or summarize the physical size of a Mechanical_connector (see 4.2.263) or Mechanical_system_component (see 4.2.270), based on a set of optional dimensional characteristics, and an optional dimensional standard. The set of parameters may be extended through a set of user defined parameters.

NOTE A Component_size_description is used to specify the size of a Mechanical_component (see 4.2.262) as a whole (where the size is assumed constant over the extent of the component) or to each individual connector of the Mechanical_component (where the sizes of each different connector differ).

The data associated with a component_size_description are the following:

- dimensional_standard;
- machined_from_stock;
- outside_measurement;
- overall_length;
- width;
- height;
- thickness;
- diameter.

4.2.93.1 dimensional_standard

A dimensional_standard specifies a designation for the standard used to dimension the Mechanical_component (see 4.2.262). The dimensional_standard need not be specified for a particular Component_size_description.

EXAMPLE Examples of dimensional_standard designations include ANSI and DIN.

4.2.93.2 machined_from_stock

A machined_from_stock indicates whether the dimension parameters associated with Component_size_description are those after machining the Mechanical_system_component (see 4.2.270) from a nominal stock. A Component_size_description which is not machined from stock indicates that the dimension parameters provided are for a Mechanical_system_component ready for use as supplied.

4.2.93.3 outside_measurement

An outside_measurement indicates whether the dimension parameters associated with Component_size_description are taken external to the Mechanical_system_component (see 4.2.270). A Component_size_description which does not have an outside_measurement indicates that the dimension parameters associated are internal measurements.

4.2.93.4 overall_length

An overall_length is a measurement that specifies the overall length of the Mechanical_system_component (see 4.2.270). This measurement may be determined for the maximum external length or internal length depending upon the value provided by the outside_measurement. The overall length need not be specified for a particular Component_size_description.

ISO 10303-227:2005(E)

4.2.93.5 width

A width is a measurement that specifies the lateral extent of the Mechanical_system_component (see 4.2.270). This measurement may be determined for either the external width or internal width depending upon the value provided by the outside_measurement. The width need not be specified for a particular Component_size_description.

4.2.93.6 height

A height is a measurement that specifies the vertical extent of the Mechanical_system_component (see 4.2.270). This measurement may be determined for either an external height or internal height (if applicable) depending upon the value provided by the outside_measurement. The height need not be specified for a particular Component_size_description.

4.2.93.7 thickness

A thickness is a measurement that specifies the extent of the material thickness for the Mechanical_system_component (see 4.2.270). This measurement is determined independantly of the value provided by the outside_measurement. The thickness need not be specified for a particular Component_size_description.

4.2.93.8 diameter

A diameter is a measurement that specifies the radial extent of the Mechanical_system_component (see 4.2.270). This measurement may be determined for either an external diameter or internal diameter depending upon the value provided by the outside_measurement. The diameter need not be specified for a particular Component_size_description.

4.2.94 Conduit

A Conduit is a type of Cableway_piece (see 4.2.36) that is a tube with a round cross section that holds Cable (see 4.2.31) objects.

EXAMPLE Liquid-tight conduit, flexible conduit, rigid steel conduit, intermediate steel conduit, electrical metallic tubing, power concrete encased duct bank use conduit, rigid heavy wall conduit, rigid extra-heavy wall conduit.

4.2.95 Conduit_size_description

A Conduit_size_description is a type of Cableway_size_description (see 4.2.37) that is used to explain or summarize the physical size of a Conduit (see 4.2.93) based on a set of dimensional characteristics.

The data associated with a Conduit_size_description are the following:

- outer_diameter;
- inner_diameter;
- thickness.

4.2.95.1 outer_diameter

The outer_diameter specifies the external diameter of the Conduit (see 4.2.93). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.95.2 inner_diameter

The `inner_diameter` specifies the diameter of the opening of the Conduit (see 4.2.93). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.95.3 thickness

The `thickness` specifies the width of the wall of the Conduit (see 4.2.93). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.96 Cone

A `Cone` is a type of `Csg_element` (see 4.2.111) that is a 3D volume with parallel, coaxial, circular cross-sections of radii that varies uniformly from a circular base to an axis normal to and positioned at the centre point of the base.

4.2.97 Conic

A `Conic` is a type of `Curve` (see 4.2.112) composed of points located at a uniform distance from a point, a pair of points, or a point and a line.

EXAMPLE Kinds of Conics include circles, ellipses, parabolas, and hyperbolas.

4.2.98 Connected_collection

A `Connected_collection` is a type of `Plant_item_collection` (see 4.2.315) where elements of the whole collection must be connected.

NOTE These connections may be identified explicitly by `Plant_item_connection` (see 4.2.316) objects.

EXAMPLE A set of `Plant_item` (see 4.2.313) objects can be collected for the purpose of defining the items that comprise an assembly. Examples of this assembly include packaged unit and module in a plant.

The data associated with a `Connected_collection` are the following:

— `element`.

4.2.98.1 element

An `element` is a `Plant_item` which is used in the `Connected_collection`.

4.2.99 Connection_component

A `Connection_component` is a `Plant_item` (see 4.2.313) that is used for the purpose of connecting other `Plant_items`.

4.2.100 Connection_definition

A `Connection_definition` is a type of `Plant_item_connection` (see 4.2.316) that specifies connection comprised of two or more connectors that is part of a `Plant_item_definition` (see 4.2.320).

NOTE A `Connection_definition` that is part of a `Plant_item_definition` (see 4.2.320) implies that the `Plant_item_definition` is a `Connected_collection` (see 4.2.98).

ISO 10303-227:2005(E)

4.2.101 Connection_inspection_record

A Connection_inspection_record is a collection of information that captures the result of an evaluation of an observed value for a characteristic of a connection against an expected or prescribed value for that characteristic, as well as information to evaluate the acceptability of the observed value.

The data associated with a Connection_inspection_record are the following:

- inspected_property_name;
- connection_type;
- inspection_type;
- weld_id;
- connecting_portion_id;
- inspected_property_tolerance;
- inspected_property_measured_value;
- inspection_record_number.

4.2.101.1 inspected_property_name

The inspected_property_name specifies the characteristic for which information is being recorded. The inspected_property_name may be one of the following:

For welded connections:

- drift diameter tolerance;
- fit up;
- hardness test;
- heat treatment;
- nde;
- weld dimension;
- welding person;
- welding procedure.

For flanged connections:

- bolt and nut tightening torque;
- fit up;
- gasket compressed thickness;
- gasket thickness;
- gasket type.

For threaded connections:

- fit up;

- gasket type;
- threaded tightening torque.

4.2.101.1.1 bolt and nut tightening torque

bolt and nut tightening torque specifies that the inspection is carried out by checking record of fastening torque to tighten a Nut (see 4.2.275) to a Bolt (see 4.2.21).

4.2.101.1.2 drift diameter tolerance

drift diameter tolerance specifies that the inspection is made on the degree of diametric dislocation between two Piping_connectors (see 4.2.295) at a joint.

4.2.101.1.3 fit up

fit up specifies that the inspection is made whether the preset conditions for the final assembling are correct at a joint of two Piping_connectors (see 4.2.295) joined.

4.2.101.1.4 gasket compressed thickness

gasket compressed thickness specifies that the inspection is made on the thickness of a Gasket (see 4.2.164) when compressed between Flanges (see 4.2.148).

4.2.101.1.5 gasket thickness

gasket thickness specifies that the inspection is made on the thickness of a Gasket (see 4.2.164) before compressed between Flanges (see 4.2.148).

4.2.101.1.6 gasket type

gasket type specifies that the inspection is made whether correct Gasket (see 4.2.164) is used as specified.

4.2.101.1.7 heat treatment

heat treatment specifies that the inspection is carried out by checking record of heat treating temperature.

4.2.101.1.8 hardness test

hardness test specifies that the inspection is carried out by measuring relative hardness of welded surface using hardness tester.

4.2.101.1.9 nde

nde specifies that the inspection is carried out by nondestructive test method which does not damage the test sample.

4.2.101.1.10 threaded tightening torque

threaded tightening torque specifies that the inspection is carried out by checking record of fastening torque applied at a joint where Threaded (see 4.2.418) connectors are connected.

4.2.101.1.11 weld dimension

weld dimension specifies that the inspection is made on the size of a welded part.

4.2.101.1.12 welding person

welding person specifies that the inspection is carried out by checking record of welder's name and his or her qualification.

ISO 10303-227:2005(E)

4.2.101.1.13 welding procedure

welding procedure specifies that the inspection is carried out by checking record whether method and condition of welding are proper.

4.2.101.2 connection_type

The connection_type specifies the kind of connection that is being inspected. The connection_type may be one of the following:

- buttweld;
- flanged;
- slip on;
- socket;
- stub in;
- threaded.

4.2.101.2.1 buttweld

buttweld specifies that two Piping_components (see 4.2.293), whose ends are Buttweld (see 4.2.30), are connected at the joint.

4.2.101.2.2 flanged

flanged specifies that two Piping_components (see 4.2.293), whose ends are Flanged (see 4.2.149), are connected at the joint.

4.2.101.2.3 slip on

slip on specifies that a Slip_on_flange (see 4.2.383) and a Pipe (see 4.2.289) are connected at the joint.

4.2.101.2.4 socket

socket specifies that two Piping_components (see 4.2.293), one of which has a Socket (see 4.2.385) end, are connected at the joint.

4.2.101.2.5 stub in

stub in specifies that one Piping_component (see 4.2.293) is connected inserting its end in a Branch_hole (see 4.2.26) of the other Piping_component.

4.2.101.2.6 threaded

threaded specifies that two Piping_components (see 4.2.293), whose ends are Threaded (see 4.2.418), are connected at the joint.

4.2.101.3 inspection_type

The inspection_type specifies the kind of inspection that is being performed. The inspection_type may be one of the following:

- mt;
- pt;
- rt;

- ut;
- visual examination.

4.2.101.3.1 mt

mt specifies that the inspection is carried out by magnetic inspection method to detect flaws where ferromagnetic particles are applied to a metal surface and the particles accumulate in surface cracks by magnetic attraction.

4.2.101.3.2 pt

pt specifies that the inspection is carried out by flowing a liquid with low surface tension, which usually contains a dye or fluorescent chemical, over a metal surface. This liquid is called penetrant and is used to determine the existence and extent of cracks.

4.2.101.3.3 rt

rt specifies that the inspection is carried out by radiography that is a kind of nondestructive test method and employs a beam of x-rays or gamma-rays to get a photographic image of a specimen.

4.2.101.3.4 ut

ut specifies that the inspection is carried out by ultrasonic testing that is a kind of nondestructive test method and employs high-frequency waves.

4.2.101.3.5 visual examination

visual examination specifies that the inspection is carried out by human eye.

4.2.101.4 weld_id

The weld_id is an identification of the weld point at which the inspection is being made.

4.2.101.5 connecting_portion_id

The connecting_portion_id specifies a descriptive identification of the area of the connection that is being inspected.

EXAMPLE For a welded slip on flange connection, two connecting portions may be defined – the inner portion where the end of the pipe is welded to the inner surface of the fitting, and the outside portion where the end of the fitting is welded to the outside of the pipe.

4.2.101.6 inspected_property_tolerance

The inspected_property_tolerance specifies the acceptable deviation for the measured result of the inspection.

4.2.101.7 inspected_property_measured_value

The inspected_property_measured_value specifies the recorded result of the inspection.

4.2.101.8 inspection_record_number

The inspection_record_number specifies an alphanumeric identifier assigned to the Connection_-inspection_record.

ISO 10303-227:2005(E)

4.2.102 Connection_material

The Connection_material specifies the substances or other Plant_item (see 4.2.313) objects used at the connection of two Plant_item_connector (see 4.2.318) objects. This may be one or more specifications and one or more Plant_item objects.

EXAMPLE At a connection of two butt-weld connectors, there is a welding specification that applies to the connection. At a connection of two flanged connectors there are bolts and nuts that connect the Flanges (see 4.2.148), as well as a specification for the use of these items.

The data associated with a Connection_material are the following:

— material_name.

4.2.102.1 material_name

The material_name specifies common nomenclature used to refer to the material.

4.2.103 Connector_definition

A Connector_definition is a type of Plant_item_connector (see 4.2.318) that identifies the connector where a non-instantiated Plant_item (see 4.2.313) can connect to one or more other Plant_item_connector objects.

4.2.104 Coupling

A Coupling is a type of Fitting (see 4.2.147) that is used to make a linear connection between two pipes.

NOTE 1 Figure 11 depicts a typical socket-weld Coupling.

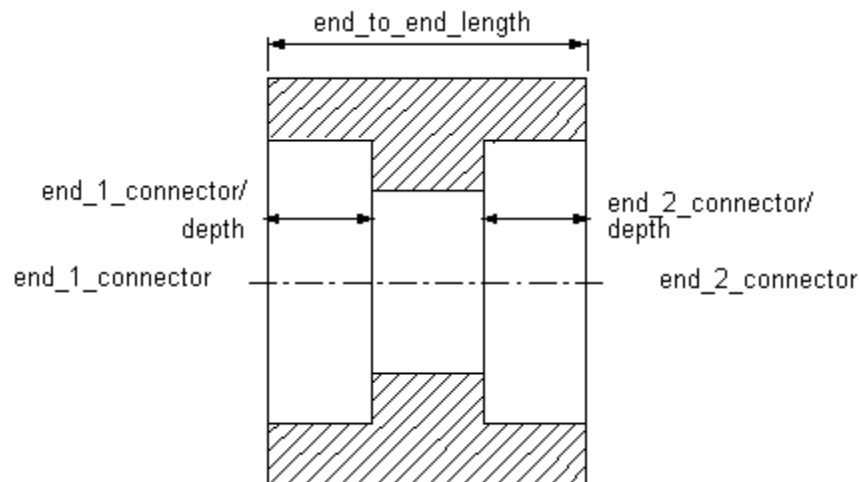


Figure 11 — Socket weld coupling

EXAMPLE A sleeve is a kind of Coupling. Figure 12 depicts a typical sleeve.

NOTE 2 Figure 12 depicts a type of Coupling which is a sleeve. A sleeve is not a "traditional" Coupling.




Figure 12 — Sleeve

The data associated with a Coupling are the following:

- end_1_connector;
- end_2_connector;
- end_to_end_length.

4.2.104.1 end_1_connector

The end_1_connector specifies the Piping_connector (see 4.2.295) designated as end one.

4.2.104.2 end_2_connector

The end_2_connector specifies the Piping_connector (see 4.2.295) designated as end two.

4.2.104.3 end_to_end_length

The end_to_end_length specifies the external distance between the end-one and end-two faces. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.105 Cross

A Cross is a type of Fitting (see 4.2.147) that is a branched outlet consisting of four perpendicular legs to provide straight through and 90 degree flow.

NOTE Figure 13 depicts a typical butt-weld Cross.

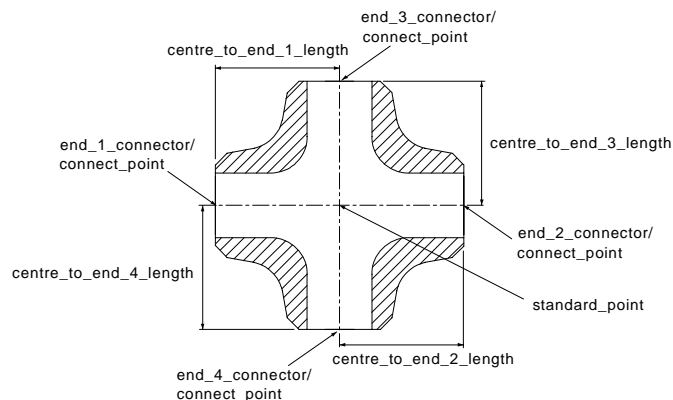


Figure 13 — Butt-weld cross

The data associated with a Cross are the following:

- centre_to_end_1_length;
- centre_to_end_2_length;

ISO 10303-227:2005(E)

- centre_to_end_3_length;
- centre_to_end_4_length;
- end_1_connector;
- end_2_connector;
- end_3_connector;
- end_4_connector.

4.2.105.1 centre_to_end_1_length

The `centre_to_end_1_length` specifies the distance from the intersection of the cross straight-run centreline and branch-run centreline to the end-one (straight-run) face. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.105.2 centre_to_end_2_length

The `centre_to_end_2_length` specifies the distance from the intersection of the cross straight-run centreline and branch-run centreline to the end-two (straight-run) face. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.105.3 centre_to_end_3_length

The `centre_to_end_3_length` specifies the distance from the intersection of the cross straight-run centreline and branch-run centreline to the end-three (branch-run) face. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.105.4 centre_to_end_4_length

The `centre_to_end_4_length` specifies the distance from the intersection of the cross straight-run centreline and branch-run centreline to the end-four (branch-run) face. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.105.5 end_1_connector

The `end_1_connector` specifies the `Piping_connector` (see 4.2.295) designated as end one.

4.2.105.6 end_2_connector

The `end_2_connector` specifies the `Piping_connector` (see 4.2.295) designated as end two.

4.2.105.7 end_3_connector

The `end_3_connector` specifies the `Piping_connector` (see 4.2.295) designated as end three.

4.2.105.8 end_4_connector

The end_4_connector specifies the Piping_connector (see 4.2.295) designated as end four.

4.2.106 Cross_section_flat_oval

A Cross_section_flat_oval is a type of Hvac_cross_section (see 4.2.181).

NOTE Figure 14 depicts a typical Cross_section_flat_oval.

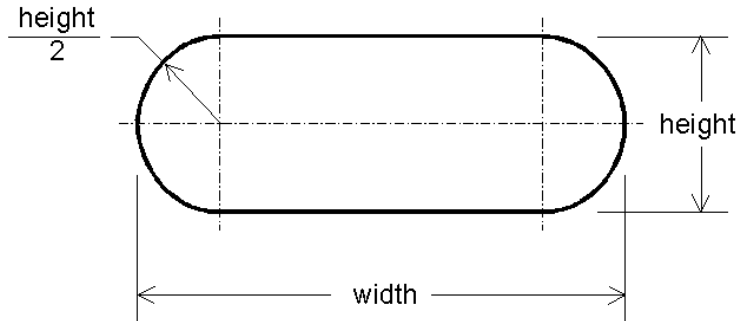


Figure 14 — Cross_section_flat_oval

The data associated with a Cross_section_flat_oval are the following:

- height;
- width.

4.2.106.1 height

The height specifies the distance between the flats as shown in Figure 14.

4.2.106.2 width

The width specifies the distance between the outside of the rounds as shown in Figure 14.

4.2.107 Cross_section_non_standard

The Cross_section_non_standard is a type of Hvac_cross_section (see 4.2.181) which cannot be defined by a set of common parameters and therefore requires explicit geometry to define the shape of the cross section.

The data associated with a Cross_section_non_standard are the following:

- cross_section_boundary.

4.2.107.1 cross_section_boundary

A cross_section_boundary is a curve made up of several component curves but joined together to act as a single curve. The component curves are usually bounded by other surface intersections.

ISO 10303-227:2005(E)

4.2.108 Cross_section_radiused_corner

The `Cross_section_radiused_corner` is a type of `Hvac_cross_section` (see 4.2.181) taken through a piece of rectangular duct whose corners are radiused.

NOTE Figure 15 depicts a typical `Cross_section_radiused_corner`.

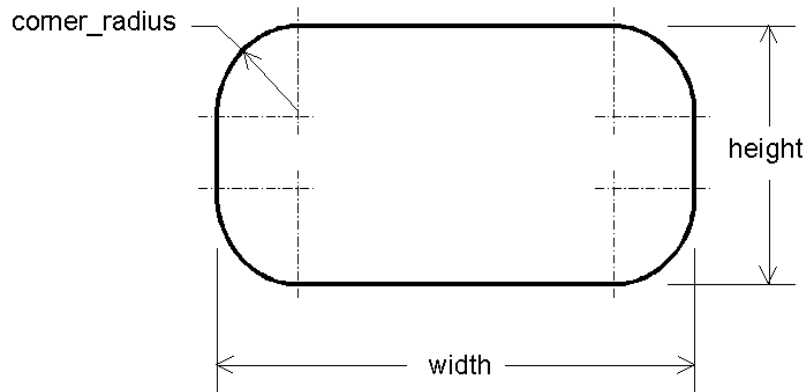


Figure 15 — Cross_section_radiused_corner

The data associated with a `Cross_section_radiused_corner` are the following:

- height;
- width;
- corner_radius.

4.2.108.1 height

The height specifies the distance between the horizontal flats as shown in Figure 15.

4.2.108.2 width

The width specifies the distance between the vertical flats as shown in Figure 15.

4.2.108.3 corner_radius

The corner_radius specifies the radius of the fillet between a vertical face and a horizontal face.

4.2.109 Cross_section_rectangular

The `Cross_section_rectangular` is a type of `Hvac_cross_section` (see 4.2.181) applied to the cross section taken through a piece of rectangular duct in an `Hvac_system`.

The data associated with a `Cross_section_rectangular` are the following:

- height;
- width.

4.2.109.1 height

The height specifies the distance between the horizontal flats.

4.2.109.2 width

The width specifies the distance between the vertical flats.

4.2.110 Cross_section_round

The `Cross_section_round` is a type of `Hvac_cross_section` (see 4.2.181) which is applied to the cross section taken through a piece of round duct in an `Hvac_system`.

The data associated with a `Cross_section_round` are the following:

— radius.

4.2.110.1 radius

The radius specifies the distance from the centre of the cross section to a point on its circumference.

4.2.111 Csg_element

A `Csg_element` is a type of `Shape_representation_element` (see 4.2.375) that is a regular, 3D geometric shape that is combined with other regular shapes through boolean operations to create a complex, 3D, solid model. Each `Csg_element` is either: a `Block` (see 4.2.20), a `Circular_ellipsoid` (see 4.2.89), a `Cone` (see 4.2.96), a `Cylinder` (see 4.2.113), an `Eccentric_cone` (see 4.2.122), an `Eccentric_cylinder` (see 4.2.123), an `Eccentric_pyramid` (see 4.2.124), an `Extrusion` (see 4.2.140), a `Faceted_brep` (see 4.2.142), a `Hemisphere` (see 4.2.169), a `Pyramid` (see 4.2.341), a `Reducing_torus` (see 4.2.347), a `Solid_of_revolution` (see 4.2.387), a `Sphere` (see 4.2.392), a `Square_to_round` (see 4.2.395), a `Torus` (see 4.2.422), a `Trimmed_block` (see 4.2.424), a `Trimmed_cone` (see 4.2.425), a `Trimmed_cylinder` (see 4.2.426), a `Trimmed_pyramid` (see 4.2.427), a `Trimmed_sphere` (see 4.2.428), a `Trimmed_torus` (see 4.2.429).

4.2.112 Curve

A `Curve` is a type of `Wire_and_surface_element` (see 4.2.439) that is a one-dimensional manifold in a space of dimension two or three. A `Curve` may be a `Conic` (see 4.2.97), a `Free_form_curve` (see 4.2.154), a `Line` (see 4.2.237), a `Polygon` (see 4.2.336), or a `Vector` (see 4.2.435).

NOTE Informally, a `Curve` can be envisioned as the path of a point moving in its coordinate space.

4.2.113 Cylinder

A `Cylinder` is a type of `Csg_element` (see 4.2.111) that is a 3D cylindrical solid primitive with end surfaces that are planar and are perpendicular to the axis. The size and shape of a `Cylinder` is completely described by two real values that represent the radius and length of the cylinder.

4.2.114 Design_arrangement_performance

A `Design_arrangement_performance` is the set of power performance characteristics under a specific circumstance at the termination of a `Mechanical_system_arrangement_segment` (see 4.2.267) or a `Plant_item_connector_occurrence` (see 4.2.319).

The data associated with a `Design_arrangement_performance` are the following:

- description;
- arrangement_case_type;
- arrangement_data_reference;

ISO 10303-227:2005(E)

— arrangement_design_id.

4.2.114.1 description

The description specifies a textual explanation or summary of the Design_arrangement_performance.

4.2.114.2 arrangement_case_type

The arrangement_case_type specifies the condition that the power performance characteristics are being defined under. An arrangement_case_type is required for each Design_arrangement_performance.

EXAMPLE Examples of arrangement_case_type conditions include idle, normal, and reverse.

4.2.114.3 arrangement_data_reference

The arrangement_data_reference specifies the source(s) that provide the basis for the performance data.

4.2.114.4 arrangement_design_id

The arrangement_design_id specifies a unique identifier for the Design_arrangement_performance. An arrangement_design_id is required for each Design_arrangement_performance.

4.2.115 Design_project

A Design_project is a task with a specifically defined purpose and scope that is used for the administration and management of plant designs.

The data associated with a Design_project are the following:

- description;
- name;
- owner.

4.2.115.1 description

The description specifies a textual explanation or summary of the Design_project.

4.2.115.2 name

The name specifies a textual label given to the Design_project.

4.2.115.3 owner

The owner specifies the name of the organization that is responsible for the Design_project.

4.2.116 Detail_shape

A Detail_shape is a type of Shape_representation (see 4.2.374) that is the actual or intended external shape of a Plant_item (see 4.2.313). A Detail_shape does not include the description of voids or other internal details of the shape of the Plant_item.

NOTE Contrast Detail_shape with Outline_shape (see 4.2.280) and Envelope_shape (see 4.2.131). A Detail_shape more closely approximates the actual shape of the Plant_item than either Envelope_shape or Outline_shape and is, therefore, likely to be more complex than either Envelope_shape or Outline_shape.

4.2.117 Document

A Document is the identification of a logical collection of information about a particular subject.

The data associated with a Document are the following:

- document_id;
- version_id;
- document_type;
- internal_document_reference.

4.2.117.1 document_id

The document_id specifies a unique identification for the Document.

4.2.117.2 version_id

The version_id specifies a unique identification of a revision of a particular Document.

4.2.117.3 document_type

The document_type specifies the kind of Document.

EXAMPLE A document_type may be “coating specification”, “material test report”, “mill sheet”, “positive material identification record”, "specification", "record", "chart", etc.

4.2.117.4 internal_document_reference

The internal_document_reference specifies a specific location within a Document where information is represented.

4.2.118 Ducting_component

A Ducting_component is a type of Plant_item (see 4.2.313) that conveys gaseous matter or airborne, particulate matter. Each Ducting_component may be one of the following: an Equipment_breaching (see 4.2.133), an Hvac_ducting (see 4.2.182), or a Process_ducting (see 4.2.339).

EXAMPLE A Ducting_component that does not fall within one of the subtype categories may be cable trays, raceways, and other ducting used for routing and support of cables.

4.2.119 Ducting_system

A Ducting_system is a type of Plant_system (see 4.2.329) that controls the temperature, humidity, cleanliness, and circulation of environmental or exhaust air as required in a Plant (see 4.2.311). A Ducting_system may be an Hvac_system (see 4.2.216).

The data associated with a Ducting_system are the following:

- type.

4.2.119.1 type

The type specifies a designation that classifies a Ducting_system based on the kind of service that it provides.

4.2.120 Dummy_leg

A Dummy_leg is a type of Piping_support (see 4.2.301) that is attached to a corner of bent part. The main body of it is usually a pipe but shape steel or plate is occasionally used as the material of the part. The Dummy_leg is placed horizontally and supports the weight that acts perpendicularly to the axis of the main body.

NOTE Figure 16 depicts a typical Dummy_leg.

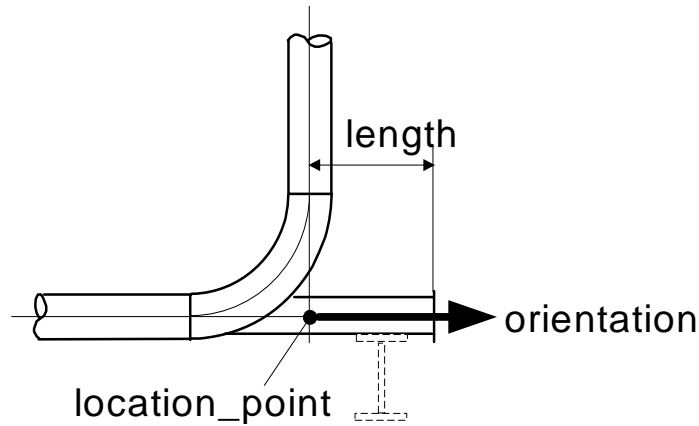


Figure 16 — Dummy_leg

The data associated with a Dummy_leg are the following:

— length.

4.2.120.1 length

The length specifies the distance between the end face of the Dummy_leg and the location_point.

4.2.121 Eccentric_base_elbow_support

An Eccentric_base_elbow_support is a type of Base_elbow_support (see 4.2.15) positioned such that its vertical leg is shifted from the centreline of the pipe it supports.

NOTE Figure 17 depicts a typical Eccentric_base_elbow_support.

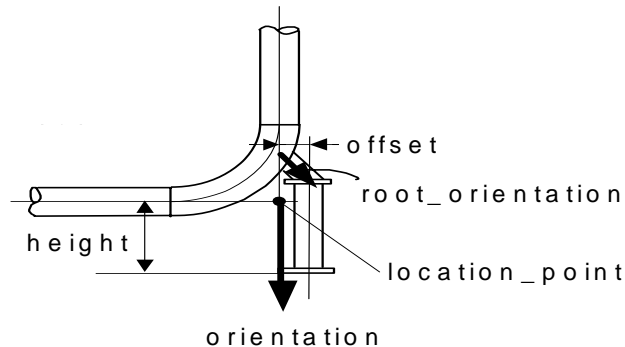


Figure 17 — Eccentric_base_elbow_support

The data associated with an Eccentric_base_elbow_support are the following:

- offset;
- root_orientation.

4.2.121.1 offset

The offset is the perpendicular distance between the location_point and the centreline of the main body of the Eccentric_base_elbow_support.

4.2.121.2 root_orientation

The root_orientation is the unit vector which gives the direction of the centreline of the inclined portion of the Eccentric_base_elbow_support at the point where it supports the pipe.

4.2.122 Eccentric_cone

An Eccentric_cone is a type of Csg_element (see 4.2.111) that consists of a Cone (see 4.2.96) with an axis that is not normal to the base.

4.2.123 Eccentric_cylinder

An Eccentric_cylinder is a type of Csg_element (see 4.2.111) that consists of a Cylinder (see 4.2.113) with an axis that is not normal to the base.

4.2.124 Eccentric_pyramid

An Eccentric_pyramid is a type of Csg_element (see 4.2.111) that consists of a Pyramid (see 4.2.341) with an axis that is not normal to the base.

4.2.125 Eccentric_reducer

An Eccentric_reducer is a type of Reducer (see 4.2.345) where the small end is off-centre from the large end.

NOTE Figure 18 depicts a typical butt-weld Eccentric_reducer. The end_<number>_connectors correspond to the end_<number>_connector attributes defined in Reducer.

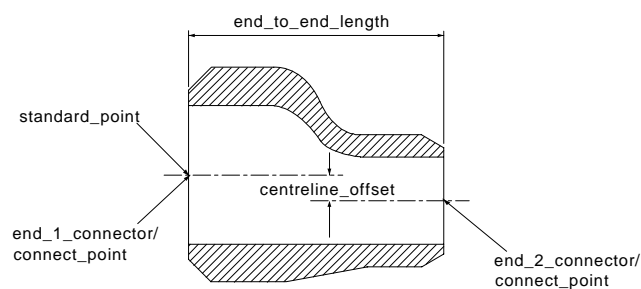


Figure 18 — Eccentric_reducer

The data associated with an Eccentric_reducer are the following:

- centreline_offset;

ISO 10303-227:2005(E)

— flat_side_orientation.

4.2.125.1 centreline_offset

The centreline_offset specifies the perpendicular distance between the centreline of the large end of the Reducer (see 4.2.345) and the centreline of the smaller end of the Reducer.

4.2.125.2 flat_side_orientation

The flat_side_orientation specifies the direction of the straight side of the Eccentric_reducer.

NOTE 1 The direction of the straight side is typically specified as up or down.

NOTE 2 The straight side of the Eccentric_reducer corresponds to the side where the ends of the Eccentric_reducer have a common tangent point parallel to the centreline axes of the Eccentric_reducer.

NOTE 3 Eccentric swage is a synonym for Eccentric Reducer which is normally used for smaller sizes.

4.2.126 Elbow

An Elbow is a type of Fitting (see 4.2.147) that is used to change the direction of piping.

NOTE Figure 19 depicts a typical socket-weld Elbow.

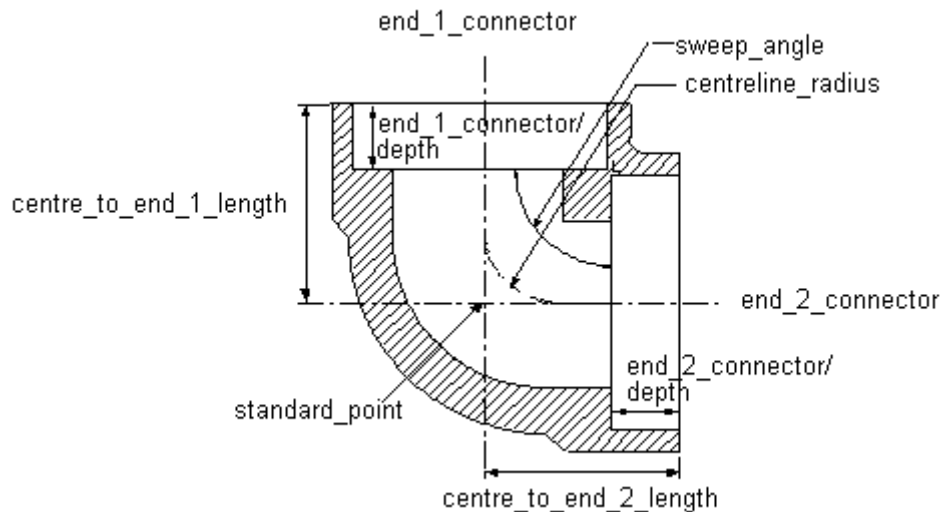


Figure 19 — Elbow

The data associated with an Elbow are the following:

- centre_to_end_1_length;
- centre_to_end_2_length;
- centreline_radius;
- end_1_connector;
- end_2_connector;
- sweep_angle;
- type.

4.2.126.1 centre_to_end_1_length

The `centre_to_end_1_length` specifies the distance from the centre of the Elbow (i.e., where the centrelines for the two ends intersect) to the end-one face. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.126.2 centre_to_end_2_length

The `centre_to_end_2_length` specifies the distance from the centre of the Elbow (i.e., where the centrelines for the two ends intersect) to the end-two face. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.126.3 centreline_radius

The `centreline_radius` specifies the distance from the centreline of the Elbow to the intersection of the perpendicular projection of the centreline taken at the point where the Elbow centreline ends or where the inlet and outlet ends of the Elbow centreline become straight lines. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.126.4 end_1_connector

The `end_1_connector` specifies the `Piping_connector` (see 4.2.295) designated as end one.

4.2.126.5 end_2_connector

The `end_2_connector` specifies the `Piping_connector` (see 4.2.295) designated as end two.

4.2.126.6 sweep_angle

The `sweep_angle` specifies the included angle formed between two lines that are parallel to the end-one and end-two faces of the Elbow, measured at their point of intersection (the centre of radius of the Elbow). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.126.7 type

The `type` specifies a designation that classifies the Elbow.

EXAMPLE Examples of elbow designations include long radius, short radius, reducing, and street.

4.2.127 Electrical_component

An `Electrical_component` is a type of `Plant_item` (see 4.2.313) that is an individually identifiable and functional part of an `Electrical_system` (see 4.2.129).

EXAMPLE Examples of `Electrical_components` include cable tray, wireway, conduit, ductbank, cables, switches, relays, motor control centres, and junction boxes.

ISO 10303-227:2005(E)

4.2.128 Electrical_connector

An `Electrical_connector` is a type of `Plant_item_connector` (see 4.2.318) that is intended to establish an electrical connection (signal or power) between two `Plant_item` (see 4.2.313) objects.

The data associated with an `Electrical_connector` are the following:

— `type`.

4.2.128.1 type

The `type` specifies the designation that describes the functional behaviour of the `Electrical_connector`.

4.2.129 Electrical_system

An `Electrical_system` is a type of `Plant_system` (see 4.2.329) that is a system of wiring, switches, relays, and other equipment associated with receiving and distributing electrical power.

The data associated with an `Electrical_system` are the following:

— `system_voltage_designation`;

— `type`.

4.2.129.1 system_voltage_designation

The `system_voltage_designation` is the rated voltage of the system.

4.2.129.2 type

The `type` specifies a designation that classifies the `Electrical_system` based on the kind of service that it provides.

4.2.130 Electricity_transference

An `Electricity_transference` is a type of `Plant_item_connection` (see 4.2.316) that identifies the purpose or role of the connection as being the transfer of electrical current or signal.

4.2.131 Envelope_shape

An `Envelope_shape` is a type of `Shape_representation` (see 4.2.374) that is a 3D spatial volume that completely encloses or bounds a `Plant_item` (see 4.2.313). An `Envelope_shape` is a very simple geometric shape, such as a box, that encloses the plant item. An `Envelope_shape` may, but need not, include clearance or access spaces associated with the plant item.

NOTE Contrast `Envelope_shape` with `Detail_shape` (see 4.2.116) and `Outline_shape` (see 4.2.280).

4.2.132 Equipment

An `Equipment` is a type of `Plant_item` (see 4.2.313) that is treated as a single and self-contained unit that provides a function. Each `Equipment` may be an `Inline_equipment` (see 4.2.223).

The data associated with an `Equipment` are the following:

— `characteristics`;

— `equipment_type`;

- heat_tracing_type;
- insulation_specification;
- rated_temperature;
- shock_qualification_status;
- vibration_amplitude;
- vibration_frequency.

4.2.132.1 characteristics

The characteristics specifies functional attributes of the Equipment.

EXAMPLE Characteristics of a pump may be that it operates at 80% efficiency while pumping 1250 gallons per minute.

4.2.132.2 equipment_type

The equipment_type specifies a classification of an Equipment based on its performance characteristics.

EXAMPLE Examples of equipment_type classifications include compressor, engine, furnace, gear box, heat exchanger, pressure vessel, pump, silo, tank, and turbine.

4.2.132.3 heat_tracing_type

The heat_tracing_type specifies the means utilized to impart a temperature increase to the Equipment by an external wrapping or coiling.

EXAMPLE Examples of heat_tracing_types include, but are not limited to, electrical or steam.

4.2.132.4 insulation_specification

The insulation_specification specifies the document that defines the insulation requirements for the Equipment.

4.2.132.5 rated_temperature

The rated_temperature applies to the maximum temperature of the environment where the operating equipment will be installed.

4.2.132.6 shock_qualification_status

The shock_qualification_status for HVAC applications falls into an "A" or "B" category. Under category "A" an HVAC component can withstand the full limits of shock and still operate. Under the "B" category the HVAC component will not be operational after full shock but the component will remain intact.

4.2.132.7 vibration_amplitude

The vibration_amplitude is the magnitude, or amount, of displacement, velocity, or acceleration, measured from the "at rest" value. The amplitude of a vibration signal can be expressed in terms of "peak" level, "Peak-to-peak" level, or RMS level. It is somewhat of a de facto standard that Displacement is peak-to-peak, Velocity is peak, and Acceleration is RMS.

ISO 10303-227:2005(E)

4.2.132.8 vibration_frequency

Vibration_frequency refers to the pitch of a sound generated by vibration within an Hvac_system. Usually measured in cycles per second (cps).

4.2.133 Equipment_breaching

An Equipment_breaching is a type of Ducting_component (see 4.2.118) consisting of a type of ductwork connected to a piece of Equipment (see 4.2.132) for the purpose of exhausting gases.

4.2.134 Equipment_trim_piping

An Equipment_trim_piping is piping connected to a piece of Equipment (see 4.2.132) that performs a function integral to the Equipment.

NOTE The piping is normally designed and possibly provided or installed by the Equipment manufacturer. Piping of this nature is normally of nominal size two inches and below.

4.2.135 Expander_flange

An Expander_flange is a type of Flange (see 4.2.148) that provides a transition from a smaller to a larger diameter Pipe (see 4.2.289) at a flanged connection.

NOTE Figure 20 depicts a typical Expander_flange.

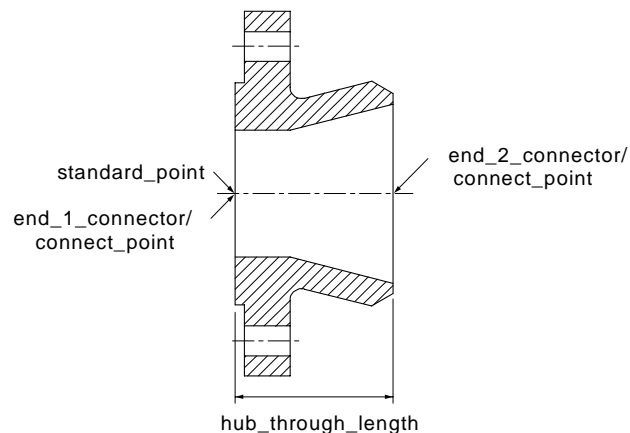


Figure 20 — Expander_flange

4.2.136 External_classification

An External_classification is a designation and description that classifies a Plant_item (see 4.2.313), Plant (see 4.2.311), Plant_system (see 4.2.329), or Plant_item_connector (see 4.2.318) based on predefined tables or sources defined externally to this part. The designation is a reference to the predefined table or source.

The data associated with an External_classification are the following:

- description;
- name;
- source.

4.2.136.1 description

The description specifies a textual explanation or summary of the External_classification.

4.2.136.2 name

The name specifies a textual label given to the External_classification.

4.2.136.3 source

The source specifies a designation that identifies a table or document that contains a list of candidate classifications that the name and description are drawn from.

4.2.137 External_schema_context

An External_schema_context is a representation of an instance of an entity that does not exist in the same scope.

EXAMPLE An External_schema_context may be used to refer to an entity instance defined within the scope of one of the other the ship application protocols (Ship Moulded Forms, Ship Arrangements or Ship Structures). This may be required when referencing a ship's structural bulkhead that a pipe penetrates, the compartment within which a mechanical component resides and situations that require links to representations found in other STEP exchanges (and legacy exchanges).

NOTE The entity that is referenced must be a type of either Definable_object, Definition, or Plant_item in order to be referable via a globally unambiguous identifier.

The data associated with an external_schema_context are the following:

- target_entity_name;
- target_schema_name.

4.2.137.1 target_entity_name

The target_entity_name specifies the name of the entity data type of the External_schema_context.

4.2.137.2 target_schema_name

The target_schema_name specifies the schema in which the entity of the External_schema_context is defined.

4.2.138 Externally_defined_document

An Externally_defined_document is a Document (see 4.2.117) that is referenced from a source outside the context of an exchange.

The data associated with an Externally_defined_document are the following:

- source_id;
- source_description.

4.2.138.1 source_id

The source_id specifies a unique identification of the external origin of the document.

ISO 10303-227:2005(E)

EXAMPLE A `source_id` may be “ANSI”, “ISO”, “ISO 13584”, “DIN”, “JIS”, “PFI”, “Joe’s notebook” or another external source.

4.2.138.2 source_description

The `source_description` is text that characterizes the `external_source`.

4.2.139 Externally_defined_user_defined_attribute_value

An `Externally_defined_user_defined_attribute_value` is a type of `User_defined_attribute_value` (see 4.2.433).

The data associated with an `Externally_defined_user_defined_attribute_value` are the following:

— `source`.

4.2.139.1 source

The `source` specifies a textual identification of the reference resource in which the `User_defined_attribute_value` is described.

4.2.140 Extrusion

An `Extrusion` is a type of `Csg_element` (see 4.2.111) that is a closed, 2D profile swept through a linear distance in space.

4.2.141 Facet_trigon

A `Facet_trigon` is a planar, polygonal surface with three sides.

NOTE In 3D computer models, curved surfaces are sometimes represented by a collection of facets that approximate the curved surface.

4.2.142 Faceted_brep

A `Facet_brep` is a type of `Csg_element` (see 4.2.111).

4.2.143 Faceted_surface_representation

A `Faceted_surface_representation` is a type of `Site_shape_representation` (see 4.2.381) that consists of a collection of `Facet_trigon` (see 4.2.141) objects that represent the topography of a `Site` (see 4.2.379).

4.2.144 Family_definition

A `Family_definition` is a `Plant_item_definition` (see 4.2.320) that characterizes a set of `Piping_component` (see 4.2.293) objects based on common physical characteristics. Physical characteristics may be specified as a specific value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

EXAMPLE A `Piping_specification` (see 4.2.298) describes a `Family_definition`, such as a class of elbows made of stainless steel that are long radius elbows between six inches and twenty four inches in diameter.

The data associated with a `Family_definition` are the following:

— `family_classification_description`.

4.2.144.1 family_classification_description

The family_classification_description specifies a textual explanation of the principal characteristics that vary within the family.

4.2.145 Female_end

A Female_end is a type of Piping_connector (see 4.2.295) end type that forms a recessed opening at the connector to support the insertion of a compatible male connector.

NOTE Figure 21 depicts a typical Female_end.

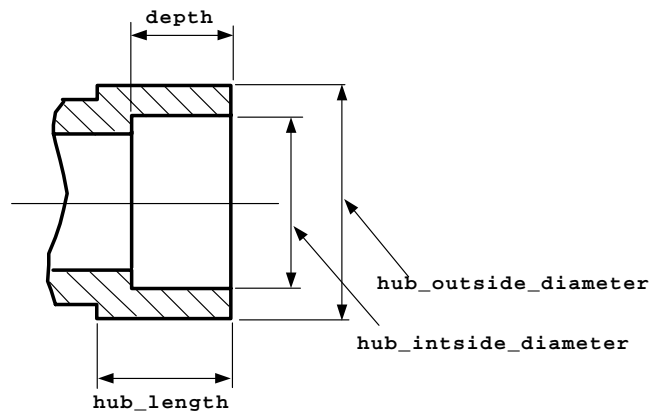


Figure 21 — Female_end

The data associated with a Female_end are the following:

- depth;
- hub_inside_diameter;
- hub_length;
- hub_outside_diameter.

4.2.145.1 depth

The depth specifies the distance from the face of the Piping_connector (see 4.2.295) to the depth of relief. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.145.2 hub_inside_diameter

The hub_inside_diameter specifies the diameter of the opening at the hub. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

ISO 10303-227:2005(E)

4.2.145.3 hub_length

The `hub_length` specifies the distance from the face of the `Plant_item_connector` (see 4.2.318) to the point where the hub size transitions to the body size of the `Plant_item` (see 4.2.313). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.145.4 hub_outside_diameter

The `hub_outside_diameter` specifies the external diameter of the hub. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.146 Ferrule

A Ferrule is a metal cylinder placed over a hose end to affix the fitting to the hose.

NOTE Figure 22 depicts a typical Ferrule.

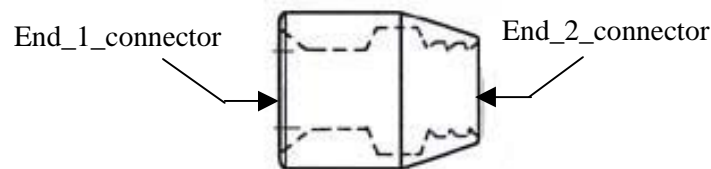


Figure 22 — Ferrule

The data associated with a Ferrule are the following:

- `end_1_connector`;
- `end_2_connector`;
- `length`.

4.2.146.1 end_1_connector

The `end_1_connector` specifies the `Piping_connector` (see 4.2.295) designated as end one.

4.2.146.2 end_2_connector

The `end_2_connector` specifies the `Piping_connector` (see 4.2.295) designated as end two.

4.2.146.3 length

The `length` is the distance between the `end_1_connector` and the `end_2_connector`.

4.2.147 Fitting

A Fitting is a type of `Piping_component` (see 4.2.293) used to join or terminate sections of Pipe (see 4.2.289) or provide changes of direction or branching in a `Piping_system` (see 4.2.302). Each Fitting may

be one of the following: a Blank (see 4.2.18), a Bushing (see 4.2.29), a Coupling (see 4.2.104), a Cross (see 4.2.105), an Elbow (see 4.2.126), a Flange (see 4.2.148), an Insert_fitting (see 4.2.225), a Lap_joint_stub_end (see 4.2.235), a Lateral (see 4.2.236), an Olet (see 4.2.277), an Orifice_plate (see 4.2.279), a Pipe_closure (see 4.2.290), a Reducer (see 4.2.345), a Spacer (see 4.2.388), a Tee (see 4.2.417), a Union (see 4.2.431), or a Y_type_lateral (see 4.2.440).

4.2.148 Flange

A Flange is a type of Fitting (see 4.2.147) that is an annular collar that permits a bolted connection to a similar collar. Each Flange contains two end connectors, one of which shall be a Piping_connector (see 4.2.295) of type Flanged_end. Each Flange may be one of the following: a Blind_flange (see 4.2.19), an Expander_flange (see 4.2.135), an Orifice_flange (see 4.2.278), a Reducing_flange (see 4.2.346), a Lap_joint_flange (see 4.2.234), a Slip_on_flange (see 4.2.383), a Socket_weld_flange (see 4.2.386), a Threaded_flange (see 4.2.419), or a Weld_neck_flange (see 4.2.437).

The data associated with a Flange are the following:

- end_1_connector;
- end_2_connector;
- hole_straddle_centreline_orientation;
- hub_through_length;
- hub_weld_point_diameter.

4.2.148.1 end_1_connector

The end_1_connector specifies the Piping_connector (see 4.2.295) at the flange face.

4.2.148.2 end_2_connector

The end_2_connector specifies the Piping_connector (see 4.2.295) at the hub face.

4.2.148.3 hole_straddle_centreline_orientation

The hole_straddle_centreline_orientation is the orientation of the hole straddle centreline of the Flange in plant coordinates. The hole straddle centreline is the line on the flange surface connected between the centre of the Flange and the middle point of two neighboring bolt holes.

NOTE Figure 23 depicts hole_straddle_centreline_orientation.

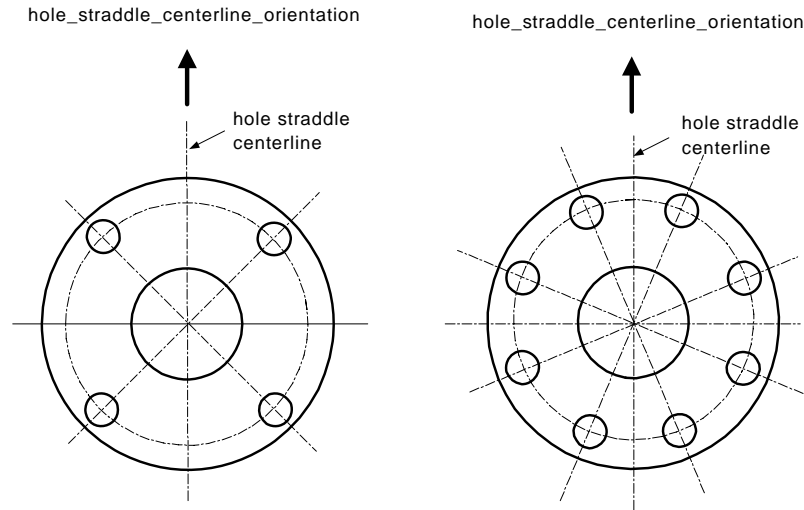


Figure 23 — Hole_straddle_centerline_orientation

NOTE The receiving system may transform the plant coordinates into a local coordinate system if necessary.

4.2.148.4 hub_through_length

The `hub_through_length` specifies the distance between the flange face and the hub face. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.148.5 hub_weld_point_diameter

The `hub_weld_point_diameter` specifies the outside diameter of the hub at the point of connection between the flange and the pipe. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.149 Flanged

A `Flanged` is a type of `Piping_connector` (see 4.2.295) end engagement type consisting of a circular disk of material with holes around the circumference and a facing style.

NOTE The holes are used to bolt together two connected flanges. The facing is the mating surface that in conjunction with a gasket forms a tight connection by the pressure of the two connected flanged connectors. A flanged connection can be disassembled.

4.2.150 Flanged_end

A `Flanged_end` is a type of `Piping_connector` (see 4.2.295) end type that is a circular disk of material that supports the insertion of bolts to mate with a compatible `Flanged_end`.

NOTE Figure 24 depicts a typical `Flanged_end`.

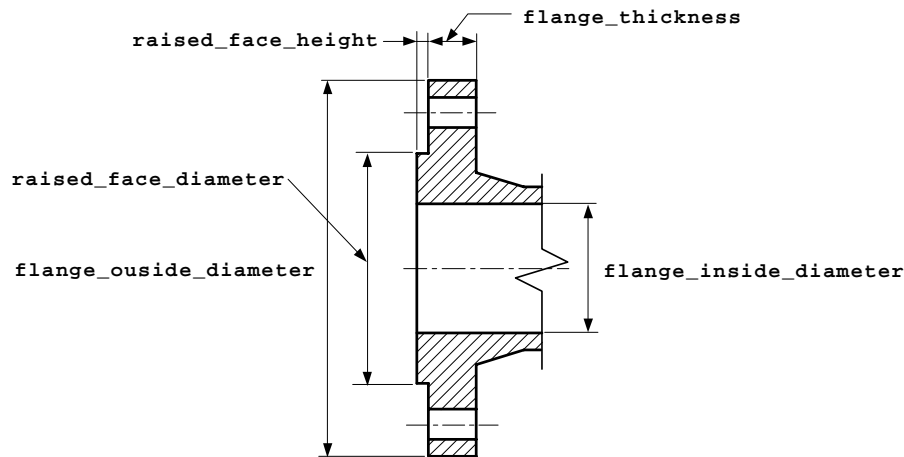


Figure 24 — Flanged_end

The data associated with a Flanged_end are the following:

- face_finish;
- face_type;
- flange_inside_diameter;
- flange_outside_diameter;
- flange_thickness;
- raised_face_diameter;
- raised_face_height;
- ring_bottom_radius;
- ring_diameter;
- ring_width.

4.2.150.1 face_finish

The face_finish specifies a description of the Flange (see 4.2.148) face surface roughness and groove pattern.

4.2.150.2 face_type

The face_type specifies a classification of the mating surface of a Flange (see 4.2.148) based on its shape characteristics.

EXAMPLE Examples of face_type designations include raised_face, flat_face, ring_type_joint, male_face_of_male_and_female, female_face_of_male_and_female, male_face_of_tongue_and_groove, and female_face_of_tongue_and_groove.

NOTE Figures 25 to 29 depict these face types.

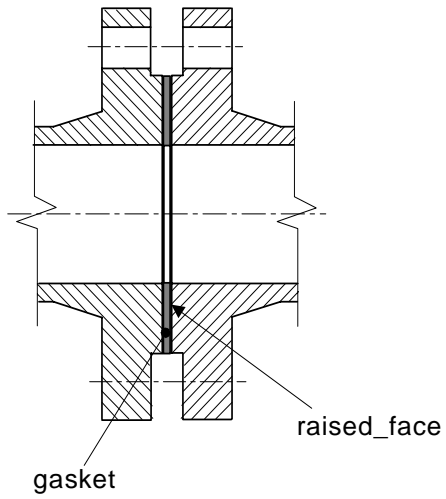


Figure 25 — Raised face flange

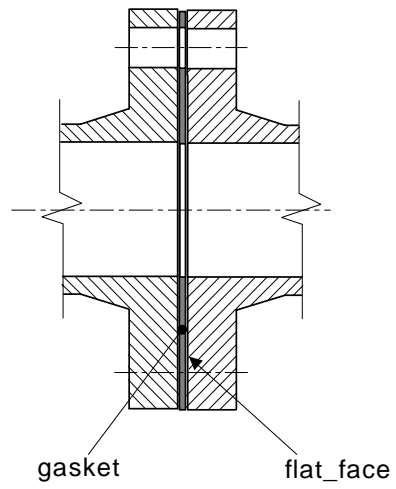


Figure 26 — Flat face flange

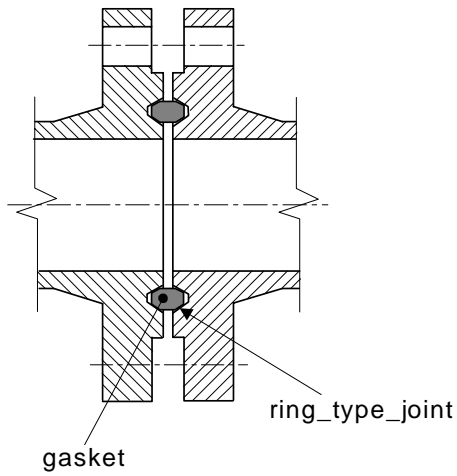


Figure 27 — Ring type joint flange

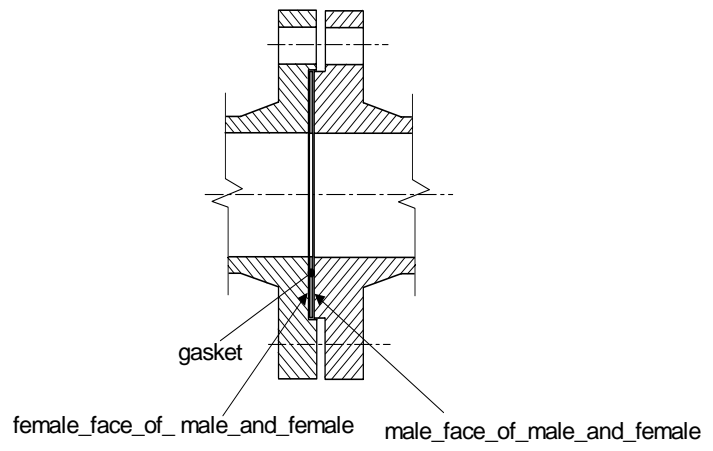


Figure 28 — Male and female flange

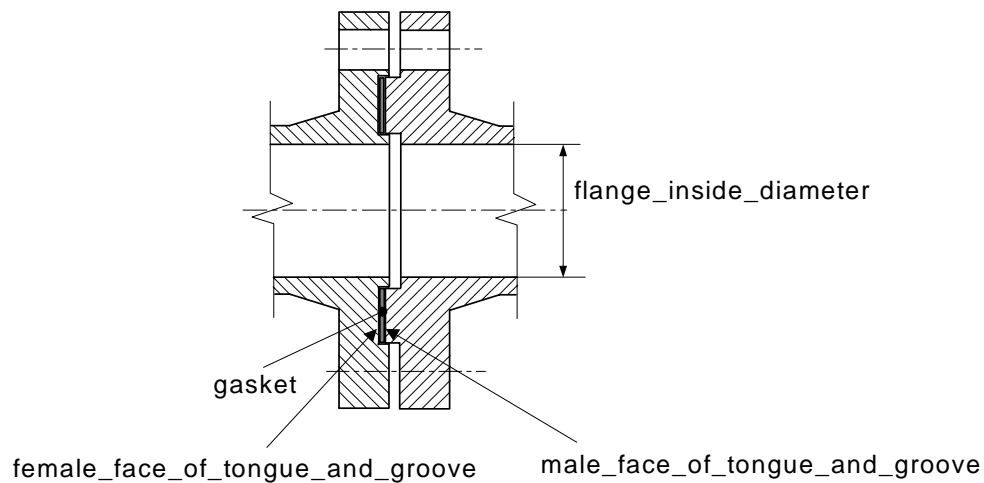


Figure 29 — Tongue and groove flange

4.2.150.3 flange_inside_diameter

The `flange_inside_diameter` specifies the interior diameter of the Flange (see 4.2.148) at the working point. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.150.4 flange_outside_diameter

The `flange_outside_diameter` specifies the external diameter of the Flange (see 4.2.148). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.150.5 flange_thickness

The `flange_thickness` specifies the distance between the inside and outside Flange (see 4.2.148) disk surfaces, measured at the disk perimeter. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.150.6 raised_face_diameter

The `raised_face_diameter` specifies the diameter measured across the elevated portion of the mating surface of a Flange (see 4.2.148). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.150.7 raised_face_height

The `raised_face_height` specifies the perpendicular distance measured from the elevated portion of the Flange (see 4.2.148) mating surface to the lower Flange surface. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

ISO 10303-227:2005(E)

4.2.150.8 ring_bottom_radius

The `ring_bottom_radius` specifies the radial measure of the bottom corners of a ring in raised face. The `ring_bottom_radius` may not be specified for a particular `Flanged_end`, but when specified must be accompanied by `raised_face_diameter`, `raised_face_height`, `ring_diameter`, and `ring_width`.

4.2.150.9 ring_diameter

The `ring_diameter` specifies the diameter of a ring in the raised-face portion of a `Flanged_end`. The `ring_diameter` may not be specified for a particular `Flanged_end`, but when specified must be accompanied by `raised_face_diameter`, `raised_face_height`, `ring_bottom_radius`, and `ring_width`.

4.2.150.10 ring_width

The `ring_width` specifies the width of the groove formed by a ring in the raised-face portion of a `Flanged_end`. The `ring_width` may not be specified for a particular `Flanged_end`, but when specified must be accompanied by `raised_face_diameter`, `raised_face_height`, `ring_bottom_radius`, and `ring_diameter`.

4.2.151 Flared_end

A `Flared_end` is an `end_type` where the `inside_diameter` and `outside_diameter` at the end is increased with no change in thickness forming a kind of lip.

The data associated with a `Flared_end` are the following:

- `diameter`;
- `thickness`.

4.2.151.1 diameter

The `diameter` is the inside diameter at the end of the flare (largest point).

4.2.151.2 thickness

The `thickness` is the Fitting (see 4.2.147) thickness at the point the `diameter` is measured.

4.2.152 Flexible_connection

A `Flexible_connection` is a type of `Plant_item_connection` (see 4.2.316) in which two `Plant_item_connector` (see 4.2.318) objects are in physical contact, though there is no implication concerning the freedom of motion of the connected `Plant_item` (see 4.2.313) objects.

EXAMPLE The pump driver may be connected to an electrical cable at its terminal using a `Flexible_connection`; the cable need not rotate when the pump is rotated, but contact must be preserved.

4.2.153 Fluid_transference

A `Fluid_transference` is a type of `Plant_item_connection` (see 4.2.316) that identifies the purpose or role of the connection as being the transfer of gas, vapour, liquid or solid material.

4.2.154 Free_form_curve

A `Free_form_curve` is a type of `Curve` (see 4.2.112). It is a one-dimensional, contiguous set of points.

4.2.155 Functional_connection_definition_satisfaction

A `Functional_connection_definition_satisfaction` is the assignment of an actual `Connection_definition` (see 4.2.100) to a functional `Connection_definition` for the purpose of satisfying the functional requirements with a physical object.

4.2.156 Functional_connection_occurrence_satisfaction

A `Functional_connection_occurrence_satisfaction` is the assignment of an actual `Plant_item_connection_-occurrence` (see 4.2.317) to a functional `Plant_item_connection_occurrence` for the purpose of satisfying the functional requirements with a physical object.

4.2.157 Functional_connector

A `Functional_connector` is a type of `Plant_item_connector_occurrence` (see 4.2.319) that represents the functional or logical aspect of the `Plant_item_connector_occurrence`. Each `Functional_connector` is either: a `Line_plant_item_branch_connector` (see 4.2.243) or a `Line_plant_item_connector` (see 4.2.245).

4.2.158 Functional_connector_definition_satisfaction

A `Functional_connector_definition_satisfaction` is the assignment of an actual `Connector_definition` (see 4.2.103) to a functional `Connector_definition` for the purpose of satisfying the functional requirements with a physical object.

4.2.159 Functional_connector_occurrence_satisfaction

A `Functional_connector_occurrence_satisfaction` is the assignment of an actual `Physical_connector` (see 4.2.287) to a `Functional_connector` (see 4.2.157) for the purpose of satisfying the functional requirements with a physical object.

4.2.160 Functional_design_view

A `Functional_design_view` is a type of `Plant_item_design_view` (see 4.2.321) that indicates that data associated with the `Plant_item` (see 4.2.313) are the logical characteristics of a `Plant_item` rather than the physical.

The data associated with a `Functional_design_view` are the following:

— `tag_number`.

4.2.160.1 tag_number

The `tag_number` specifies an optional identifier assigned to the `Plant_item` (see 4.2.313) for purposes of functional identification and eventual physical tracking.

4.2.161 Functional_plant

A `Functional_plant` is a `Plant` (see 4.2.311) that is the identification of a view of the `Plant` that aggregates the functional characteristics of the `Plant`.

ISO 10303-227:2005(E)

4.2.162 Functional_plant_item_satisfaction

A `Functional_plant_item_satisfaction` is the assignment of a `Physical_design_view` (see 4.2.288) to a `Functional_design_view` (see 4.2.160) for the purpose of satisfying the functional requirements with a physical object.

4.2.163 Functional_plant_satisfaction

A `Functional_plant_satisfaction` is the assignment of an actual `Planned_physical_plant` (see 4.2.309) to a `Functional_plant` (see 4.2.161) for the purpose of satisfying the functional requirements with a physical object.

4.2.164 Gasket

A `Gasket` is a type of `Piping_component` (see 4.2.293) that seals a connection between two connectors.

NOTE Gaskets are primarily used with `Flanged` (see 4.2.149) `Plant_item_connector` (see 4.2.318).

The data associated with a `Gasket` are the following:

- `compressed_thickness`;
- `uncompressed_thickness`.

4.2.164.1 compressed_thickness

The `compressed_thickness` specifies the distance between the two parallel surfaces of the `Gasket` in its compressed state in a connection. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.164.2 uncompressed_thickness

The `uncompressed_thickness` specifies the as-procured distance between the two parallel surfaces of the `Gasket`. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.165 Gis_position

A `Gis_position` is the positioning and orientation information necessary for transforming coordinate values between a local coordinate space and the global coordinate system of earth. Transformation procedures depend upon the geographic information system (GIS) coordinate system. Each `Gis_position` object designates the global position and orientation of a `Site_shape_representation` (see 4.2.381).

The data associated with a `Gis_position` are the following:

- `height`;
- `scale`;
- `system`;
- `x_axis_delta_x`;
- `x_axis_delta_y`;
- `x_coordinate`;

- y_coordinate;
- zone.

4.2.165.1 height

The height specifies the distance above sea level or reference level in the GIS coordinate system.

4.2.165.2 scale

The scale specifies a transformation factor applied to the conversion of point coordinates between a local coordinate system and a GIS coordinate system. The precise application of the transformation will depend on the GIS system.

4.2.165.3 system

The system specifies the identifier of the GIS system being used.

EXAMPLE Gauss-Krueger, Universal Transverse Mercator (UTM), and State Plane are examples of GIS systems used for global positioning.

4.2.165.4 x_axis_delta_x

The x_axis_delta_x specifies the abscissa value of the end point of a vector indicating the positive x-axis of GIS coordinate space in the local coordinate system.

4.2.165.5 x_axis_delta_y

The x_axis_delta_y specifies the ordinate value of the end point of a vector indicating the orientation of the positive x-axis of GIS coordinate space in the local coordinate system.

EXAMPLE The GIS coordinate system XY00 has an origin at the intersection of the equator and the Greenwich meridian. The x-axis of the coordinate system runs East (positive) and West (negative). The y-axis runs North (positive) and South (negative). The positive z-axis is up (above sea level or the reference level in the GIS coordinate system). The negative z-axis is down (below sea level or the reference level in the GIS coordinate system). An x_axis_delta_x of 1.0 and x_axis_delta_y of 1.0 indicates x axis of the GIS coordinate space makes a +45° angle with respect to the x axis of the local coordinate; if the local coordinate space were superimposed on the GIS coordinate space, the positive x-axis of the local coordinate system would point in a South-East direction (-45°).

4.2.165.6 x_coordinate

The x_coordinate specifies the distance from the y-axis of the coordinate space defined by the GIS system and zone.

4.2.165.7 y_coordinate

The y_coordinate specifies the distance from the x-axis of the coordinate space defined by the GIS system and zone.

4.2.165.8 zone

The zone specifies a subdivision of the earth's surface based on the GIS system.

EXAMPLE The Gauss-Krueger GIS system subdivides the earth into 120 zones that are 3° in longitudinal width. Each zone is identified as 3°, 6°, 9°, etc., from the Greenwich meridian.

ISO 10303-227:2005(E)

4.2.166 Grooved_end

A Grooved_end is a type of Piping_connector (see 4.2.295) end type that contains a circumferential groove cut or is rolled on a pipe surface for a grooved joint connection.

NOTE Figure 30 depicts a typical Grooved_end.

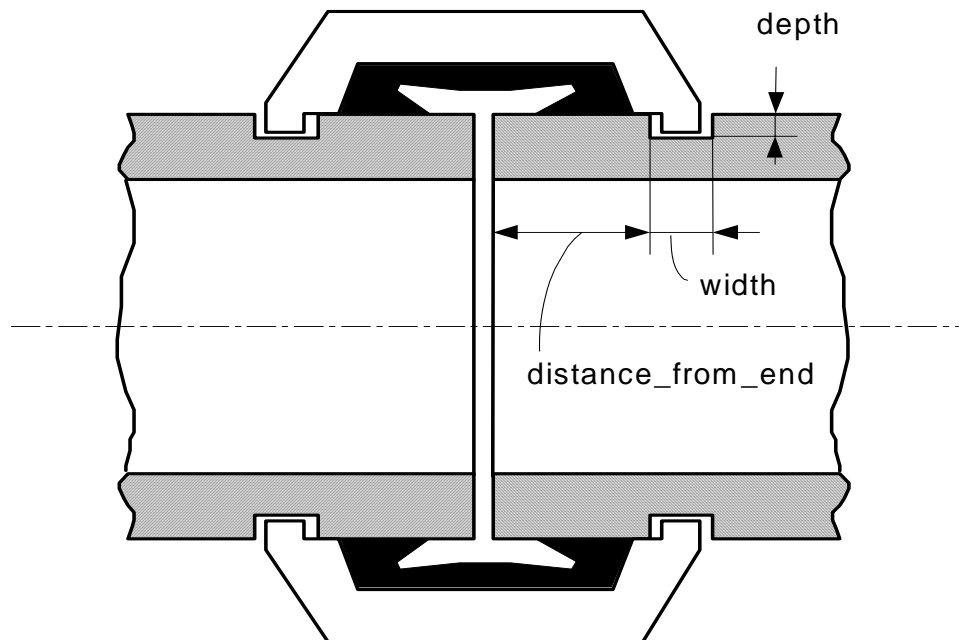


Figure 30 — Grooved_end

The data associated with a Grooved_end are the following:

- depth;
- distance_from_end;
- width.

4.2.166.1 depth

The depth specifies the distance between the outer surface of the Pipe (see 4.2.289) and the bottom of the groove. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.166.2 distance_from_end

The distance_from_end specifies the distance between the end of the Pipe (see 4.2.289) and the inner edge of the groove. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.166.3 width

The width specifies the distance between the inner edge and the outer edge of the groove. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.167 Gusset

A Gusset is a type of Reinforcing_component (see 4.2.349) that is a tensile member placed diagonally between run pipe and branch pipe, and prevents the branch from breaking or deforming.

NOTE Figure 31 depicts a Gusset.

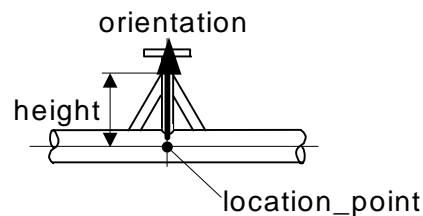


Figure 31 — Gusset

The data associated with a Gusset are the following:

— height.

4.2.167.1 height

The height is the distance between the location point and the most outer point of the Gusset welded to the branch pipe. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.168 Hanger

A Hanger is a type of Piping_support (see 4.2.301) that supports piping hanging from the structure of a building, for example.

NOTE Figure 32 depicts a typical Hangers of without_spring and with_spring.

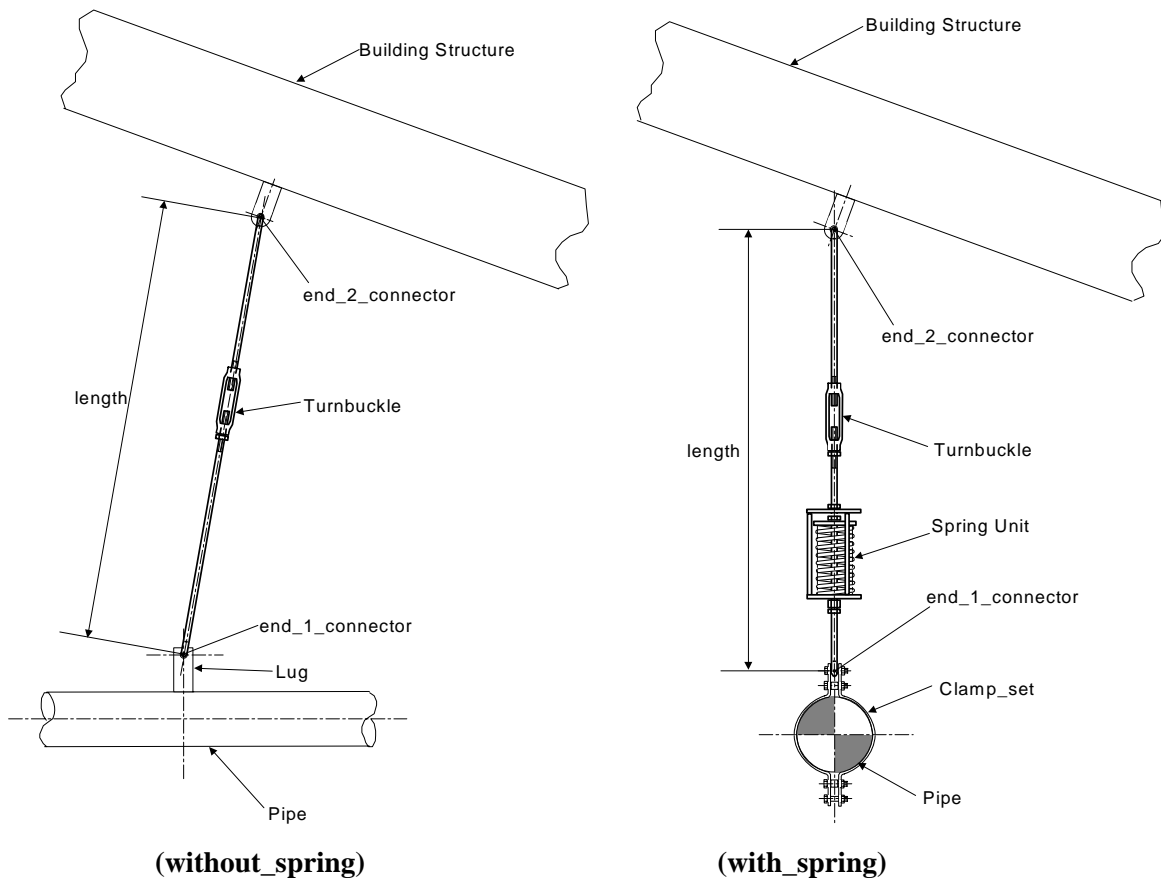


Figure 32 — Hangers both without_spring and with_spring

The data associated with a Hanger are the following:

- end_2_connector;
- length;
- spring.

4.2.168.1 end_2_connector

The end_2_connector specifies the Plant_item_connector (see 4.2.318) on the Hanger to the structure.

4.2.168.2 length

The length specifies the distance between the end_1_connector and the end_2_connector of the Hanger.

4.2.168.3 spring

The spring specifies whether the Hanger contains a spring. The value of spring shall be one of the following:

- with_spring;
- without_spring.

4.2.168.3.1 with_spring

with_spring specifies that the Hanger contains a spring.

4.2.168.3.2 without_spring

without_spring specifies that the Hanger does not contain a spring

4.2.169 Hemisphere

A Hemisphere is a type of Csg_element (see 4.2.111) that is formed by cutting a Sphere (see 4.2.392) with a plane that passes through the centre point of the Sphere and removing one section.

4.2.170 Hierarchically_organized_collection

A Hierarchically_organized_collection is a type of Plant_item_collection (see 4.2.315) that indicates whether a Plant_item (see 4.2.313) that is a member of an aggregate Plant_item is related to other Plant_items that are also members of the aggregate Plant_item. The members of the aggregate may, but need not, be connected.

The data associated with an Hierarchically_organized_collection are the following:

- element.

4.2.170.1 element

An element is a Plant_item which is used in the Hierarchically_organized_collection.

4.2.171 Hull_applicability

A Hull_applicability is the identification of a ship hull, or a range of hulls, within a class of ships, for which the particular product data are applicable.

The data associated with a Hull_applicability are the following:

- start_hull;
- end_hull.

4.2.171.1 start_hull

The start_hull specifies the first hull in a range of hulls for which the product data are applicable.

4.2.171.2 end_hull

The end_hull specifies the final hull in a range of hulls for which the product data are applicable. The end_hull need not be specified for a particular Hull_applicability. If the end_hull is not specified, the product data are applicable to only the start_hull.

4.2.172 Hvac_access_opening

An Hvac_access_opening is a hole in an Hvac_component (see 4.2.176) providing maintenance access.

The data associated with an Hvac_access_opening are the following:

- access_opening_id;

ISO 10303-227:2005(E)

- access_type;
- shape.

4.2.172.1 access_opening_id

The access_opening_id differentiates one Hvac_access_opening on an Hvac_component (see 4.2.176) from another.

4.2.172.2 access_type

The access_type specifies the type of opening in the Hvac_component (see 4.2.176).

4.2.172.3 shape

The shape is the volumetric representation of the Hvac_access_opening or the projection of the Hvac_access_opening on the Hvac_component (see 4.2.176).

4.2.173 Hvac_band_support

An Hvac_band_support is an Hvac_support (see 4.2.215) which wraps around an instance of Hvac_fitting (see 4.2.188) or Hvac_ducting (see 4.2.182) and is supported by one or two instances of Hvac_hanger (see 4.2.191).

The data associated with an Hvac_band_support are the following:

- band_size;
- hanger_attachment_loc.

4.2.173.1 band_size

The band_size is the width and thickness or diameter of the Hvac_band_support.

4.2.173.2 hanger_attachment_loc

The hanger_attachment_loc is a point on the Hvac_component (see 4.2.176) at which the Hvac_band_support is attached.

4.2.174 Hvac_bend

An Hvac_bend is an Hvac_fitting (see 4.2.188) which follows a curved path. The cross section of the fitting is normal to the path.

The data associated with an Hvac_bend are the following:

- bend_path;
- end_1_connector;
- end_2_connector;
- length.

4.2.174.1 bend_path

The bend_path is the centreline trace of the Hvac_bend.

4.2.174.2 end_1_connector

The end_1_connector specifies the Hvac_connector (see 4.2.178) which is the primary connecting end of an Hvac_bend.

4.2.174.3 end_2_connector

The end_2_connector specifies the Hvac_connector (see 4.2.178) which is the secondary connecting end of an Hvac_bend.

4.2.174.4 length

The length refers to the extent of the Hvac_bend from beginning to end.

4.2.175 Hvac_branch_connection

An Hvac_branch_connection is a connection between the logical termination of one Hvac_section (see 4.2.206) and a point on another Hvac_section other than a termination.

The data associated with an Hvac_branch_connection are the following:

- branch_sequence_id.

4.2.175.1 branch_sequence_id

The branch_sequence_id specifies an alphanumeric identifier that indicates the order that branches extend from the main Hvac_section (see 4.2.206).

NOTE All branch_sequence_ids are unique with respect to the branches of a given Hvac_section.

4.2.176 Hvac_component

An Hvac_component is a type of Plant_item (see 4.2.313) that is an individually identifiable item or combination of items that is part of an Hvac_system (see 4.2.216). Each Hvac_component may be one of the following: an Hvac_equipment (see 4.2.187), an Hvac_fitting (see 4.2.188), an Hvac_ducting (see 4.2.182), an Hvac_instrument (see 4.2.192), and an Hvac_flow_control_device (see 4.2.189).

EXAMPLE The description attribute inherited from Plant_item is used to describe the Hvac_component. Examples of descriptions include "air handling unit", "chiller", or "space heater".

An Hvac_component applies to any element that is a subset member of an Hvac_system.

The data associated with an Hvac_component are the following:

- design_flow_rate;
- design_flow_condition;
- design_pressure;
- design_temperature;
- pressure_loss_coefficient;
- pressure_drop;
- velocity;
- correction_factor.

ISO 10303-227:2005(E)

4.2.176.1 design_flow_rate

The `design_flow_rate` specifies the required flow volume over a specific unit of time.

4.2.176.2 design_flow_condition

The `design_flow_condition` specifies the flow volume under standard operating procedures.

4.2.176.3 design_pressure

The `design_pressure` specifies the maximum allowable pressure at the `Hvac_connector` (see 4.2.178). It may be specified as a single value or as a range of values.

NOTE 1 This value can be obtained during an analysis of the `Hvac_system` (see 4.2.216) design.

NOTE 2 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.176.4 design_temperature

The `design_temperature` specifies the maximum allowable temperature at the `Hvac_connector` (see 4.2.178). It may be specified as a single value or as a range of values.

NOTE 1 This value is normally created as part of doing 3D analysis of the `Hvac_system` (see 4.2.216) design.

NOTE 2 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.176.5 pressure_loss_coefficient

The `pressure_loss_coefficient` specifies a constant used to determine the total pressure drop as a function of the equivalent length of the `Hvac_component` due to internal system factors such as friction and turbulence.

4.2.176.6 pressure_drop

The `pressure_drop` specifies the total change in pressure within the `Hvac_component` due to leaks, friction, or distance.

4.2.176.7 velocity

The `velocity` specifies the distance which air moves per unit of time.

4.2.176.8 correction_factor

The `correction_factor` is a dimensionless number used to compensate for surface roughness in the calculation of the static pressure drop.

4.2.177 Hvac_component_thickness

An `Hvac_component_thickness` is the skin thickness of the `Hvac_component` (see 4.2.176).

The data associated with an `Hvac_component_thickness` are the following:

- `sheet_metal_thickness`;
- `thickness_type`.

4.2.177.1 sheet_metal_thickness

The `sheet_metal_thickness` specifies the dimension between two of the sheet metal's opposite surfaces. The thickness specifies the perpendicular distance between the two faces of the sheet metal. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.177.2 thickness_type

The `thickness_type` specifies the specific unit measurement type applied to quantify the thickness for a given element of an `Hvac_system` (see 4.2.216).

4.2.178 Hvac_connector

An `Hvac_connector` is a type of `Plant_item_connector` (see 4.2.318) that is intended to establish a material flow connection between two `Plant_item` (see 4.2.313) objects within an `Hvac_system` (see 4.2.216).

The data associated with an `Hvac_connector` are the following:

- `name`;
- `hvac_connector_specification`;
- `hvac_joint_inspection_specification`;
- `connector_flow_direction`;
- `hvac_joint_test_specification`;
- `hvac_joint_engagement_length`;
- `hvac_joint_joining_type`;
- `hvac_joint_sealant_type`;
- `hvac_joint_joint_type`;
- `hvac_joint_tightness`.

4.2.178.1 name

The `name` specifies a textual label given to the `Hvac_connector`.

4.2.178.2 hvac_connector_specification

The `hvac_connector_specification` specifies the specification associated with the `Hvac_connector`. There may be more than one `hvac_connector_specification` for an `Hvac_connector`.

EXAMPLE Examples of the identified `connector_specification` include insulation specification, end preparation specification, and thread specification.

4.2.178.3 hvac_joint_inspection_specification

The `hvac_joint_inspection_specification` specifies the criteria for the review and approval processes of `Hvac_component` (see 4.2.176) connections.

ISO 10303-227:2005(E)

4.2.178.4 connector_flow_direction

The `connector_flow_direction` specifies the direction air moves past the `Plant_item` (see 4.2.313). The value of `connector_flow_direction` is one of the following:

- `both`;
- `inlet`;
- `outlet`.

4.2.178.4.1 both

Air may flow in either direction past the `Hvac_connector`.

4.2.178.4.2 inlet

Air moves into the `Plant_item` past the `Hvac_connector`.

4.2.178.4.3 Outlet

Air moves out of the `Plant_item` past the `Hvac_connector`.

4.2.178.5 hvac_joint_test_specification

The `hvac_joint_test_specification` specifies the test and evaluation procedures which apply to `Hvac_component` (see 4.2.176) connections.

4.2.178.6 hvac_joint_engagement_length

The `hvac_joint_engagement_length` specifies the length of the interface between joined `Hvac_`-components (see 4.2.176).

4.2.178.7 hvac_joint_joining_type

The `hvac_joint_joining_type` specifies the method of mechanically joining the `Hvac_components` (see 4.2.176). The value of the `hvac_joint_joining_type` may be one of the following:

- `weld`;
- `solder`;
- `lapped_rivet`;
- `sheet_metal_screw`.

4.2.178.8 hvac_joint_sealant_type

The `hvac_joint_sealant_type` specifies the method used to seal the joint in order to satisfy the leak condition specified by the `hvac_joint_tightness`. The value of the `hvac_joint_sealant_type` may be one of the following:

- `hvac_gasket`;
- `hvac_thermal_fit_band`;
- `hvac_duct_sealant`;

— hvac_tape.

4.2.178.8.1 hvac_gasket

The hvac_gasket is a seal or packing used between components to prevent the escape of air.

4.2.178.8.2 hvac_thermal_fit_band

The hvac_thermal_fit_band is usually associated with spiral duct work where one piece is slid into another. The thermal_fit_band or coupler is placed around the joint and when heated seals the ducts together.

4.2.178.8.3 hvac_duct_sealant

The hvac_duct_sealant is an adhesive agent used to secure Hvac components to prevent seepage of moisture or air.

4.2.178.8.4 hvac_tape

The hvac_tape provides a seal to the hvac_joint_joint_type

4.2.178.9 hvac_joint_joint_type

The hvac_joint_joint_type specifies the method used to join Plant_item_connection_occurrence (see 4.2.317) objects.

4.2.178.10 hvac_joint_tightness

The hvac_joint_tightness specifies the ability of the joint to resist leakage. The value of hvac_joint_tightness is one of the following:

- air_tight;
- water_tight;
- non_water_tight;
- drip_tight.

4.2.178.10.1 air_tight

An air_tight joint shall not allow any gas to leak through the joint.

4.2.178.10.2 water_tight

A water_tight joint shall not allow any water to leak through the joint.

4.2.178.10.3 non_water_tight

Non_water_tight refers to an hvac joint description which is not required to prevent or retard the passage of any liquid or air at the designated hvac joint.

4.2.178.10.4 drip_tight

A drip_tight joint shall not allow any fluid, including air to leak from the joint.

ISO 10303-227:2005(E)

4.2.179 Hvac_connector_service_characteristic

An Hvac_connector_service_characteristic defines the operating conditions for which the Hvac_connector (see 4.2.178) is designed.

The data associated with an Hvac_connector_service_characteristic are the following:

- design_pressure;
- design_temperature.

4.2.179.1 design_pressure

The design_pressure specifies the maximum allowable pressure at the Hvac_connector (see 4.2.178). It may be specified as a single value or as a range of values.

NOTE 1 This value is normally created as part of doing 3D analysis of the Hvac_system (see 4.2.216) design.

NOTE 2 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.179.2 design_temperature

The design_temperature specifies the maximum allowable temperature at the Hvac_connector (see 4.2.178). It may be specified as a single value or as a range of values.

NOTE 1 This value is normally created as part of doing 3D analysis of the Hvac_system (see 4.2.216) design.

NOTE 2 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.180 Hvac_coupling

An Hvac_coupling is a type of Hvac_fitting (see 4.2.188) which makes a flexible or rigid connection between two Hvac_component (see 4.2.176) objects.

The data associated with an Hvac_coupling are the following:

- end_1_connector;
- end_2_connector;
- length;
- offset_x;
- offset_y.

4.2.180.1 end_1_connector

The end_1_connector specifies the Hvac_connector (see 4.2.178) which is the primary connecting end of an Hvac_coupling.

4.2.180.2 end_2_connector

The end_2_connector specifies the Hvac_connector (see 4.2.178) which is the secondary connecting end of an Hvac_coupling.

4.2.180.3 length

The length specifies the distance of the Hvac_coupling from beginning to end.

4.2.180.4 offset_x

The `offset_x` specifies the distance between `end_connector_1` and `end_connector_2` as measured along the x axis of the `Hvac_cross_section` (see 4.2.181).

4.2.180.5 offset_y

The `offset_y` specifies the distance between `end_connector_1` and `end_connector_2` as measured along the y axis of the `Hvac_cross_section` (see 4.2.181).

4.2.181 Hvac_cross_section

An `Hvac_cross_section` is a planar shape created by a plane cutting through an `Hvac_component` (see 4.2.176) at a right angle to the component's centreline axis. This reveals the external outline of the component. Each `Hvac_cross_section` may be one of the following: a `Cross_section_flat_oval` (see 4.2.106), a `Cross_section_non_standard` (see 4.2.107), a `Cross_section_radiused_corner` (see 4.2.108), a `Cross_section_rectangular` (see 4.2.109), or a `Cross_section_round` (see 4.2.110).

The data associated with an `Hvac_cross_section` are the following:

— `equivalent_diameter`.

4.2.181.1 equivalent_diameter

The term `equivalent_diameter` with respect to the `Hvac_cross_section` means the diameter of a duct having a circular cross section and having the same pressure loss per unit length at the same rate of flow as a duct having a non-circular cross section.

4.2.182 Hvac_ducting

An `Hvac_ducting` is a type of `Ducting_component` (see 4.2.118) and a type of `Hvac_component` (see 4.2.176) that is an individually identifiable piece or section of ducting that is part of an `Hvac_system` (see 4.2.216). The `Hvac_specification_id` is a designation that differentiates one `Hvac_specification` (see 4.2.214) from another.

The data associated with an `Hvac_ducting` are the following:

- `duct_path`;
- `duct_seam`;
- `length`;
- `end_1_connector`;
- `end_2_connector`;
- `friction_factor`;
- `roughness`.

4.2.182.1 duct_path

The `duct_path` specifies the centreline trace of the `Hvac_ducting`.

ISO 10303-227:2005(E)

4.2.182.2 duct_seam

The duct_seam refers to the line formed where two surfaces of the duct overlap each other.

4.2.182.3 length

The length specifies the distance of the Hvac_ducting from beginning to end.

4.2.182.4 end_1_connector

The end_1_connector specifies the Hvac_connector (see 4.2.178) which is the primary connecting end of a piece of duct.

4.2.182.5 end_2_connector

The end_2_connector specifies the Hvac_connector (see 4.2.178) which is the secondary connecting end of a piece of duct.

4.2.182.6 friction_factor

The friction_factor is a dimensionless number used to calculate the static pressure in an instance of Hvac_ducting.

4.2.182.7 roughness

The roughness is the average height of the imperfections of the surface over which the fluid flows.

4.2.183 Hvac_elbow_90deg_reducing

The Hvac_elbow_90deg_reducing is a type of Hvac_fitting (see 4.2.188) in which the flow of the air changes direction through a 90 degree turn and the cross section transitions from one size diameter to another. In terms of geometric construction, there are two closed curves with an interior trace curve from centre to centre upon which the surface is created.

NOTE 1 In terms of geometric construction, there are two closed curves with an interior trace curve from centre to centre upon which the surface is created.

NOTE 2 Figure 33 depicts an Hvac_elbow_90deg_reducing.

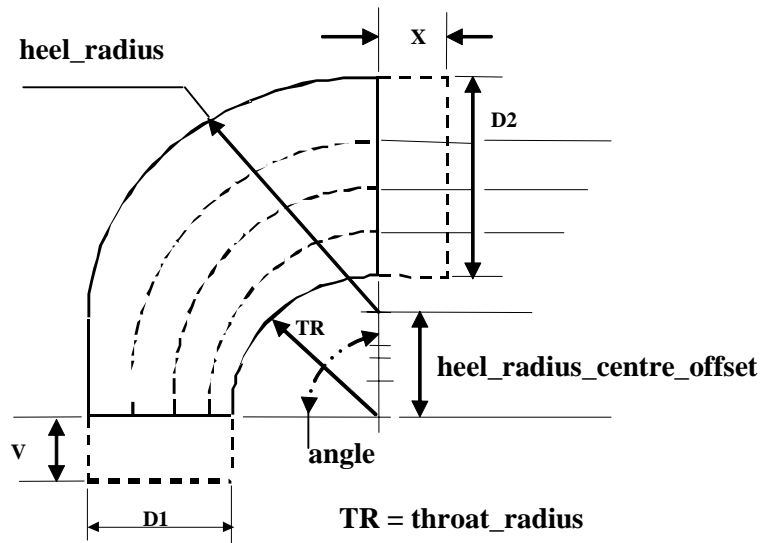


Figure 33 — Hvac_elbow_90deg_reducing

The data associated with an Hvac_elbow_90deg_reducing are the following:

- angle;
- throat_radius;
- heel_radius;
- heel_radius_centre_offset;
- end_1_connector;
- end_2_connector.

4.2.183.1 angle

The angle specifies the sweep angle in degrees for the component elbow.

4.2.183.2 throat_radius

The throat_radius specifies the inside radius for the component elbow.

4.2.183.3 heel_radius

The heel_radius specifies the outside radius for the component elbow.

4.2.183.4 heel_radius_centre_offset

The heel_radius_centre_offset specifies the vertical distance from the throat centre to the splitter centre.

4.2.183.5 end_1_connector

The end_1_connector specifies the Hvac_connector (see 4.2.178) which is the primary connecting end of a component elbow.

ISO 10303-227:2005(E)

4.2.183.6 end_2_connector

The end_2_connector specifies the Hvac_connector (see 4.2.178) which is the secondary connecting end of a component elbow.

4.2.184 Hvac_elbow_centred

The Hvac_elbow_centred is a type of Hvac_fitting (see 4.2.188) in which the flow of the air changes direction. In terms of geometric construction, there are two closed curves with an interior trace curve from centre to centre upon which the surface is created.

NOTE Figure 34 depicts an Hvac_elbow_centred.

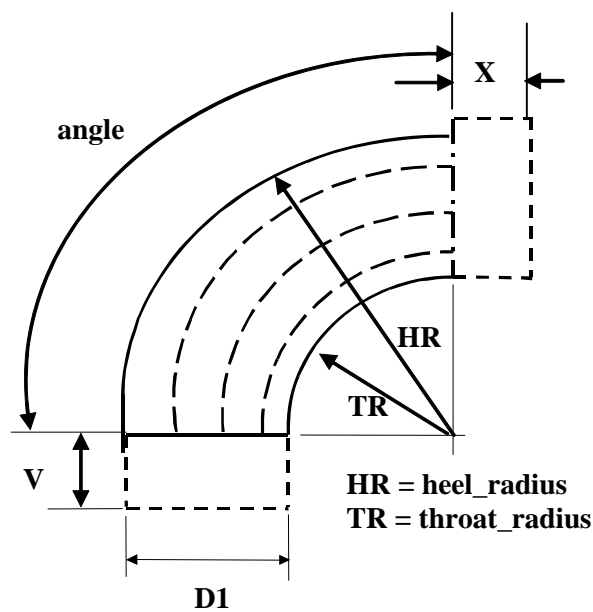


Figure 34 — Hvac_elbow_centred

The data associated with an Hvac_elbow_centred are the following:

- angle;
- width;
- height;
- throat_radius;
- heel_radius;
- end_1_connector;
- end_2_connector.

4.2.184.1 angle

The angle specifies the sweep angle in degrees for the component elbow.

4.2.184.2 width

The width specifies the distance between the sides of the elbow component. Not indicated on the sketch.

4.2.184.3 height

The height specifies the vertical distance from the throat centre to the heel_radius.

4.2.184.4 throat_radius

The throat_radius specifies the inside radius for the component elbow.

4.2.184.5 heel_radius

The heel_radius specifies the outside radius for the component elbow.

4.2.184.6 end_1_connector

The end_1_connector specifies the Hvac_connector (see 4.2.178) which is the primary connecting end of a component elbow.

4.2.184.7 end_2_connector

The end_2_connector specifies the Hvac_connector (see 4.2.178) which is the secondary connecting end of a component elbow.

4.2.185 Hvac_elbow_mitre

An Hvac_elbow_mitre is a type of Hvac_fitting (see 4.2.188) developed through the use of two or more straight sections of vent that are beveled and joined on a line bisecting the angle of junction.

NOTE Figure 35 depicts an Hvac_elbow_mitre.

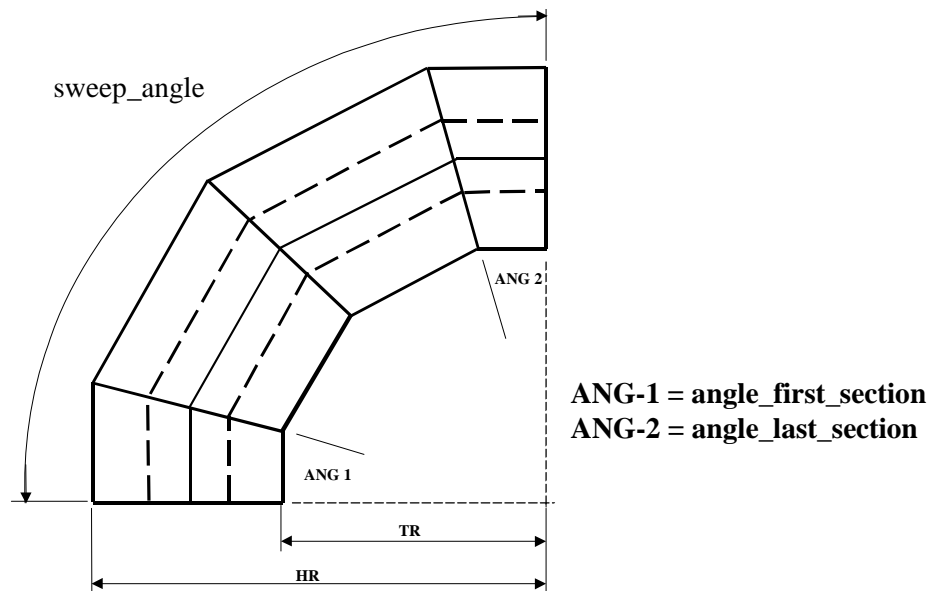


Figure 35 — Hvac_elbow_mitre

ISO 10303-227:2005(E)

The data associated with an `Hvac_elbow_mitre` are the following:

- `angle_first_section`;
- `angle_last_section`;
- `number_of_sections`;
- `sweep_angle`;
- `throat_radius`;
- `heel_radius`;
- `end_1_connector`;
- `end_2_connector`.

4.2.185.1 angle_first_section

The `angle_first_section` specifies the sweep angle in degrees for the first section of the mitred elbow development.

4.2.185.2 angle_last_section

The `angle_last_section` specifies the sweep angle in degrees for the last section of the mitred elbow development.

4.2.185.3 number_of_sections

The `number_of_sections` specifies how many sections are necessary to develop the mitred elbow.

4.2.185.4 sweep_angle

The `sweep_angle` specifies the overall angle of the elbow.

4.2.185.5 throat_radius

The `throat_radius` specifies the inside radius for the component elbow.

4.2.185.6 heel_radius

The `heel_radius` specifies the outside radius for the component elbow.

4.2.185.7 end_1_connector

The `end_1_connector` specifies the `Hvac_connector` (see 4.2.178) which is the primary connecting end of a component elbow.

4.2.185.8 end_2_connector

The `end_2_connector` specifies the `Hvac_connector` (see 4.2.178) which is the secondary connecting end of a component elbow.

4.2.186 Hvac_end_fitting

An Hvac_end_fitting is a type of Hvac_fitting (see 4.2.188) which only connects to one other Hvac_-component (see 4.2.176).

The data associated with an Hvac_end_fitting are the following:

- end_1_connector;
- opening_type.

4.2.186.1 end_1_connector

The end_1_connector specifies the Hvac_connector (see 4.2.178) which is the primary connecting end of an Hvac_end_fitting.

4.2.186.2 opening_type

The opening_type specifies the type of opening at the end of the fitting which does not have a connector.

4.2.187 Hvac_equipment

An Hvac_equipment is a type of Hvac_component (see 4.2.176) used to develop a functional Hvac_-system (see 4.2.216).

4.2.188 Hvac_fitting

An Hvac_fitting is an individual component of an Hvac duct system. Each Hvac_fitting may be one of the following: Hvac_coupling (see 4.2.180), an Hvac_elbow_90deg_reducing (see 4.2.183), an Hvac_-elbow_centred (see 4.2.184), an Hvac_elbow_mitre (see 4.2.185), an Hvac_end_fitting (see 4.2.186), an Hvac_gasket (see 4.2.190), an Hvac_offset_centred (see 4.2.195), an Hvac_offset_ogee_centred (see 4.2.196), an Hvac_takeoff (see 4.2.217), an Hvac_transition (see 4.2.218), and an Hvac_transition_slanted (see 4.2.219).

4.2.189 Hvac_flow_control_device

An Hvac_flow_control_device is a type of Hvac_component (see 4.2.176) of the Hvac_system (see 4.2.216) that regulates the airflow based on the inline design conditions and settings.

Note Such devices fall into four categories and include sensors, controllers, controlled devices, and auxiliary devices. Auxiliary devices include relays, transducers, and switches.

The data associated with an Hvac_flow_control_device are the following:

- end_1_connector;
- end_2_connector;
- control_point_nominal_value;
- control_point_min_value;
- control_point_max_value;
- control_point_set_point_value.

ISO 10303-227:2005(E)

4.2.189.1 end_1_connector

The end_1_connector specifies the Hvac_connector (see 4.2.178) which is the primary connecting end of an Hvac_flow_control_device.

4.2.189.2 end_2_connector

The end_2_connector specifies the Hvac_connector (see 4.2.178) which is the secondary connecting end of an Hvac_flow_control_device.

4.2.189.3 control_point_nominal_value

The control_point_nominal_value specifies the average controlled airflow.

4.2.189.4 control_point_min_value

The control_point_min_value specifies the minimum controlled airflow.

4.2.189.5 control_point_max_value

The control_point_max_value specifies the maximum controlled airflow.

4.2.189.6 control_point_set_point_value

The control_point_set_point_value specifies the value at which a signal is generated by the Hvac_flow_control_device.

4.2.190 Hvac_gasket

An Hvac_gasket is a type of Hvac_component (see 4.2.176) used between components to prevent the escape of air.

Example An example of an Hvac_gasket is a seal or packing.

The data associated with an Hvac_gasket are the following:

- end_1_connector;
- end_2_connector;
- gasket_thickness.

4.2.190.1 end_1_connector

The end_1_connector specifies the Hvac_connector (see 4.2.178) which is the primary connecting end of an Hvac_gasket.

4.2.190.2 end_2_connector

The end_2_connector specifies the Hvac_connector (see 4.2.178) which is the secondary connecting end of an Hvac_gasket.

4.2.190.3 gasket_thickness

The gasket_thickness specifies the total thickness of the Hvac_gasket.

4.2.191 Hvac_hanger

An Hvac_hanger is an instance of Hvac_component (see 4.2.176) which connects the Hvac_band_support (see 4.2.173) or Hvac_trapeze_bar (see 4.2.220) to a structure or an instance of Hvac_support (see 4.2.215).

The data associated with an Hvac_hanger are the following:

- upper_attachment_loc;
- upper_attachment_type;
- hanger_size.

4.2.191.1 upper_attachment_loc

The upper_attachment_loc is a point where the Hvac_hanger attaches to its support.

4.2.191.2 upper_attachment_type

The upper_attachment_type is the method used to attach the Hvac_hanger to the support.

4.2.191.3 hanger_size

The hanger_size specifies the noiminal size of the Hvac_hanger.

4.2.192 Hvac_instrument

An Hvac_instrument is a type of Hvac_fitting (see 4.2.188) which monitors, measures, indicates, and records the system status.

Note The purpose of the Hvac_instrument is to provide information to the plant operator for analyzing, troubleshooting, and improving the operation of the Hvac_system (see 4.2.216).

The data associated with an Hvac_instrument are the following:

- units;
- low_range;
- high_range;
- type;
- parameter_measured;
- low_alarm;
- high_alarm;
- nameplate_inscription;
- divisions.

4.2.192.1 units

The units specifies the units of the items measured by the Hvac_instrument.

ISO 10303-227:2005(E)

4.2.192.2 low_range

The `low_range` specifies the low end setting for a particular `Hvac_system` (see 4.2.216) function.

Example Oil pressure gauge.

4.2.192.3 high_range

The `high_range` specifies high end setting for an `Hvac_system` (see 4.2.216) function.

4.2.192.4 type

The `type` specifies a specific kind of `Hvac_instrument` device used to monitor an `Hvac_system` (see 4.2.216).

4.2.192.5 parameter_measured

The `parameter_measured` specifies a function that is monitored or measured.

Example Voltage, current, pressure, velocity.

4.2.192.6 low_alarm

The `low_alarm` specifies the value at which a signal is generated by the `Hvac_instrument`.

4.2.192.7 high_alarm

The `high_alarm` specifies a function of an `Hvac_instrument` device.

4.2.192.8 nameplate_inscription

The `nameplate_inscription` specifies the text on the nameplate used to identify an `Hvac_instrument` and the function it is designed to carry out.

4.2.192.9 divisions

The `divisions` specifies the gradations on the gauge.

4.2.193 Hvac_intermediate_reinforcement

An `Hvac_intermediate_reinforcement` is an instance of `Hvac_reinforcement` (see 4.2.203) which is located between the joints of an instance of `Hvac_ducting` (see 4.2.182).

The data associated with an `Hvac_intermediate_reinforcement` are the following:

— `distance_along_centreline_from_connector`.

4.2.193.1 distance_along_centreline_from_connector

The `distance_along_centreline_from_connector` is the distance of the `Hvac_intermediate_reinforcement` from the `reference_connector`.

4.2.194 Hvac_joint_reinforcement

An `Hvac_joint_reinforcement` is an instance of `Hvac_reinforcement` (see 4.2.203) which is located at the joint of an instance of `Hvac_ducting` (see 4.2.182).

4.2.195 Hvac_offset_centred

An Hvac_offset_centred is a type of Hvac_connector (see 4.2.178) fitting.

The data associated with an Hvac_offset_centred are the following:

- angle;
- offset;
- length;
- throat_radius;
- heel_radius;
- end_1_connector;
- end_2_connector.

4.2.195.1 angle

The angle specifies the number of degrees for the radial sections at both top and bottom.

4.2.195.2 offset

The offset specifies the perpendicular distance between the centres of two Hvac_components (see 4.2.176) which are to be connected.

4.2.195.3 length

The length specifies the horizontal distance between two Hvac_component (see 4.2.176) objects from connection point one to connection point two.

4.2.195.4 throat_radius

The throat_radius specifies the inside radius for the end sections of the Hvac_offset_centred fitting.

4.2.195.5 heel_radius

The heel_radius specifies the outside radius for the end sections of the Hvac_offset_centred fitting.

4.2.195.6 end_1_connector

The end_1_connector specifies the Hvac_connector (see 4.2.178) which is the primary connecting end of an Hvac_offset_centred fitting.

4.2.195.7 end_2_connector

The end_2_connector specifies the Hvac_connector (see 4.2.178) which is the secondary connecting end of an Hvac_offset_centred fitting.

4.2.196 Hvac_offset_ogee_centred

An Hvac_offset_ogee_centred is a type of Hvac_fitting (see 4.2.188) that appears to be an “s” shaped component.

NOTE Figure 36 depicts an Hvac_offset_ogee_centred.

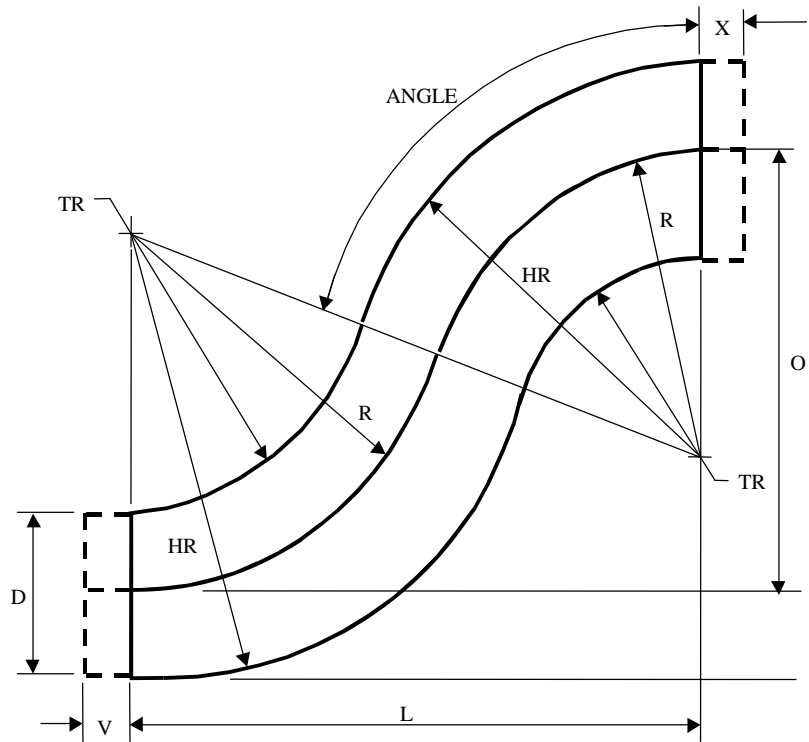


Figure 36 — Hvac_offset_ogee_centred

The data associated with an Hvac_offset_ogee_centred are the following:

- angle;
- offset;
- length;
- throat_radius;
- heel_radius;
- end_1_connector;
- end_2_connector.

4.2.196.1 angle

The angle specifies the number of degrees applied to the upper and lower heel and throat radius construction.

4.2.196.2 offset

The offset specifies the perpendicular distance between the centrelines of the upper and lower connecting ends of the Hvac_offset_ogee_centred component.

4.2.196.3 length

The length specifies the horizontal distance between end_1_connector and end_2_connector of the Hvac_offset_ogee_centred fitting.

4.2.196.4 throat_radius

The throat_radius specifies the interior radius of the radial transition of the Hvac_offset_ogee_centred. It applies to the upper and lower transitions.

4.2.196.5 heel_radius

The heel_radius specifies the exterior radius of the radial transition of the Hvac_offset_ogee_centred. It applies to the upper and lower transition.

4.2.196.6 end_1_connector

The end_1_connector specifies the Hvac_connector (see 4.2.178) which is the primary connecting end of an Hvac_offset_ogee_centred.

4.2.196.7 end_2_connector

The end_2_connector specifies the Hvac_connector (see 4.2.178) which is the secondary connecting end of an Hvac_offset_ogee_centred.

4.2.197 Hvac_plant_item_branch_connection

An Hvac_plant_item_branch_connection is a connection between an Hvac_plant_item_branch_connection and a point on an Hvac_section (see 4.2.206) other than an Hvac_section_termination (see 4.2.210). Each Hvac_plant_item_branch_connection defines the branches of exactly one Hvac_section.

The data associated with an Hvac_plant_item_branch_connection are the following:

— branch_sequence_id.

4.2.197.1 branch_sequence_id

The branch_sequence_id specifies an alphanumeric identifier that indicates the order that branches extend from the main Hvac_section (see 4.2.206).

NOTE All branch_sequence_ids are unique with respect to the branches of a given Hvac_section.

4.2.198 Hvac_plant_item_branch_connector

An Hvac_plant_item_branch_connector is a type of Functional_connector (see 4.2.157) which connects an Hvac_plant_item_branch_connector to a point on an Hvac_section (see 4.2.206) other than a termination. The Hvac_plant_item_branch_connector branches from the Hvac_section.

4.2.199 Hvac_plant_item_connection

An Hvac_plant_item_connection is a linkage between two or more Hvac_plant_item_connector (see 4.2.200) objects. The joining conditions may be specified for the connection.

ISO 10303-227:2005(E)

4.2.200 Hvac_plant_item_connector

An Hvac_plant_item_connector is a type of Functional_connector (see 4.2.157) which is a feature of a Plant_item (see 4.2.313) that is designed to connect to a connector on another HVAC Plant_item.

4.2.201 Hvac_plant_item_termination

An Hvac_plant_item_termination is a type of Hvac_section_termination (see 4.2.210) that connects to an Hvac_plant_item_connection (see 4.2.199).

4.2.202 Hvac_plenum

An Hvac_plenum is an instance of an Hvac_component (see 4.2.176) which has one or more instances of Hvac_connector (see 4.2.178) providing a space for the circulation of air.

4.2.203 Hvac_reinforcement

An Hvac_reinforcement is an instance of Hvac_component (see 4.2.176) which increases the stiffness of an instance of Hvac_ducting (see 4.2.182).

The data associated with an Hvac_reinforcement are the following:

- reference_connector;
- hvac_reinforcement_size.

4.2.203.1 reference_connector

A reference_connector is an instance of Hvac_connector (see 4.2.178) from which the distance_along_centreline_from_connector is measured.

4.2.203.2 hvac_reinforcement_size

The hvac_reinforcement_size specifies the width and thickness or diameter of the Hvac_reinforcement.

4.2.204 Hvac_run

An Hvac_run is a collection of one or more instances of Hvac_section (see 4.2.206).

The data associated with an Hvac_run are the following:

- hvac_run_id.

4.2.204.1 hvac_run_id

The hvac_run_id is a unique identifier by which the Hvac_run is referred.

4.2.205 Hvac_run_termination

An Hvac_run_termination is an instance of Hvac_section_termination (see 4.2.210) which defines the end of an Hvac_run (see 4.2.204).

The data associated with an Hvac_run_termination are the following:

- location;
- start_or_end.

4.2.205.1 location

The location specifies the relative distance in the X, Y, Z directions of the position of the end of the Hvac_section (see 4.2.206), from the plant origin.

NOTE The location position may also be defined by where it connects to an upstream piece of Equipment (see 4.2.132) or Hvac_section.

4.2.205.2 start_or_end

The start_or_end specifies an enumerated value that defines the side of the Hvac_ducting (see 4.2.182) on which the section termination lies.

NOTE A value of 'start' indicates the section termination is on the upstream end, and a value of 'end' indicates that the section termination is on the downstream end.

4.2.206 Hvac_section

An Hvac_section is a collection of one or more instances of Hvac_ducting (see 4.2.182), Hvacinstrument (see 4.2.192), Hvac_flow_control_device (see 4.2.189), Hvac_fitting (see 4.2.188), or Hvac_equipment (see 4.2.187).

NOTE An HVAC section has exactly one or two termination points which play the role of HVAC_section_to_section_termination. Any additional termination points play a role of an HVAC_section_branch_termination. Any connection between sections which involves an HVAC_section_-branch_termination is an HVAC_section_-branch_connection. Connections between sections involving two HVAC_section_to_section_terminations is an HVAC_section_to_section_connection.

The data associated with an Hvac_section are the following:

- hvac_section_id;
- pressure_drop;
- flow_rate;
- velocity;
- equivalent_diameter;
- equivalent_length;
- friction_factor;
- roughness.

4.2.206.1 hvac_section_id

The hvac_section_id specifies a unique identifier for the Hvac_section.

4.2.206.2 pressure_drop

The pressure_drop specifies the drop in pressure in the Hvac_section.

4.2.206.3 flow_rate

The flow_rate specifies the rate of flow of the fluid through the Hvac_section.

ISO 10303-227:2005(E)

4.2.206.4 velocity

The velocity specifies the velocity of the fluid through the Hvac_section.

4.2.206.5 equivalent_diameter

The equivalent_diameter specifies the diameter of a section of round duct which has an equivalent head loss as the section.

4.2.206.6 equivalent_length

The equivalent_length specifies the length of straight round duct which has the same head loss as the section.

4.2.206.7 friction_factor

The friction_factor specifies a dimensionless number used to calculate the static pressure in an instance of Hvac_ducting (see 4.2.182).

4.2.206.8 roughness

The roughness specifies the quality of the surface finish over which the fluid flows.

4.2.207 Hvac_section_branch_termination

An Hvac_section_branch_termination is a type of Hvac_section_termination (see 4.2.210) that connects to an Hvac_section (see 4.2.206) at a point other than a termination.

4.2.208 Hvac_section_component_assignment

An Hvac_section_component_assignment is the identification of the instance of Hvac_section (see 4.2.206) that an Hvac_component (see 4.2.176) belongs to.

4.2.209 Hvac_section_insulation

An Hvac_section_insulation defines insulation for an instance of Hvac_section (see 4.2.206).

The data associated with an Hvac_section_insulation are the following:

- insulation_thickness;
- insulation_type;
- insulation_description;
- insulation_specification.

4.2.209.1 insulation_thickness

The insulation_thickness specifies the total thickness of the insulation measure from the surface of the Hvac_section (see 4.2.206) outward.

4.2.209.2 insulation_type

The insulation_type specifies the type of material which keeps the hot side hot and the cold side cold.

4.2.209.3 insulation_description

The `insulation_description` specifies a description of the insulation.

4.2.209.4 insulation_specification

The `insulation_specification` specifies a document which describes the properties of the insulation.

4.2.210 Hvac_section_termination

An `Hvac_section_termination` is one of the logical end-points of an `Hvac_section` (see 4.2.206). Each `Hvac_section_termination` may be one of the following: an `Hvac_section_branch_termination` (see 4.2.207), an `Hvac_run_termination` (see 4.2.205), an `Hvac_section_to_section_termination` (see 4.2.212), or an `Hvac_plant_item_termination` (see 4.2.201).

The data associated with an `Hvac_section_termination` are the following:

- `flow_direction`.

4.2.210.1 flow_direction

The `flow_direction` is the direction of flow of the fluid with respect to the `Hvac_section`.

4.2.211 Hvac_section_to_section_connection

An `Hvac_section_to_section_connection` is a connection between two `Hvac_sections` (see 4.2.206).

The data associated with an `Hvac_section_to_section_connection` are the following:

- `section_to_section_connection_id`.

4.2.211.1 section_to_section_connection_id

The `section_to_section_connection_id` is a unique identifier of the connection between two `Hvac_sections`.

4.2.212 Hvac_section_to_section_termination

An `Hvac_section_to_section_termination` is a type of `Hvac_section_termination` (see 4.2.210) that connects to an `Hvac_section` (see 4.2.206) at a point of termination.

4.2.213 Hvac_single_wire_support

An `Hvac_single_wire_support` is an instance of `Hvac_support` (see 4.2.215) which consists of a single wire wrapped around an instance of `Hvac_ducting` (see 4.2.182) or `Hvac_component` (see 4.2.176).

The data associated with an `Hvac_single_wire_support` are the following:

- `upper_attach_loc`;
- `duct_attach_loc`;
- `single_wire_hanger_size`.

4.2.213.1 upper_attach_loc

The `upper_attach_loc` is a point where the hanger attaches to its support.

ISO 10303-227:2005(E)

4.2.213.2 duct_attach_loc

The duct_attach_loc is a point on the Hvac_component (see 4.2.176) at which the Hvac_single_wire_support is attached.

4.2.213.3 single_wire_hanger_size

The single_wire_hanger_size specifies the diameter of the Hvac_single_wire_support.

4.2.214 Hvac_specification

The data associated with an Hvac_specification are the following:

- hvac_specification_id;
- name;
- owner;
- service_description.

4.2.214.1 hvac_specification_id

The hvac_specification_id specifies a designation that differentiates one Hvac_specification from another.

4.2.214.2 name

The name specifies a textual label given to the Hvac_specification.

4.2.214.3 owner

The owner specifies the owner as a point of contact for the specification.

4.2.214.4 service_description

The service_description specifies the service that this specification applies to.

4.2.215 Hvac_support

An Hvac_support is an instance of Hvac_component (see 4.2.176) which supports an instance of Hvac_ducting (see 4.2.182) or Hvac_component.

4.2.216 Hvac_system

An Hvac_system is a type of Ducting_system (see 4.2.119) that controls the temperature, humidity, cleanliness, and circulation of environmental air as required in a Building (see 4.2.28).

4.2.217 Hvac_takeoff

An Hvac_takeoff is a type of Hvac_fitting (see 4.2.188) which has three end connectors.

The data associated with an Hvac_takeoff are the following:

- end_1_connector;
- end_2_connector;

- end_3_connector;
- centre_to_end_1_length;
- centre_to_end_2_length;
- centre_to_end_3_length;
- takeoff_angle.

4.2.217.1 end_1_connector

The end_1_connector specifies the Hvac_connector (see 4.2.178) which is the connector to the inlet of the Hvac_takeoff.

4.2.217.2 end_2_connector

The end_2_connector specifies the Hvac_connector (see 4.2.178) which is the connector to the outlet of the Hvac_takeoff.

4.2.217.3 end_3_connector

The end_3_connector specifies the Hvac_connector (see 4.2.178) which is the connector to the branch of the Hvac_takeoff.

4.2.217.4 centre_to_end_1_length

The centre_to_end_1_length specifies the distance from the intersection of the branch and the run to end_1_connector which is the inlet of the Hvac-fitting (see 4.2.188).

4.2.217.5 centre_to_end_2_length

The centre_to_end_2_length specifies the distance from the intersection of the branch and the run to end_2_connector, which is the outlet of the Hvac_fitting (see 4.2.188).

4.2.217.6 centre_to_end_3_length

The centre_to_end_3_length specifies the distance from the intersection of the branch and the run to end_3_connector which is the branch of the Hvac_fitting (see 4.2.188).

4.2.217.7 takeoff_angle

The takeoff_angle specifies the angle between the through run of the Hvac_fitting (see 4.2.188) and the line segment connecting the intersection of the branch and the run to the termination to the end_3_connector.

4.2.218 Hvac_transition

An Hvac_transition is a type of Hvac_fitting (see 4.2.188) between two Hvac_sections (see 4.2.206) having different cross sections, shapes, size, or having an offset.

NOTE Figure 37 depicts an Hvac_transition from Rectangular to Round.

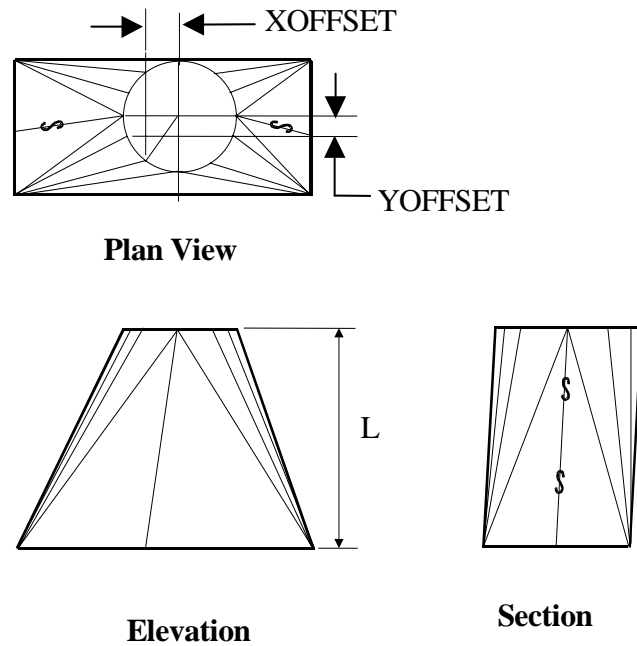


Figure 37 — Transition - rectangular to round

The data associated with an `Hvac_transition` are the following:

- `offset_x`;
- `offset_y`;
- `length`;
- `end_1_connector`;
- `end_2_connector`.

4.2.218.1 `offset_x`

The `offset_x` specifies the distance from the inlet to the outlet as shown by `XOFFSET` in Figure 37.

4.2.218.2 `offset_y`

The `offset_y` specifies the distance from the inlet to the outlet as shown by `YOFFSET` in Figure 37.

4.2.218.3 `length`

The `length` specifies the length of the transition as shown by `L` in Figure 37.

4.2.218.4 `end_1_connector`

The `end_1_connector` specifies the `Hvac_connector` (see 4.2.178) which is the primary connecting end of a transition.

4.2.218.5 end_2_connector

The end_2_connector specifies the Hvac_connector (see 4.2.178) which is the secondary connecting end of a transition.

4.2.219 Hvac_transition_slanted

An Hvac_transition_slanted is a type of Hvac_fitting (see 4.2.188) which provides a change in size and a change in direction between two Plant_items (see 4.2.313).

NOTE Figure 38 depicts an Hvac_transition_slanted from Rectangle to Round.

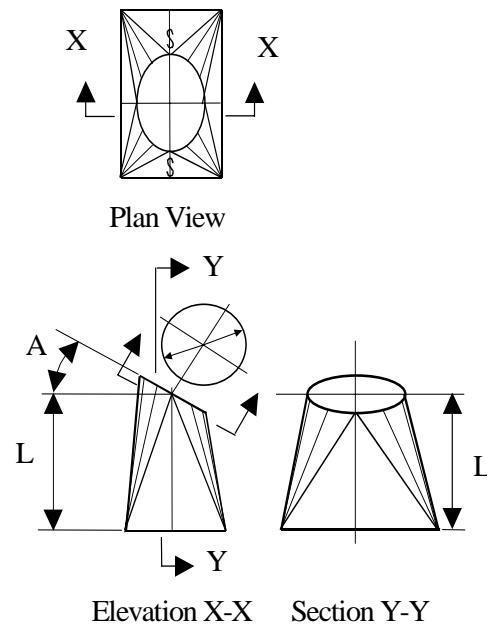


Figure 38 — Transition - rectangle to round slanted

The data associated with an Hvac_transition_slanted are the following:

- slant_angle;
- length;
- end_1_connector;
- end_2_connector.

4.2.219.1 slant_angle

The slant_angle specifies the slant angle of the transition as shown by A in Figure 38.

4.2.219.2 length

The length specifies the length between end_1_connector and end_2_connector.

ISO 10303-227:2005(E)

4.2.219.3 end_1_connector

The end_1_connector specifies the Hvac_connector (see 4.2.178) which is the primary connecting end of a slanted transition.

4.2.219.4 end_2_connector

The end_2_connector specifies the Hvac_connector (see 4.2.178) which is the secondary connecting end of a slanted transition.

4.2.220 Hvac_trapeze_bar

An Hvac_trapeze_bar is an instance of Hvac_component (see 4.2.176) upon which rests an instance of Hvac_ducting (see 4.2.182) or Hvac_component.

The data associated with an Hvac_trapeze_bar are the following:

- trapeze_bar_size;
- hanger1_att_loc;
- hanger1_att_type;
- hanger2_att_loc;
- hanger2_att_type.

4.2.220.1 trapeze_bar_size

The trapeze_bar_size specifies the width and thickness or diameter of the Hvac_trapeze_bar.

4.2.220.2 hanger1_att_loc

The hanger1_att_loc specifies a point on the Hvac_hanger (see 4.2.191) at which the Hanger_trapeze_bar is attached.

4.2.220.3 hanger1_att_type

The hanger1_att_type specifies the method used to attach the Hanger_trapeze_bar to the Hvac_hanger (see 4.2.191).

4.2.220.4 hanger2_att_loc

The hanger2_att_loc specifies a point on a second Hvac_hanger (see 4.2.191) at which the Hvac_trapeze_bar (see 4.2.220) is attached.

4.2.220.5 hanger2_att_type

The hanger2_att_type specifies the method used to attach the Hvac_trapeze_bar (see 4.2.220) to a second Hvac_hanger (see 4.2.191).

4.2.221 Hvac_trapeze_support

An Hvac_trapeze_support is an instance of Hvac_support (see 4.2.215) that connects an instance of Hvac_trapeze_bar (see 4.2.220) to another instance of Hvac_trapeze_bar or structure.

4.2.222 Hybrid_shape_representation

A Hybrid_shape_representation is a type of Shape_representation. (see 4.2.374).

4.2.223 Inline_equipment

An Inline_equipment is a type of Equipment (see 4.2.132) and Piping_system_component (see 4.2.303) that is inserted into the flow of a process stream to perform a function.

Note: In general, Inline_equipment assumes the design criteria of the pipeline (i.e. pressure, temperature, flow). On the other hand, stand_alone equipment sets the design conditions for pipelines that connect to it.

4.2.224 Inline_instrument

An Inline_instrument is a type of Instrument (see 4.2.229) and Piping_system_component (see 4.2.303) that is inserted into the flow of a process stream to measure some characteristic of the stream.

EXAMPLE Thermowells, pressure gauges, and flowmeters are examples of Inline_instruments.

4.2.225 Insert_fitting

An Insert_fitting is a type of Fitting (see 4.2.147) with one external and one smaller internal end.

NOTE Figure 39 depicts a typical Insert_fitting.

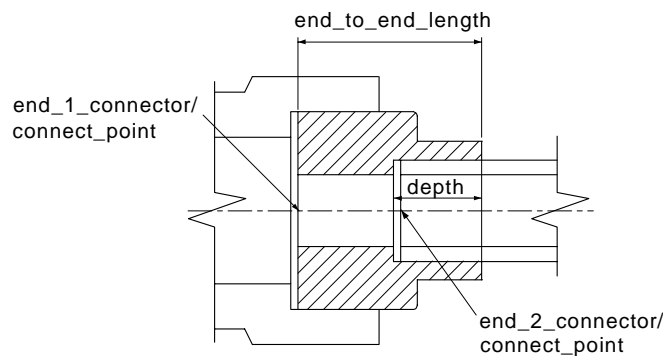


Figure 39 — Insert_fitting

The data associated with an Insert_fitting are the following:

- end_1_connector;
- end_2_connector;
- end_to_end_length.

4.2.225.1 end_1_connector

The end_1_connector specifies the Piping_connector (see 4.2.295) designated as Male_end (see 4.2.257).

4.2.225.2 end_2_connector

The end_2_connector specifies the Piping_connector (see 4.2.295) designated as Female_end (see 4.2.145).

ISO 10303-227:2005(E)

4.2.225.3 end_to_end_length

The `end_to_end_length` specifies the external length of the `Insert_fitting` from the end-one face to the end-two face. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.226 Inside_and_thickness

An `Inside_and_thickness` is a type of `Piping_size_description` (see 4.2.297) that describes the size of a `Piping_system_component` (see 4.2.303) or a `Piping_connector` (see 4.2.295) using an actual (intended) inside diameter and wall thickness.

The data associated with an `Inside_and_thickness` are the following:

- `inside_diameter`;
- `thickness`.

4.2.226.1 inside_diameter

The `inside_diameter` specifies the actual (intended, not nominal) inside diameter of the `Piping_system_component` (see 4.2.303) or `Piping_connector` (see 4.2.295). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.226.2 thickness

The `thickness` specifies the minimum distance between the inside and outside piping wall surfaces required for the `Piping_system_component` (see 4.2.303) or `Piping_connector` (see 4.2.295). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.227 Inspection_condition

The `Inspection_condition` is a characteristic which shall be required to be attained for the inspection to be accomplished.

The data associated with an `Inspection_condition` are the following:

- `condition_name`;
- `condition_value`.

4.2.227.1 condition_name

The `condition_name` specifies the characteristic that is being defined.

EXAMPLE “welding preheating temp” and “post heating temp” are inspection condition names.

4.2.227.2 condition_value

The `condition_value` specifies the specific quantity or alphanumeric qualifier for the characteristic that affects the inspection.

4.2.228 Installed_physical_design_view

An `Installed_physical_design_view` is an indication that the `Plant_item` (see 4.2.313) described by a `Physical_design_view` (see 4.2.288) is physically installed within the `Plant` (see 4.2.311).

NOTE Within a usage of this part of ISO 10303, all `Plant_items` are considered as planned physical design views unless they are related to `Installed_physical_design_view`. This relationship indicates that the `Plant_item` is an actual item that currently exists or is installed in the `Plant`.

The data associated with an `Installed_physical_design_view` are the following:

- `serial_number`.

4.2.228.1 serial_number

The `serial_number` specifies a designation that uniquely identifies a particular physical `Plant_item` (see 4.2.313) that is installed in a `Plant` (see 4.2.311).

NOTE The designation is typically assigned and affixed by the manufacturer of the `Plant_item`.

4.2.229 Instrument

An `Instrument` is a type of `Instrumentation_and_control_component` (see 4.2.230) that monitors one or more performance characteristics of a system. Each `Instrument` may be one of the following: an `Inline_instrument` (see 4.2.224) or an `Offline_instrument` (see 4.2.276).

The data associated with an `Instrument` are the following:

- `control_loop_id`;
- `instrument_type`;
- `sensor_type`;
- `signal_type`;
- `stream_interaction_type`.

4.2.229.1 control_loop_id

A `control_loop_id` specifies a unique identifier for a control module that is implemented by an `Instrument`.

4.2.229.2 instrument_type

The `instrument_type` specifies a classification of an `Instrument` based on its performance characteristics.

EXAMPLE Examples of `instrument_type` classifications include flow control, level control, pressure, or temperature.

4.2.229.3 sensor_type

The `sensor_type` specifies a classification of an `Instrument` actuator based on its operational characteristics.

4.2.229.4 signal_type

The `signal_type` specifies a classification of an `Instrument` signal based on its physical characteristics.

EXAMPLE Examples of `instrument` `signal_type` classifications include electric and pneumatic.

ISO 10303-227:2005(E)

4.2.229.5 stream_interaction_type

The `stream_interaction_type` specifies a classification of an Instrument based on how the sensor is positioned to sense the stream.

EXAMPLE Examples of `stream_interaction_type` include outside, inserted, and immersed.

4.2.230 Instrumentation_and_control_component

An `Instrumentation_and_control_component` is a type of `Plant_item` (see 4.2.313) that is an individually identifiable item or combination of items that is part of the `Instrumentation_and_control_system` (see 4.2.231). Each `Instrumentation_and_control_component` may be an Instrument (see 4.2.229).

EXAMPLE Examples of `Instrumentation_and_control_component` objects include wiring, switches, control valves, and gauges.

4.2.231 Instrumentation_and_control_system

An `Instrumentation_and_control_system` is a type of `Plant_system` (see 4.2.329) that is a system of wiring, switches, controls, and other equipment associated with monitoring and controlling the performance characteristics of `Plant_system` objects.

The data associated with an `Instrumentation_and_control_system` are the following:

— `type`.

4.2.231.1 type

The `type` specifies a designation that classifies the `Instrumentation_and_control_system` based on the kind of service that it provides.

4.2.232 Insulation

An `Insulation` is a type of `Plant_item` (see 4.2.313) that is a material or assembly of materials used to provide resistance to heat flow.

4.2.233 Interfering_shape_element

An `Interfering_shape_element` is the portion of the `Plant_item_shape` (see 4.2.326) that is interfered with by a shape element of another `Plant_item` (see 4.2.313).

NOTE This application object is intended to support design integration, specifically the need to identify the elements of the designs that physically interfere with one another.

The data associated with an `Interfering_shape_element` are the following:

— `interference_colour`.

4.2.233.1 interference_colout

The `interference_colour` specifies the colour that displays the element.

4.2.234 Lap_joint_flange

A `Lap_joint_flange` is a type of `Flange` (see 4.2.148) that has a rounded contour at the intersection of the bore and the Flange face in order to mate to a `Lap_joint_stub_end` (see 4.2.235).

NOTE 1 This Flange can be swiveled around a Lap_joint_stub_end in order to align bolt holes.

NOTE 2 Figure 40 depicts a typical Lap_joint_flange.

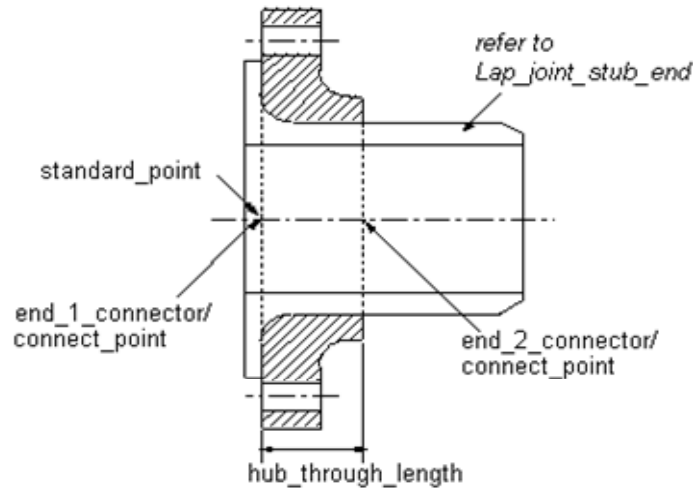


Figure 40 — Lap_joint_flange

4.2.235 Lap_joint_stub_end

A Lap_joint_stub_end is a type of Fitting (see 4.2.147) used with a Lap_joint_flange (see 4.2.234), consisting of a cylinder or barrel with an integral flat ring or lap around one end with a rounded contour at the external intersection of the barrel and the lap.

NOTE 1 Figure 41 depicts a typical Lap_joint_stub_end.

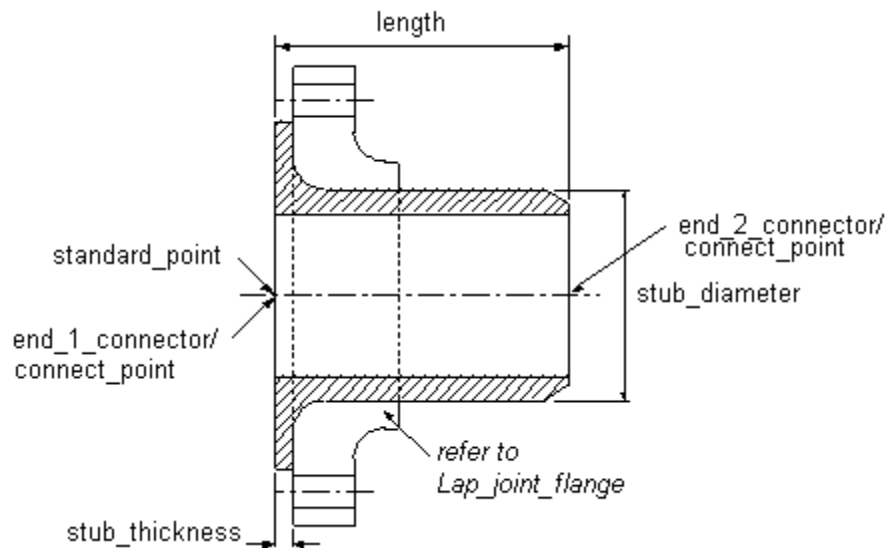


Figure 41 — Lap_joint_stub_end

NOTE 2 End two is beveled for butt welding to pipe. The lap face normally has a flat or concentric serrated finish. This surface serves as the raised-face gasket surface of the Flange (see 4.2.148) in Lap_joint_flange connections.

ISO 10303-227:2005(E)

The data associated with a `Lap_joint_stub_end` are the following:

- `end_1_connector`;
- `end_2_connector`;
- `length`;
- `stub_diameter`;
- `stub_thickness`.

4.2.235.1 end_1_connector

The `end_1_connector` specifies the `Piping_connector` (see 4.2.295) at the stub end face that connects to another Flange (see 4.2.148) or Nozzle (see 4.2.274).

4.2.235.2 end_2_connector

The `end_2_connector` specifies the `Piping_connector` (see 4.2.295) at the stub end face that connects to a non-flange `Piping_component` (see 4.2.293).

4.2.235.3 length

The `length` specifies the external distance between the lap face and the other stub end face. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.235.4 stub_diameter

The `stub_diameter` specifies the nominal diameter of the `Lap_joint_stub_end`. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.235.5 stub_thickness

The `stub_thickness` specifies the distance between the inner and outer surfaces of the flared portion of the stub end. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.236 Lateral

A Lateral is a type of Fitting (see 4.2.147) that is a three-way fitting having two ends opposite each other in a straight run and a branch outlet projecting from the run at an angle.

NOTE Figure 42 depicts a typical butt-weld Lateral.

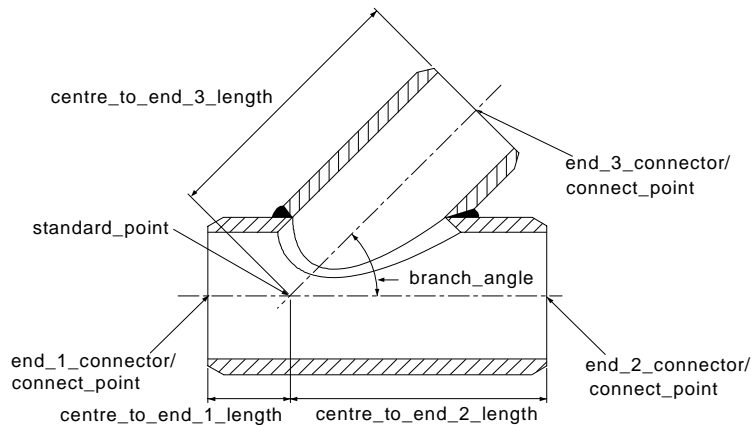


Figure 42 — Lateral

The data associated with a Lateral are the following:

- `branch_angle`;
- `centre_to_end_1_length`;
- `centre_to_end_2_length`;
- `centre_to_end_3_length`;
- `end_1_connector`;
- `end_2_connector`;
- `end_3_connector`.

4.2.236.1 `branch_angle`

The `branch_angle` specifies the angle that the branch projects from the straight run. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.236.2 `centre_to_end_1_length`

The `centre_to_end_1_length` specifies the distance between the point where the branch and straight run centrelines intersect and the straight-run face that is closest to the intersection. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.236.3 `centre_to_end_2_length`

The `centre_to_end_2_length` specifies the distance between the point where the branch and straight run centrelines intersect and the straight-run face that is furthest from the intersection. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

ISO 10303-227:2005(E)

4.2.236.4 centre_to_end_3_length

The `centre_to_end_3_length` specifies the distance between the point where the branch and straight run centrelines intersect and the branch face. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.236.5 end_1_connector

The `end_1_connector` specifies the `Piping_connector` (see 4.2.295) on the straight run that is closest to the intersection between the centrelines of the branch run and straight run.

4.2.236.6 end_2_connector

The `end_2_connector` specifies the `Piping_connector` (see 4.2.295) on the straight run that is furthest from the intersection between the centrelines of the branch run and straight run.

4.2.236.7 end_3_connector

The `end_3_connector` specifies the `Piping_connector` (see 4.2.295) that connects to the branch line.

4.2.237 Line

A `Line` is a type of `Curve` (see 4.2.112) that is a one-dimensional, contiguous set of points that are positioned at a constant distance from a vector or that constitute the shortest distance between two points.

4.2.238 Line_branch_connection

A `Line_branch_connection` is a connection between the logical termination of one `Piping_system_line_segment` (see 4.2.305) and a point on another `Piping_system_line_segment` other than a termination. The former `Piping_system_line_segment` branches from the latter `Piping_system_line_segment`.

The data associated with a `Line_branch_connection` are the following:

— `branch_sequence_id`.

4.2.238.1 branch_sequence_id

The `branch_sequence_id` specifies an alphanumeric identifier that indicates the order that branches extend from the main `Piping_system_line_segment` (see 4.2.305).

4.2.239 Line_branch_termination

A `Line_branch_termination` is a type of `Piping_system_line_segment_termination` (see 4.2.306) that connects to a `Piping_system_line_segment` (see 4.2.305) at a point other than a termination.

4.2.240 Line_less_piping_system

A `Line_less_piping_system` is a type of `Piping_system` (see 4.2.302) that does not have a line designation as defined in `Piping_system_line` (see 4.2.304).

4.2.241 Line_piping_system_component_assignment

A `Line_piping_system_component_assignment` is the relationship between a `Piping_system_line` (see 4.2.304) and a `Piping_system_component` (see 4.2.303) that is part of, or satisfies the need specified by, the `Piping_system_line`.

4.2.242 Line_plant_item_branch_connection

A `Line_plant_item_branch_connection` is a connection between a `Line_plant_item_branch_connector` (see 4.2.243) and a point on a `Piping_system_line_segment` (see 4.2.305) other than a termination. The `Line_plant_item_branch_connector` branches from the `Piping_system_line_segment`.

The data associated with a `Line_plant_item_branch_connection` are the following:

— `branch_sequence_id`.

4.2.242.1 branch_sequence_id

The `branch_sequence_id` specifies an alphanumeric identifier that indicates the order that branches extend from the main `Piping_system_line_segment` (see 4.2.305).

4.2.243 Line_plant_item_branch_connector

A `Line_plant_item_branch_connector` is a type of `Functional_connector` (see 4.2.157) that participates in a `Line_plant_item_branch_connection` (see 4.2.242).

4.2.244 Line_plant_item_connection

A `Line_plant_item_connection` is a connection between the logical termination of a `Piping_system_line_segment` (see 4.2.305) and a `Line_plant_item_connector` (see 4.2.245).

4.2.245 Line_plant_item_connector

A `Line_plant_item_connector` is a type of `Functional_connector` (see 4.2.157) that participates in a `Line_plant_item_connection` (see 4.2.244).

4.2.246 Line_plant_item_termination

A `Line_plant_item_termination` is a type of `Piping_system_line_segment_termination` (see 4.2.306) that connects to other `Line_to_line_termination` (see 4.2.248) objects.

4.2.247 Line_to_line_connection

A `Line_to_line_connection` is a connection between the logical terminations of two or more `Piping_system_line_segment` (see 4.2.305) objects.

4.2.248 Line_to_line_termination

A `Line_to_line_termination` is a type of `Piping_system_line_segment_termination` (see 4.2.306) that connects to other `Line_to_line_termination` objects.

4.2.249 Lined_piping

A `Lined_piping` is a type of `Piping_spool` (see 4.2.299) with coating material on the inner side.

ISO 10303-227:2005(E)

The data associated with a Lined_piping are the following:

- lining_thickness_inside_pipe;
- lining_thickness_at_flange_face.

4.2.249.1 lining_thickness_inside_pipe

The lining_thickness_inside_pipe specifies the thickness of the coating material on the inner surface of the Piping_spool (see 4.2.299).

4.2.249.2 lining_thickness_at_flange_face

The lining_thickness_at_flange_face specifies the thickness of the coating material on the connecting face of the Flange (see 4.2.148) at the ends of the Piping_spool (see 4.2.299) if the spool is terminated by a Flange.

4.2.250 Load_transference

A Load_transference is a type of Plant_item_connection (see 4.2.316) that identifies the purpose or role of the connection as being the transfer of load or force.

4.2.251 Location_in_building

A Location_in_building is a type of Plant_item_location (see 4.2.325) that is the position of the Plant_item (see 4.2.313) relative to the Building (see 4.2.28).

4.2.252 Location_in_plant

A Location_in_plant is a type of Plant_item_location (see 4.2.325) that is the position of the Plant_item (see 4.2.313) relative to the Plant (see 4.2.311).

4.2.253 Location_in_ship

A Location_in_ship is a type of Location_in_plant (see 4.2.252). The Location_in_ship application object specifies the location of a Plant_item_instance (see 4.2.322) using traditional ship reference points.

The data associated with a Location_in_ship are the following:

- deck_number;
- frame_number;
- port_or_starboard;
- fore_midship_aft.

4.2.253.1 deck_number

The deck_number specifies the vertical position of the deck onto which the Plant_item_instance (see 4.2.322) is situated.

4.2.253.2 frame_number

The frame_number specifies the longitudinal position of the ship where the Plant_item_instance (see 4.2.322) is situated.

4.2.253.3 port_or_starboard

A port_or_starboard specifies a lateral position (transverse region) of the ship where the Plant_item_instance (see 4.2.322) is situated. A lateral position may be one of port or starboard.

4.2.253.4 fore_midship_aft

A fore_midship_aft specifies the relative longitudinal region of the ship where the Plant_item_instance (see 4.2.322) is situated. A longitudinal region may be one of fore, midship or aft. A fore_midship_aft need not be specified for a particular Location_in_ship.

4.2.254 Location_in_site

A Location_in_site is a type of Plant_item_location (see 4.2.325) that is the position of the Plant_item (see 4.2.313) relative to the Site (see 4.2.379).

4.2.255 Locked_orientation_connection

A Locked_orientation_connection is a type of Plant_item_connection (see 4.2.316) in which two Plant_item_connector (see 4.2.318) objects are in physical contact and there is no relative motion of the connected Plant_item (see 4.2.313) objects with respect to each other.

NOTE A pump housing (containing the impeller and shaft) can be connected to the driver (motor) using a Locked_orientation_connection; this would mean that they move in unison.

4.2.256 Lug

The Lug is a type of Piping_support (see 4.2.301) that consists of a simple plate with a hole to be hanged by. A Lug is used for attaching of piping supports to structural steel. A Lug without a hole is used to support the weight in a manner similar to the Trunnion (see 4.2.430).

EXAMPLE A Lug may be with or without a hole.

NOTE Figure 43 depicts a typical Lug.




Figure 43 — Lug

The data associated with a Lug are the following:

— length.

4.2.256.1 length

The length specifies the distance between the tip of the Lug and the location_point.

ISO 10303-227:2005(E)

4.2.257 Male_end

A Male_end is a type of Piping_connector (see 4.2.295) end type that forms a compatible connection with a Female_end (see 4.2.145).

The data associated with a Male_end are the following:

- outer_end_preparation;
- inner_end_preparation.

4.2.257.1 outer_end_preparation

The outer_end_preparation specifies a description of the outer end of the connector that is necessary to prepare it for welding.

4.2.257.2 inner_end_preparation

The inner_end_preparation specifies a description of the inner end of the connector that is necessary to prepare it for welding.

4.2.258 Manufacturing_line

A Manufacturing_line is a type of Plant (see 4.2.311) that is defined by the type of product(s) it produces.

4.2.259 Material_specification_selection

A Material_specification_selection is the candidate material specification for piping system design. Each Material_specification_selection may be a Material_specification_subset_reference (see 4.2.260).

The data associated with a Material_specification_selection are the following:

- description;
- material_specification_id;
- required_or_optional;
- selection_id;
- type.

EXAMPLE The material_specification_selection for a piping component would have a type of "Stainless Steel", a material_specification_id of "ASTM (American Society for Testing and Materials) A403", a selection_id of "SS A316S", a description of "standard material callout", and be required.

4.2.259.1 description

The description specifies a textual explanation or summary of the selected material specification.

4.2.259.2 material_specification_id

The material_specification_id specifies a unique identifier for the material specification selected. Material_specification_id is required for each Material_specification_selection.

4.2.259.3 required_or_optional

The `required_or_optional` specifies whether the material specification is required or whether its use is optional.

4.2.259.4 selection_id

The `selection_id` specifies a unique identifier for the candidate material specification. `Selection_id` is required for each `Material_specification_selection`.

4.2.259.5 type

The `type` specifies a designation that classifies a `Material_specification_selection` based on selection criteria.

4.2.260 Material_specification_subset_reference

A `Material_specification_subset_reference` is a type of `Material_specification_selection` (see 4.2.259) that is the reference parameter required to identify the applicable subset of a `Required_material_description` (see 4.2.353).

The data associated with a `Material_specification_subset_reference` are the following:

- `subset_id`.

4.2.260.1 subset_id

The `subset_id` specifies a unique identifier for the specified subset portion of a `Required_material_description` (see 4.2.353). `subset_id` is required for each `Material_specification_subset_reference`.

NOTE The subset reference is used when further subdivisions of the material specification selection are provided to allow for a more precise specification of the material.

4.2.261 Mechanical_arrangement_specification

A `Mechanical_arrangement_specification` is a specification of the mechanical system's design. It may contain information on the fabrication and parameters of various components of the mechanical system, alignment information, tolerances, list of materials, drawings, notes and other requirements.

NOTE The `Mechanical_arrangement_specification` is used in the design, fabrication and assembly process to specify the component parameters, fitting details and layout. The components listed in the `Mechanical_arrangement_specification` may reference component catalogues.

The data associated with a `Mechanical_arrangement_specification` are the following:

- `name`;
- `mechanical_arrangement_specification_id`;
- `owner`;
- `service_description`.

4.2.261.1 name

The `name` specifies a textual label given to the `Mechanical_arrangement_specification`.

4.2.261.2 mechanical_arrangement_specification_id

The `mechanical_arrangement_specification_id` specifies a unique identifier for the `Mechanical_arrangement_specification`. A `mechanical_arrangement_specification_id` is required for each `Mechanical_arrangement_specification`.

4.2.261.3 owner

The `owner` specifies the designation given to the person or organization that created and maintains the `Mechanical_arrangement_specification`.

4.2.261.4 service_description

The `service_description` specifies a textual explanation or summary of the process stream conditions that are supported by the `Plant_item` (see 4.2.313) objects described in the `Mechanical_arrangement_specification`.

4.2.262 Mechanical_component

A `Mechanical_component` is a type of `Mechanical_system_component` (see 4.2.270) whose primary function is the conveyance or control of mechanical power distribution. Each `Mechanical_component` may be further classified using the `External_classification` (see 4.2.136) application object, or defined by a `Catalogue_item` (see 4.2.42) in order to convey specific types of components if required. A `Mechanical_component` may also be characterized by a `Mechanical_family_definition` (see 4.2.264).

The data associated with a `Mechanical_component` are the following:

- `standard_point`.

4.2.262.1 standard_point

The `standard_point` specifies an x, y, z coordinate position defined for the `Mechanical_component` that will be used to position the `Mechanical_component` in the `Plant` (see 4.2.311).

4.2.263 Mechanical_connector

A `Mechanical_connector` is a type of `Plant_item_connector` (see 4.2.318) whose primary function is the conveyance or control of mechanical power distribution. Each `Mechanical_connector` may be further classified using the `External_classification` (see 4.2.136) application object, or defined by a `Catalogue_item` (see 4.2.42) in order to convey specific types of connectors if required. A `Mechanical_connector` may have a set of physical dimensions defined for it through the inherited `Component_size_description` (see 4.2.93) application object.

The data associated with a `Mechanical_connector` are the following:

- `connector_type`;
- `name`;
- `specification`;
- `torque_direction`.

4.2.263.1 connector_type

The `connector_type` specifies the basic type of `Mechanical_connector`.

4.2.263.2 name

The `name` specifies the name of the `Mechanical_connector`.

4.2.263.3 specification

The `specification` identifies the specification associated with the `Mechanical_connector`. There may be more than one specification for a `Mechanical_connector`.

EXAMPLE Examples of the identified specifications include fabrication specification, installation specification, and inspection specification.

4.2.263.4 torque_direction

The `torque_direction` specifies the way the power is directed through the `Mechanical_connector`.

4.2.264 Mechanical_family_definition

A `Mechanical_family_definition` characterizes a set of `Mechanical_component` (see 4.2.262) and `Plant_item_definition` (see 4.2.320) objects based on common physical characteristics. The physical characteristics may be specified as a specific value or as a range of values. A `Mechanical_family_definition` may be defined as part of a `Mechanical_arrangement_specification` (see 4.2.261).

EXAMPLE A `Mechanical_arrangement_specification` (see 4.2.261) may describe a `Mechanical_family_definition`, such as a class of universal joints made with castings that have varied radius flanges between six inches and twenty four inches in diameter.

The data associated with a `Mechanical_family_definition` are the following:

- `classification_description`.

4.2.264.1 classification_description

The `classification_description` specifies a textual explanation of the principal characteristics that vary within the class.

4.2.265 Mechanical_system

A `Mechanical_system` is a type of `Plant_system` (see 4.2.329), that is a system of interconnected `Plant_item` (see 4.2.313) objects that conveys mechanical power or control for a specific function. Each `Mechanical_system` may be an `Arrangement_less_mechanical_system` (see 4.2.4).

EXAMPLE Functions that require the conveyence of power distribution through the ship include, propulsion, steering gear, deck cranes, winches, and hanger deck lifts.

The data associated with a `Mechanical_system` are the following:

- `code`;
- `description`;
- `system_type`.

ISO 10303-227:2005(E)

4.2.265.1 code

The code specifies the name of the specification that the Mechanical_system needs to conform to.

4.2.265.2 description

The description specifies a textual explanation or summary of the Mechanical_system.

4.2.265.3 system_type

The system_type specifies a designation that classifies a Mechanical system based on its physical and functional characteristics.

4.2.266 Mechanical_system_arrangement

A Mechanical_system_arrangement is a logical component of a Mechanical_system (see 4.2.265) and is composed of a collection of interconnected Mechanical_system_arrangement_segment (see 4.2.267) objects.

The data associated with a Mechanical_system_arrangement are the following:

- arrangement_number.

4.2.266.1 arrangement_number

The arrangement_number specifies an alphanumeric identifier assigned to the Mechanical_system_arrangement and can be used to uniquely define the Mechanical_system_arrangement. An arrangement_number is required for each Mechanical_system_arrangement.

4.2.267 Mechanical_system_arrangement_segment

A Mechanical_system_arrangement_segment is an element of a Mechanical_system_arrangement (see 4.2.266). A mechanical_system_arrangement_segment terminates at a functional Plant_item_connector (see 4.2.318), or a point where the power (torque) is split (for example through an axle driving two or more separate loads), controlled (for example, by a governor), absorbed by a load (for example a propellor) or is converted (for example to pneumatic power through relevant equipment).

The data associated with a Mechanical_system_arrangement_segment are the following:

- analysis_tracing_type;
- design_pressure;
- design_speed;
- design_temperature;
- design_torque;
- lubrication_reference.

4.2.267.1 analysis_tracing_type

An analysis_tracing_type specifies the means utilized to impart a variation to a certain characteristic of the Mechanical_system_arrangement_segment. An analysis_tracing_type need not be given, but for a

given `Mechanical_system_arrangement_segment`, the value of this attribute overrides any global specification.

NOTE Types may include (but not limited to) vibration, noise, shock or temperature.

4.2.267.2 design_pressure

The `design_pressure` specifies the maximum allowable pressure (or pressure range) of the `Mechanical_component` (see 4.2.262) object which realises the `Mechanical_system_arrangement_segment` for which this `design_pressure` is defined. A `design_pressure` need not be specified for a given `Mechanical_system_arrangement_segment`, but when given, overrides any global specification of pressure for the `Mechanical_system_arrangement_segment`.

4.2.267.3 design_speed

The `design_speed` specifies the maximum allowable speed (or speed range) of the `Mechanical_component` (see 4.2.262) object which realises the `Mechanical_system_arrangement_segment` for which this `design_speed` is defined. A `design_speed` need not be specified for a given `Mechanical_system_arrangement_segment`, but when given, overrides any global specification of speed for the `Mechanical_system_arrangement_segment`.

4.2.267.4 design_temperature

The `design_temperature` specifies the maximum allowable temperature (or temperature range) of the `Mechanical_component` (see 4.2.262) object which realises the `Mechanical_system_arrangement_segment` for which this `design_temperature` is defined. A `design_temperature` need not be specified for a given `Mechanical_system_arrangement_segment`, but when given, overrides any global specification of temperature for the `Mechanical_system_arrangement_segment`.

4.2.267.5 design_torque

The `design_torque` specifies the maximum torque (or intended range of torque) of the `Mechanical_component` (see 4.2.262) object which realises the `Mechanical_system_arrangement_segment` for which this `design_torque` is defined. Torque is a measure of (rotational) mechanical power. A `design_torque` need not be specified for a given `Mechanical_system_arrangement_segment`, but when given, overrides any global specification of torque for the `Mechanical_system_arrangement_segment`.

4.2.267.6 lubrication_reference

The `lubrication_reference` specifies a reference to the document that details the lubrication requirements of the `Mechanical_component` (see 4.2.262). A `lubrication_reference` need not be given.

4.2.268 Mechanical_system_arrangement_segment_termination

A `Mechanical_system_arrangement_segment_termination` is one of two logical end-points of a `Mechanical_system_arrangement_segment` (see 4.2.267). Each `Mechanical_system_arrangement_segment_termination` is either: an `Arrangement_branch_termination` (see 4.2.3), an `Arrangement_to_arrangement_termination` (see 4.2.13), an `Arrangement_plant_item_termination` (see 4.2.11), or a `Mechanical_system_arrangement_termination` (see 4.2.269).

NOTE `Mechanical_system_arrangement` (see 4.2.266) objects are composed of individual `Mechanical_system_arrangement_segment` (see 4.2.267) objects. `Mechanical_system_arrangement_segment` objects are connected through `Mechanical_system_arrangement_segment_termination` objects.

ISO 10303-227:2005(E)

The data associated with a `Mechanical_system_arrangement_segment_termination` are the following:

- `torque_direction`.

4.2.268.1 torque_direction

The `torque_direction` specifies the local direction of power (torque) at the `Mechanical_system_arrangement_segment_termination`. A `torque_direction` need not be given for a specific `Mechanical_system_arrangement_segment_termination`. The value of the `torque_direction` attribute shall be one of the following:

- `forward`;
- `reverse`;
- `stuck`;
- `none`.

4.2.269 Mechanical_system_arrangement_termination

A `Mechanical_system_arrangement_termination` is a type of `Mechanical_system_arrangement_segment_termination` (see 4.2.268), that begins or ends a `Mechanical_system_arrangement` (see 4.2.266).

The data associated with a `Mechanical_system_arrangement_termination` are the following:

- `start_or_end`;
- `location`;
- `position_on_machine`.

4.2.269.1 start_or_end

The `start_or_end` specifies an enumerated value that defines the end of the machine on which the arrangement termination lies. A value of 'start' indicates the arrangement termination is further from the end conveying the mechanical power, and a value of 'end' indicates that the arrangement termination nearer to the end conveying the mechanical power.

4.2.269.2 position_on_machine

The `position_on_machine` specifies an indicator of the relationship between the point and the `Mechanical_component` (see 4.2.262) that will eventually satisfy it.

NOTE If the indicator is not specified, the assumed value is Centre Of Machine (COM).

4.2.269.3 location

The `location` specifies the relative distance in the X, Y, Z directions of the position of the end of the `Mechanical_system_arrangement` (see 4.2.266), from the global origin of the plant. The position may also be defined by where it connects to another by `Mechanical_system_arrangement`.

4.2.270 Mechanical_system_component

A `Mechanical_system_component` is a type of `Plant_item` (see 4.2.313) that is a constituent element of a `Mechanical_system` (see 4.2.265). Each `Mechanical_system_component` may be a `Mechanical_`

component (see 4.2.262). A `Mechanical_system_component` may have a set of physical size dimensions defined for it through the `Component_size_description` (see 4.2.93) application object.

The data associated with a `mechanical_system_component` are the following:

- `alignment_allowance`;
- `alignment_orientation`;
- `analysis_tracing_type`;
- `distributed_torque`;
- `drawing_sheet_number`;
- `filling_fluid`;
- `lubrication_name`;
- `operating_pressure`;
- `operating_speed`;
- `operating_temperature`;
- `vibration_amplitude`;
- `vibration_frequency`.

4.2.270.1 alignment_allowance

An `alignment_allowance` specifies the tolerance of the alignment of the `Mechanical_system_component` with respect to the overall `Mechanical_system` (see 4.2.265). For a given `Mechanical_system_component`, the value of this attribute overrides any global specification.

4.2.270.2 alignment_orientation

An `alignment_orientation` specifies the direction of the alignment of the `Mechanical_system_component` within the `Mechanical_system` (see 4.2.265). An `alignment_orientation` need not be specified for a specific `Mechanical_system_component`.

4.2.270.3 analysis_tracing_type

An `analysis_tracing_type` specifies the means utilized to impart a variation to a certain characteristic of the `Mechanical_system_component`. For a given `Mechanical_system_component`, the value of this attribute overrides any global specification.

NOTE Types may include (but not limited to) vibration, noise, shock or temperature.

4.2.270.4 distributed_torque

The `distributed_torque` specifies the torque delivered to the `Mechanical_system_component`. The torque is a measure of (rotational) mechanical power. A `distributed_torque` need not be specified for a given `Mechanical_system_component`. However, for a given `Mechanical_system_component`, the value of this attribute overrides any global specification.

ISO 10303-227:2005(E)

4.2.270.5 drawing_sheet_number

The `drawing_sheet_number` specifies an identifier of the document that provides the detailed drawing of the `Mechanical_system_component`. A `drawing_sheet_number` need not be specified for a `Mechanical_system_component`.

4.2.270.6 filling_fluid

A `filling_fluid` specifies the fluid that the `Mechanical_system_component` may contain in a reservoir or consume. A filling fluid may be a type of (but not limited to) fuel, oil, water, or a mixture. A `filling_fluid` need not be specified for a given `Mechanical_system_component`.

EXAMPLE A filling fluid for a ship's stern tube could be a mixture described as "60/40 Water-Oil mixture".

4.2.270.7 lubrication_name

A `lubrication_name` specifies the name of a substance used to lubricate the moving parts of a `Mechanical_system_component`. A `lubrication_name` need not be specified for a given `Mechanical_system_component`. However, for a given `Mechanical_system_component`, the value of this attribute overrides any global specification.

4.2.270.8 operating_pressure

The `operating_pressure` specifies the working pressure of the `Mechanical_system_component` within the given `Mechanical_system` (see 4.2.265) being operated for a specific `Design_arrangement_performance` (see 4.2.114). An `operating_pressure` need not be specified for a given `Mechanical_system_component`, but if present overrides any global specification of pressure.

4.2.270.9 operating_speed

The `operating_speed` specifies the working speed of the `Mechanical_system_component` within the given `Mechanical_system` (see 4.2.265) being operated for a specific `Design_arrangement_performance` (see 4.2.114). An `operating_speed` need not be specified for a given `Mechanical_system_component`, but if present overrides any global specification of speed.

4.2.270.10 operating_temperature

The `operating_temperature` specifies the working temperature of the `Mechanical_system_component` within the given `Mechanical_system` (see 4.2.265) being operated for a specific `Design_arrangement_performance` (see 4.2.114). An `operating_temperature` need not be specified for a given `Mechanical_system_component`, but if present overrides any global specification of temperature.

4.2.270.11 vibration_amplitude

The `vibration_amplitude` specifies the magnitude of the vibration experienced by the `Mechanical_system_component`. The magnitude, or amount, of displacement, velocity, or acceleration, is measured from the "at rest" value. The amplitude of a vibration signal can be expressed in terms of "peak" level, "peak-to-peak" level, or RMS level. It is somewhat of a de-facto standard that displacement is peak-to-peak, velocity is peak, and acceleration is RMS. A `vibration_amplitude` need not be specified for a given `Mechanical_system_component`, but if present overrides any global specification of vibration amplitude.

4.2.270.12 vibration_frequency

The vibration_frequency specifies how often the vibration is experienced by the Mechanical_system_component occurs. The frequency originates from the pitch of a sound generated by vibration within the Mechanical_system (see 4.2.265) and is usually measured in cycles per second (cps). A vibration_frequency need not be specified for a given Mechanical_system_component, but if present overrides any global specification of vibration_frequency.

4.2.271 Mitre_bend_pipe

A Mitre_bend_pipe is a type of Pipe (see 4.2.289) that is a change in Pipe direction accomplished through the use of two or more straight sections of Pipe that are beveled and joined on a line bisecting the angle of junction.

NOTE Figure 44 depicts a typical Mitre_bend_pipe.

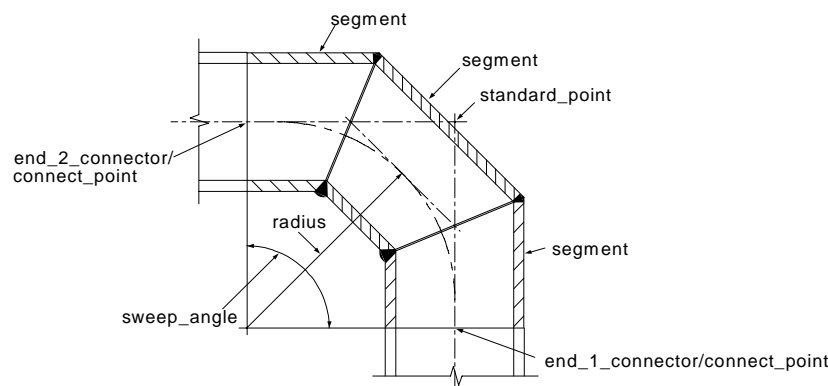


Figure 44 — Mitre_bend_pipe

The data associated with a Mitre_bend_pipe are the following:

- number_of_segments;
- radius;
- sweep_angle.

4.2.271.1 number_of_segments

The number_of_segments specifies the number of distinct straight sections of Pipe (see 4.2.289) that constitute the Mitre_bend_pipe.

4.2.271.2 radius

The radius specifies the measure of the radius of curvature for a Mitre_bend_pipe. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.271.3 sweep_angle

The sweep_angle specifies the angular measure at the centre of curvature from one end of the Mitre_bend_pipe to the other. It may be specified as a single value or as a range of values.

ISO 10303-227:2005(E)

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.272 Nipple

A Nipple is a type of Pipe (see 4.2.289) that is commonly acquired in prefabricated lengths and end preparations. Nipples are generally small in size in comparison to other pipes in a piping system.

NOTE Figure 45 depicts a typical Nipple.

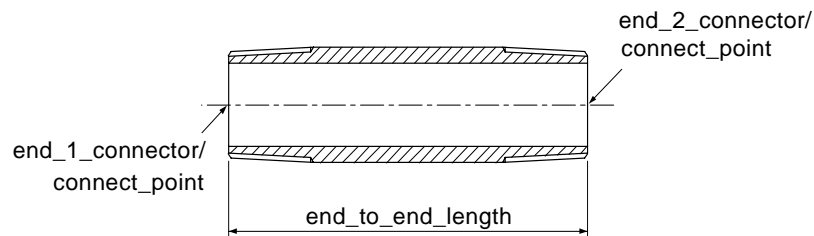


Figure 45 — Nipple

The data associated with a Nipple are the following:

— end_to_end_length.

4.2.272.1 end_to_end_length

The end_to_end_length specifies the external distance between the end-one face and the end-two face of the nipple. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.273 Node

A Node is a Functional_connector (see 4.2.157) that defines the positional placement for physical components along a Route (see 4.2.356).

4.2.274 Nozzle

A Nozzle is a type of Plant_item (see 4.2.313) that is designed to facilitate the connection of another Plant_item object to a piece of Equipment (see 4.2.132). A Nozzle is generally permanently affixed to, and protrudes from, the Equipment item and is most commonly used to connect Piping_components (see 4.2.293).

The data associated with Nozzle are the following:

— end_1_connector;

— end_2_connector.

4.2.274.1 end_1_connector

The end_1_connector connects to the Equipment in general.

4.2.274.2 end_2_connector

The end_2_connector connects to the pipe in general.

4.2.275 Nut

A Nut is a type of Bolt_and_nut_component (see 4.2.22) that is used to fasten two or more Plant_items (see 4.2.313) together. The Nut is an internally threaded fastener for Bolts (see 4.2.21) or screws.

4.2.276 Offline_instrument

An Offline_instrument is a type of Instrument (see 4.2.229) that monitors the conditions of a system but is not an integral element of the system.

EXAMPLE Local panels, analyzer houses, junction box are examples of Offline_instruments.

4.2.277 Olet

An Olet is a type of Fitting (see 4.2.147) welded onto a hole in the side of a Pipe (see 4.2.289) or other Fitting.

NOTE 1 The primary use of an Olet is for making small branch connections or connecting Instrument (see 4.2.229) lines to Piping_component (see 4.2.293) objects.

NOTE 2 Figure 46 depicts a typical butt-welded latrolet, a kind of Olet.

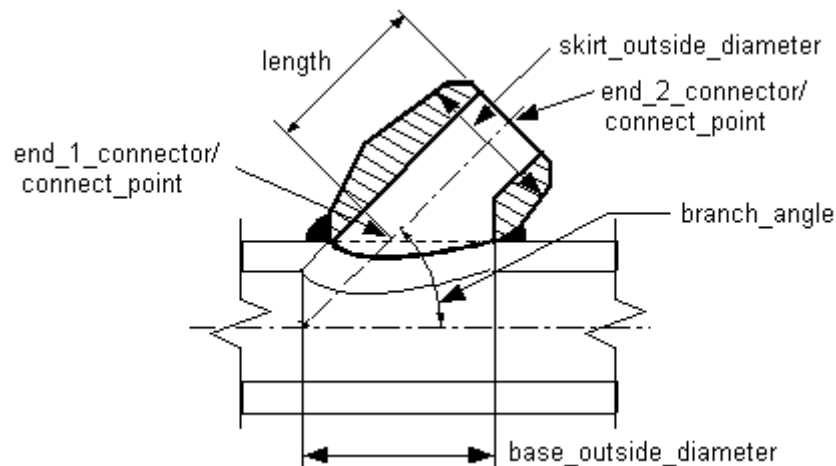


Figure 46 — Olet

EXAMPLE Other kinds of Olets include weldolets, sweepolets, elbowlets, and sockolets.

The data associated with an Olet are the following:

- base_outside_diameter;
- branch_angle;
- end_1_connector;
- end_2_connector;
- length;
- skirt_outside_diameter.

ISO 10303-227:2005(E)

4.2.277.1 base_outside_diameter

The `base_outside_diameter` specifies the external diameter of the Olet at the surface that mates with the straight-run Pipe (see 4.2.289). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.277.2 branch_angle

The `branch_angle` specifies the angle that the branch projects from the straight run. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.277.3 end_1_connector

The `end_1_connector` specifies the `Piping_connector` (see 4.2.295) that connects to the main Pipe (see 4.2.289) or Fitting (see 4.2.147).

4.2.277.4 end_2_connector

The `end_2_connector` specifies the `Piping_connector` (see 4.2.295) that connects to the branch line.

4.2.277.5 length

The `length` specifies the distance between the end-one face and the end-two face at the centreline of the Olet. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.277.6 skirt_outside_diameter

The `skirt_outside_diameter` specifies the maximum external diameter of the Olet (measured perpendicular to the Olet centreline). It may be specified as a single value or as a range of values.

NOTE 1 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

NOTE 2 The sides of an Olet are tapered (not vertical).

4.2.278 Orifice_flange

An `Orifice_flange` is a type of Flange (see 4.2.148) used to assemble an `Inline_instrument` (see 4.2.224) to meter the flow of liquids or gases in a pipe.

NOTE 1 `Orifice_flange` objects are used in pairs in conjunction with an `Orifice_plate` (see 4.2.279).

NOTE 2 Figure 47 depicts a typical `Orifice_flange` and `Orifice_plate` (see 4.2.279) configuration.

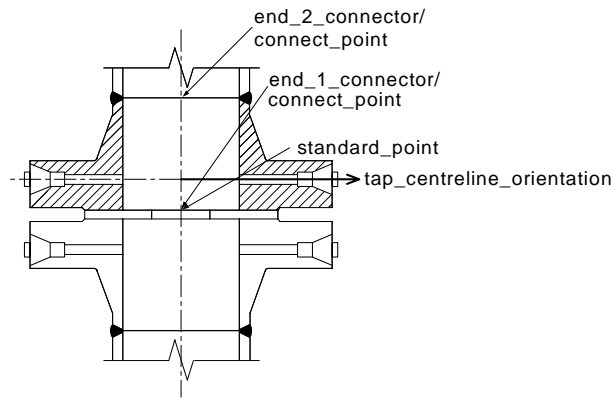


Figure 47 — Orifice_flange

The data associated with an Orifice_flange are the following:

- jacking_screw_orientation;
- tap;
- tap_centreline_orientation.

4.2.278.1 jacking_screw_orientation

The jacking_screw_orientation specifies the angular position of the threaded bolt holes in an Orifice_flange.

NOTE Jacking screws are used to separate the Orifice_flange objects sufficiently to remove or insert the Orifice_plate (see 4.2.279).

4.2.278.2 tap

The tap specifies the Piping_connector (see 4.2.295) designated as the tap.

4.2.278.3 tap_centreline_orientation

The tap_centreline_orientation specifies the orientation of the tap's centreline of the Orifice_flange. It is specified as direction values within the plant coordinate system.

4.2.279 Orifice_plate

An Orifice_plate is a type of Fitting (see 4.2.147) that is a disk with a calibrated hole that is placed in a Pipe (see 4.2.289) to measure flow.

NOTE Figure 48 depicts a typical Orifice_plate.

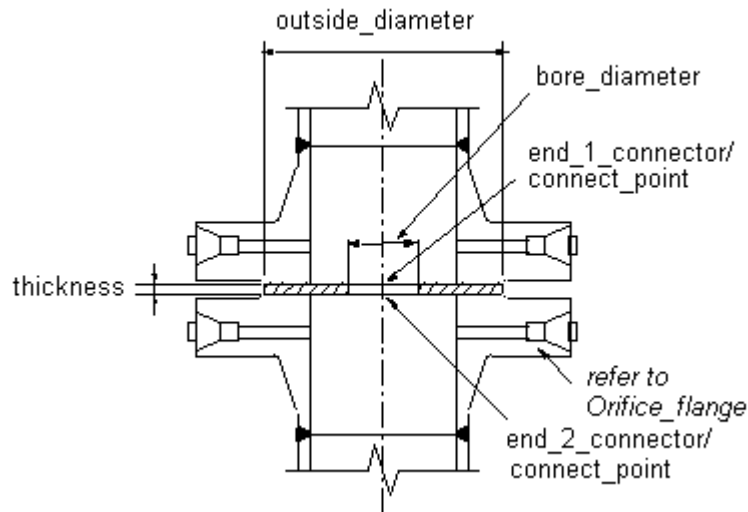


Figure 48 — Orifice_plate

The data associated with an Orifice_plate are the following:

- beta_ratio;
- bore_diameter;
- end_1_connector;
- end_2_connector;
- outside_diameter;
- thickness.

4.2.279.1 beta_ratio

The beta_ratio is defined as the diameter of the hole in the Orifice_plate divided by the inside diameter of the Pipe (see 4.2.289).

4.2.279.2 bore_diameter

The bore_diameter specifies the diameter of the hole in the Orifice_plate. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.279.3 end_1_connector

The end_1_connector specifies the Piping_connector (see 4.2.295) that is placed on the inlet side of the Orifice_plate.

4.2.279.4 end_2_connector

The end_2_connector specifies the Piping_connector (see 4.2.295) that is placed on the outlet side of the Orifice_plate.

4.2.279.5 outside_diameter

The `outside_diameter` specifies the external diameter of the `Orifice_plate`. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.279.6 thickness

The `thickness` specifies the perpendicular distance between the two faces of the `Orifice_plate`. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.280 Outline_shape

An `Outline_shape` is a type of `Shape_representation` (see 4.2.374) that is a 3D spatial volume that corresponds to the bounding surface features of a `Plant_item` (see 4.2.313).

NOTE Contrast with `Detail_shape` (see 4.2.116) and `Envelope_shape` (see 4.2.131). An `Outline_shape` is a simple geometric representation of `Plant_item` (see 4.2.313); this representation may be called a cartoon. The representation is a more accurate representation of the shape of the `Plant_item` than that provided by an `Envelope_shape`, but not nearly as precise as a `Detailed_shape`.

4.2.281 Outside_and_thickness

An `Outside_and_thickness` is a type of `Piping_size_description` (see 4.2.297) that describes the size by providing the outside diameter and thickness values.

The data associated with an `Outside_and_thickness` are the following:

- `outside_diameter`;
- `thickness`.

4.2.281.1 outside_diameter

The `outside_diameter` specifies the external diameter of the `Piping_system_component` (see 4.2.303) or `Piping_connector` (see 4.2.295). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.281.2 thickness

The `thickness` specifies the minimum distance between the inside and outside piping wall surfaces of the `Piping_system_component` (see 4.2.303) or `Piping_connector` (see 4.2.295). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.282 Pad

A `pad` is a type of `Piping_support` (see 4.2.301) that is attached firmly to the pipe, and prevents the pipe from deforming or squashing.

NOTE Figure 49 depicts a typical `Pad`.

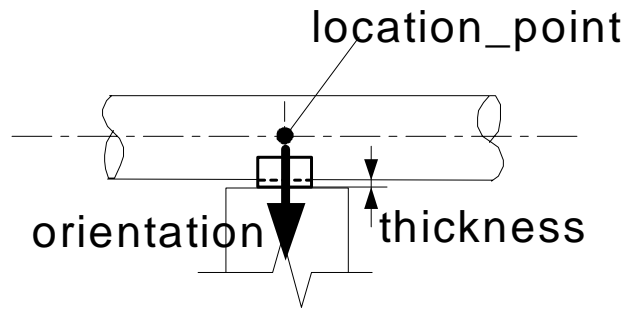


Figure 49 — Pad

The data associated with a Pad are the following:

- thickness.

4.2.282.1 thickness

The thickness specifies the distance between both faces of the Pad.

4.2.283 Paddle_blank

A Paddle_blank is a type of Blank (see 4.2.18) that reserves space between two Flange (see 4.2.148) objects and blocks the flow of material.

NOTE A Paddle_blank has a handle that permits removal or repositioning of the Paddle_blank. The name is derived from the fact that the Paddle_blank looks like a ping pong paddle.

The data associated with a Paddle_blank are the following:

- paddle_length;
- paddle_width.

4.2.283.1 paddle_length

The paddle_length specifies the length of the handle on the Paddle_blank. It may be specified as a single value or as a range of values.

NOTE 1 The length is measured from the outside diameter of the Blank (see 4.2.18).

NOTE 2 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.283.2 paddle_width

The paddle_width specifies the width of the handle on the Paddle_blank. It may be specified as a single value or as a range of values.

NOTE 1 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

NOTE 2 Figure 50 depicts a typical Paddle_blank.

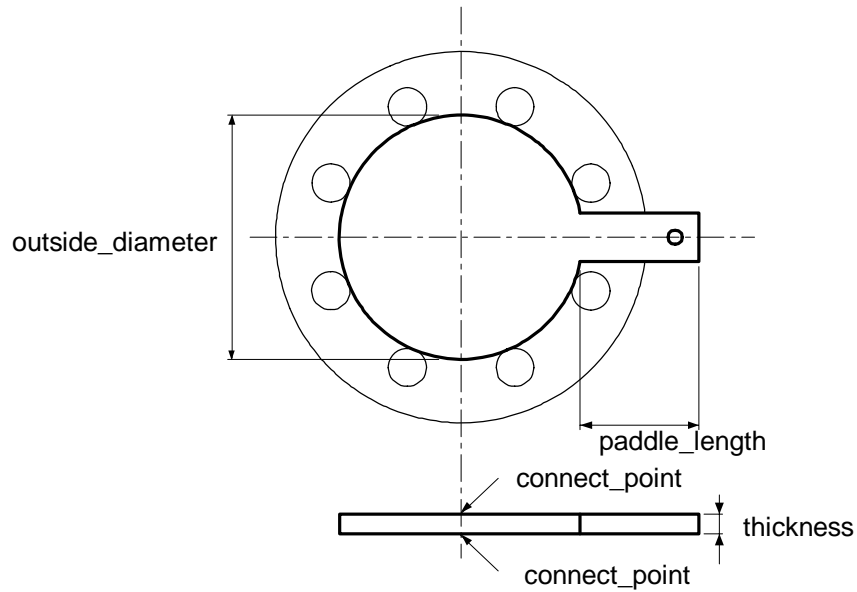


Figure 50 — Paddle_blank

4.2.284 Paddle_spacer

A Paddle_spacer is a type of Spacer (see 4.2.388) that reserves space between two Flange (see 4.2.148) objects and permits flow through the Pipe (see 4.2.289).

NOTE 1 A Paddle_spacer has a handle that permits its removal or repositioning. The inner diameter of the Paddle_spacer may be less than the diameter of the Pipe, thus altering flow.

NOTE 2 Figure 51 depicts a typical Paddle_spacer.

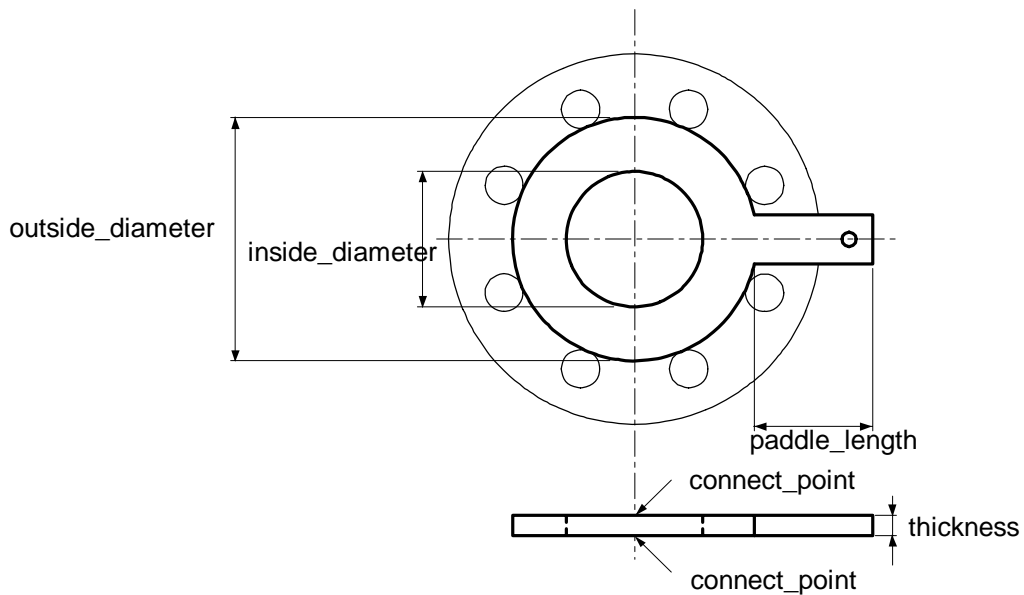


Figure 51 — Paddle_spacer

ISO 10303-227:2005(E)

The data associated with a Paddle_spacer are the following:

- inside_diameter;
- paddle_length;
- paddle_width.

4.2.284.1 inside_diameter

The inside_diameter specifies the diameter of the bore hole through the Paddle_spacer. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.284.2 paddle_length

The paddle_length specifies the length of the handle of the Paddle_spacer. It may be specified as a single value or as a range of values.

NOTE 1 The length is measured from the outside diameter of the Paddle_spacer.

NOTE 2 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.284.3 paddle_width

The paddle_width specifies the width of the handle of the Paddle_spacer. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.285 Perforated_cap

A Perforated_cap is a type of Cap (see 4.2.39) with a hole on its closing surface.

NOTE Figure 52 depicts a typical Perforated_cap.

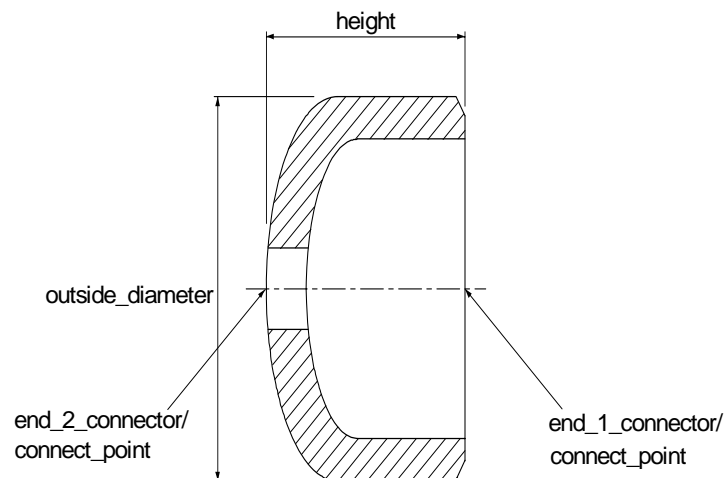


Figure 52 — Perforated_cap

The data associated with a Perforated_cap are the following:

- end_2_connector;
- hole_diameter.

4.2.285.1 end_2_connector

The end_2_connector specifies the Piping_connector (see 4.2.295) where the inside Pipe (see 4.2.289) of the jacketed piping connects to the Perforated_cap.

4.2.285.2 hole_diameter

The hole_diameter is the diameter of the hole in the Perforated_cap.

4.2.286 Perforated_plate

A Perforated_plate is a type of Plate (see 4.2.332) with a hole on its surface.

The data associated with a Perforated_plate are the following:

- end_2_connector;
- hole_diameter.

4.2.286.1 end_2_connector

The end_2_connector specifies the Piping_connector (see 4.2.295) where the inside Pipe (see 4.2.289) of the jacketed piping connects to the Perforated_plate.

4.2.286.2 hole_diameter

The hole_diameter is the diameter of the hole in the Perforated_plate.

4.2.287 Physical_connector

A Physical_connector is a type of Plant_item_connector_occurrence (see 4.2.319) that represents the physical aspects of the Plant_item_connector_occurrence.

4.2.288 Physical_design_view

A Physical_design_view is a type of Plant_item_design_view (see 4.2.321) that describes the physical and spatial characteristics of a Plant_item (see 4.2.313).

4.2.289 Pipe

A Pipe is a type of Piping_component (see 4.2.293) that is a hollow cylindrical conveyance, with a constant radius for the cross-sectional circle, for directing fluid, vapour, or particulate flow. Each Pipe may be one of the following: a Mitre_bend_pipe (see 4.2.271), a Nipple (see 4.2.272), a Straight_pipe (see 4.2.398), or a Swept_bend_pipe (see 4.2.415).

NOTE 1 In most cases, the Pipe will conform to the dimensional requirements for nominal pipe size as tabulated in national standards such as American National Standards Institute (ANSI) B36.10 and ANSI B36.19.

NOTE 2 This definition does not exclude tubing and flex hoses from consideration as Pipe.

ISO 10303-227:2005(E)

The data associated with a Pipe are the following:

- `additional_length`;
- `end_1_connector`;
- `end_2_connector`.

4.2.289.1 `additional_length`

The `additional_length` specifies the length of Pipe that is extended from the designed length of the Pipe to allow for installation error.

4.2.289.2 `end_1_connector`

The `end_1_connector` specifies the `Piping_connector` (see 4.2.295) that connects to one end of the Pipe.

4.2.289.3 `end_2_connector`

The `end_2_connector` specifies the `Piping_connector` (see 4.2.295) that connects to the other end of the Pipe.

4.2.290 `Pipe_closure`

A `Pipe_closure` is a type of `Fitting` (see 4.2.147) used to close an end of a `Piping_component` (see 4.2.293).

Each `Pipe_closure` may be one of the following: `Cap` (see 4.2.39), `Plug` (see 4.2.333), or `Plate` (see 4.2.332).

NOTE 1 `Blind_flange` (see 4.2.19) objects also perform the function of closing a `Piping_system` (see 4.2.302). However, industry terminology treats them differently and they have been defined as separate objects.

NOTE 2 Figure 53 depicts a typical butt-weld Pipe Cap, which is a kind of `Pipe_closure`.

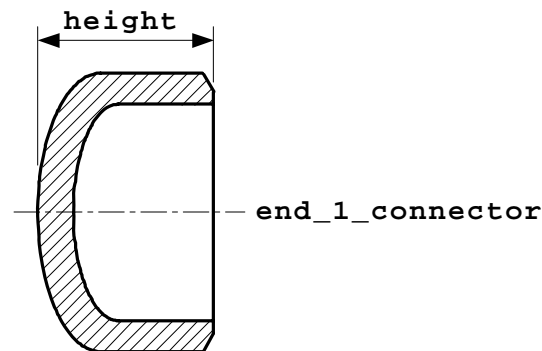


Figure 53 — Butt-weld Pipe Cap

The data associated with a `Pipe_closure` are the following:

- `end_1_connector`;
- `shape_type`.

4.2.290.1 end_1_connector

The `end_1_connector` specifies the `Piping_connector` (see 4.2.295) that connects to the `Pipe` (see 4.2.289).

4.2.290.2 shape_type

The `shape_type` specifies a designation that classifies a `Pipe_closure` based on its shape.

EXAMPLE Examples of the `shape_type` of a `Pipe_closure` include square and round.

4.2.291 Piping_assembly

A `Piping_assembly` is an assembled collection of piping `Plant_item` (see 4.2.313) objects.

The data associated with a `Piping_assembly` are the following:

— `piping_assembly_number`.

4.2.291.1 piping_assembly_number

The `piping_assembly_number` specifies an alphanumeric identifier assigned to the `Piping_assembly`.

NOTE A `Piping_assembly` may be defined to meet transportation, fabrication, or erection requirements.

4.2.292 Piping_assembly_assignment

A `Piping_assembly_assignment` is the identification of the `Piping_assembly` (see 4.2.291) that a `Piping_component` (see 4.2.293) belongs to.

4.2.293 Piping_component

A `Piping_component` is a type of `Piping_system_component` (see 4.2.303) whose primary function is the conveyance or control of fluid flow. Each `Piping_component` may be one of the following: a `Fitting` (see 4.2.147), a `Pipe` (see 4.2.289), or a `Valve` (see 4.2.434).

The data associated with a `Piping_component` are the following:

— `pmi_record`;

— `side_connector`;

— `standard_point`;

— `mill_sheet_number`.

4.2.293.1 pmi_record

The `pmi_record` specifies an identifier of the positive material identification document for a `Piping_component`.

4.2.293.2 side_connector

The `side_connector` specifies the `Piping_connector` (see 4.2.295) that is located between the two ends of the `Piping_component`. There may be more than one `side_connector` for a `Piping_component`.

ISO 10303-227:2005(E)

4.2.293.3 standard_point

The `standard_point` specifies an x, y, z coordinate position defined for the `Piping_component` that will position the `Piping_component` in the Plant (see 4.2.311) when overlaid on the Node (see 4.2.273).

4.2.293.4 mill_sheet_number

The `mill_sheet_number` specifies an identifier of the document that comes from the mill providing a record of the raw material that comprises the `Piping_component`.

4.2.294 Piping_component_inspection_record

A `Piping_component_inspection_record` is a collection of information that captures the result of an evaluation of an observed value for a characteristic of a `Piping_component` (see 4.2.293) against an expected, designed or prescribed value for that characteristic, as well as information to evaluate the acceptability of the observed value.

The data associated with a `Piping_component_inspection_record` are the following:

- `inspected_property_name`;
- `inspected_property_tolerance`;
- `inspected_property_measured_value`;
- `inspection_record_number`.

4.2.294.1 inspected_property_name

The `inspected_property_name` specifies the characteristic for which information is being recorded. The `inspected_property_name` may be one of the following:

- branch angle;
- centreline radius;
- end preparation shape;
- flange face type;
- flange inside diameter;
- flat side orientation;
- hole straddle centreline orientation;
- hub inside diameter;
- hub outside diameter;
- hub weld point diameter;
- hub weld point thickness;
- inside diameter;
- longitudinal welding seam orientation;
- nominal size;

- outside diameter;
- ovality;
- paddle orientation;
- pipe schedule;
- pressure rating;
- stand off;
- swept angle;
- tap orientation;
- thickness;
- threaded type;
- weld point inside diameter;
- weld point outside diameter;
- weld point thickness.

4.2.294.1.1 branch angle

branch angle specifies that the inspection is made on the angle that the branch projects from the straight run.

4.2.294.1.2 centreline radius

centreline radius specifies that the inspection is made on the radius of curvature for a bend pipe such as a Swept_bend_pipe (see 4.2.415) or a Mitre_bend_pipe (see 4.2.271).

4.2.294.1.3 end preparation shape

end preparation shape specifies that the inspection is made on the shape of the end of a Piping_component (see 4.2.293) which is welded.

4.2.294.1.4 flange face type

flange face type specifies that the inspection is made on the classification of the mating surface of a Flange (see 4.2.148).

4.2.294.1.5 flange inside diameter

flange inside diameter specifies that the inspection is made on the interior diameter of a Flange (see 4.2.148) at the working point.

4.2.294.1.6 flat side orientation

flat side orientation specifies that the inspection is made on the direction of the straight side of a Eccentric_reducer (see 4.2.125).

ISO 10303-227:2005(E)

4.2.294.1.7 hole straddle centreline orientation

hole straddle centreline orientation specifies that the inspection is made on the direction of the hole straddle centreline of a Flange (see 4.2.148), which is the line on the flange surface connected between the centre of the Flange and the middle point of two neighboring bolt holes.

4.2.294.1.8 hub inside diameter

hub inside diameter specifies that the inspection is made on the diameter of the opening at a hub.

4.2.294.1.9 hub outside diameter

hub outside diameter specifies that the inspection is made on the external diameter of a hub.

4.2.294.1.10 hub weld point diameter

hub weld point diameter specifies that the inspection is made on the outside diameter of the hub at the point of connection between a Flange (see 4.2.148) and a Pipe (see 4.2.289).

4.2.294.1.11 hub weld point thickness

hub weld point thickness specifies that the inspection is made on the thickness of the hub at the point of connection between a Flange (see 4.2.148) and a Pipe (see 4.2.289).

4.2.294.1.12 inside diameter

inside diameter specifies that the inspection is made on the interior diameter of a Piping_component (see 4.2.293) at the working point.

4.2.294.1.13 longitudinal welding seam orientation

longitudinal welding seam orientation specifies that the inspection is made on the direction of the seam at which a Straight_pipe (see 4.2.398) is welded parallel to the centreline of the Straight_pipe.

4.2.294.1.14 nominal size

nominal size specifies that the inspection is made whether the size of a Piping_component (see 4.2.293) or its Piping_connector (see 4.2.295) conforms to the designated standard size.

4.2.294.1.15 outside diameter

outside diameter specifies that the inspection is made on the external diameter of a Piping_component (see 4.2.293).

4.2.294.1.16 ovality

ovality specifies that the inspection is made on the roundness of a Piping_component (see 4.2.293) or its Piping_connector (see 4.2.295).

4.2.294.1.17 paddle orientation

paddle orientation specifies that the inspection is made on the direction of the handle that some of the Piping_components (see 4.2.293), such as Paddle_blank (see 4.2.283) or Paddle_spacer (see 4.2.284) has.

4.2.294.1.18 pipe schedule

pipe schedule specifies that the inspection is made whether the wall thickness and external diameter of a Pipe (see 4.2.289) conform to the designated standard dimensions.

4.2.294.1.19 pressure rating

pressure rating specifies that the inspection is made whether the nominal pressure of a Piping_component (see 4.2.293) or a Piping_connector (see 4.2.295) conforms to the designated pressure.

4.2.294.1.20 stand off

stand off specifies that the inspection is made on the distance between the face of a Slip_on_flange (see 4.2.383) and the end of a Pipe (see 4.2.289) or a Fitting (see 4.2.147) that is inserted into the Slip_on_flange.

4.2.294.1.21 swept angle

swept angle specifies that the inspection is made on the subtended angle of circular arc of a Swept_bend_pipe (see 4.2.415) or a Mitre_bend_pipe (see 4.2.271).

4.2.294.1.22 tap orientation

tap orientation specifies that the inspection is made on the direction of the treaded hole drilled into Piping_components (see 4.2.293)

EXAMPLE An Orifice_flange (see 4.2.278) is an example of such a Piping_component.

4.2.294.1.23 thickness

thickness specifies that the inspection is made on the distance between the inside and outside surfaces of a Piping_component (see 4.2.293) or a Piping_connector (see 4.2.295).

4.2.294.1.24 threaded type

threaded type specifies that the inspection is made on the classification of the screw thread at the end of a Piping_connector (see 4.2.295) whose end engagement type is Threaded (see 4.2.418).

4.2.294.1.25 weld point inside diameter

weld point inside diameter specifies that the inspection is made on the interior diameter at a welded connection.

4.2.294.1.26 weld point outside diameter

weld point outside diameter specifies that the inspection is made on the external diameter at a welded connection.

4.2.294.1.27 weld point thickness

weld point thickness specifies that the inspection is made on the distance between the inside and outside surfaces at a welded connection.

ISO 10303-227:2005(E)

4.2.294.2 inspected_property_tolerance

The inspected_property_tolerance specifies the acceptable deviation for the measured result of the inspection.

4.2.294.3 inspected_property_measured_value

The inspected_property_measured_value specifies the recorded result of the inspection.

4.2.294.4 inspection_record_number

The inspection_record_number specifies an alphanumeric identifier assigned to the Piping_component_inspection_record.

4.2.295 Piping_connector

A Piping_connector is a type of Plant_item_connector (see 4.2.318) that is intended to establish a material flow connection between two Plant_item (see 4.2.313) objects. Each Piping_connector may be one of the following: a Butt_weld (see 4.2.30), a Clamped (see 4.2.92), a Flanged (see 4.2.149), a Pressure_fit (see 4.2.338), a Socket (see 4.2.385), a Stub_in (see 4.2.404), or a Threaded (see 4.2.418). The end_type of each Piping_connector may be one of the following: a Branch_hole (see 4.2.26), a Female_end (see 4.2.145), a Flanged_end (see 4.2.150), a Flared_end (see 4.2.151), a Grooved_end (see 4.2.166), or a Male_end (see 4.2.257).

The data associated with a Piping_connector are the following:

- connector_flow_direction;
- connector_specifications;
- name.

4.2.295.1 connector_flow_direction

The connector_flow_direction specifies the direction fluid moves past the Plant_item (see 4.2.313).

The value of connector_flow_direction is one of the following:

- both;
- inlet;
- outlet.

4.2.295.1.1 both

Fluid may flow in either direction past the Piping_connector.

4.2.295.1.2 inlet

Fluid moves into the Plant_item past the Piping_connector.

4.2.295.1.3 outlet

Fluid moves out of the Plant_item past the Piping_connector.

4.2.295.2 connector_specifications

The `connector_specifications` identifies the specifications associated with the `Piping_connector`. There may be more than one `connector_specifications` for a `Piping_connector`.

EXAMPLE Examples of the identified `connector_specifications` include insulation specification, end preparation specification, and thread specification.

4.2.295.3 name

The `name` specifies a textual label given to the `Piping_connector`.

4.2.296 Piping_connector_service_characteristic

A `Piping_connector_service_characteristic` holds the conditions that the `Piping_connector` (see 4.2.295) is designed to withstand.

The data associated with a `Piping_connector_service_characteristic` are the following:

- `design_pressure`;
- `design_temperature`.

4.2.296.1 design_pressure

The `design_pressure` specifies the maximum allowable pressure at the `Piping_connector` (see 4.2.295). It may be specified as a single value or as a range of values.

NOTE 1 This value is normally created as part of doing 3D analysis of the piping system design.

NOTE 2 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.296.2 design_temperature

The `design_temperature` specifies the maximum allowable temperature at the `Piping_connector` (see 4.2.295). It may be specified as a single value or as a range of values.

NOTE 1 This value is normally created as part of doing 3D analysis of the piping system design.

NOTE 2 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.297 Piping_size_description

A `Piping_size_description` is used to explain or summarize the physical size of a `Piping_connector` (see 4.2.295) or `Piping_system_component` (see 4.2.303), based on a set of dimensional characteristics, and an optional dimensional standard. Each `Piping_size_description` is either an `Inside_and_thickness` (see 4.2.226), an `Outside_and_thickness` (see 4.2.281), a `Pressure_class` (see 4.2.337), or a `Schedule` (see 4.2.357).

NOTE A `Piping_size_description` is used to specify the size of a `Piping_component` (see 4.2.293) as a whole (where the size is constant over the extent of the component) or to each individual connector of the `Piping_component` (where the sizes of each different connector differ.)

The data associated with a `Piping_size_description` are the following:

- `dimensional_standard`;
- `ovality_allowance`.

ISO 10303-227:2005(E)

4.2.297.1 dimensional_standard

The `dimensional_standard` specifies a designation for the standard used to dimension the Pipe (see 4.2.289). The `dimensional_standard` need not be specified for a particular `Piping_size_description`.

EXAMPLE Examples of `dimensional_standard` designations include ANSI and DIN.

4.2.297.2 ovality_allowance

The `ovality_allowance` specifies the acceptable deviation or tolerance allowed in the 'out-of-roundness' of the `Piping_connector` (see 4.2.295) or `Piping_system_component` (see 4.2.303). In other words, it specifies how much the `Piping_connector` or `Piping_system_component` can deviate from a perfect circle. The `ovality_allowance` need not be specified for a particular `Piping_size_description`.

4.2.298 Piping_specification

A `Piping_specification` is a specification of conditions such as pressure, material, and corrosion allowance that must be met in a `Piping_system_line_segment` (see 4.2.305) and may include a list of `Piping_component` (see 4.2.293) objects by size range that meet these conditions.

NOTE The `Piping_specification` is used in Spec-driven design, where the user specifies the size and component type, and the `Piping_specification` is used to look-up the correct component characteristics. The components listed in the `Piping_specification` may reference component catalogues.

The data associated with a `Piping_specification` are the following:

- `name`;
- `owner`;
- `piping_specification_id`;
- `service_description`.

4.2.298.1 name

The `name` specifies a textual label given to the `Piping_specification`.

4.2.298.2 owner

The `owner` specifies the designation given to the person or organization that created and maintains the `Piping_specification`.

4.2.298.3 piping_specification_id

The `piping_specification_id` specifies a unique identifier for the `Piping_specification`. `Piping_specification_id` is required for each `Piping_specification`.

4.2.298.4 service_description

The `service_description` specifies a textual explanation or summary of the process stream conditions that are supported by the `Plant_item` (see 4.2.313) objects described in the `Piping_specification`.

4.2.299 Piping_spool

A Piping_spool is an assembly of Piping_components (see 4.2.293) and applicable Plant_items (see 4.2.313) such as Piping_support (see 4.2.301) attachment to be shop fabricated and physically connected into one item.

The data associated with a Piping_spool are the following:

- tag_number;
- piping_type;
- temporary_flag.

4.2.299.1 tag_number

The tag_number is a unique identification of the Piping_spool.

4.2.299.2 piping_type

The piping_type specifies whether a Piping_spool is comprised of single or jacketed piping.

The value of piping_type is one of the following:

- jacketed;
- single.

4.2.299.2.1 jacketed

A jacketed Piping_spool has inner piping and outer piping.

4.2.299.2.2 single

A single Piping_spool has no jacket.

4.2.299.3 temporary_flag

The temporary flag specifies whether the Piping_spool is a temporary spool, usually having flanged connectors, that is to be replaced with a different Piping_component (see 4.2.293) at some point in the construction of the Plant (see 4.2.311).

4.2.300 Piping_spool_inspection_record

A Piping_spool_inspection_record is a collection of information that captures the result of an evaluation of an observed value for a characteristic of a Piping_spool (see 4.2.299) against an expected, designed or prescribed value for that characteristic, as well as information to evaluate the acceptability of the observed value.

The data associated with a Piping_spool_inspection_record are the following

- inspected_property_name;
- inspected_property_tolerance;
- inspected_property_measured_value;
- inspection_record_number.

ISO 10303-227:2005(E)

4.2.300.1 inspected_property_name

The inspected_property_name specifies the characteristic for which information is being recorded. The inspected_property_name may be one of the following:

- end protection;
- high voltage for pin hole detective;
- leak test;
- lining thickness;
- marking;
- packed figure;
- piping spool configuration inspection;
- pressure test;
- surface painting;
- visual examination.

4.2.300.1.1 end protection

end protection specifies that the inspection is made for checking whether proper protection is made at both ends of a Piping_spool (see 4.2.299).

4.2.300.1.2 high voltage for pin hole detective

high voltage for pin hole detective specifies that the inspection is made for checking, using electric spark tester, whether the lining of the coated material is proper inside pipe or at flange surface.

4.2.300.1.3 leak test

leak test specifies that the inspection is carried out by applying gaseous pressure to the inside of a Piping_spool (see 4.2.299) for inspecting leakage.

4.2.300.1.4 lining thickness

lining thickness specifies that the inspection is made on the thickness of the coated material inside pipe or at flange surface.

4.2.300.1.5 marking

marking specifies that the inspection is made for checking whether proper identification letters are painted, stenciled or stamped as specified on the outer surface of a Piping_spool (see 4.2.299).

4.2.300.1.6 packed figure

packed figure specifies that the inspection is made for checking whether a Piping_spool (see 4.2.299) is properly packed for shipping.

4.2.300.1.7 piping spool configuration inspection

piping spool configuration inspection specifies that the inspection is made for checking whether correct Piping_components (see 4.2.293) are properly assembled to a Piping_spool (see 4.2.299) as designed.

4.2.300.1.8 pressure test

pressure test specifies that the inspection is carried out by applying hydraulic or gaseous pressure to the inside of a Piping_spool (see 4.2.299) for inspecting pressure-resistance.

4.2.300.1.9 surface painting

surface painting specifies that the inspection is made for checking whether the outer surface of a Piping_spool (see 4.2.299) is painted properly as specified.

4.2.300.1.10 visual examination

visual examination specified that the inspection is made for checking the assembled figure and defects of a Piping_spool (see 4.2.299) by human eye.

4.2.300.2 inspected_property_tolerance

The inspected_property_tolerance specifies the acceptable deviation for the measured result of the inspection.

4.2.300.3 inspected_property_measured_value

The inspected_property_measured_value specifies the recorded result of the inspection.

4.2.300.4 inspection_record_number

The inspection_record_number specifies an alphanumeric identifier assigned to the Piping_spool_inspection_record.

4.2.301 Piping_support

A Piping_support is a type of Support_component (see 4.2.409) that is fabricated onto the pipe, and supports the Piping_spool (see 4.2.299) when it is installed into the Plant (see 4.2.311).

Types of Piping_supports include: Base_elbow_support (Adjustable and Non-adjustable) (see 4.2.15), Base_line_support (see 4.2.16), Dummy_leg (see 4.2.120), Eccentric_base_elbow_support (see 4.2.121), Lug (see 4.2.256), Shoe (see 4.2.378), Stopper (see 4.2.397), and Trunnion (see 4.2.430).

The data associated with a Piping_support are the following:

- end_1_connector;
- location_point;
- orientation.

4.2.301.1 end_1_connector

The end_1_connector specifies the Plant_item_connector (see 4.2.318) on the Piping_support to the pipe.

4.2.301.2 location_point

The location_point is a standard point on Piping_component (see 4.2.293) at which the Piping_support is attached.

EXAMPLE When a Base_elbow_support (see 4.2.15) is attached to an Elbow (see 4.2.126), the location_point is the centre of the Elbow, where the centrelines of two arms of Elbow intersect. When a Base_line_support (see 4.2.16)

ISO 10303-227:2005(E)

is attached to a `Straight_pipe` (see 4.2.398), the `location_point` is the intersection of the centrelines of the `Straight_pipe` and the main body of the `Base_line_support`.

4.2.301.3 orientation

The orientation specifies a unit vector in the direction of the main part of the `Piping_support`. The vector defines the layout of the `Piping_support`.

4.2.302 Piping_system

A `Piping_system` is a type of `Plant_system` (see 4.2.329) that is a system of interconnected `Plant_item` (see 4.2.313) objects that convey fluid, vapour, or particulate flow throughout a plant. Each `Piping_system` may be a `Line_less_piping_system` (see 4.2.240).

EXAMPLE Methods of flow conveyance through the `Piping_system` include mechanical, gravitational, and electromagnetic induction.

The data associated with a `Piping_system` are the following:

- `code`;
- `description`.

4.2.302.1 code

The `code` specifies the name of the specification to which the `Piping_system` needs to conform.

4.2.302.2 description

The `description` specifies a textual explanation or summary of the `Piping_system`.

4.2.303 Piping_system_component

A `Piping_system_component` is a type of `Plant_item` (see 4.2.313) that is a constituent element of a `Piping_system` (see 4.2.302). Each `Piping_system_component` may be one of the following: an `Inline_equipment` (see 4.2.223), an `Inline_instrument` (see 4.2.224), a `Piping_component` (see 4.2.293), a `Process_ducting` (see 4.2.339), a `Reinforcing_component` (see 4.2.349) or a `Specialty_item` (see 4.2.390).

The data associated with a `Piping_system_component` are the following:

- `coating_reference`;
- `corrosion_allowance`;
- `heat_tracing_type`;
- `lining`.

4.2.303.1 coating_reference

The `coating_reference` specifies a reference to the specification of the substances used to coat the surfaces of a `Piping_system_component`. For a given `Piping_system_component`, the value of this attribute overrides any global specification.

4.2.303.2 corrosion_allowance

The `corrosion_allowance` specifies the depth that corrosion may encroach below the surface of a `Piping_system_component` before action is required. For a given `Piping_system_component`, the value of this attribute overrides any global specification. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values. The depth of the corrosion may vary over the extent of the `Piping_component` (see 4.2.293).

4.2.303.3 heat_tracing_type

The `heat_tracing_type` specifies the means utilized to impart a temperature increase to the `Piping_system_component` by an external wrapping or coiling. For a given `Piping_system_component`, the value of this attribute overrides any global specification.

NOTE Types may include electrical or steam.

4.2.303.4 lining

The `lining` specifies a description of the substances used to line the internal surfaces of a `Piping_system_component`.

4.2.304 Piping_system_line

A `Piping_system_line` is a logical component of a `Piping_system` (see 4.2.302) and is composed of a collection of interconnected `Piping_system_line_segment` (see 4.2.305) objects.

The data associated with a `Piping_system_line` are the following:

- `line_number`;
- `P_and_I_reference`.

4.2.304.1 line_number

The `line_number` specifies an alphanumeric identifier assigned to the `Piping_system_line` and can be used to uniquely define the `Piping_system_line`. `Line_number` is required for each `Piping_system_line`.

EXAMPLE A1A-PX-100-4-150, is a coded number that identifies the `Piping_system_line` and the main design criteria - specification = A1A, process = PX, sequence number = 100, line size = 4, and pressure rating = 150.

4.2.304.2 P_and_I_reference

The `P_and_I_reference` specifies the piping and instrumentation diagram that depicts the `Piping_system_line`.

4.2.305 Piping_system_line_segment

A `Piping_system_line_segment` is an element of a `Piping_system_line` (see 4.2.304). A `Piping_system_line_segment` terminates at a functional `Plant_item_connector` (see 4.2.318), a tap into a `Piping_system_line`, a point where the stream diverges or converges, a vent, or a drain.

The data associated with a `Piping_system_line_segment` are the following:

- `coating_reference`;
- `corrosion_allowance`;

ISO 10303-227:2005(E)

- design_pressure;
- design_temperature;
- elevation;
- heat_tracing_type;
- line_size.

4.2.305.1 coating_reference

The coating_reference specifies a reference to the specification that details the coating requirements of the Piping_component (see 4.2.293) objects associated with the Piping_system_line (see 4.2.304).

4.2.305.2 corrosion_allowance

The corrosion_allowance specifies the depth that corrosion may encroach below the surface of components on a Piping_system_line_segment before action is required. For a given Piping_system_component (see 4.2.303), the value of this attribute overrides any global specification.

4.2.305.3 design_pressure

The design_pressure specifies the requirement for maximum allowable pressure of the Piping_component (see 4.2.293) objects associated with the Piping_system_line (see 4.2.304).

4.2.305.4 design_temperature

The design_temperature specifies the requirement for maximum allowable temperature of the Piping_component (see 4.2.293) objects associated with the Piping_system_line (see 4.2.304).

4.2.305.5 elevation

The elevation specifies the distance above sea level that the piping assigned to the line should exist.

4.2.305.6 heat_tracing_type

The heat_tracing_type specifies the heating method used to maintain temperature in the Piping_system_line (see 4.2.304).

EXAMPLE Heating method designations include steam tracing and electrical.

4.2.305.7 line_size

The line_size specifies the intended diameter of the piping to be selected to satisfy the Piping_system_line (see 4.2.304). The line_size need not be specified for a particular Piping_system_line_segment (see 4.2.305) where the Piping_system_line_segment corresponds to one Piping_system_component (see 4.2.303).

NOTE When the line_size is not specified, it is either ambiguous due to the nature of the Piping_system_component such as a Reducer (see 4.2.345), or derivable from one or more of the connecting Piping_system_line_segments.

4.2.306 Piping_system_line_segment_termination

A Piping_system_line_segment_termination is one of two logical end-points of a Piping_system_line_segment (see 4.2.305). Each Piping_system_line_segment_termination is either: a Line_branch_-

termination (see 4.2.239), a `Line_to_line_termination` (see 4.2.248), a `Line_plant_item_termination` (see 4.2.246), or `Piping_system_line_termination` (see 4.2.307).

NOTE `Piping_system_line` (see 4.2.304) objects are composed of individual `Piping_system_line_segment` (see 4.2.305) objects. `Piping_system_line_segment` objects are connected through `Piping_system_line_segment_termination` objects.

The data associated with a `Piping_system_line_segment_termination` are the following:

— `flow_direction`.

4.2.306.1 flow_direction

The `flow_direction` specifies the direction of material flow at the `Piping_system_line_segment_termination`. The value of the `flow_direction` attribute shall be one of the following:

— `both`;

— `in`;

— `not_specified`;

— `out`.

4.2.306.1.1 both

material may flow in either direction past the `Piping_system_line_segment_termination`.

4.2.306.1.2 in

material flows into the line segment past the `Piping_system_line_segment_termination`.

4.2.306.1.3 not_specified

the direction of material flow past the `Piping_system_line_segment_termination` is not specified.

4.2.306.1.4 out

material flows out of the line segment past the `Piping_system_line_segment_termination`.

4.2.307 Piping_system_line_termination

A `Piping_system_line_termination` is a type of `Piping_system_line_segment_termination` (see 4.2.306) that begins or ends a `Piping_system_line` (see 4.2.304).

The data associated with a `Piping_system_line_termination` are the following:

— `location`;

— `position_on_pipe`;

— `start_or_end`.

4.2.307.1 location

The `location` specifies the relative distance in the X, Y, Z directions of the position of the end of the `Piping_system_line` (see 4.2.304), from the plant origin. The `location` position may also be defined by where it connects to an upstream piece of Equipment (see 4.2.132) or `Piping_system_line`.

ISO 10303-227:2005(E)

4.2.307.2 position_on_pipe

The `position_on_pipe` specifies an indicator of the relationship between the point and the `Piping_`-component (see 4.2.293) that will eventually satisfy it.

NOTE If the indicator is not specified, the assumed value is Centre Of Pipe (COP).

EXAMPLE A `position_on_pipe` may be COP or BOP indicating that the location of the `Piping_system_line_`-termination location is on the centre or bottom of the pipe.

4.2.307.3 start_or_end

The `start_or_end` specifies an enumerated value that defines the side of the pipe on which the line termination lies. A value of 'start' indicates the line termination is on the upstream end, and a value of 'end' indicates that the line termination is on the downstream end.

4.2.308 Plain_washer

A `Plain_washer` is a type of `Washer` (see 4.2.436). The shape of the `Plain_washer` is a thin flat ring.

The data associated with a `Plain_washer` are the following:

- `thickness`;
- `outside_diameter`.

4.2.308.1 thickness

The `thickness` specifies the distance between two faces of the `Plain_washer`. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.308.2 outside_diameter

The `outside_diameter` specifies the external diameter of the `Plain_washer`. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.309 Planned_physical_plant

A `Planned_physical_plant` is the set of physical and spatial characteristics that a `Plant` (see 4.2.311) can have, including siting, location, and orientation.

NOTE A `Planned_physical_plant` can also be the basis for locating other items such as `Plant_item` (see 4.2.313) objects, `Plant_item_location` (see 4.2.325).

4.2.310 Planned_physical_plant_item

A `Planned_physical_plant_item` is a type of `Plant_item_instance` (see 4.2.322) that is intended to have physical existence in the real world and that has been used or instanced in a design.

NOTE Additionally, a `Planned_physical_plant_item` is always intended to be 'physical' as opposed to purely volumetric. In general, this means that anything that would pose a hard physical impediment to a kick (e.g., a pump) is a physical item, and anything that does not (e.g., an escape route or the water in a cooling pond) is purely volumetric.

The data associated with a `Planned_physical_plant_item` are the following:

- `stock_code`;
- `global_unambiguous_identifier`.

4.2.310.1 `stock_code`

The `stock_code` is an identifier of an in-stock item that may be necessary to be included in a piece of shop fabricated piping.

4.2.310.2 `global_unambiguous_identifier`

A `global_unambiguous_identifier` is a unique, persistent identifier which uniquely identifies the product data.

The data associated with a `global_unambiguous_identifier` are the following:

- `id`.

4.2.310.2.1 `id`

The `id` specifies a unique, persistent identifier generated by the company that creates the product data.

4.2.311 Plant

A Plant is a portion of an installation (or the entire installation) required to operate to produce products. Each Plant may be one of the following: a `Manufacturing_line` (see 4.2.258), a `Train` (see 4.2.423), or a `Unit` (see 4.2.432). The z-axis of the local coordinate system of the Plant shall be considered the elevation of the coordinate space.

NOTE `Manufacturing_lines`, `Trains`, and `Units`, may be considered as sub-plants of a Plant because they perform all of the same functions as a plant and may be considered as a plant. They are distinct, they produce products based on input resources, and they are (relatively) independent of other plant/sub-plants. `Trains`, for instance, provide duplicate functionality of one another in case of failure.

The data associated with a Plant are the following:

- `definition_coordinate_system`;
- `description`;
- `name`;
- `operator`;
- `owners`;
- `plant_id`;
- `plant_type`.

4.2.311.1 `definition_coordinate_system`

The `definition_coordinate_system` holds the origin and axes of the Plant that serve as the basis for the location and orientation of `Plant_items` (see 4.2.313) and subplants in the Plant.

ISO 10303-227:2005(E)

4.2.311.2 description

The description specifies a textual explanation or summary of the Plant. The description need not be specified for a particular Plant. There may be more than one description for a Plant.

4.2.311.3 name

The name specifies a textual label given to the Plant.

4.2.311.4 operator

The operator specifies the name of the organization(s) responsible for the operation of the Plant. For a given Plant, the operator need not be specified.

4.2.311.5 owners

The owners specifies the name of the organization(s) that owns the Plant. For a given Plant, the owners need not be specified.

4.2.311.6 plant_id

The plant_id specifies a unique identifier for the Plant. Plant_id is required for each Plant.

4.2.311.7 plant_type

Plant_type specifies a designation that classifies a Plant based on its physical and functional characteristics.

EXAMPLE Examples of plant_type include: beverage plant, pharmaceutical plant, power plant, offshore oil facility, and ship.

4.2.312 Plant_csg_shape_representation

A Plant_csg_shape_representation is a type of Shape_representation (see 4.2.374). This requirement is for a "pure csg" shape, and a complex csg will be accomplished using the hybrid representation.

4.2.313 Plant_item

A Plant_item is an identifiable item that has a shape and that may be used as a component of the Plant (see 4.2.311). The Plant_item need not be a physical item, but may be an allocation of space reserved for a purpose. Each Plant_item is either: a Plant_item_definition (see 4.2.320) or a Plant_item_instance (see 4.2.322). Each Plant_item may be one of the following: a Ducting_component (see 4.2.118), an Electrical_component (see 4.2.127), an Equipment (see 4.2.132), an Hvac_component (see 4.2.176), an Instrumentation_and_control_component (see 4.2.230), an Insulation (see 4.2.232), a Piping_system_component (see 4.2.303), a Structural_component (see 4.2.401), or a Support_component (see 4.2.409).

The data associated with a Plant_item are the following:

- description;
- name;
- plant_item_id;
- status;

— type.

4.2.313.1 description

The description specifies a textual explanation or summary of the Plant_item.

4.2.313.2 name

The name specifies a textual label given to the Plant_item.

4.2.313.3 plant_item_id

The plant_item_id specifies a unique identifier for the Plant_item. Plant_item_id is required for each Plant_item.

4.2.313.4 status

The status specifies the state of the Plant_item within the life cycle of the Plant (see 4.2.311).

4.2.313.5 type

The type specifies a designation that classifies a Plant_item based on its physical and functional characteristics.

4.2.314 Plant_item_centreline

A Plant_item_centreline is a type of Reference_geometry (see 4.2.348) that is a centre of symmetry of an aspect of the shape of the Plant_item (see 4.2.313).

4.2.315 Plant_item_collection

A Plant_item_collection is an association that indicates that a component Plant_item (see 4.2.313) is part of an aggregate Plant_item. Each Plant_item_collection may be a Connected_collection (see 4.2.98). Each Plant_item_collection may be a Hierarchically_organized_collection (see 4.2.170).

EXAMPLE A Plant_item_collection may be defined for a kit, where the members are not connected, or for an assembly, where the members are connected. Collections that are not hierarchically organized may be physical systems where a single component plays a role in multiple systems, such as a gauge.

The data associated with a Plant_item_collection are the following:

- location_and_orientation;
- usage_type.

4.2.315.1 location_and_orientation

The location_and_orientation specifies the relative position and orientation of the Plant_item (see 4.2.313) within the Plant_item_collection. The location_and_orientation need not be specified for a particular Plant_item_collection.

4.2.315.2 usage_type

The usage_type specifies the purpose for the association defined by the Plant_item_collection. The usage_type may be one of the following:

ISO 10303-227:2005(E)

- BOM;
- compound bend pipe;
- source identification;
- assembly-component.

4.2.315.2.1 BOM

The value BOM specifies that the Plant_item_collection is being used to collect Plant_items (see 4.2.313) that represent a bill of materials for the Plant_item identified as the group.

4.2.315.2.2 compound bend pipe

The value compound bend pipe specifies that the Plant_item_collection is being used to collect Plant_items (see 4.2.313) that are Pipes (see 4.2.289) to create a Bent_pipe (see 4.2.17). If the usage_type is compound bend pipe, the group Plant_item shall be a Bent_pipe, and the element Plant_items are either Straight_pipe (see 4.2.398), Swept_bend_pipe (see 4.2.415), or Mitre_bend_pipe (see 4.2.271).

4.2.315.2.3 source identification

The value source identification specifies that the Plant_item_collection is being used to collect different suppliers' source Plant_items (see 4.2.313) identified by the element for a particular Plant_item identified by the group.

4.2.315.2.4 assembly-component

The value assembly-component specifies that the Plant_item_collection is being used to collect immediate component Plant_items (see 4.2.313) in an assembly Plant_item. The group identifies the Plant_item that is the assembly and the element identifies the Plant_item that is the group.

EXAMPLE: If the usage_type is Bent_pipe (see 4.2.17), the group Plant_item (see 4.2.313) shall be a Bent_pipe, and the element Plant_items are either Straight_pipe (see 4.2.398), Swept_bend_pipe (see 4.2.415), or Mitre_bend_pipe (see 4.2.271).

4.2.316 Plant_item_connection

A Plant_item_connection is a linkage between two or more Plant_item_connector (see 4.2.318) objects. The joining conditions may be specified for the connection. Each Plant_item_connection is either a Connection_definition (see 4.2.100) or a Plant_item_connection_occurrence (see 4.2.317). Each Plant_item_connection is either a Flexible_connection (see 4.2.152) or a Locked_orientation_connection (see 4.2.255). Each Plant_item_connection may be an Electricity_transference (see 4.2.130), a Fluid_transference (see 4.2.153), or a Load_transference (see 4.2.250). Each Plant_item_connection can have many function types, for the purpose of describing the role that the connection plays in the Plant (see 4.2.311).

NOTE 1 In most cases, such as Piping_components (see 4.2.293), a Plant_item_connection links only two Plant_item_connector objects.

NOTE 2 The term connection does not imply functional continuity beyond the connectors involved in the connection.

The data associated with a Plant_item_connection are the following:

- connection_commitment_target;

- connection_id;
- description;
- joint_fit_type.

4.2.316.1 connection_commitment_target

The connection_commitment_target specifies when in the life_cycle phases of the Plant_system (see 4.2.329) that a connection is actually made.

EXAMPLE Examples of connection_commitment_targets include fabrication, field-fit, commissioning, or others.

4.2.316.2 connection_id

The connection_id specifies a unique identifier for the Plant_item_connection. Connection_id is required for each Plant_item_connection.

4.2.316.3 description

The description specifies the textual explanation or summary of the function of the Plant_item_connection.

4.2.316.4 joint_fit_type

The joint_fit_type specifies where the connection is to be made.

The value of joint_fit_type is one of the following:

- shop_joint;
- field_fit_joint;
- field_joint.

4.2.316.4.1 shop_joint

The shop_joint specifies that the connection is made in the shop.

4.2.316.4.2 field_fit_joint

The field_fit_joint specifies that the connection is made in the field to fit the connection.

4.2.316.4.3 field_joint

The field_joint specifies that the connection is made without readjusting component's length, for example in the field.

4.2.317 Plant_item_connection_occurrence

A Plant_item_connection_occurrence is a type of Plant_item_connection (see 4.2.316) that involves a physical linkage between two or more Plant_item_connector_occurrence (see 4.2.319) objects.

The data associated with a Plant_item_connection_occurrence are the following:

- connection_definition.

ISO 10303-227:2005(E)

4.2.317.1 connection_definition

The connection_definition specifies the connection_id of the Connection_definition (see 4.2.100) which specifies the defined characteristics of the Plant_item_connection_occurrence.

4.2.318 Plant_item_connector

A Plant_item_connector is a feature of a Plant_item (see 4.2.313) that is designed to connect to a connector on another Plant_item. Each Plant_item_connector may have specified its design type as one of the following: an Electrical_connector (see 4.2.128), an Hvac_connector (see 4.2.178), a Mechanical_connector (see 4.2.263), a Piping_connector (see 4.2.295), or a Structural_load_connector (see 4.2.402). Each Plant_item_connector is either a Connector_definition (see 4.2.103) (a definitional type) or a Plant_item_connector_occurrence (see 4.2.319) (a specified type).

NOTE The definitional type is used as the connector definition for a Plant_item_definition (see 4.2.320). A specified type is used for a Plant_item_instance (see 4.2.322).

The data associated with a Plant_item_connector are the following:

- connect_point;
- plant_item_connector_id.

4.2.318.1 connect_point

The connect_point specifies a point on or in the connector where the terminal interface with another connector occurs.

4.2.318.2 plant_item_connector_id

The plant_item_connector_id specifies a unique identifier for the Plant_item_connector. Plant_item_connector_id is required for each Plant_item_connector.

4.2.319 Plant_item_connector_occurrence

A Plant_item_connector_occurrence is a type of Plant_item_connector (see 4.2.318) that is a physical feature of a Plant_item (see 4.2.313) that connects or mates with a like type of connector on another Plant_item. Each Plant_item_connector_occurrence is either: a Functional_connector (see 4.2.157) or a Physical_connector (see 4.2.287).

The data associated with a Plant_item_connector_occurrence are the following:

- orientation.

4.2.319.1 orientation

The orientation specifies the relative orientation of the Plant_item_connector_occurrence to a defined point on the Plant_item (see 4.2.313).

4.2.320 Plant_item_definition

A Plant_item_definition is a type of Plant_item (see 4.2.313) that has been designed to some level of completeness, but has not been used as the design for physical Plant_item objects.

4.2.321 Plant_item_design_view

A `Plant_item_design_view` is the collection of information about a `Plant_item` (see 4.2.313) that is associated with a particular design phase. Each `Plant_item_design_view` is either: a `Functional_design_view` (see 4.2.160) or a `Physical_design_view` (see 4.2.288).

The data associated with a `Plant_item_design_view` are the following:

- name.

4.2.321.1 name

The name specifies a textual label given to the `Plant_item_design_view`.

4.2.322 Plant_item_instance

A `Plant_item_instance` is a planned type of `Plant_item` (see 4.2.313), as instanced in a spatial, functional or other design. Each `Plant_item_instance` is either a `Planned_physical_plant_item` (see 4.2.310) or a `Plant_volume` (see 4.2.331).

NOTE A `Plant_item_instance` is created through the use or instancing of a `Plant_item_definition` (see 4.2.320) by placing it in a design.

4.2.323 Plant_item_interference

A `Plant_item_interference` is where the spatial volume occupied by a `Plant_item` (see 4.2.313) overlaps the space occupied by one or more `Plant_item` objects.

The data associated with a `Plant_item_interference` are the following:

- type.

4.2.323.1 type

The type specifies the kind of `Plant_item_interference`.

EXAMPLE Examples of `Plant_item_interference` type classifications include hard and soft interferences.

4.2.324 Plant_item_interference_status

A `Plant_item_interference_status` is a designation indicating the state of resolution of an identified interference.

The data associated with a `Plant_item_interference_status` are the following:

- assessor;
- status.

4.2.324.1 assessor

The assessor specifies the individual or organization assigned the responsibility for resolving the `Plant_item_interference` (see 4.2.323).

4.2.324.2 status

The status specifies a designation indicating the state of resolution of an identified `Plant_item_interference` (see 4.2.323).

ISO 10303-227:2005(E)

4.2.325 Plant_item_location

A `Plant_item_location` is the position of the `Plant_item` (see 4.2.313) within a `Plant` (see 4.2.311). The position of a `Plant_item` is specified as the transformation (translation and rotation) of a point and axes on the `Plant_item` to a point and axes in the destination coordinate system. Each `Plant_item_location` is either a `Location_in_building` (see 4.2.251), a `Location_in_plant` (see 4.2.252), a `Location_in_site` (see 4.2.254), or a `Relative_item_location` (see 4.2.352).

The data associated with a `Plant_item_location` are the following:

- `location_and_orientation`;
- `location_id`.

4.2.325.1 location_and_orientation

The `location_and_orientation` specifies the relative position and orientation of the `Plant_item` (see 4.2.313) within the `Plant` (see 4.2.311).

4.2.325.2 location_id

The `location_id` specifies a unique identifier for the `Plant_item_location`.

4.2.326 Plant_item_shape

A `Plant_item_shape` is the volumetric representation of a `Plant_item` (see 4.2.313). Each `Plant_item_shape` may be one of the following: a `Detail_shape` (see 4.2.116), an `Envelope_shape` (see 4.2.131), or an `Outline_shape` (see 4.2.280). The z-axis of the local coordinate system of the `Plant_item_shape` shall be considered the elevation of the coordinate space.

The data associated with a `Plant_item_shape` are the following:

- `clash_detection_class`;
- `origin`.

4.2.326.1 clash_detection_class

The `clash_detection_class` specifies a designation that classifies a `Plant_item_shape` for the purposes of interference checking. The value of the `clash_detection_class` attribute shall be one of the following:

- `hard`;
- `ignore`;
- `soft`.

4.2.326.1.1 hard

the `Plant_item_shape` is used for clash detection and indicates that the shape cannot occupy the same physical space with another hard shape.

4.2.326.1.2 ignore

the `Plant_item_shape` is not used for clash detection.

4.2.326.1.3 soft

the `Plant_item_shape` is used for clash detection and indicates that the shape can occupy the same space with another soft shape and, depending on the circumstances, may occupy the same space as a hard object.

NOTE Table 1 represents a comparison between the `clash_detection_class` designations for two `Plant_item_shapes` and indicates whether the resulting interference would be designated as hard clash, soft clash, or no clash. A hard clash refers to an interference between two `Plant_item_shapes` whose `clash_detection_class` is hard. A soft clash refers to an interference between two `Plant_item_shapes` where at least one of the `Plant_item_shapes` has a `clash_detection_class` of soft. A no clash refers to an interference between two `Plant_item_shapes` where at least one of the `Plant_item_shapes` has a `clash_detection_class` of ignore.

Table 1 — `Plant_item_shape` interference clash detection

	Hard	Ignore	Soft
Hard	hard clash	no clash	soft clash
Ignore	no clash	no clash	no clash
Soft	soft clash	no clash	soft clash

4.2.326.2 origin

The origin specifies the locating point for the geometric shape of a `Plant_item` (see 4.2.313).

4.2.327 `Plant_item_weight`

A `Plant_item_weight` is an estimate or the measure of the force experienced by the `Plant_item` (see 4.2.313) as a result of the earth's gravity.

NOTE Before the `Plant_item` (see 4.2.313) actually exists, weight is simply an estimate. The actual weight may be provided if the `Plant_item` does exist and has been measured.

The data associated with a `Plant_item_weight` are the following:

- `centre_of_gravity`;
- `weight_state`;
- `weight_value`.

4.2.327.1 `centre_of_gravity`

The `centre_of_gravity` specifies the point where the entire weight of a `Plant_item` (see 4.2.313) may be considered as concentrated so that if supported at this point the `Plant_item` would remain in equilibrium in any position.

4.2.327.2 `weight_state`

The `weight_state` specifies a designation of the condition of the `Plant_item` (see 4.2.313) that corresponds to the `Plant_item_weight`.

NOTE The value of the `weight_state` may be one of a set of predefined values or may be user supplied.

The value of the `weight_state` attribute may be one of the following:

ISO 10303-227:2005(E)

- empty;
- full;
- operating;
- shipping;
- test.

4.2.327.2.1 empty

the Plant_item (see 4.2.313) does not contain any process materials.

4.2.327.2.2 full

the Plant_item (see 4.2.313) contains maximum amount of process materials.

4.2.327.2.3 operating

the Plant_item (see 4.2.313) is in normal operating conditions.

4.2.327.2.4 shipping

the Plant_item (see 4.2.313) and its transportation and packing materials are included.

4.2.327.2.5 test

the Plant_item (see 4.2.313) is for purposes of structural load calculations.

4.2.327.3 weight_value

The weight_value specifies a measure of the force experienced by the Plant_item (see 4.2.313) as a result of the earth's gravity.

4.2.328 Plant_process_capability

A Plant_process_capability is a functional behaviour that can be executed by the Plant (see 4.2.311).

The data associated with a Plant_process_capability are the following:

- production_capacity;
- production_type.

EXAMPLE A Plant (see 4.2.311) with a production_type of POWER may produce power at a production_capacity of 500 million kilowatts per hour. If this process capability is provided by a combination of a Piping_system (see 4.2.302) (for steam, for example) and an Electrical_system (see 4.2.129), both of these systems can be combined as a subplant; the subplant has the process capability and is part of a plant.

4.2.328.1 production_capacity

The production_capacity specifies the rated output of the Plant (see 4.2.311) with respect to a Plant_process_capability.

4.2.328.2 production_type

The production_type specifies a designation that classifies the Plant (see 4.2.311) based on the products it produces.

4.2.329 Plant_system

A `Plant_system` is a combination of `Plant_item` (see 4.2.313) objects that perform a function required for the `Plant` (see 4.2.311) to operate to produce products. Each `Plant_system` may be one of the following: an `Electrical_system` (see 4.2.129), a `Ducting_system` (see 4.2.119), an `Instrumentation_and_control_system` (see 4.2.231), a `Piping_system` (see 4.2.302), or a `Structural_system` (see 4.2.403).

The data associated with a `Plant_system` are the following:

- `name`;
- `plant_system_id`;
- `service_description`;
- `approval_state`.

4.2.329.1 name

The `name` specifies a textual label given to the `Plant_system`.

4.2.329.2 plant_system_id

The `plant_system_id` specifies a unique identifier for the `Plant_system`. `Plant_system_id` is required for each `Plant_system`.

4.2.329.3 service_description

The `service_description` specifies a textual or summary label for the system.

EXAMPLE Examples of `service_description` labels include Boiler Feedwater System, Paraxylene System, Pipe Rack K, and 4160V Power System.

4.2.329.4 approval_state

The `approval_state` indicates the current status of the system.

4.2.330 Plant_system_assembly

A `Plant_system_assembly` is a collection of `Plant_system` (see 4.2.329) objects into a higher-level system to perform a functional capability.

4.2.331 Plant_volume

A `Plant_volume` is a type of `Plant_item_instance` (see 4.2.322) that is a specifically defined volume located within a `Plant` (see 4.2.311) that may, but need not be occupied by physical `Plant_item` (see 4.2.313) objects. Each `Plant_volume` may be one of the following: a `Reserved_space` (see 4.2.354), a `Route` (see 4.2.356), or a `System_space` (see 4.2.416).

The data associated with a `Plant_volume` are the following:

- `type`.

4.2.331.1 type

The `type` specifies a designation that classifies the `Plant_volume`.

ISO 10303-227:2005(E)

EXAMPLE Examples of Plant_volume object type classifications include reserved space, zone-area, area classification zone, equipment pull space, and egress for personnel.

4.2.332 Plate

A Plate is a type of Pipe_closure (see 4.2.290) that consists of a flat piece that is welded on the end of the Pipe (see 4.2.289).

NOTE Figure 54 depicts a typical Plate.

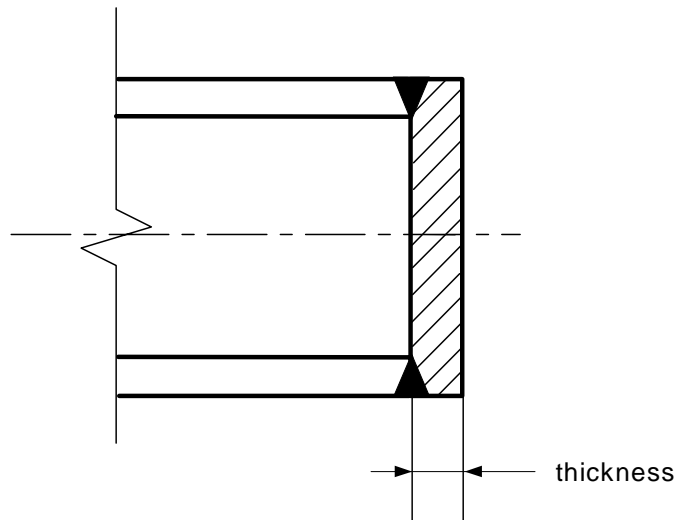


Figure 54 — Plate

The data associated with a Plate are the following:

— thickness.

4.2.332.1 thickness

The thickness is the distance between the parallel faces of the Plate.

4.2.333 Plug

A Plug is a type of Pipe_closure (see 4.2.290) that closes off the end of a Pipe (see 4.2.289) by fitting within the inside wall of the Pipe.

NOTE Figure 55 depicts a typical Plug.

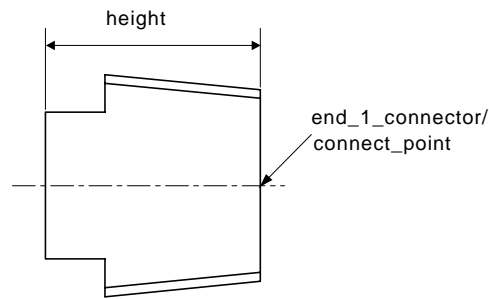


Figure 55 — Plug

The data associated with a Plug are the following:

- height.

4.2.333.1 height

The height specifies the axial length of Plug.

4.2.334 Point

A Point is a type of Wire_and_surface_element (see 4.2.439) that is a dimensionless location in space.

4.2.335 Point_and_line_representation

A Point_and_line_representation is a type of Site_shape_representation (see 4.2.381) represented as a collection of Point (see 4.2.334) objects that define the surface grid of the topography of a Site (see 4.2.379).

4.2.336 Polygon

A Polygon is a type of Curve (see 4.2.112) that is composed of a set of points connected by line segments that form a planar, closed, non-self-intersecting figure.

4.2.337 Pressure_class

A Pressure_class is a type of Piping_size_description (see 4.2.297) based on pressure rating or classification and a nominal size value.

NOTE This type of Piping_size_description (see 4.2.297) is commonly associated with a dimensional specification, such as the ANSI B16.5 specification for Flange objects.

The data associated with a Pressure_class are the following:

- nominal_size;
- pressure_rating.

4.2.337.1 nominal_size

The nominal_size specifies a standard size designation of the Piping_system_component (see 4.2.303) or Piping_connector (see 4.2.295). It may be specified as a single value or as a range of values.

ISO 10303-227:2005(E)

NOTE 1 The nominal size need not represent an actual dimension.

NOTE 2 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.337.2 pressure_rating

The `pressure_rating` specifies a nominal pressure for the design of the `Piping_system_component` (see 4.2.303) or `Piping_connector` (see 4.2.295). It may be specified as a single value or as a range of values.

NOTE 1 When specified with a dimensional standard, such as ANSI B16.1, its value corresponds to a selection out of a set of available values (e.g., 150 PSI, 300 PSI).

NOTE 2 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.338 Pressure_fit

A `Pressure_fit` is a type of `Piping_connector` (see 4.2.295) that is a physical feature of a `Plant_item` (see 4.2.313) that intended to establish a connection with another connector through pressure between the connector rather than by means of threading, welds, or fasteners.

4.2.339 Process_ducting

A `Process_ducting` is a type of `Ducting_component` (see 4.2.118) and `Piping_system_component` (see 4.2.303) that consists of `Piping_component` (see 4.2.293) objects or ductwork that is used to convey process streams in a `Plant` (see 4.2.311).

NOTE `Process_ducting` is used for venting gaseous portions of the process stream. It is part of the system that handles the process stream, but is ductwork rather than piping.

The data associated with a `Process_ducting` are the following:

— `gauge`.

4.2.339.1 gauge

The `gauge` specifies a designation that refers to the thickness of the `Process_ducting`.

4.2.340 Project_design_assignment

A `Project_design_assignment` is an assignment of a `Plant_item` (see 4.2.313) to a `Design_project` (see 4.2.115).

NOTE The set of `Project_design_assignment` instances for a project defines the items and areas that are part of the project.

4.2.341 Pyramid

A `Pyramid` is a type of `Csg_element` (see 4.2.111) that is a 3D volume with a rectangular base and four triangular sides that meet at an apex. The axis of a `Pyramid` is the line segment from the centre of the base to the apex.

4.2.342 Raceway

A `Raceway` is a type of `Cableway_piece` (see 4.2.36) that has a rectangular cross section and contains one or more channels for holding cables.

EXAMPLE Surface raceway, ladder-type raceway.

4.2.343 Raceway_lane

A Raceway_lane is a type of Cableway_component (see 4.2.33) that is a channel within a Raceway (see 4.2.342) for holding cables.

4.2.344 Raceway_size_description

A Raceway_size_description is a type of Cableway_size_description (see 4.2.37) that is used to explain or summarize the physical size of a Raceway (see 4.2.342) based on a set of dimensional characteristics.

The data associated with a Raceway_size_description are the following:

- outer_width;
- outer_height;
- inner_width;
- inner_height.

4.2.344.1 outer_width

The outer_width is the horizontal measurement of the outer surface of a Raceway (see 4.2.342). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.344.2 outer_height

The outer_height is the vertical measurement of the outer surface of a Raceway (see 4.2.342). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.344.3 inner_width

The inner_width is the horizontal measurement of the inner surface of a Raceway (see 4.2.342). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.344.4 inner_height

The inner_height is the vertical measurement of the inner surface of a Raceway (see 4.2.342). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.345 Reducer

A Reducer is a type of Fitting (see 4.2.147) that provides a reduction from one Pipe (see 4.2.289) size to another. Each Reducer may be an Eccentric_reducer (see 4.2.125).

NOTE Figure 56 depicts a typical butt-weld Reducer.

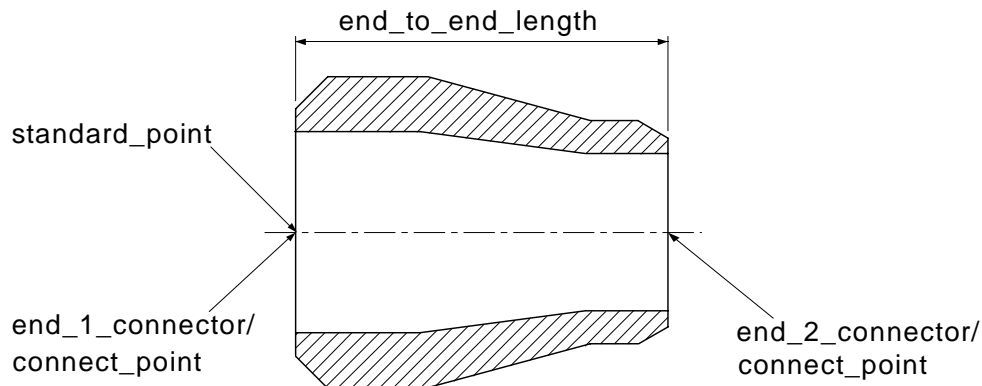


Figure 56 — Reducer

The data associated with a Reducer are the following:

- end_1_connector;
- end_2_connector;
- end_to_end_length.

4.2.345.1 end_1_connector

The end_1_connector specifies the Piping_connector (see 4.2.295) that connects to the larger size Pipe (see 4.2.289).

4.2.345.2 end_2_connector

The end_2_connector specifies the Piping_connector (see 4.2.295) that connects to the smaller size Pipe (see 4.2.289).

4.2.345.3 end_to_end_length

The end_to_end_length specifies the external distance between the end-one face and the end-two face of the Reducer. It may be specified as a single value or as a range of values.

NOTE 1 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

NOTE 2 Swage is a synonym for Reducer which is normally used for smaller sizes.

4.2.346 Reducing_flange

A Reducing_flange is a type of Flange (see 4.2.148) used to make a Flanged (see 4.2.149) joint between Pipe (see 4.2.289) objects of different nominal sizes that has the dimensional characteristics of the larger Pipe and the bore of the smaller Pipe.

EXAMPLE Examples of Reducing_flange types include Weld_neck_flange (see 4.2.437), Slip_on_flange (see 4.2.383), Socket_weld_flange (see 4.2.386), and Threaded_flange (see 4.2.419).

NOTE Figure 57 depicts a typical Reducing_flange.

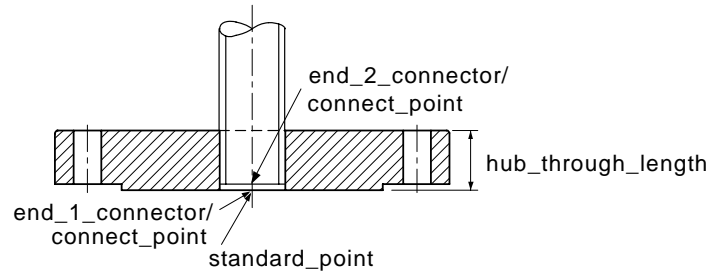


Figure 57 — Reducing_flange

4.2.347 Reducing_torus

A Reducing_torus is a type of Csg_element (see 4.2.111) that is formed by sweeping a circle that uniformly decreases in size through a circular sweep angle of less than 360 degrees.

4.2.348 Reference_geometry

A Reference_geometry is the identification of one or more Shape_representation_element (see 4.2.375) objects in a model that are not part of a component shape, but provide additional geometric information relative to the shape of the Plant_item (see 4.2.313). Each Reference_geometry may be a Plant_item-centreline (see 4.2.314).

The data associated with a Reference_geometry are the following:

- name.

4.2.348.1 name

The name specifies a textual label given to the Reference_geometry.

4.2.349 Reinforcing_component

A Reinforcing_component is a type of Piping_system_component (see 4.2.303) which is used to strengthen the Piping_spool (see 4.2.299). Types of Reinforcing_component include: Gusset (see 4.2.167), Reinforcing_plate (see 4.2.350), Reinforcing_ring (see 4.2.351) and Stay (see 4.2.396).

The data associated with a Reinforcing_component are the following:

- end_1_connector;
- location_point;
- orientation.

ISO 10303-227:2005(E)

4.2.349.1 end_1_connector

The end_1_connector specifies the Plant_item_connector (see 4.2.318) on the Reinforcing_component to the pipe.

4.2.349.2 location_point

The location_point is a standard point on Piping_component (see 4.2.293) at which the Reinforcing_component is attached.

4.2.349.3 orientation

The orientation specifies a unit vector in the attaching direction of the Reinforcing_component, which is usually perpendicular to the centreline of the run pipe. The vector defines the layout of the Reinforcing_component.

4.2.350 Reinforcing_plate

A Reinforcing_plate is a type of Reinforcing_component (see 4.2.349) that is made of plate that has a hole at its centre. It is firmly attached to run pipe and branch pipe to prevent the welded part between the branch pipe and the run pipe from breaking.

NOTE Figure 58 depicts a typical Reinforcing_plate.

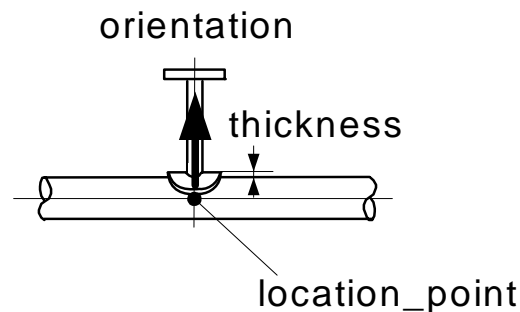


Figure 58 — Reinforcing_plate

The data associated with a Reinforcing_plate are the following:

— thickness.

4.2.350.1 thickness

The thickness is the distance of the top face of the Reinforcing_plate from the surface of the run pipe.

4.2.351 Reinforcing_ring

A Reinforcing_ring is a type of Reinforcing_component (see 4.2.349) that is made of ring plate that has a hole at its centre. It is firmly attached to the pipe to prevent the pipe from deforming or squashing.

NOTE Figure 59 depicts a typical Reinforcing_ring.

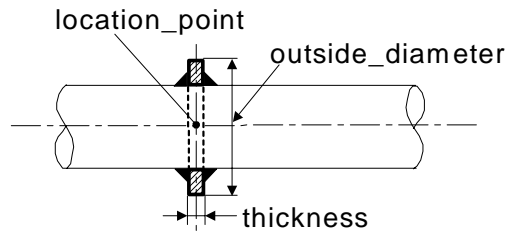


Figure 59 — Reinforcing_ring

The data associated with a Reinforcing_ring are the following:

- thickness;
- outside_diameter.

4.2.351.1 thickness

The thickness specifies the distance between both faces of the Reinforcing_ring.

4.2.351.2 outside_diameter

The outside_diameter specifies the external diameter of the Reinforcing_ring.

4.2.352 Relative_item_location

A Relative_item_location is a type of Plant_item_location (see 4.2.325) that is the relative position of the Plant_item (see 4.2.313) with respect to another Plant_item.

4.2.353 Required_material_description

A Required_material_description is a specification of the substances or the requirements of the substances that a component is to be made from.

The data associated with a Required_material_description are the following:

- description;
- material_requirement_id.

4.2.353.1 description

The description specifies a textual explanation or summary of the required materials.

4.2.353.2 material_requirement_id

The material_requirement_id specifies a unique identifier for the specification that provides the required material. Material_requirement_id is required for each Required_material_description.

NOTE The identifier is normally a coded value that is company-specific.

4.2.354 Reserved_space

A Reserved_space is a type of Plant_volume (see 4.2.331) that is a region of space that is not to be obstructed by physical objects for reasons related to plant operation.

ISO 10303-227:2005(E)

NOTE Reserved_spaces are normally prescriptive.

EXAMPLE Reserved_spaces include maintenance volume, operator access, and safety zone.

4.2.355 Ring_spacer

A Ring_spacer is a type of Spacer (see 4.2.388) that fits between Flange (see 4.2.148) objects in a Flanged (see 4.2.149) joint to bridge a large gap or fill a slight angle between the Flange objects that cannot be accommodated by standard Flange gaskets.

NOTE Figure 60 depicts a typical Ring_spacer.

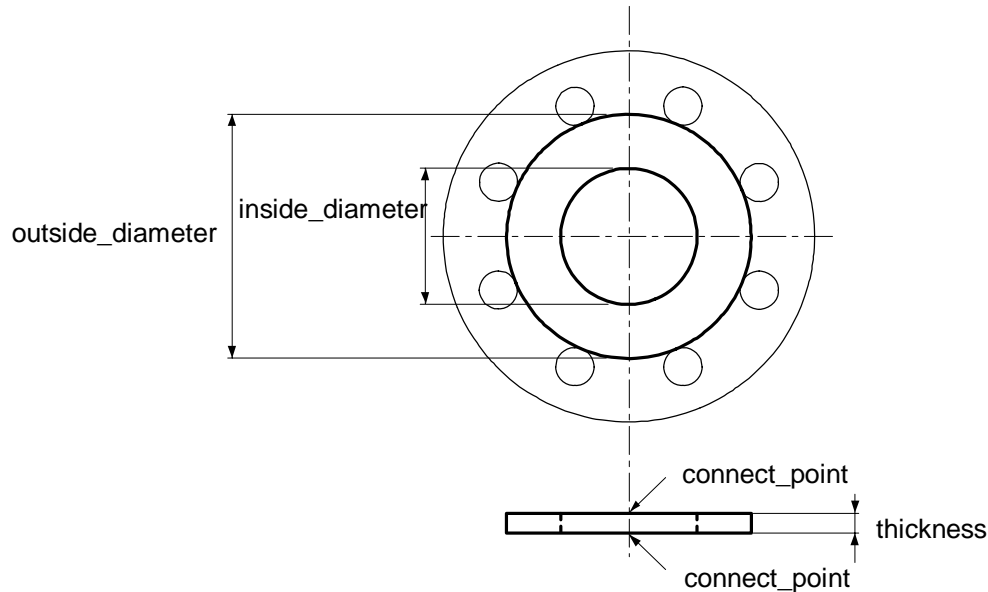


Figure 60 — Ring_spacer

The data associated with a Ring_spacer are the following:

— inside_diameter.

4.2.355.1 inside_diameter

The inside_diameter specifies the diameter of the bore hole through the Ring_spacer. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.356 Route

A Route is a type of Plant_volume (see 4.2.331) that is a 3D path from one location to another.

NOTE 1 A Route is a conceptual engineered path that reserves space for a Piping_system (see 4.2.302). This space need not be occupied by a Plant_item (see 4.2.313) at a future time.

NOTE 2 The shape of the reserved volume of a Route is a specified Plant_item_shape (see 4.2.326).

EXAMPLE A cable trench is a kind of Route that goes through and runs underneath the surface of a Site (see 4.2.379).

4.2.357 Schedule

A Schedule is a type of Piping_size_description (see 4.2.297) that gives the Pipe (see 4.2.289) or Piping_-component (see 4.2.293) size in terms of nominal size and a sizing schedule.

NOTE When a Schedule entity is used, the dimensional standard attribute of Piping_size_description must be specified.

The data associated with a Schedule are the following:

- nominal_size;
- pipe_schedule.

4.2.357.1 nominal_size

The nominal_size specifies a standard size designation of the Piping_system_component (see 4.2.303) or Piping_connector (see 4.2.295). It may be specified as a single value or as a range of values.

NOTE 1 The nominal size need not represent an actual dimension.

NOTE 2 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.357.2 pipe_schedule

The pipe_schedule specifies a designation of a standard wall thickness and external diameter for a nominal pipe size through a reference to the dimensional standard.

4.2.358 Schematic

A Schematic is a diagram of the logical design of one or more Plant_systems (see 4.2.329). The Schematic is comprised of a Title_block (see 4.2.420) and one or more of Schematic_presentation_-components (see 4.2.364). A Schematic shows the arrangement of equipment, the piping required to connect the equipment, and the piping connections, analysis data, and stream design case operating conditions.

The data associated with Schematic are the following:

- id;
- version;
- type.

4.2.358.1 id

The id specifies the unique identifier of the Schematic.

4.2.358.2 version

The version specifies the revision level of the Schematic.

4.2.358.3 type

The type specifies the kind of Schematic.

EXAMPLE – Types of schematics include a Process Flow Diagram (PFD) or a Piping and Instrumentation Diagram (P&ID).

ISO 10303-227:2005(E)

4.2.359 Schematic_callout

The Schematic_callout is a group of Schematic_elements (see 4.2.362) that has a particular meaning on the diagram.

The data associated with Schematic_callout is the following:

— name.

4.2.359.1 name

The name specifies a textual label for the callout.

4.2.360 Schematic_callout_dependency

The Schematic_callout_dependency is a binary relationship between two Schematic_callout (see 4.2.359) objects in which one Schematic_callout depends on another.

The data associated with Schematic_callout_dependency is the following:

— purpose.

4.2.360.1 purpose

The purpose specifies the reason for establishing the Schematic_callout_dependency between the two callouts.

4.2.361 Schematic_curve

A Schematic_curve is the placement of a Curve or (see 4.2.112) curves on a Schematic (see 4.2.358) to represent a portion or all of a Schematic_element (see 4.2.362).

The data associated with Schematic_curve are the following:

— defining_curve.

4.2.361.1 defining_curve

A defining_curve specifies a particular line such as a box, circle, ellipsoid, free form curve, or straight line that is used to draw the Schematic_curve.

4.2.362 Schematic_element

A Schematic_element is the specific representation of a piece of Component_size_description (see 4.2.93), Document (see 4.2.117), Ducting_system (see 4.2.119), Functional_connector (see 4.2.157), Hvac_plant_item_connector (see 4.2.200), Hvac_run (see 4.2.204), Hvac_section (see 4.2.206), Hvac_section_termination (see 4.2.210), Mechanical_arrangement_specification (see 4.2.261), Mechanical_system (see 4.2.265), Mechanical_system_arrangement (see 4.2.266), Mechanical_system_arrangement_segment (see 4.2.267), Mechanical_system_arrangement_segment_termination (see 4.2.268), Piping_size_description (see 4.2.297), Piping_specification (see 4.2.298), Piping_system (see 4.2.302), Piping_system_line (see 4.2.304), Piping_system_line_segment (see 4.2.305), Piping_system_line_segment_termination (see 4.2.306), Piping_system_line_termination (see 4.2.307), Plant_item (see 4.2.313), Plant_item_connection (see 4.2.316), Required_material_description (see 4.2.353) depicted on the Schematic (see 4.2.358).

The data associated with Schematic_element are the following:

— style.

4.2.362.1 style

The style specifies the visual characteristics of the curve, text and points that comprise the Schematic_element.

4.2.363 Schematic_point

A Schematic_point is the placement of a Point (see 4.2.334) on a Schematic (see 4.2.358) to represent a portion or all of a Schematic_element (see 4.2.362).

The data associated with Schematic_point are the following:

— point_coordinates.

4.2.363.1 point_coordinates

The point_coordinates specify the x and y position of the Schematic_point.

4.2.364 Schematic_presentation_component

A Schematic_presentation_component specifies an element of the arrangement of a Schematic (see 4.2.358).

EXAMPLE – Schematic_presentation_components include sheets, areas, views and other presentation components.

4.2.365 Schematic_presentation_component_composition

The Schematic_presentation_component_composition specifies a relationship between two Schematic_presentation_component (see 4.2.364) objects. The relationships among the Schematic_presentation_component objects that are defined for a Schematic (see 4.2.358) describe the drawing structure of that Schematic.

The data associated with Schematic_presentation_component_composition are the following:

— clipping;

— projection.

4.2.365.1 clipping

A clipping specifies how to eliminate a portion of the picture either inside the fenced or selected area and maintaining everything outside that area or outside the fenced or selected area and maintaining everything inside that area.

4.2.365.2 projection

A projection specifies the particular view to be shown for that depicted Schematic (see 4.2.358).

4.2.366 Schematic_symbol_definition

A Schematic_symbol_definition specifies a combination of one or more of Schematic_points (see 4.2.363), Schematic_curves (see 4.2.361), Schematic_text (see 4.2.368), and Schematic_symbol_occurrences (see 4.2.367) to define a symbol for placement on a Schematic (see 4.2.358).

ISO 10303-227:2005(E)

NOTE The `Schematic_symbol_occurrence` (see 4.2.367) is used to place the `Schematic_symbol_definition` in a `Schematic_presentation_component` (see 4.2.364).

The data associated with `Schematic_symbol_definition` are the following:

- identifier;
- name;
- source.

4.2.366.1 identifier

The identifier specifies a unique identification for the `Schematic_symbol_definition`

4.2.366.2 name

The name specifies a textual label given to a particular symbol.

4.2.366.3 source

The source specifies whether a symbol is available to the drawing from a standard symbol library, from a specifically generated symbol library, or from the drawing tool palette.

4.2.367 Schematic_symbol_occurrence

A `Schematic_symbol_occurrence` consists of the use of a previously drawn symbol that is available from a palette or library and can be placed on the Schematic (see 4.2.358) as a complete symbol.

4.2.368 Schematic_text

The `Schematic_text` is the placement of alphanumeric text on a Schematic (see 4.2.358) as part of the `Schematic_element` (see 4.2.362) or as textual notes.

The data associated with `Schematic_text` are the following:

- `text_literal`.

4.2.368.1 text_literal

The `text_literal` specifies the alphanumeric text on a Schematic (see 4.2.358) as either notes on the depicted drawing, or as a description on or near the `Schematic_element` (see 4.2.362), or as text on the `Title_block` (see 4.2.420).

4.2.369 Segment_insulation

A `Segment_insulation` is a logical connection between a `Piping_system_line_segment` (see 4.2.305) and the `Insulation` (see 4.2.232) attached to the `Pipe` (see 4.2.289) associated with the `Piping_system_line_segment`.

The data associated with a `Segment_insulation` are the following:

- boundaries;
- description;
- thickness;

— type.

4.2.369.1 boundaries

The boundaries specifies a description that defines the boundaries for Insulation (see 4.2.232) on the Piping_system_line (see 4.2.304).

EXAMPLE An example description for the Insulation boundaries of a Piping_system_line is personnel protection insulation shall extend to 12 feet above grade or walkway.

4.2.369.2 description

The description specifies a textual explanation or summary of the reasons for providing Insulation (see 4.2.232).

EXAMPLE Examples of Piping_system_line (see 4.2.304) Insulation descriptions include provided for heat conservation and provided for personnel protection.

4.2.369.3 thickness

The thickness specifies the distance between the inside and outside surfaces of the Insulation (see 4.2.232). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values. The thickness of the insulation may vary over the extent of the insulation.

4.2.369.4 type

The type specifies the Insulation (see 4.2.232) material.

4.2.370 Service_operating_case

A Service_operating_case is a stream condition that may exist at a Plant_item_connector (see 4.2.318).

EXAMPLE Examples of Service_operating_case conditions include normal, upset, and shutdown.

The data associated with a Service_operating_case are the following:

- duration;
- frequency;
- name;
- operating_pressure;
- operating_temperature.

4.2.370.1 duration

The duration specifies the expected time span of the Service_operating_case. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.370.2 frequency

The frequency specifies the expected number of times that the Service_operating_case will occur over a defined period of time. It may be specified as a single value or as a range of values.

ISO 10303-227:2005(E)

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.370.3 name

The name specifies a textual label given to the condition that the Equipment (see 4.2.132) operating characteristics are being defined under.

4.2.370.4 operating_pressure

The operating_pressure specifies the force per unit area exerted by the process stream on the Plant_item (see 4.2.313) under a specific Service_operating_case. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.370.5 operating_temperature

The operating_temperature specifies the temperature of the process stream on the Plant_item (see 4.2.313) under a specific Service_operating_case. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.371 Shape_inspection_record

A Shape_inspection_record is a collection of information that captures the result of an evaluation of an observed value for a characteristic of the shape of a Piping_spool (see 4.2.299) against an expected, designed or prescribed value for that characteristic, as well as information to evaluate the acceptability of the observed value.

The data associated with a Shape_inspection_record are the following:

- shape_inspection_property_name;
- shape_inspection_property_sequence_number;
- inspected_property_tolerance;
- inspected_property_measured_value;
- inspection_record_number;
- inspected_property_design_value.

4.2.371.1 shape_inspection_property_name

The shape_inspection_property_name specifies the characteristic for which information is being recorded. The shape_inspection_property_name may be one of the following:

- attached element location;
- attached element orientation;
- planarity;
- point to point angle;
- point to point length.

4.2.371.1.1 attached element location

attached element location specifies that the inspection is made on the position of an attached element such as a Piping_support (see 4.2.301), a Reinforcing_component (see 4.2.349).

4.2.371.1.2 attached element orientation

attached element orientation specifies that the inspection is made on the direction of an attached element such as a Piping_support (see 4.2.301), a Reinforcing_component (see 4.2.349).

4.2.371.1.3 planarity

planarity specifies that the inspection is carried out by measuring the deviations of a Piping_spool (see 4.2.299) from the plane that is defined by three points on the Piping_spool.

4.2.371.1.4 point to point angle

point to point angle specifies that the inspection is made on the angle which is specified by three points on a Piping_spool (see 4.2.299).

4.2.371.1.5 point to point length

point to point length specifies that the inspection is made on the distance between two points specified on a Piping_spool (see 4.2.299).

4.2.371.2 shape_inspection_property_sequence_number

The shape_inspection_property_sequence_number specifies an alphanumeric string that identifies the node point that defines the shape property that is being measured. There may be more than one shape_inspection_property_sequence_number for a Shape_inspection_record.

NOTE The method of identification is outside the scope of this part of ISO 10303.

4.2.371.3 inspected_property_tolerance

The inspected_property_tolerance specifies the acceptable deviation for the measured result of the inspection.

4.2.371.4 inspected_property_measured_value

The inspected_property_measured_value specifies the recorded result of the inspection.

4.2.371.5 inspection_record_number

The inspection_record_number specifies an alphanumeric identifier assigned to the Shape_inspection_record.

4.2.371.6 inspected_property_design_value

The inspected_property_design_value specifies the design value presented as a standard value for the inspection.

4.2.372 Shape_interference_zone_usage

A Shape_interference_zone_usage contains the representational elements that define the shape of a volume that encloses the region of space where the interference of clashing Plant_items (see 4.2.313) occurs.

ISO 10303-227:2005(E)

4.2.373 Shape_parameter

A Shape_parameter is a type of Shape_representation_element (see 4.2.375) that is a name-value pair that specifies the dimensional value of some aspect of the Plant_item_shape (see 4.2.326). The meaning of the name-value pair is not specified in this part of ISO 10303.

NOTE 1 A use of this structure is to provide a generic capability to reference classes of Plant_items (see 4.2.313) by a dimensional characteristic, such as 5 centimeter pipe.

NOTE 2 It was not the intent of this object to use this structure to create a geometric representation of an item. The effective use of this structure requires an agreement between the exchanging parties as to the meanings of the names so that they can understand the information being exchanged.

The data associated with a Shape_parameter are the following:

- name;
- value.

4.2.373.1 name

The name specifies a textual label given to a dimension or parameter of a Plant_item_shape (see 4.2.326).

EXAMPLE An example of this is the name "diameter".

4.2.373.2 value

The value specifies a number that represents the measure of the dimension or parameter of the Plant_item_shape (see 4.2.326).

EXAMPLE An example of this is the value "5.6".

4.2.374 Shape_representation

A Shape_representation is a combination of geometric elements that describe or define the general or specific surface boundaries of a Plant_item (see 4.2.313). Shape_representation is either a Hybrid_shape_representation (see 4.2.222) or Plant_csg_shape_representation (see 4.2.312).

NOTE Shape representation need not be the exact or specific shape of the item.

The data associated with a Shape_representation are the following:

- minimum_point_spacing.

4.2.374.1 minimum_point_spacing

The minimum_point_spacing specifies the minimum distance between two points that are considered coincident in the originating CAD system.

NOTE This attribute is used to provide the concept of the geometric precision of the CAD system from which the product data originated. Such information may be required for "healing" algorithms on Brep geometry.

4.2.375 Shape_representation_element

A Shape_representation_element is a geometric model that is used to represent the shape or some aspect of the shape of a Plant_item (see 4.2.313). Each Shape_representation_element is either a B_rep_element

(see 4.2.14), a Csg_element (see 4.2.111), a Shape_parameter (see 4.2.373), or a Wire_and_surface_element (see 4.2.439).

4.2.376 Shape_representation_element_usage

A Shape_representation_element_usage is an assignment of a Shape_representation_element (see 4.2.375) to a Shape_representation (see 4.2.374) of a Plant_item (see 4.2.313).

NOTE Shape_representation_element_usage is the mechanism that aggregates the geometric elements that represent the shape of the Plant_item. The rules or constraints for what constitutes a valid aggregation are delineated by conformance class.

The data associated with a Shape_representation_element_usage are the following:

- element_colour;
- layer.

4.2.376.1 element_colour

The element_colour specifies the colour that displays the element.

4.2.376.2 layer

The layer specifies the collection of displayable items for the purpose of controlling visibility and presentation style.

4.2.377 Ship

A Ship is a type of Plant (see 4.2.311) which is generally a large sea going vessel (boat) propelled by power.

NOTE Figure 61 shows Ship's Axes at the Forward and Aft Perpendiculars.

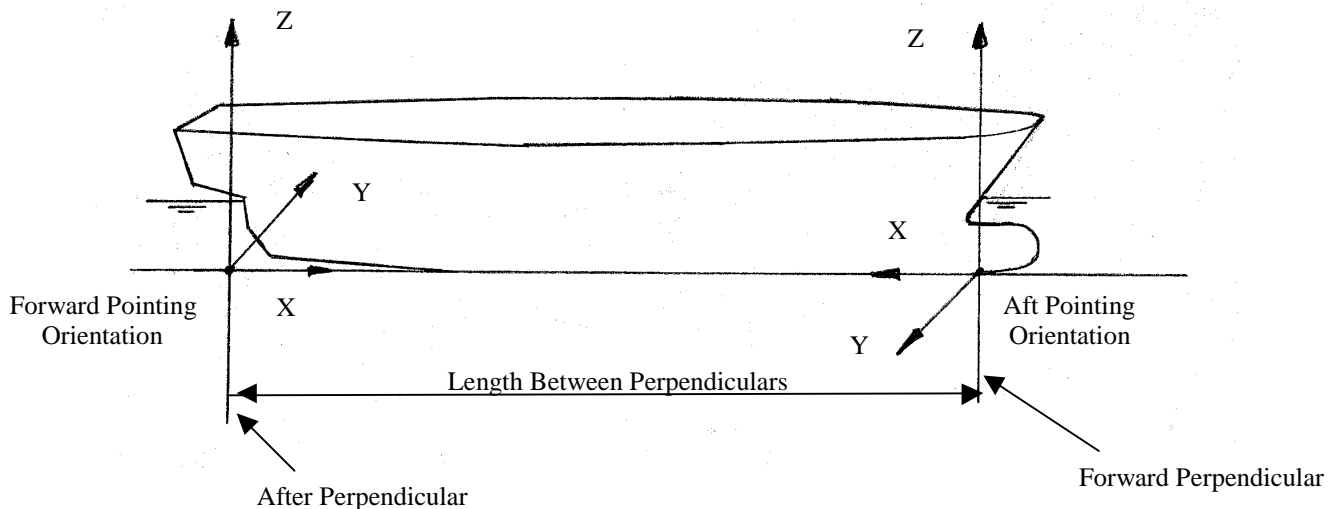


Figure 61 — Forward and aft pointing ship's axes

ISO 10303-227:2005(E)

The data associated with a Ship are the following:

- orientation;
- single_hull_or_class;
- after_perpendicular_offset;
- length_between_perpendiculars.

4.2.377.1 orientation

The orientation specifies the direction of the X-axis.

The value of orientation shall be one of the following:

- aft_pointing;
- forward_pointing.

4.2.377.1.1 aft_pointing

aft_pointing: an orientation of a right handed ship coordinate system that has the positive X-axis from the forward part of the Ship directed to the aft part of the Ship.

4.2.377.1.2 forward_pointing

forward_pointing: an orientation of a right handed ship coordinate system that has the positive X-axis from the aft part of the Ship directed to the forward part of the Ship.

4.2.377.2 single_hull_or_class

The single_hull_or_class specifies whether the exchange of data is applicable to a single hull or to multiple hulls in a class of Ships.

The value of the single_hull_or_class shall be one of the following:

- design_for_single_hull;
- design_for_multiple_hulls.

4.2.377.2.1 design_for_single_hull

design_for_single_hull: the product data is applicable to a single hull.

4.2.377.2.2 design_for_multiple_hulls

design_for_multiple_hulls: the product data is applicable to multiple hulls in a class of ships.

4.2.377.3 after_perpendicular_offset

The after_perpendicular_offset specifies the distance from the forward perpendicular (which is assumed to be the origin in the Ship's coordinate system) to the after perpendicular.

4.2.377.4 length_between_perpendiculars

The length_between_perpendiculars specifies the length measured from the after perpendicular to the forward perpendicular of the Ship.

4.2.378 Shoe

A Shoe is a type of Piping_support (see 4.2.301) that is composed of Plates (see 4.2.332), and which has a cross-sectional shape that resembles a reversed “T” or reversed PI. The Shoe supports the weight rigidly at its base, and is used to regulate the movement or to fix the position of pipe.

NOTE Figure 62 depicts a typical Shoe.

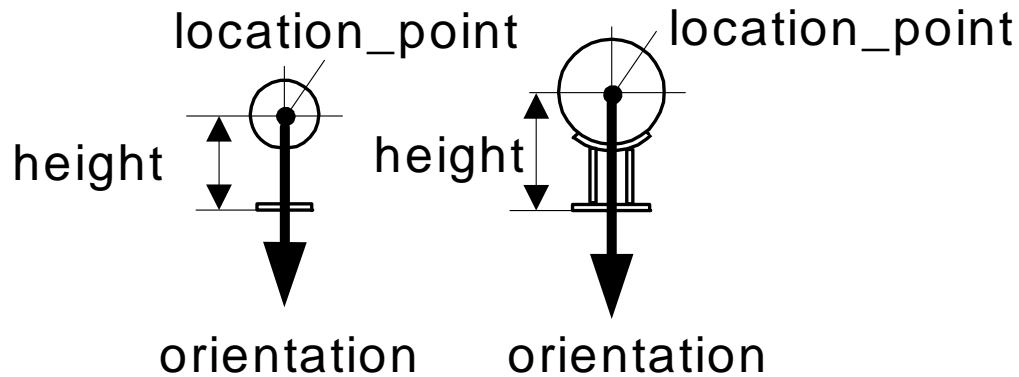


Figure 62 — Shoe

The data associated with a Shoe are the following:

- height.

4.2.378.1 height

The height is the distance between the supporting face of the base plate of the Shoe and location_point.

4.2.379 Site

A Site is a geographical location where the Plant (see 4.2.311) is located. The z-axis of the local coordinate system of the Site shall be considered the elevation of the coordinate space.

The data associated with a Site are the following:

- address;
- coordinates;
- elevation;
- environmental_references;
- locality;
- name;
- orientation;
- owners;
- site_id.

ISO 10303-227:2005(E)

4.2.379.1 address

The address specifies the street address (including city, state, and zip code as appropriate) of the Site.

4.2.379.2 coordinates

The coordinates specifies the longitude and latitude coordinates of the Site with respect to a known Point (see 4.2.334) on the Site.

4.2.379.3 elevation

The elevation specifies the distance that the Site is located above sea level with respect to a known Point (see 4.2.334) on the Site.

NOTE The Point referenced here is the same point referenced under coordinates.

4.2.379.4 environmental_references

The `environmental_references` specifies a reference to a Document (see 4.2.117) that provides environmental information relevant to the Site.

EXAMPLE `Environmental_references` specify Documents that describe the conditions of the environment that a Plant (see 4.2.311) operates in that affect the design, such as snow loads, wind loads, and seismic data.

4.2.379.5 locality

The locality specifies the municipality or region where the Site is located.

4.2.379.6 name

The name specifies a textual label given to the Site.

4.2.379.7 orientation

The orientation specifies the relative alignment of the Site with respect to a given compass direction.

4.2.379.8 owners

The owners specify the company or organization that is financially responsible for the Site.

4.2.379.9 site_id

The `site_id` specifies a unique identifier for the Site. `Site_id` is required for each Site.

4.2.380 Site_feature

A `Site_feature` is the composition, proportions, form, or outward appearance of some thing of interest on a Site (see 4.2.379).

EXAMPLE A `Site_feature` may be man-made, such as a building, road, railway, water tower or it may be natural, such as a river, hill, or forest.

The data associated with a `Site_feature` are the following:

- `location_and_orientation`;
- `man_made_or_natural`;

- shape;
- site_feature_id;
- type.

4.2.380.1 location_and_orientation

The location_and_orientation specifies the position of the Site_feature relative to the Site (see 4.2.379) coordinate system and the orientation of the Site_feature relative to a specified direction.

4.2.380.2 man_made_or_natural

The man_made_or_natural specifies that the Site_feature is either man-made or natural.

4.2.380.3 shape

The shape specifies a 3D spatial volume that completely encloses or bounds a feature.

NOTE The shape of the Site_feature is necessary for the spatial layout of buildings and the piping between buildings.

4.2.380.4 site_feature_id

The site_feature_id specifies a unique identifier for the Site_feature.

4.2.380.5 type

The type specifies a designation that classifies a Site_feature based on its physical and functional characteristics.

4.2.381 Site_shape_representation

A Site_shape_representation is a replica of the topography of a specific area. Each Site_shape_representation is either a Faceted_surface_representation (see 4.2.143) or a Point_and_line_representation (see 4.2.335).

4.2.382 Sited_plant

A Sited_plant is a Planned_physical_plant (see 4.2.309) that a Site (see 4.2.379) location has been defined for.

The data associated with a Sited_plant are the following:

- plant_site_location;
- plant_site_orientation.

4.2.382.1 plant_site_location

The plant_site_location specifies the geographic position of the Plant (see 4.2.311) relative to the Site (see 4.2.379) or a feature of the Site.

4.2.382.2 plant_site_orientation

The plant_site_orientation specifies the directional orientation of the Plant (see 4.2.311) with respect to the Site (see 4.2.379).

ISO 10303-227:2005(E)

4.2.383 Slip_on_flange

A Slip_on_flange is a type of Flange (see 4.2.148) that slips over the end of a Pipe (see 4.2.289) or Fitting (see 4.2.147) and is fillet welded in place.

NOTE Figure 63 depicts a typical Slip_on_flange.

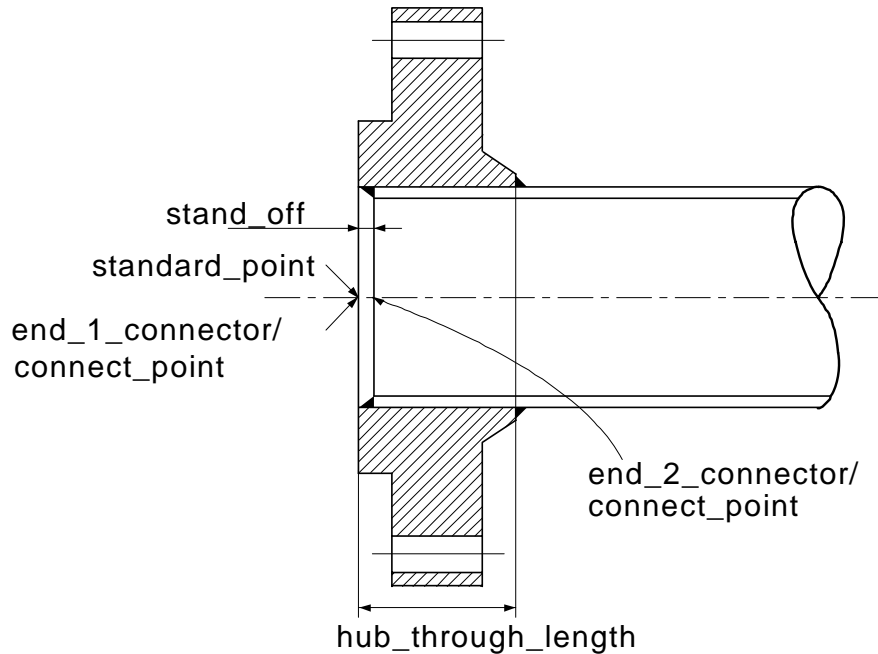


Figure 63 — Slip_on_flange

The data associated with a Slip_on_flange are the following:

— stand_off.

4.2.383.1 stand_off

The stand_off specifies the measure of the distance between the face of the Slip_on_flange and the end of the Pipe (see 4.2.289) or the Fitting (see 4.2.147) that is inserted into the Slip_on_flange. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.384 Slip_on_jacket_flange

A Slip_on_jacket_flange is a type of Slip_on_flange (see 4.2.383) that slips over the end of a jacketed Piping_spool (see 4.2.299), and closes off the jacket.

NOTE Figure 64 depicts a typical Slip_on_jacket_flange.

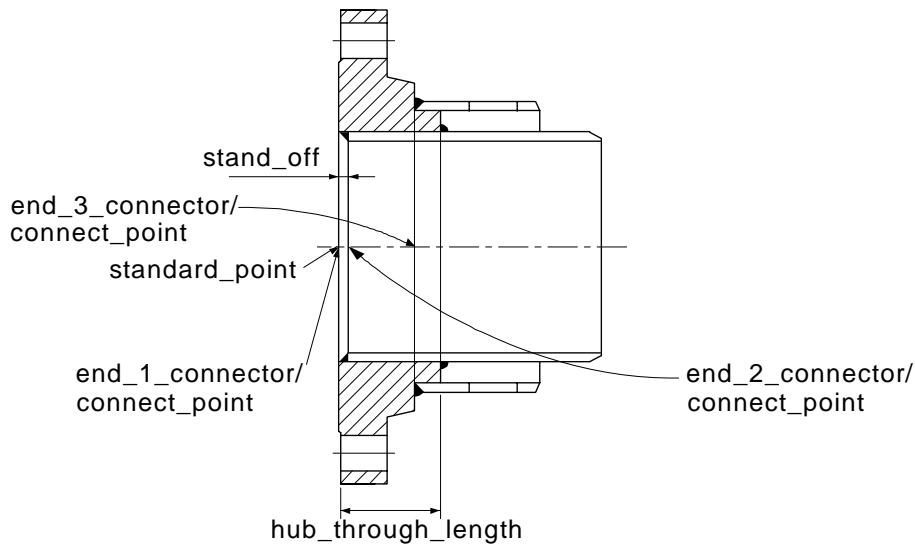


Figure 64 — Slip_on_jacket_flange

The data associated with a Slip_on_jacket_flange are the following:

- end_3_connector.

4.2.384.1 end_3_connector

The end_3_connector specifies the Piping_connector (see 4.2.295) where the outside Pipe (see 4.2.289) of the jacketed piping connects to the Flange (see 4.2.148).

4.2.385 Socket

A Socket is a type of Piping_connector (see 4.2.295) that is a physical feature of a Plant_item (see 4.2.313) that allows partial insertion of the Male_end (see 4.2.257) of another Plant_item.

NOTE 1 The location of the connect point should be based on the dimension from the centreline to the bottom of the Socket of a Valve (see 4.2.434) or Fitting (see 4.2.147) plus the set_back.

NOTE 2 Figure 65 depicts a typical Socket.

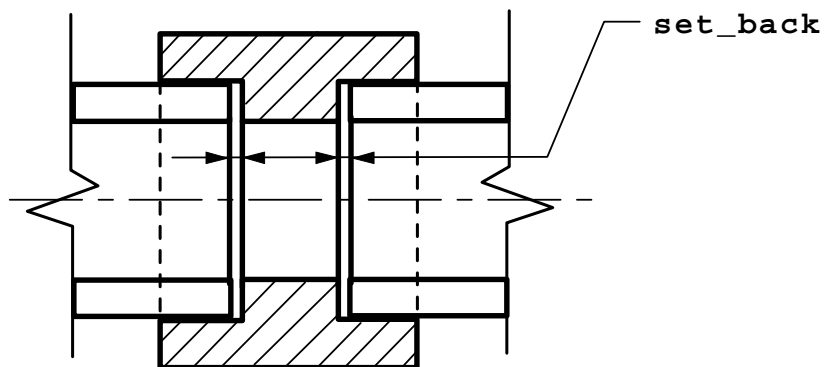


Figure 65 — Socket

ISO 10303-227:2005(E)

The data associated with a Socket are the following:

— set_back.

4.2.385.1 set_back

The set_back specifies the distance between the end of the Piping_component (see 4.2.293) and the bottom of the Socket.

NOTE The attribute for set_back will only be used when the Piping_component (see 4.2.293) participates in a connection.

4.2.386 Socket_weld_flange

A Socket_weld_flange is a type of Flange (see 4.2.148) having a Socket (see 4.2.385) configuration that fits the end of a Pipe (see 4.2.289) for fillet welding.

NOTE Figure 66 depicts a typical Socket_weld_flange.

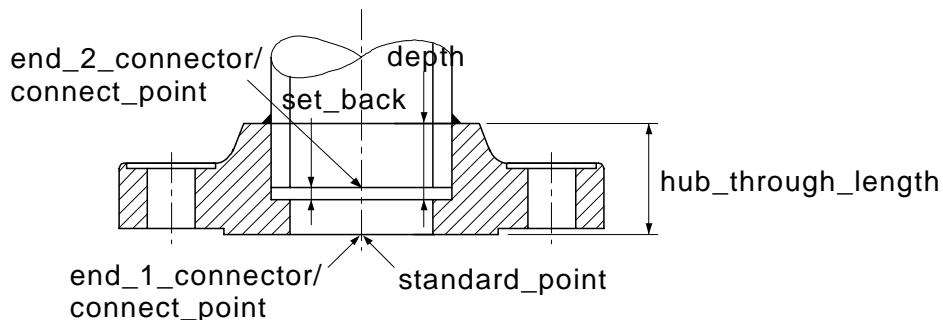


Figure 66 — Socket_weld_flange

4.2.387 Solid_of_revolution

A Solid_of_revolution is a type of Csg_element (see 4.2.111) that is formed by sweeping a 2D shape about an axis. The 2D shape may be closed or open; if open, then the ends of the 2D shape must lie on the sweep axis.

4.2.388 Spacer

A Spacer is a type of Fitting (see 4.2.147) that is placed between two Flange (see 4.2.148) objects to enable the flow of material between the pipelines on either side of the Spacer. Each Spacer may be one of the following: a Paddle_spacer (see 4.2.284), or a Ring_spacer (see 4.2.355).

The data associated with a Spacer are the following:

— outside_diameter;

— thickness.

4.2.388.1 outside_diameter

The outside_diameter specifies the external diameter of the Spacer. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.388.2 thickness

The thickness specifies the distance between the two parallel faces of the Spacer. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.389 Spare_plant_item_usage

A Spare_plant_item_usage is an association between a primary Plant_item (see 4.2.313) and a Plant_item used as a spare for the primary Plant_item.

4.2.390 Specialty_item

A Specialty_item is a type of Piping_system_component (see 4.2.303) whose specific dimensional design or configuration is not met by some standard commodity item.

EXAMPLE Examples of Specialty_item types include Flange (see 4.2.148) and Valve (see 4.2.434).

4.2.391 Spectacle_blind

A Spectacle_blind is a type of Blank (see 4.2.18) that consists of two paddles connected by an arm. One paddle blocks the flow of material (see Paddle_blank in 4.2.283) and the other is a ring that permits or alters the flow (see Paddle_spacer in 4.2.284). A spectacle either allows or disallows flow in a pipe depending on which end of the spectacle is installed in line. It is often used to isolate a section of the Piping_system (see 4.2.302) or Equipment (see 4.2.132).

NOTE 1 The term spectacle refers to shape of the item, that resembles a pair of spectacles (i.e., reading glasses).

NOTE 2 Figure 67 depicts a typical Spectacle_blind.

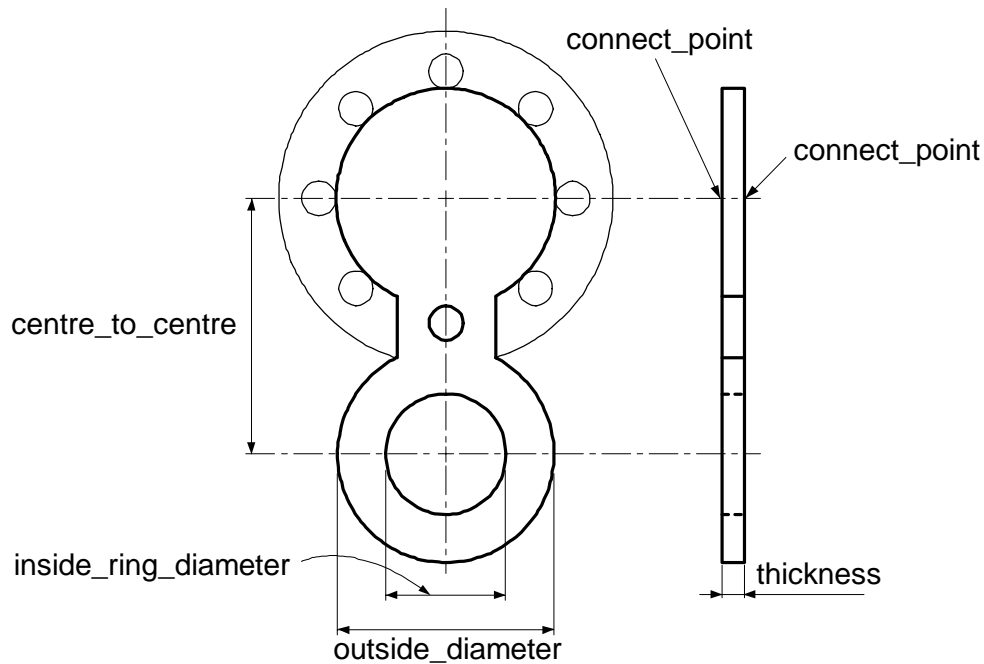


Figure 67 — Spectacle_blind

The data associated with a Spectacle_blind are the following:

- arm_width;
- centre_to_centre;
- inside_ring_diameter.

4.2.391.1 arm_width

The arm_width specifies the width of the arm connecting the paddles. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.391.2 centre_to_centre

The centre_to_centre specifies the distance between the geometric centres of the paddles. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.391.3 inside_ring_diameter

The inside_ring_diameter specifies the diameter of the bore hole through the ring paddle. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.392 Sphere

A Sphere is a type of Csg_element (see 4.2.111) that is a solid bounded by a surface at a constant radius from a centre point.

4.2.393 Splitter

A Splitter is a vane which is placed inside an Hvac_fitting (see 4.2.188) for the purpose of directing flow.

The data associated with a Splitter are the following:

- splitter_id;
- splitter_radius;
- splitter_radius_centre_offset;
- straight_portion_length.

4.2.393.1 splitter_id

The splitter_id specifies a unique identifier for the Splitter.

4.2.393.2 splitter_radius

The splitter_radius specifies the radius of the Splitter.

4.2.393.3 splitter_radius_centre_offset

The splitter_radius_centre_offset specifies the vertical distance from the throat centre to the Splitter centre.

4.2.393.4 straight_portion_length

The straight_portion_length specifies the length of the straight portion of the Splitter.

4.2.394 Spring_washer

A Spring_washer is a type of Washer (see 4.2.436). The Spring_washer has one radial cut and both ends are pulled to opposite directions, and is furnished with the function of a coil spring.

The data associated with a Spring_washer are the following

- thickness;
- outside_diameter.

4.2.394.1 thickness

The thickness specifies the distance between two faces of the material plate of the Spring_washer. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.394.2 outside_diameter

The outside_diameter specifies the external diameter of the Spring_washer. It may be specified as a single value or as a range of values.

ISO 10303-227:2005(E)

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.395 Square_to_round

A Square_to_round is a type of Csg_element (see 4.2.111) that consists of a planar, rectangular surface, a planar circular surface parallel to the rectangular surface, and an enclosing, transitional surface that connects the boundaries of the rectangular surface and circular surface.

4.2.396 Stay

A Stay is a type of Reinforcing_component (see 4.2.349) that is a tensile member placed between a run pipe and a branch pipe that are arranged in parallel. The Stay prevents the branch pipe from breaking or deforming.

NOTE Figure 68 depicts a typical Stay.

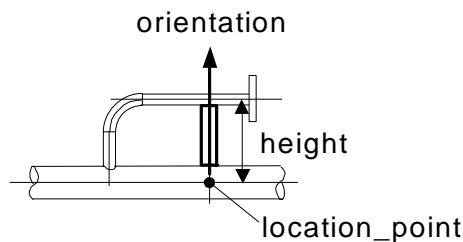


Figure 68 — Stay

The data associated with a Stay are the following:

— height.

4.2.396.1 height

The height is the distance between the location_point and the centreline of the branch pipe that is reinforced by the Stay.

4.2.397 Stopper

A Stopper is a type of Piping_support (see 4.2.301) that consists of a plate perpendicularly fixed to the pipe axis and one or more strengthening plates for the perpendicular plate. The Stopper is used to prevent the pipe from moving.

NOTE Figure 69 depicts a typical Stopper.

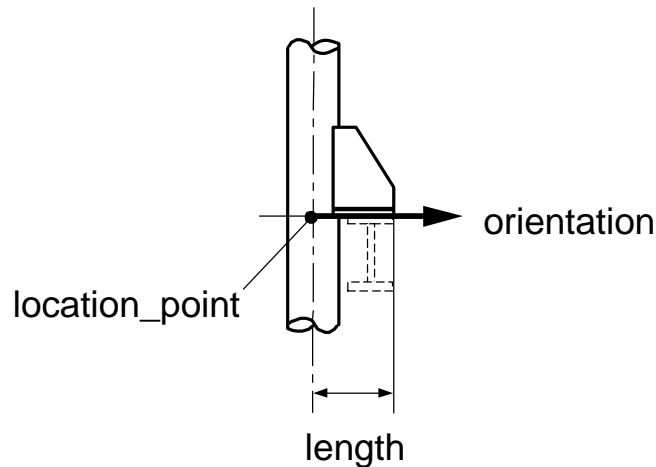


Figure 69 — Stopper

The data associated with a Stopper are the following:

— length.

4.2.397.1 length

The length is the distance between the outer face of the Stopper and the location_point.

4.2.398 Straight_pipe

A Straight_pipe is a type of Pipe (see 4.2.289) that does not change the direction of fluid flow.

The data associated with a Straight_pipe are the following:

- end_to_end_cut_length;
- end_to_end_length;
- cold_spring;
- longitudinal_welding_seam_orientation.

4.2.398.1 end_to_end_cut_length

The end_to_end_cut_length is the length of the Straight_pipe for shop fabrication that takes into account extra length required for installation variations and the subtracted length for the difference between designed length and shop fabricated length.

EXAMPLE The root_gap of the Buttweld (see 4.2.30) is an example of the difference between designed length and shop fabricated length.

4.2.398.2 end_to_end_length

The end_to_end_length specifies the external length of the Straight_pipe. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

ISO 10303-227:2005(E)

4.2.398.3 cold_spring

The cold_spring specifies the length of the Straight_pipe that is deducted from the designed length of the Straight_pipe to absorb expansion at operation temperature.

4.2.398.4 longitudinal_welding_seam_orientation

The longitudinal_welding_seam_orientation is the orientation of the welding seam of the Straight_pipe in plant coordinates. The orientation of the welding seam is specified by the orientation of the line on the cross section of the Straight_pipe connected between the centre of the Straight_pipe and the welding seam.

4.2.399 Stream_design_case

A Stream_design_case is the set of characteristics of a gas, liquid, vapour, or solid stream under a specific circumstance at the termination of a Piping_system_line_segment (see 4.2.305) or a Plant_item_connector_occurrence (see 4.2.319).

The data associated with a Stream_design_case are the following:

- description;
- flow_rate;
- pressure;
- stream_case_type;
- stream_data_reference;
- stream_design_id;
- velocity.

4.2.399.1 description

The description specifies a textual explanation or summary of the Stream_design_case.

4.2.399.2 flow_rate

The flow_rate specifies the stream volume, mass, or molar units per unit time. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.399.3 pressure

The pressure specifies the amount of force applied by the stream over a unit area. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.399.4 stream_case_type

The stream_case_type specifies the condition that the stream characteristics are being defined under. Stream_case_type is required for each Stream_design_case.

EXAMPLE Examples of stream_case_type conditions include normal, upset, and shutdown.

4.2.399.5 stream_data_reference

The stream_data_reference specifies the sources that provide the basis for the stream data.

4.2.399.6 stream_design_id

The stream_design_id specifies a unique identifier for the Stream_design_case. Stream_design_id is required for each Stream_design_case.

4.2.399.7 velocity

The velocity specifies the distance that the stream of gas, liquid, vapour, or solid stream moves per unit of time, usually in feet per minute or feet per second.

4.2.400 Stream_phase

A Stream_phase is the set of characteristics of a single gas, liquid, vapour, or solid stream that may be composed into a Stream_design_case (see 4.2.399).

The data associated with a Stream_phase are the following:

- constituent_mole_fraction;
- constituents;
- phase_density;
- phase_fraction;
- specific_gravity;
- surface_tension;
- temperature;
- viscosity.

4.2.400.1 constituent_mole_fraction

The constituent_mole_fraction specifies the mass ratio of any given component to the whole for the Stream_phase.

4.2.400.2 constituents

The constituents specifies the various chemicals for the Stream_phase.

4.2.400.3 phase_density

The phase_density specifies the amount of mass per unit volume for the Stream_phase.

4.2.400.4 phase_fraction

The phase_fraction specifies the percentage of the mass of this Stream_phase in the Stream_design_case (see 4.2.399).

ISO 10303-227:2005(E)

4.2.400.5 specific_gravity

The `specific_gravity` specifies the ratio of the mass of a liquid to the mass of an equal volume of distilled water at 4 degrees Celsius.

4.2.400.6 surface_tension

The `surface_tension` specifies the force per unit area of the cohesive forces at or near the surface of a liquid `Stream_phase`.

4.2.400.7 temperature

The `temperature` specifies the measure of molecular motion of a stream. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.400.8 viscosity

The `viscosity` specifies a measure of the resistance of a stream to deformation when subjected to a shear stress.

4.2.401 Structural_component

A `Structural_component` is a type of `Plant_item` (see 4.2.313) that is an individually identifiable item or combination of items that is part of the `Structural_system` (see 4.2.403).

NOTE `Structural_component` objects include structural steel members, load resisting walls, stairs, platforms foundations, supports (excluding pipe supports) for `Plant_item` objects, and have a primary function to transfer or resist live or dead loads.

The data associated with a `Structural_component` are the following:

- `exact_section`;
- `size_designator`.

4.2.401.1 exact_section

The `exact_section` specifies the detailed shape of a cross section of the structural element.

4.2.401.2 size_designator

The `size_designator` specifies the designation given to some types of plant structural elements to define cross-sectional size and general shape based on industry-standard practice.

EXAMPLE W30 X 132 is the U.S. American Institute of Steel Construction (AISC) designation for a wide flange beam of nominal 76.20 centimetres (30 inches) depth weighing 194.88 kilograms per metre (132 pounds per foot) of length. Similar designations exist for other plant structural elements such as angles, channels, and structural tee shapes. Also, like designations exist for other structural elements, e.g., reinforcing bar (#8 rebar).

4.2.402 Structural_load_connector

A `Structural_load_connector` is a type of `Plant_item_connector` (see 4.2.318) that connects two `Structural_component` (see 4.2.401) objects for the purpose of load transfer.

The data associated with a `Structural_load_connector` are the following:

— `type`.

4.2.402.1 `type`

The `type` specifies either a shear, moment, or shear and moment type of load at the connector.

4.2.403 `Structural_system`

A `Structural_system` is a type of `Plant_system` (see 4.2.329) that is an assembly of one or more `Structural_component` (see 4.2.401) objects and `Structural_load_connector` (see 4.2.402) objects.

The data associated with a `Structural_system` are the following:

— `type`.

4.2.403.1 `type`

The `type` specifies a designation that classifies the `Structural_system` based on the kind of service that it provides.

4.2.404 `Stub_in`

A `Stub_in` is a type of `Piping_connector` (see 4.2.295) that consists of the welding of two `Piping_component` (see 4.2.293) where a `Male_end` (see 4.2.257) of one `Piping_component` is inserted in a `Branch_hole` (see 4.2.26) of the other `Piping_component`.

NOTE Figure 70 depicts a typical `Stub_in`.

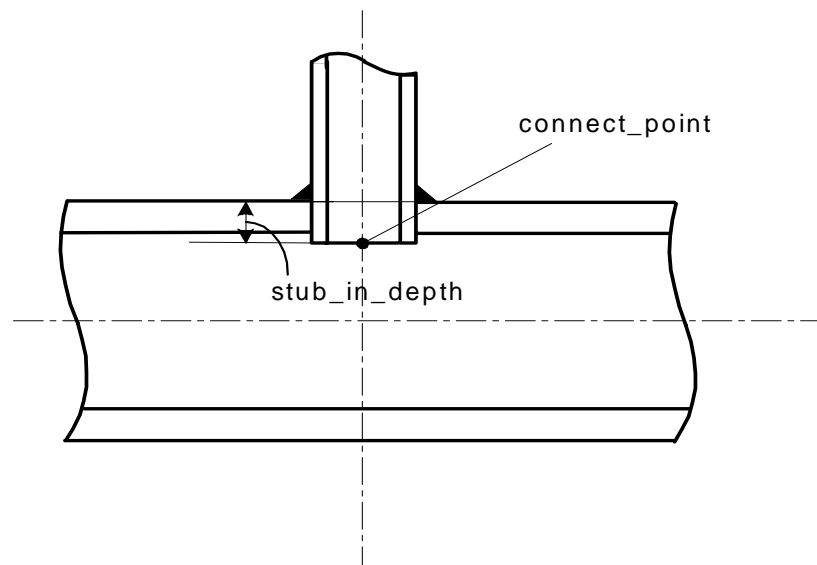


Figure 70 — `Stub_in`

The data associated with a `Stub_in` are the following:

— `stub_in_depth`.

ISO 10303-227:2005(E)

4.2.404.1 stub_in_depth

The `stub_in_depth` specifies the distance from the end of the stubbed-in `Piping_component` (see 4.2.293) to the point where the centreline of the stubbed-in `Piping_component` intersects the outer surface of the other `Piping_component`. It may be specified as a single value or as a range of values.

NOTE 1 See annex L for a discussion of attributes that may be assigned a single value or a range of values.

NOTE 2 The attribute for `stub_in_depth` will only be used when the `Piping_component` participates in a connection.

4.2.405 Stud_bolt

A `Stud_bolt` is a type of a `Bolt` (see 4.2.21) that has screw threads on both ends.

The data associated with a `Stud_bolt` are the following:

— `length`.

4.2.405.1 length

The `length` specifies the distance from the tip of one screw thread to the tip of the other screw thread of the `Stud_bolt`. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.406 Sub_plant_relationship

A `Sub_plant_relationship` is the relationship between `Plant` (see 4.2.311) objects and sub-plants and defines their relative locations.

EXAMPLE Examples of `Sub_plant_relationships` include manufacturing `Line` (see 4.2.237), `Train` (see 4.2.423), and `Plant unit`.

The data associated with a `Sub_plant_relationship` are the following:

— `location_and_orientation`.

4.2.406.1 location_and_orientation

The `location_and_orientation` specifies the relative position and orientation of the sub-plant within the `Plant` (see 4.2.311).

4.2.407 Supplied_equipment

A `Supplied_equipment` is an `Equipment` (see 4.2.132) that is, or is to be, provided by a `Supplier` (see 4.2.408) for use in a `Plant` (see 4.2.311).

The data associated with a `Supplied_equipment` are the following:

— `delivery_date`;

— `purchase_order_number`;

— `requisition_number`.

4.2.407.1 delivery_date

The `delivery_date` specifies the calendar day-month-year and time when the Equipment (see 4.2.132) was, or is, scheduled to be delivered to the Site (see 4.2.379).

NOTE A specific ordering of the day, month, and year within the date is not required.

4.2.407.2 purchase_order_number

The `purchase_order_number` specifies an identifier assigned to the Equipment (see 4.2.132) purchase order.

4.2.407.3 requisition_number

The `requisition_number` specifies an identifier assigned to a written request for a piece of Equipment (see 4.2.132).

4.2.408 Supplier

A Supplier is the organization that produces a piece of Equipment (see 4.2.132) or publishes a catalogue.

The data associated with a Supplier are the following:

- `supplier_id`;
- `vendor_name`.

4.2.408.1 supplier_id

The `supplier_id` specifies a unique identifier for the Supplier. `Supplier_id` is required for each Supplier.

4.2.408.2 vendor_name

The `vendor_name` specifies a textual label used by the company or organization that is providing the Equipment (see 4.2.132).

4.2.409 Support_component

A `Support_component` is a type of `Plant_item` (see 4.2.313) that is designed to support other `Plant_item` objects. This support includes carrying the weight of the `Plant_item`, including internal fluids and external insulation, permitting thermal expansion and contraction, and dampening any vibrational or seismic forces applied to the `Plant_item`. Each `Support_component` may be a `Cable_support` (see 4.2.32).

EXAMPLE If a `Support_component` is not a `Cable_support`, it may be a branch reinforcing pad, a hanger, a footer, pipe rack, or anything that supports the weight of a `Plant_item`.

4.2.410 Support_constraints

A `Support_constraints` is a limitation on the movement of a `Plant_item` (see 4.2.313) support, normally in specified directions.

The data associated with a `Support_constraints` are the following:

- `gap`;
- `K`;

ISO 10303-227:2005(E)

— restrained.

4.2.410.1 gap

The gap specifies the allowable space between a Plant_item (see 4.2.313) and a Plant_item support.

4.2.410.2 K

The K specifies the ratio between the force applied to the support and the support deflection produced by that force.

4.2.410.3 restrained

The restrained specifies a boolean indicator that specifies whether the Plant_item (see 4.2.313) support limits movement of the Plant_item in a specified direction.

4.2.411 Support_usage

A Support_usage is the relationship between a defined load bearing element and the Plant_item (see 4.2.313) that it provides support for. Each Support_usage may be a Support_usage_connection (see 4.2.412).

The data associated with a Support_usage are the following:

- detail_sheet_reference;
- function.

4.2.411.1 detail_sheet_reference

The detail_sheet_reference specifies the support detail drawings that define the support.

4.2.411.2 function

The function specifies the role or purpose of using the Plant_item (see 4.2.313) as a support.

EXAMPLE Examples of function designations include anchor, guide, restraint, and support.

4.2.412 Support_usage_connection

A Support_usage_connection is a type of Support_usage (see 4.2.411) that specifies the actual Plant_item_connection_occurrence (see 4.2.317) where the support occurs.

4.2.413 Surface

A Surface is a type of Wire_and_surface_element (see 4.2.439) that is a set of connected points in 3D geometric space that is always locally 2D, but need not be a manifold.

NOTE Surface has many subtypes. Besides being a self-contained object, Surface is used in the definition of other geometric objects such as Point (see 4.2.334) objects and Curve (see 4.2.112) objects. It will not be instantiated as it has no attributes.

4.2.414 Survey_point

A Survey_point is a particular location (position and elevation) on a Site (see 4.2.379) relative to a known geographic location.

NOTE Survey_point data are established by performing a survey. The collection of Survey_point data can be interpolated to generate a faceted or surface representation of the topography of the Site.

4.2.415 Swept_bend_pipe

A Swept_bend_pipe is a type of Pipe (see 4.2.289) that is bent to alter the direction of flow of its contents.

The data associated with a Swept_bend_pipe are the following:

- wall_thinning_allowance;
- centreline_radius;
- sweep_angle.

4.2.415.1 wall_thinning_allowance

The wall_thinning_allowance specifies the amount of pipe wall material that must be provided to compensate for reduction in wall thickness of the Pipe (see 4.2.289) caused by bending.

NOTE As a Pipe is bent, the wall thickness on the outside portion of the bend will reduce as material stretches.

4.2.415.2 centreline_radius

The centreline_radius specifies the radius of the Swept_bend_pipe circular arc as measured to the centreline of the Pipe (see 4.2.289).

4.2.415.3 sweep_angle

The sweep_angle specifies the subtended angle of the Swept_bend_pipe circular arc.

4.2.416 System_space

A System_space is a type of Plant_volume (see 4.2.331) that is used to describe or allocate a volume of space for use by a Plant_system (see 4.2.329).

EXAMPLE Examples of System_space type designations include electrical chases, Hvac chases, and instrumentation and control chases.

4.2.417 Tee

A Tee is a type of Fitting (see 4.2.147) that is a single branched outlet Fitting consisting of a straight run and a perpendicular branch used to permit straight-through and 90-degree flow.

NOTE Figure 71 depicts a typical butt-weld Tee.

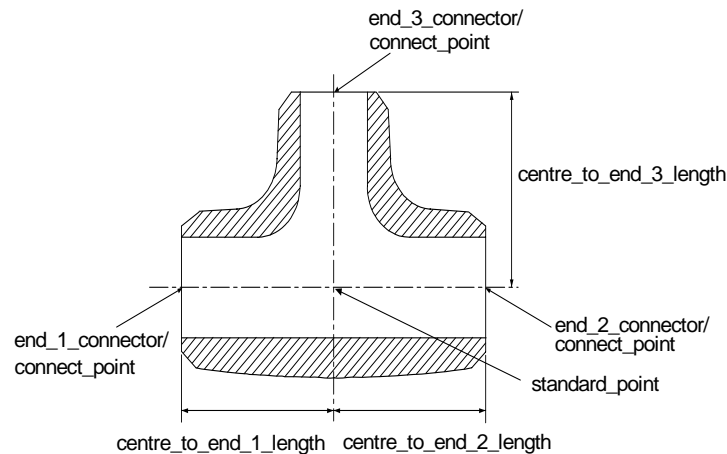


Figure 71 — Tee

The data associated with a Tee are the following:

- centre_to_end_1_length;
- centre_to_end_2_length;
- centre_to_end_3_length;
- end_1_connector;
- end_2_connector;
- end_3_connector.

4.2.417.1 centre_to_end_1_length

The centre_to_end_1_length specifies the distance from the intersection of the Tee straight-run centreline and branch-run centreline to the end-one face. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.417.2 centre_to_end_2_length

The centre_to_end_2_length specifies the distance from the intersection of the Tee straight-run centreline and branch-run centreline to the end-two face. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.417.3 centre_to_end_3_length

The centre_to_end_3_length specifies the distance from the intersection of the Tee straight-run centreline and branch-run centreline to the end-three face. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.417.4 end_1_connector

The end_1_connector specifies the Piping_connector (see 4.2.295) along the straight-run centreline designated as end one.

4.2.417.5 end_2_connector

The end_2_connector specifies the Piping_connector (see 4.2.295) along the straight-run centreline designated as end two.

4.2.417.6 end_3_connector

The end_3_connector specifies the Piping_connector (see 4.2.295) along the branch-run centreline designated as end three.

4.2.418 Threaded

A Threaded is a type of Piping_connector (see 4.2.295) that is a physical feature of a Plant_item (see 4.2.313) that allows partial insertion of a male threaded connector.

NOTE Figure 72 depicts a typical Threaded end.

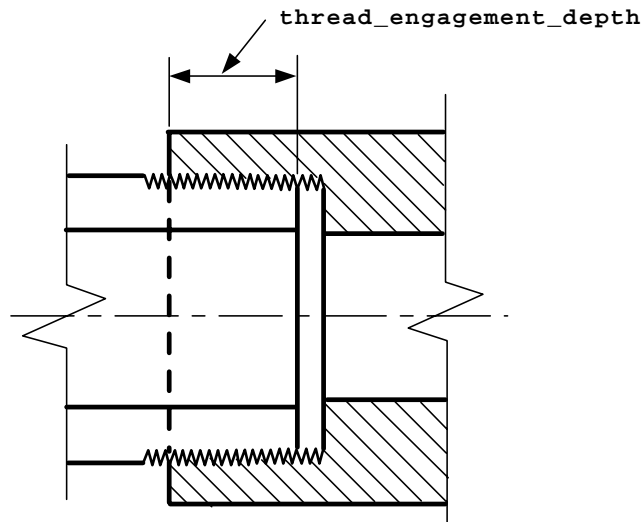


Figure 72 — Threaded

The data associated with a Threaded are the following:

— thread_engagement_depth.

4.2.418.1 thread_engagement_depth

The thread_engagement_depth specifies the insertion distance of the male threaded connector into a female threaded connector.

ISO 10303-227:2005(E)

4.2.419 Threaded_flange

A Threaded_flange is a type of Flange (see 4.2.148) whose bore is Threaded (see 4.2.418) and that is connected to a Pipe (see 4.2.289) by screwing a threaded Pipe end into the Flange.

NOTE Figure 73 depicts a typical Threaded_flange.

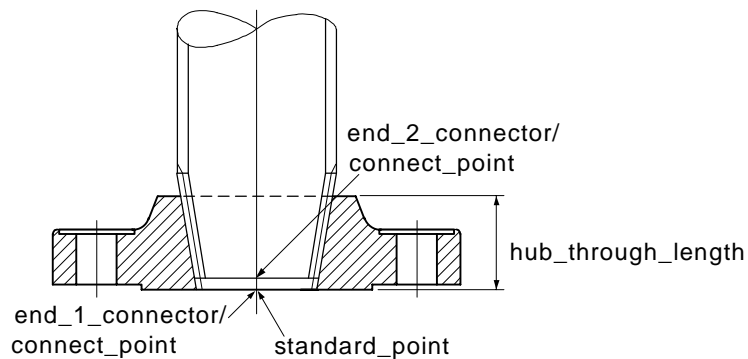


Figure 73 — Threaded_flange

4.2.420 Title_block

The Title_block is the block on the Schematic (see 4.2.358) that depicts administrative information about the drawing.

NOTE The title block is usually located in the lower right corner of the drawing and contains the project name, project receiver, and project owner.

The data associated with Title_block are the following:

- approvals;
- contractor_information.

4.2.420.1 approvals

The approvals specifies who has authorized the Schematic (see 4.2.358) for a purpose at a specific authorization level.

4.2.420.2 contractor_information

The contractor_information specifies what contractor, if any, has contributed to that particular Schematic (see 4.2.358) and in what way they have made a contribution.

4.2.421 Toothed_lock_washer

A Toothed_lock_washer is a type of Washer (see 4.2.436). The Toothed_lock_washer has teeth on its outer or inner, or both circular edges. The teeth are bent or twisted to improve electric conductivity when fastened.

The data associated with a `Toothed_lock_washer` are the following:

- `thickness`;
- `outside_diameter`.

4.2.421.1 thickness

The `thickness` specifies the distance between two faces of the material plate of the `Toothed_lock_washer`. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.421.2 outside_diameter

The `outside_diameter` specifies the diameter of a circumscribed circle of the `Toothed_lock_washer`. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.422 Torus

A `Torus` is a type of `Csg_element` (see 4.2.111) that is defined by sweeping the area of a circle (with minor radius) about a larger circle. A `Torus` may be an `Reducing_torus` (see 4.2.347). A `Torus` may be a `Trimmed_torus` (see 4.2.429).

4.2.423 Train

A `Train` is a type of `Plant` (see 4.2.311) that consists of connected `Plant_items` (see 4.2.313) that perform a distinct function. It is one of two or more distinct but similar portions of a system that perform the same function.

4.2.424 Trimmed_block

A `Trimmed_block` is a type of `Csg_element` (see 4.2.111) that is formed by cutting a `Block` (see 4.2.20) with one or more planes and removing one or more of the resulting sections.

4.2.425 Trimmed_cone

A `Trimmed_cone` is a type of `Csg_element` (see 4.2.111) that is formed by cutting a `Cone` (see 4.2.96) with one or more planes and removing one or more of the resulting sections.

4.2.426 Trimmed_cylinder

A `Trimmed_cylinder` is a type of `Csg_element` (see 4.2.111) that is formed by cutting a `Cylinder` (see 4.2.113) with one or more planes and removing one or more of the resulting sections.

4.2.427 Trimmed_pyramid

A `Trimmed_pyramid` is a type of `Csg_element` (see 4.2.111) that is formed by cutting a `Pyramid` (see 4.2.341) with one or more planes and removing one or more of the resulting sections.

4.2.428 Trimmed_sphere

A `Trimmed_sphere` is a type of `Csg_element` (see 4.2.111) that is formed by cutting a `Sphere` (see 4.2.392) with one or more planes and removing one or more of the resulting sections.

ISO 10303-227:2005(E)

4.2.429 Trimmed_torus

A Trimmed_torus is a type of Csg_element (see 4.2.111) that is formed by cutting a Torus (see 4.2.422) with one or more planes and removing one or more of the resulting sections.

4.2.430 Trunnion

A Trunnion is a type of Piping_support (see 4.2.301) that is attached to a vertical pipe. The main body of the Trunnion is typically pipe, but shape steel or plate is occasionally used as the material of the part. The Trunnion is placed horizontally and supports the weight that acts perpendicularly to the axis of the main body.

NOTE Figure 74 depicts a typical Trunnion.

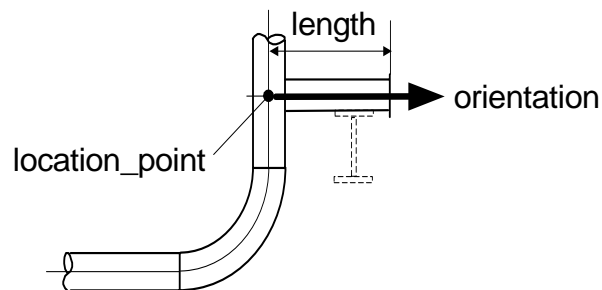


Figure 74 — Trunnion

The data associated with a Trunnion are the following:

— length.

4.2.430.1 length

The length specifies the distance between the outer face of the Trunnion and the location_point

4.2.431 Union

A Union is a type of Fitting (see 4.2.147) composed of multiple pieces that allows the joining or separating of piping without rotating the piping. It consists of two internally Threaded (see 4.2.418) ends and a centre piece that draws the two ends together when rotated.

NOTE Figure 75 depicts a typical socket-weld Union.

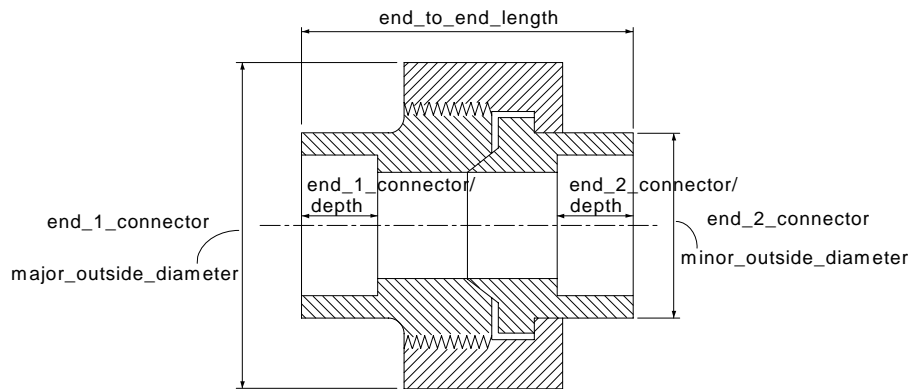


Figure 75 — Union

The data associated with a Union are the following:

- end_1_connector;
- end_2_connector;
- end_to_end_length;
- major_outside_diameter;
- minor_outside_diameter.

4.2.431.1 end_1_connector

The end_1_connector specifies the Piping_connector (see 4.2.295) that corresponds to the end with the major_outside_diameter.

4.2.431.2 end_2_connector

The end_2_connector specifies the Piping_connector (see 4.2.295) that corresponds to the end with the minor_outside_diameter.

4.2.431.3 end_to_end_length

The end_to_end_length specifies the external distance between the end-one face and the end-two face. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.431.4 major_outside_diameter

The major_outside_diameter specifies the maximum diameter of the Union along the centreline, normally at the joint between the two internal pieces of the Union. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.431.5 minor_outside_diameter

The minor_outside_diameter specifies the external diameter of the Union at the end-one and end-two connections. It may be specified as a single value or as a range of values.

ISO 10303-227:2005(E)

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.432 Unit

A Unit is a type of Plant (see 4.2.311) that is the designation (name or number) for a Plant or portion of a Plant that produces the same product by different means.

NOTE A Unit may perform a unique function for the Plant such as oxygen production, or there may be several Units that perform the same function such as multiple Units in a power generation installation. The underground or offsite portion of a Plant may be a Unit.

4.2.433 User_defined_attribute_value

A User_defined_attribute_value is a name-value pair for any characteristic that is not specified by an explicit attribute of an application object. The User_defined_attribute_value enables the exchange of characteristics and their values that are not defined explicitly by an application object attribute.

The data associated with a User_defined_attribute_value are the following:

- name;
- value.

4.2.433.1 name

The name specifies a label that characterizes the User_defined_attribute_value.

4.2.433.2 value

The value specifies the data for the User_defined_attribute_value.

4.2.434 Valve

A Valve is a type of Piping_component (see 4.2.293) that provides isolation or controls fluid direction or flow rate.

The data associated with a Valve are the following:

- actuator_type;
- operation_mode;
- valve_stem_orientation;
- end_to_end_length.

4.2.434.1 actuator_type

The actuator_type specifies a descriptive designation of device or mechanism used to open, position, or close a Valve.

4.2.434.2 operation_mode

The operation_mode specifies the failure mode, as in the state of being open or closed when the actuator either has no power or is in the default position.

4.2.434.3 valve_stem_orientation

The `valve_stem_orientation` specifies the centreline direction of the Valve stem.

4.2.434.4 end_to_end_length

The `end_to_end_length` specifies the distance between connecting faces of a Valve.

4.2.435 Vector

A Vector is a type of Curve (see 4.2.112). It specifies a direction in 3D space.

4.2.436 Washer

A Washer is a type of Bolt_and_nut_component (see 4.2.22) that is used to improve the tightness of a screw fastener. The Washer is a flattened, ring-shaped device.

4.2.437 Weld_neck_flange

A `Weld_neck_flange` is a type of Flange (see 4.2.148) with a tapered hub bored to match the inside diameter of matching `Plant_item` (see 4.2.313) and with the hub beveled for butt welding to the `Plant_item`.

NOTE Figure 76 depicts a typical Weld-neck flange.

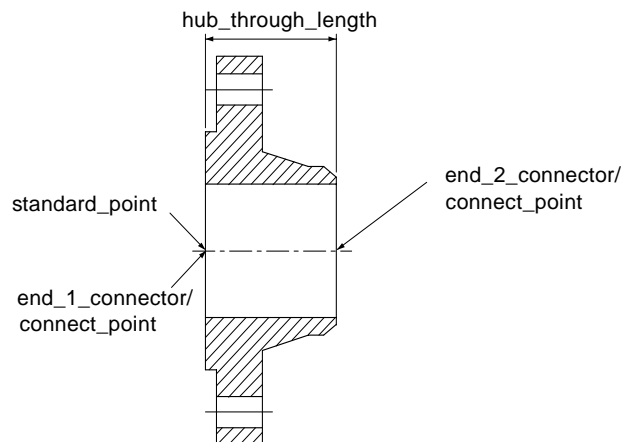


Figure 76 — Weld_neck_flange

4.2.438 Weld_neck_jacket_flange

A `Weld_neck_jacket_flange` is a type of `Weld_neck_flange` (see 4.2.437) that is welded onto a `Piping_spool` (see 4.2.299) that is jacketed closing off the jacket.

NOTE Figure 77 depicts a typical `Weld_neck_jacket_flange`.

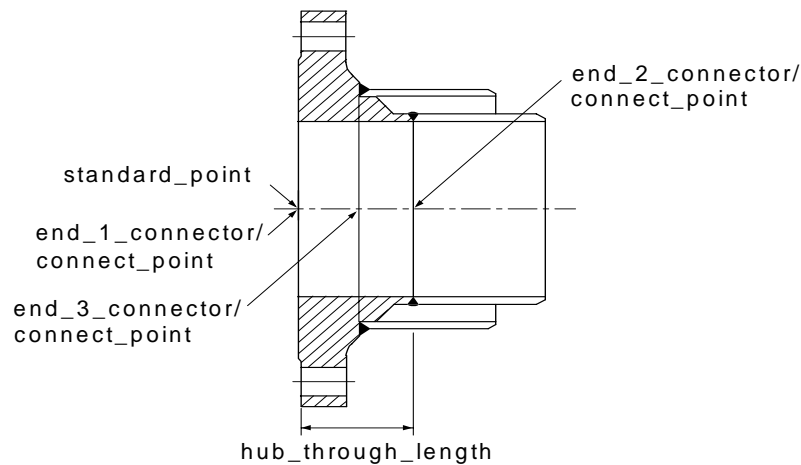


Figure 77 — Weld_neck_jacket_flange

The data associated with a `Weld_neck_jacket_flange` are the following:

— `end_3_connector`.

4.2.438.1 end_3_connector

The `end_3_connector` specifies the `Piping_connector` (see 4.2.295) where the outside `Pipe` (see 4.2.289) of the jacketed piping connects to the `Flange` (see 4.2.148).

4.2.439 Wire_and_surface_element

A `Wire_and_surface_element` is a type of `Shape_representation_element` (see 4.2.375) that is composed of geometric elements. Each `Wire_and_surface_element` is either: a `Curve` (see 4.2.112), a `Point` (see 4.2.334), or a `Surface` (see 4.2.413).

4.2.440 Y_type_lateral

A `Y_type_lateral` is a type of `Fitting` (see 4.2.147) that is a three-way fitting whose branches are at equal angles from the straight-run centreline forming a flow passage shaped like the letter "Y".

NOTE Figure 78 depicts a typical `Y_type_lateral`.

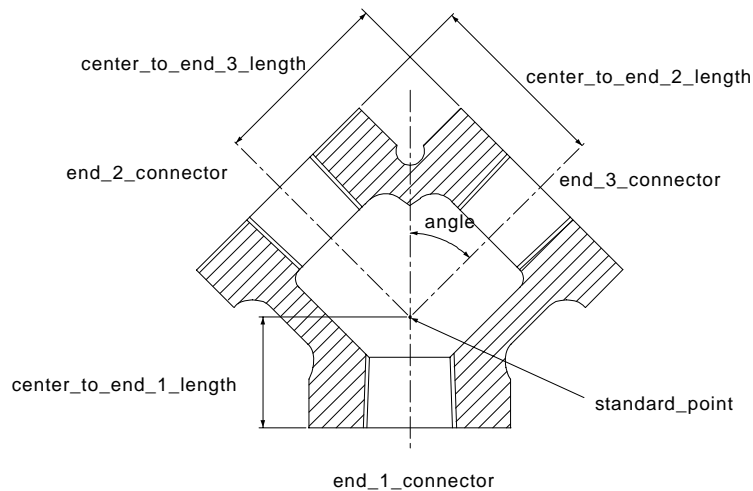


Figure 78 — Y_type_lateral

The data associated with a Y_type_lateral are the following:

- angle;
- centre_to_end_1_length;
- centre_to_end_2_length;
- centre_to_end_3_length;
- end_1_connector;
- end_2_connector;
- end_3_connector.

4.2.440.1 angle

The angle specifies the angle of the branch portions of the Y_type_lateral with respect to the straight run. It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.440.2 centre_to_end_1_length

The centre_to_end_1_length specifies the distance from the intersection of the Y_type_lateral straight-run centreline and branch-run centreline to the end-one working Point (see 4.2.334). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.440.3 centre_to_end_2_length

The centre_to_end_2_length specifies the distance from the intersection of the Y_type_lateral straight-run centreline and branch-run centreline to the end-two working Point (see 4.2.334). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

ISO 10303-227:2005(E)

4.2.440.4 centre_to_end_3_length

The `centre_to_end_3_length` specifies the distance from the intersection of the `Y_type_lateral` straight-run centreline and branch-run centreline to the end-three working Point (see 4.2.334). It may be specified as a single value or as a range of values.

NOTE See annex L for a discussion of attributes that may be assigned a single value or a range of values.

4.2.440.5 end_1_connector

The `end_1_connector` specifies the `Piping_connector` (see 4.2.295) designated as end one.

4.2.440.6 end_2_connector

The `end_2_connector` specifies the `Piping_connector` (see 4.2.295) designated as end two.

4.2.440.7 end_3_connector

The `end_3_connector` specifies the `Piping_connector` (see 4.2.295) designated as end three.

4.3 Application assertions

This subclause specifies the application assertions for the plant spatial configuration application protocol. Application assertions specify the relationships among application objects, the cardinality of the relationships, and the rules required for the integrity and validity of the application objects and UoFs. The application assertions and their definitions are given below.

4.3.1 Analysis_data_point to Plant_item

Each `Analysis_data_point` has zero or more `Plant_item` objects. Each `Plant_item` is defined for zero or more `Analysis_data_point` objects.

4.3.2 Arrangement_branch_termination to Arrangement_branch_connection

Each `Arrangement_branch_termination` branches from exactly one `Arrangement_branch_connection` object. Each `Arrangement_branch_connection` has branched from it exactly one `Arrangement_branch_termination` object.

4.3.3 Arrangement_less_mechanical_system to Design_arrangement_performance

Each `Arrangement_less_mechanical_system` transports material for zero or more `Design_arrangement_performance` objects. Each `Design_arrangement_performance` defines potential performance for zero or more `Arrangement_less_mechanical_system` objects.

4.3.4 Arrangement_less_mechanical_system to Mechanical_system_component

Each `Arrangement_less_mechanical_system` is composed of zero or more `Mechanical_system_component` objects. Each `Mechanical_system_component` is a component in zero or more `Arrangement_less_mechanical_system` objects.

4.3.5 Arrangement_load to plant_item (as items)

Each Arrangement_load has zero or more Plant_item objects. Each Plant_item object may be an item of zero or one Arrangement_load objects.

4.3.6 Arrangement_load to User_defined_attribute_value (as user_defined_loads)

Each Arrangement_load has zero or more User_defined_attribute_value objects. Each User_defined_attribute_value object may be a user_defined_load for zero or one Arrangement_load object.

4.3.7 Arrangement_plant_item_branch_connector to Arrangement_plant_item_branch_connection

Each Arrangement_plant_item_branch_connector is connected to zero or one Arrangement_plant_item_branch_connection object. Each Arrangement_plant_item_branch_connection connects exactly one Arrangement_plant_item_branch_connector object.

4.3.8 Arrangement_plant_item_connector to Arrangement_plant_item_connection

Each Arrangement_plant_item_connector is connected to zero or one Arrangement_plant_item_connection object. Each Arrangement_plant_item_connection connects exactly one Arrangement_plant_item_connector object.

4.3.9 Arrangement_plant_item_termination to Arrangement_plant_item_connection

Each Arrangement_plant_item_termination is connected to exactly one Arrangement_plant_item_connection object. Each Arrangement_plant_item_connection connects exactly one Arrangement_plant_item_termination object.

4.3.10 Arrangement_to_arrangement_connection to Arrangement_to_arrangement_termination

Each Arrangement_to_arrangement_connection connects two or more Arrangement_to_arrangement_termination objects. Each Arrangement_to_arrangement_termination is connected by exactly one Arrangement_to_arrangement_connection object.

4.3.11 Bolt_and_nut_set to Bolt_and_nut_component

Each Bolt_and_nut_set consists of one or more Bolt_and_nut_component objects. Each Bolt_and_nut_component is contained in exactly one Bolt_and_nut_set object.

4.3.12 Breakline to Survey_point

Each Breakline is defined by zero or more Survey_point objects. Each Survey_point defines zero or more Breakline objects.

4.3.13 Building to Location_in_building

Each Building is a reference frame for zero or more Location_in_building objects. Each Location_in_building has a reference frame provided by exactly one Building object.

ISO 10303-227:2005(E)

4.3.14 Building to Reference_geometry

Each Building has column lines defined by zero or more Reference_geometry objects. Each Reference_geometry defines column lines for zero or one Building object.

4.3.15 Cable to Cableway_component

Each Cable runs through zero or more Cableway_component objects. Each Cableway_component contains zero or more Cable objects.

4.3.16 Cableway_size_description to Cableway_component

Each Cableway_size_description describes size of zero or more Cableway_component objects. Each Cableway_component has a size described by exactly one Cableway_size_description object.

4.3.17 Cableway_size_description to Changed_cableway_size_description

Each Cableway_size_description is changed by zero or one Changed_cableway_size_description object. Each Changed_cableway_size_description changes exactly one Cableway_size_description object.

4.3.18 Catalogue_connector to Connector_definition

Each Catalogue_connector defines zero or one Connector_definition object. Each Connector_definition is defined by zero or one Catalogue_connector object.

4.3.19 Catalogue_definition to Catalogue_connector

Each Catalogue_definition contains zero or more Catalogue_connector objects. Each Catalogue_connector is contained by exactly one Catalogue_definition object.

4.3.20 Catalogue_definition to Catalogue_item

Each Catalogue_definition contains zero or more Catalogue_item objects. Each Catalogue_item is contained by exactly one Catalogue_definition object.

4.3.21 Catalogue_item to Catalogue_item_substitute

Each Catalogue_item has a zero or more Catalogue_item_substitute objects. Each Catalogue_item_substitute identifies a substitute for exactly one Catalogue_item object.

4.3.22 Catalogue_item to Plant_item_definition

Each Catalogue_item defines zero or one Plant_item_definition object. Each Plant_item_definition is defined by zero or one Catalogue_item object.

4.3.23 Change to Change_item

Each Change changes zero or more Change_item objects. Each Change_item is changed by exactly one Change objects.

4.3.24 Change to Change_life_cycle_stage_usage

Each Change is assigned by one or more Change_life_cycle_stage_usage objects. Each Change_life_cycle_stage_usage assigns exactly one Change object.

4.3.25 Change_life_cycle_stage to Change_life_cycle_stage_sequence (as successor)

Each Change_life_cycle_stage is successor in zero or more Change_life_cycle_stage_sequence objects. Each Change_life_cycle_stage_sequence has as successor exactly one Change_life_cycle_stage object.

4.3.26 Change_life_cycle_stage to Change_life_cycle_stage_sequence (as predecessor)

Each Change_life_cycle_stage is predecessor in zero or more Change_life_cycle_stage_sequence objects. Each Change_life_cycle_stage_sequence has as predecessor exactly one Change_life_cycle_stage object.

4.3.27 Change_life_cycle_stage to Change_life_cycle_stage_usage

Each Change_life_cycle_stage has changes assigned by zero or more Change_life_cycle_stage_usage objects. Each Change_life_cycle_stage_usage assigns changes for exactly one Change_life_cycle_stage object.

4.3.28 Change_life_cycle_stage_usage to Change_approval

Each Change_life_cycle_stage_usage is approved by zero or more Change_approval objects. Each Change_approval approves exactly one Change_life_cycle_stage_usage object.

4.3.29 Clamp_set to Bolt_and_nut_component

Each Clamp_set consists of zero or more Bolt_and_nut_component objects. Each Bolt_and_nut_component is associated with zero or one Clamp_set object.

4.3.30 Clamp_set to Clamp

Each Clamp_set consists of one or more Clamp objects. Each Clamp is associated with exactly one Clamp_set object.

4.3.31 Component_size_description to Changed_component_size_description

Each Component_size_description is changed by zero or one Changed_component_size_description object. Each Changed_component_size_description changes exactly one Component_size_description object.

4.3.32 Component_size_description to User_defined_attribute_value (as user_defined_parameter)

Each Component_size_description has zero or more User_defined_attribute_value objects. Each User_defined_attribute_value object may be a user_defined_parameter for zero or one Component_size_description object.

4.3.33 Connected_collection to Plant_item_connection

Each Connected_collection contains zero or more Plant_item_connection objects. Each Plant_item_connection participates in zero or more Connected_collection objects.

4.3.34 Connection_definition to Connector_definition

Each Connection_definition connects two or more Connector_definition objects. Each Connector_definition is connected by exactly one Connection_definition object.

4.3.35 Connection_definition to Functional_connection_definition_satisfaction

Each Connection_definition is functional requirements for zero or more Functional_connection_definition_satisfaction objects. Each Functional_connection_definition_satisfaction gets the functional requirements from exactly one Connection_definition object.

Each Connection_definition satisfies requirements for zero or more Functional_connection_definition_satisfaction objects. Each Functional_connection_definition_satisfaction has requirements satisfied by exactly one Connection_definition object.

4.3.36 Connection_definition to Plant_item_connection_occurrence

Each Connection_definition defines zero or more Plant_item_connection_occurrence objects. Each Plant_item_connection_occurrence is defined by zero or one Connection_definition object.

4.3.37 Connection_material to Bolt_and_nut_set

Each Connection_material includes zero or more Bolt_and_nut_set objects. Each Bolt_and_nut_set is used in zero or more Connection_material objects.

4.3.38 Connection_material to Clamp_set

Each Connection_material includes zero or more Clamp_set objects. Each Clamp_set is used as zero or more Connection_material objects.

4.3.39 Connector_definition to Catalogue_connector

Each Connector_definition is used as zero or more Catalogue_connector objects. Each Catalogue_connector is zero or one Connector_definition object.

4.3.40 Connector_definition to Functional_connector_definition_satisfaction

Each Connector_definition is functional requirements for zero or more Functional_connector_definition_satisfaction objects. Each Functional_connector_definition_satisfaction gets the functional requirements from exactly one Connector_definition object.

Each Connector_definition satisfies requirements for zero or more Functional_connector_definition_satisfaction objects. Each Functional_connector_definition_satisfaction has requirements satisfied by exactly one Connector_definition object.

4.3.41 Connector_definition to Plant_item_connector_occurrence

Each Connector_definition defines zero or more Plant_item_connector_occurrence objects. Each Plant_item_connector_occurrence is defined by zero or one Connector_definition object.

4.3.42 Design_arrangement_performance to Arrangement_load (as is_composed_of)

Each Design_arrangement_performance is composed of one or more Arrangement_load objects. Each Arrangement_load is an element of exactly one Design_arrangement_performance object.

4.3.43 Design_arrangement_performance to User_defined_attribute_value (as user_defined_parameter)

Each Design_arrangement_performance has zero or more User_defined_attribute_value objects. Each User_defined_attribute_value object may be a user_defined_parameter for zero or one Design_arrangement_performance object.

4.3.44 Design_project to Project_design_assignment

Each Design_project is performed in one or more Project_design_assignment objects. Each Project_design_assignment assigns a task to exactly one Design_project object.

4.3.45 Design_project to Title_block

Each Design_project is displayed on zero or more Title_block objects. Each Title_block displays zero or one Design_project object.

4.3.46 Document to Changed_document

Each Document is changed by zero or one Changed_document object. Each Changed_document changes exactly one Document object.

4.3.47 Document to Connection_inspection_record

Each Document defines inspection information for zero or more Connection_inspection_record objects. Each Connection_inspection_record has inspection information defined by zero or more Document objects.

4.3.48 Document to Piping_spool_inspection_record

Each Document defines inspection information for zero or more Piping_spool_inspection_record objects. Each Piping_spool_inspection_record has inspection information defined by zero or more Document objects.

4.3.49 Document to Shape_inspection_record

Each Document defines inspection information for zero or more Shape_inspection_record objects. Each Shape_inspection_record has inspection information defined by zero or more Document objects.

ISO 10303-227:2005(E)

4.3.50 Ducting_system to Schematic_element

Each Ducting_system is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Ducting_system objects.

4.3.51 Ducting_system to Stream_design_case

Each Ducting_system transports material for zero or more Stream_design_case objects. Each Stream_design_case defines potential material zero or more Ducting_system objects.

4.3.52 Equipment to Equipment_trim_piping

Each Equipment requires zero or more Equipment_trim_piping objects. Each Equipment_trim_piping is required by exactly one Equipment object.

4.3.53 Equipment to Supplied_equipment

Each Equipment is used as zero or more Supplied_equipment objects. Each Supplied_equipment is exactly one Equipment object.

4.3.54 Facet_trigon to Survey_point

Each Facet_trigon is defined by exactly three Survey_point objects. Each Survey_point defines zero or more Facet_trigon objects.

4.3.55 Faceted_surface_representation to Facet_trigon

Each Faceted_surface_representation is composed of one or more Facet_trigon objects. Each Facet_trigon is a component of exactly one Faceted_surface_representation object.

4.3.56 Functional_connector to Functional_connector_occurrence_satisfaction

Each Functional_connector is functional requirements for zero or more Functional_connector_occurrence_satisfaction objects. Each Functional_connector_occurrence_satisfaction gets the functional requirements from exactly one Functional_connector object.

4.3.57 Functional_connector to Schematic_element

Each Functional_connector is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Functional_connector objects.

4.3.58 Functional_design_view to Functional_plant_item_satisfaction

Each Functional_design_view is functional requirements for zero or more Functional_plant_item_satisfaction objects. Each Functional_plant_item_satisfaction gets the functional requirements from exactly one Functional_design_view object.

4.3.59 Functional_plant to Functional_plant_satisfaction

Each Functional_plant is functional requirements for zero or more Functional_plant_satisfaction objects. Each Functional_plant_satisfaction gets the functional requirements from exactly one Functional_plant object.

4.3.60 Functional_plant to Plant_system

Each Functional_plant is made up of zero or more Plant_system objects. Each Plant_system is part of exactly one Functional_plant object.

4.3.61 Hull_applicability to Plant_item

Each Hull_applicability defines effectivity of zero or more Plant_item objects. Each Plant_item is effective in zero or more Hull_applicability objects.

4.3.62 Hvac_access_opening to Changed_hvac_access_opening

Each Hvac_access_opening is changed by zero or one Changed_hvac_access_opening object. Each Changed_hvac_access_opening changes exactly one Hvac_access_opening object.

4.3.63 Hvac_band_support to Hvac_hanger

Each Hvac_band_support is held by one or two Hvac_hanger objects. Each Hvac_hanger holds exactly one Hvac_band_support object.

4.3.64 Hvac_branch_connection to Changed_hvac_branch_connection

Each Hvac_branch_connection is changed by zero or one Changed_hvac_branch_connection object. Each Changed_hvac_branch_connection changes exactly one Hvac_branch_connection object.

4.3.65 Hvac_component to Hvac_access_opening

Each Hvac_component is accessed through zero or more Hvac_access_opening objects. Each Hvac_access_opening provides access to exactly one Hvac_component object.

4.3.66 Hvac_component to Hvac_component_thickness

Each Hvac_component has skin thickness defined by zero or more Hvac_component_thickness objects. Each Hvac_component_thickness defines the skin thickness for exactly one Hvac_component object.

4.3.67 Hvac_component to Hvac_section_component_assignment

Each Hvac_component satisfies zero or more Hvac_section_component_assignment objects. Each Hvac_section_component_assignment is satisfied by exactly one Hvac_component object.

4.3.68 Hvac_component_thickness to Changed_hvac_component_thickness

Each Hvac_component_thickness is changed by zero or one Changed_hvac_component_thickness object. Each Changed_hvac_component_thickness changes exactly one Hvac_component_thickness object.

4.3.69 Hvac_connector to Hvac_connector_service_characteristic

Each Hvac_connector has zero or more Hvac_connector_service_characteristic objects. Each Hvac_connector_service_characteristic belongs to exactly one Hvac_connector object.

4.3.70 Hvac_connector to Hvac_cross_section

Each Hvac_connector has cross section defined by zero or more Hvac_cross_section objects. Each Hvac_cross_section defines cross section of exactly one Hvac_connector object.

4.3.71 Hvac_connector_service_characteristic to Changed_hvac_connector_service_characteristic

Each Hvac_connector_service_characteristic is changed by zero or one Changed_hvac_connector_service_characteristic object. Each Changed_hvac_connector_service_characteristic changes exactly one Hvac_connector_service_characteristic object.

4.3.72 Hvac_connector_service_characteristic to Service_operating_case

Each Hvac_connector_service_characteristic supports zero or more Service_operating_case objects. Each Service_operating_case is supported by exactly one Hvac_connector_service_characteristic object.

4.3.73 Hvac_cross_section to Changed_hvac_cross_section

Each Hvac_cross_section is changed by zero or one Changed_hvac_cross_section object. Each Changed_hvac_cross_section changes exactly one Hvac_cross_section object.

4.3.74 Hvac_ducting to Hvac_reinforcement

Each Hvac_ducting is reinforced by zero or more Hvac_reinforcement objects. Each Hvac_reinforcement reinforces zero or one Hvac_ducting object.

4.3.75 Hvac_elbow_90deg_reducing to Splitter

Each Hvac_elbow_90deg_reducing has potential turbulence reduced by zero or more Splitter objects. Each Splitter reduces the potential turbulence for zero or one Hvac_elbow_90deg_reducing object.

4.3.76 Hvac_elbow_centred to Splitter

Each Hvac_elbow_centred has potential turbulence reduced by zero or more Splitter objects. Each Splitter reduces potential turbulence for zero or one Hvac_elbow_centred object.

4.3.77 Hvac_elbow_mitre to Splitter

Each Hvac_elbow_mitre has potential turbulence reduced by zero or more Splitter objects. Each Splitter reduces potential turbulence for zero or one Hvac_elbow_mitre object.

4.3.78 Hvac_fitting to Hvac_reinforcement

Each Hvac_fitting is reinforced by zero or more Hvac_reinforcement objects. Each Hvac_reinforcement reinforces zero or one Hvac_fitting object.

4.3.79 Hvac_flow_control_device to Hvac_equipment

Each Hvac_flow_control_device controls zero or more Hvac_equipment objects. Each Hvac_equipment is controlled by zero or more Hvac_flow_control_device objects.

4.3.80 Hvac_instrument to Hvac_flow_control_device

Each Hvac_instrument provides data for zero or more Hvac_flow_control_device objects. Each Hvac_flow_control_device has data provided by zero or one Hvac_instrument object.

4.3.81 Hvac_offset_centred to Splitter

Each Hvac_offset_centred has potential turbulence reduced by zero or more Splitter objects. Each Splitter reduces potential turbulence for zero or one Hvac_offset_centred object.

4.3.82 Hvac_plant_item_branch_connection to Changed_hvac_plant_item_branch_connection

Each Hvac_plant_item_branch_connection is changed by zero or one Changed_hvac_plant_item_branch_connection object. Each Changed_hvac_plant_item_branch_connection changes exactly one Hvac_plant_item_branch_connection object.

4.3.83 Hvac_plant_item_branch_connector to Hvac_plant_item_branch_connection

Each Hvac_plant_item_branch_connector is connected to zero or one Hvac_plant_item_branch_connection object. Each Hvac_plant_item_branch_connection is associated with exactly one Hvac_plant_item_branch_connector object.

4.3.84 Hvac_plant_item_connector to Hvac_plant_item_connection

Each Hvac_plant_item_connector is connected to exactly two Hvac_plant_item_connection objects. Each Hvac_plant_item_connection is associated with exactly one Hvac_plant_item_connector object.

4.3.85 Hvac_plant_item_connector to Schematic_element

Each Hvac_plant_item_connector is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Hvac_plant_item_connector objects.

ISO 10303-227:2005(E)

4.3.86 Hvac_plant_item_termination to Hvac_plant_item_connection

Each Hvac_plant_item_termination is connected to exactly one Hvac_plant_item_connection object. Each Hvac_plant_item_connection is associated with exactly one Hvac_plant_item_termination object.

4.3.87 Hvac_plenum to Hvac_connector

Each Hvac_plenum has gas enter or exit at an one or more Hvac_connector objects. Each Hvac_connector is entry or exit of gas to zero or one Hvac_plenum object.

4.3.88 Hvac_run to Changed_hvac_run

Each Hvac_run is changed by zero or one Changed_hvac_run object. Each Changed_hvac_run changes exactly one Hvac_run object.

4.3.89 Hvac_run to Hvac_run_termination

Each Hvac_run is started or ended by zero or more Hvac_run_termination objects. Each Hvac_run_termination starts or ends zero or one Hvac_run object.

4.3.90 Hvac_run to Hvac_section

Each Hvac_run has one or more Hvac_section objects. Each Hvac_section is part of exactly one Hvac_run object.

4.3.91 Hvac_section to Changed_hvac_section

Each Hvac_section is changed by zero or one Changed_hvac_section object. Each Changed_hvac_section changes exactly one Hvac_section object.

4.3.92 Hvac_section to Hvac_branch_connection

Each Hvac_section is connected to zero or more Hvac_branch_connection objects. Each Hvac_branch_connection is associated with exactly one Hvac_section object.

4.3.93 Hvac_section to Hvac_plant_item_branch_connection

Each Hvac_section is connected to zero or more Hvac_plant_item_branch_connection objects. Each Hvac_plant_item_branch_connection is associated with exactly one Hvac_section object.

4.3.94 Hvac_section to Hvac_section_component_assignment

Each Hvac_section defines the need for zero or more Hvac_section_component_assignment objects. Each Hvac_section_component_assignment has the need defined by exactly one Hvac_section object.

4.3.95 Hvac_section to Hvac_section_insulation

Each Hvac_section has zero or more Hvac_section_insulation objects. Each Hvac_section_insulation is associated with exactly one Hvac_section object.

4.3.96 Hvac_section to Hvac_section_termination

Each Hvac_section is terminated by exactly two Hvac_section_termination objects. Each Hvac_section_termination terminates exactly one Hvac_section object.

4.3.97 Hvac_section to Stream_design_case

Each Hvac_section defines transport needs for zero or more Stream_design_case objects. Each Stream_design_case defines potential material zero or more Hvac_section objects.

4.3.98 Hvac_section_branch_termination to Hvac_branch_connection

Each Hvac_section_branch_termination branches from zero or more Hvac_branch_connection objects. Each Hvac_branch_connection has branched from it exactly one Hvac_section_branch_termination object.

4.3.99 Hvac_section_insulation to Changed_hvac_section_insulation

Each Hvac_section_insulation is changed by zero or one Changed_hvac_section_insulation object. Each Changed_hvac_section_insulation changes exactly one Hvac_section_insulation object.

4.3.100 Hvac_section_termination to Schematic_element

Each Hvac_section_termination is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Hvac_section_termination objects.

4.3.101 Hvac_section_to_section_connection to Changed_hvac_section_to_section_connection

Each Hvac_section_to_section_connection is changed by zero or one Changed_hvac_section_to_section_connection object. Each Changed_hvac_section_to_section_connection changes exactly one Hvac_section_to_section_connection object.

4.3.102 Hvac_section_to_section_connection to Hvac_section_to_section_termination

Each Hvac_section_to_section_connection connects zero or more Hvac_section_to_section_termination objects. Each Hvac_section_to_section_termination is connected by zero or one Hvac_section_to_section_connection object.

4.3.103 Hvac_specification to Changed_hvac_specification

Each Hvac_specification is changed by zero or one Changed_hvac_specification object. Each Changed_hvac_specification changes exactly one Hvac_specification object.

4.3.104 Hvac_specification to Hvac_section

Each Hvac_specification specifies components for zero or more Hvac_section objects. Each Hvac_section has components specified by exactly one Hvac_specification object.

ISO 10303-227:2005(E)

4.3.105 Hvac_trapeze_bar to Hvac_hanger

Each Hvac_trapeze_bar is held by exactly two Hvac_hanger objects. Each Hvac_hanger holds exactly one Hvac_trapeze_bar object.

4.3.106 Hvac_trapeze_support to Hvac_trapeze_bar

Each Hvac_trapeze_support has one or more Hvac_trapeze_bar objects. Each Hvac_trapeze_bar is associated with exactly one Hvac_trapeze_support object.

4.3.107 Inspection_condition to Connection_inspection_record

Each Inspection_condition defines the environment for zero or more Connection_inspection_record objects. Each Connection_inspection_record is specified under zero or more Inspection_condition objects.

4.3.108 Inspection_condition to Piping_component_inspection_record

Each Inspection_condition defines the environment for zero or more Piping_component_inspection_record objects. Each Piping_component_inspection_record is specified under zero or more Inspection_condition objects.

4.3.109 Line_branch_connection to Changed_line_branch_connection

Each Line_branch_connection is changed by zero or one Changed_line_branch_connection object. Each Changed_line_branch_connection changes exactly one Line_branch_connection object.

4.3.110 Line_branch_termination to Line_branch_connection

Each Line_branch_termination branches from exactly one Line_branch_connection object. Each Line_branch_connection has branched from it exactly one Line_branch_termination object.

4.3.111 Line_less_piping_system to Piping_system_component

Each Line_less_piping_system is composed of zero or more Piping_system_component objects. Each Piping_system_component is a component in zero or more Line_less_piping_system objects.

4.3.112 Line_piping_system_component_assignment to Changed_line_assignment

Each Line_piping_system_component_assignment is changed by zero or one Changed_line_assignment object. Each Changed_line_assignment changes exactly one Line_piping_system_component_assignment object.

4.3.113 Line_plant_item_branch_connection to Changed_line_plant_item_branch_connection

Each Line_plant_item_branch_connection is changed by zero or one Changed_line_plant_item_branch_connection object. Each Changed_line_plant_item_branch_connection changes exactly one Line_plant_item_branch_connection object.

4.3.114 Line_plant_item_branch_connector to Line_plant_item_branch_connection

Each Line_plant_item_branch_connector is connected to zero or one Line_plant_item_branch_connection object. Each Line_plant_item_branch_connection connects exactly one Line_plant_item_branch_connector object.

4.3.115 Line_plant_item_connection to Changed_line_plant_item_connection

Each Line_plant_item_connection is changed by zero or one Changed_line_plant_item_connection object. Each Changed_line_plant_item_connection changes exactly one Line_plant_item_connection object.

4.3.116 Line_plant_item_connector to Line_plant_item_connection

Each Line_plant_item_connector is connected to zero or one Line_plant_item_connection object. Each Line_plant_item_connection connects exactly one Line_plant_item_connector object.

4.3.117 Line_plant_item_termination to Line_plant_item_connection

Each Line_plant_item_termination is connected to exactly one Line_plant_item_connection object. Each Line_plant_item_connection connects exactly one Line_plant_item_termination object.

4.3.118 Line_to_line_connection to Changed_line_to_line_connection

Each Line_to_line_connection is changed by zero or one Changed_line_to_line_connection object. Each Changed_line_to_line_connection changes exactly one Line_to_line_connection object.

4.3.119 Line_to_line_connection to Line_to_line_termination

Each Line_to_line_connection connects two or more Line_to_line_termination objects. Each Line_to_line_termination is connected by exactly one Line_to_line_connection object.

4.3.120 Material_specification_selection to Material_specification_subset_reference

Each Material_specification_selection is used by zero or more Material_specification_subset_reference objects. Each Material_specification_subset_reference uses exactly one Material_specification_selection object.

4.3.121 Mechanical_arrangement_specification to Mechanical_family_definition

Each Mechanical_arrangement_specification is composed of one or more Mechanical_family_definition objects. Each Mechanical_family_definition is part of exactly one Mechanical_arrangement_specification object.

4.3.122 Mechanical_arrangement_specification to Mechanical_system_arrangement_segment

Each Mechanical_arrangement_specification specifies components for zero or more Mechanical_system_arrangement_segment objects. Each Mechanical_system_arrangement_segment has components specified by exactly one Mechanical_arrangement_specification object.

4.3.123 Mechanical_component to Mechanical_family_definition

Each Mechanical_component is defined by zero or one Mechanical_family_definition object. Each Mechanical_family_definition defines zero or more Mechanical_component objects.

4.3.124 Mechanical_connector to Component_size_description

Each Mechanical_connector has a size described by zero or more Component_size_description objects. Each Component_size_description describes the size of zero or more Mechanical_connector objects.

4.3.125 Mechanical_connector to User_defined_attribute_value (as user_defined_parameter)

Each Mechanical_connector has zero or more User_defined_attribute_value objects. Each User_defined_attribute_value object may be a user_defined_parameter for zero or one Mechanical_system object.

4.3.126 Mechanical_family_definition to User_defined_attribute_value (as user_defined_parameter)

Each Mechanical_family_definition has zero or more User_defined_attribute_value objects. Each User_defined_attribute_value object may be a user_defined_parameter for zero or one Mechanical_family_definition object.

4.3.127 Mechanical_system to Mechanical_system_arrangement

Each Mechanical_system is made up of zero or more Mechanical_system_arrangement objects. Each Mechanical_system_arrangement is part of exactly one Mechanical_system object.

4.3.128 Mechanical_system to Schematic_element

Each Mechanical_system is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Mechanical_system objects.

4.3.129 Mechanical_system_arrangement to Mechanical_system_arrangement_segment

Each Mechanical_system_arrangement is composed of one or more Mechanical_system_arrangement_segment objects. Each Mechanical_system_arrangement_segment is a component of exactly one Mechanical_system_arrangement object.

4.3.130 Mechanical_system_arrangement to Mechanical_system_arrangement_termination

Each Mechanical_system_arrangement is started or ended by zero or more Mechanical_system_arrangement_termination objects. Each Mechanical_system_arrangement_termination starts or ends exactly one Mechanical_system_arrangement object.

4.3.131 Mechanical_system_arrangement to Schematic_element

Each Mechanical_system_arrangement is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Mechanical_system_arrangement objects.

4.3.132 Mechanical_system_arrangement to User_defined_attribute_value (as user_defined_parameter)

Each Mechanical_system_arrangement has zero or more User_defined_attribute_value objects. Each User_defined_attribute_value object may be a user_defined_parameter for zero or one Mechanical_system_arrangement object.

4.3.133 Mechanical_system_arrangement_segment to Arrangement_branch_connection

Each Mechanical_system_arrangement_segment has branches defined by zero or more Arrangement_branch_connection objects. Each Arrangement_branch_connection defines the branches of exactly one Mechanical_system_arrangement_segment object.

4.3.134 Mechanical_system_arrangement_segment to Arrangement_mechanical_system_component_assignment

Each Mechanical_system_arrangement_segment defines the need for zero or more Arrangement_mechanical_system_component_assignment objects. Each Arrangement_mechanical_system_component_assignment satisfies the need defined by exactly one Mechanical_system_arrangement_segment object.

4.3.135 Mechanical_system_arrangement_segment to Arrangement_plant_item_branch_connection

Each Mechanical_system_arrangement_segment is connected to zero or more Arrangement_plant_item_branch_connection objects. Each Arrangement_plant_item_branch_connection connects exactly one Mechanical_system_arrangement_segment object.

4.3.136 Mechanical_system_arrangement_segment to Design_arrangement_performance

Each Mechanical_system_arrangement_segment realizes the configuration needed for zero or more Design_arrangement_performance objects. Each Design_arrangement_performance defines the design performance for zero or more Mechanical_system_arrangement_segment objects.

4.3.137 Mechanical_system_arrangement_segment to Mechanical_system_arrangement_segment_termination

Each Mechanical_system_arrangement_segment is terminated by exactly two Mechanical_system_arrangement_segment_termination objects; one is termination_1 and the other is termination_2. Each Mechanical_system_arrangement_segment_termination terminates exactly one Mechanical_system_arrangement_segment object.

4.3.138 Mechanical_system_arrangement_segment to Schematic_element

Each Mechanical_system_arrangement_segment is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Mechanical_system_arrangement_segment objects.

ISO 10303-227:2005(E)

4.3.139 Mechanical_system_arrangement_segment to User_defined_attribute_value (as user_defined_parameter)

Each Mechanical_system_arrangement_segment has zero or more User_defined_attribute_value objects. Each User_defined_attribute_value object may be a user_defined_parameter for zero or one Mechanical_system_arrangement_segment object.

4.3.140 Mechanical_system_arrangement_segment_termination to Schematic_element

Each Mechanical_system_arrangement_segment_termination is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Mechanical_system_arrangement_segment_termination objects.

4.3.141 Mechanical_system_arrangement_segment_termination to User_defined_attribute_value (as user_defined_parameter)

Each Mechanical_system_arrangement_segment_termination has zero or more User_defined_attribute_value objects. Each User_defined_attribute_value object may be a user_defined_parameter for zero or one Mechanical_system_arrangement_segment_termination object.

4.3.142 Mechanical_system_arrangement_termination to Schematic_element

Each Mechanical_system_arrangement_termination is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Mechanical_system_arrangement_termination objects.

4.3.143 Mechanical_system_component to Arrangement_mechanical_system_component_assignment (as satisfies)

Each Mechanical_system_component satisfies zero or more Arrangement_mechanical_system_component_assignment objects. Each Arrangement_mechanical_system_component_assignment is satisfied by exactly one Mechanical_system_component object.

4.3.144 Mechanical_system_component to Component_size_description

Each Mechanical_system_component has a size described by zero or more Component_size_description objects. Each Component_size_description describes size of zero or more Mechanical_system_component objects.

4.3.145 Mechanical_system_component to User_defined_attribute_value (as user_defined_parameter)

Each Mechanical_system_component has zero or more User_defined_attribute_value objects. Each User_defined_attribute_value object may be a user_defined_parameter for zero or one Mechanical_system_component object.

4.3.146 Node to Mechanical_system

Each Node defines branch point for zero or more Mechanical_system objects. Each Mechanical_system contains zero or more Node objects.

4.3.147 Node to Piping_system

Each Node defines branch point for zero or more Piping_system objects. Each Piping_system contains zero or more Node objects.

4.3.148 Physical_connector to Functional_connector_occurrence_satisfaction

Each Physical_connector satisfies requirements for zero or more Functional_connector_occurrence_satisfaction objects. Each Functional_connector_occurrence_satisfaction has requirements satisfied by exactly one Physical_connector object.

4.3.149 Physical_design_view to Functional_plant_item_satisfaction

Each Physical_design_view satisfies requirements for zero or more Functional_plant_item_satisfaction objects. Each Functional_plant_item_satisfaction has requirements satisfied by exactly one Physical_design_view object.

4.3.150 Physical_design_view to Installed_physical_design_view

Each Physical_design_view is used as zero or one Installed_physical_design_view object. Each Installed_physical_design_view is exactly one Physical_design_view object.

4.3.151 Piping_assembly to Piping_assembly_assignment

Each Piping_assembly is assembly in zero or more Piping_assembly_assignment objects. Each Piping_assembly_assignment is associated with exactly one Piping_assembly object.

4.3.152 Piping_component to Family_definition

Each Piping_component defines zero or one Family_definition object. Each Family_definition is defined by zero or one Piping_component object.

4.3.153 Piping_component to Piping_component_inspection_record

Each Piping_component has zero or more Piping_component_inspection_record objects. Each Piping_component_inspection_record is the inspection record for exactly one Piping_component object.

ISO 10303-227:2005(E)

4.3.154 Piping_component_inspection_record to Document

Each Piping_component_inspection_record has inspection information defined by zero or more Document objects. Each Document defines inspection information for zero or more Piping_component_inspection_record objects.

4.3.155 Piping_connector to Piping_connector_service_characteristic

Each Piping_connector provides zero or one Piping_connector_service_characteristic object. Each Piping_connector_service_characteristic is provided by exactly one Piping_connector object.

4.3.156 Piping_connector to Piping_size_description

Each Piping_connector has a size described by zero or more Piping_size_description objects. Each Piping_size_description describes size of zero or more Piping_connector objects.

4.3.157 Piping_connector_service_characteristic to Service_operating_case

Each Piping_connector_service_characteristic supports zero or more Service_operating_case objects. Each Service_operating_case is supported by exactly one Piping_connector_service_characteristic object.

4.3.158 Piping_specification to Changed_piping_specification

Each Piping_specification is changed by zero or one Changed_piping_specification object. Each Changed_piping_specification changes exactly one Piping_specification object.

4.3.159 Piping_specification to Family_definition

Each Piping_specification is composed of one or more Family_definition objects. Each Family_definition is part of exactly one Piping_specification object.

4.3.160 Piping_specification to Piping_system_line_segment

Each Piping_specification specifies components for zero or more Piping_system_line_segment objects. Each Piping_system_line_segment has components specified by exactly one Piping_specification object.

4.3.161 Piping_spool to Piping_spool_inspection_record

Each Piping_spool has zero or more Piping_spool_inspection_record objects. Each Piping_spool_inspection_record is part of exactly one Piping_spool object.

4.3.162 Piping_spool to Shape_inspection_record

Each Piping_spool has zero or more Shape_inspection_record objects. Each Shape_inspection_record is part of zero or one Piping_spool object.

4.3.163 Piping_spool_inspection_record to Inspection_condition

Each Piping_spool_inspection_record is specified under zero or more Inspection_condition objects. Each Inspection_condition defines the environment for zero or more Piping_spool_inspection_record objects.

4.3.164 Piping_system to Piping_system_line

Each Piping_system is made up of zero or more Piping_system_line objects. Each Piping_system_line is part of exactly one Piping_system object.

4.3.165 Piping_system to Schematic_element

Each Piping_system is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Piping_system objects.

4.3.166 Piping_system_component to Equipment_trim_piping

Each Piping_system_component is used as zero or more Equipment_trim_piping objects. Each Equipment_trim_piping is exactly one Piping_system_component object.

4.3.167 Piping_system_component to Line_piping_system_component_assignment

Each Piping_system_component satisfies zero or more Line_piping_system_component_assignment objects. Each Line_piping_system_component_assignment is satisfied by exactly one Piping_system_component object.

4.3.168 Piping_system_component to Piping_size_description

Each Piping_system_component has a size described by zero or more Piping_size_description objects. Each Piping_size_description describes size of zero or more Piping_system_component objects.

4.3.169 Piping_system_line to Changed_piping_system_line

Each Piping_system_line is changed by zero or one Changed_piping_system_line object. Each Changed_piping_system_line changes exactly one Piping_system_line object.

4.3.170 Piping_system_line to Piping_system_line_segment

Each Piping_system_line is composed of one or more Piping_system_line_segment objects. Each Piping_system_line_segment is a component of exactly one Piping_system_line object.

4.3.171 Piping_system_line to Piping_system_line_termination

Each Piping_system_line is started or ended by zero or more Piping_system_line_termination objects. Each Piping_system_line_termination starts or ends exactly one Piping_system_line object.

4.3.172 Piping_system_line to Schematic_element

Each Piping_system_line is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Piping_system_line objects.

4.3.173 Piping_system_line_segment to Changed_piping_system_line_segment

Each Piping_system_line_segment is changed by zero or one Changed_piping_system_line_segment object. Each Changed_piping_system_line_segment changes exactly one Piping_system_line_segment object.

4.3.174 Piping_system_line_segment to Line_branch_connection

Each Piping_system_line_segment has branches defined by zero or more Line_branch_connection objects. Each Line_branch_connection defines the branches of exactly one Piping_system_line_segment object.

4.3.175 Piping_system_line_segment to Line_piping_system_component_assignment

Each Piping_system_line_segment defines the need for zero or more Line_piping_system_component_assignment objects. Each Line_piping_system_component_assignment satisfies the need defined by exactly one Piping_system_line_segment object.

4.3.176 Piping_system_line_segment to Line_plant_item_branch_connection

Each Piping_system_line_segment is connected to zero or more Line_plant_item_branch_connection objects. Each Line_plant_item_branch_connection connects exactly one Piping_system_line_segment object.

4.3.177 Piping_system_line_segment to Piping_system_line_segment_termination

Each Piping_system_line_segment is terminated by exactly two Piping_system_line_segment_termination objects; one is termination_1 and the other is termination_2. Each Piping_system_line_segment_termination terminates exactly one Piping_system_line_segment object.

4.3.178 Piping_system_line_segment to Schematic_element

Each Piping_system_line_segment is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Piping_system_line_segment objects.

4.3.179 Piping_system_line_segment to Segment_insulation

Each Piping_system_line_segment requires zero or more Segment_insulation objects. Each Segment_insulation is required by exactly one Piping_system_line_segment object.

4.3.180 Piping_system_line_segment_termination to Changed_piping_system_line_segment_termination

Each Piping_system_line_segment_termination is changed by zero or one Changed_piping_system_line_segment_termination object.

Each Changed_piping_system_line_segment_termination changes exactly one Piping_system_line_segment_termination object.

4.3.181 Piping_system_line_segment_termination to Schematic_element

Each Piping_system_line_segment_termination is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Piping_system_line_segment_termination objects.

4.3.182 Piping_system_line_termination to Schematic_element

Each Piping_system_line_termination is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Piping_system_line_termination objects.

4.3.183 Planned_physical_plant to Changed_planned_physical_plant

Each Planned_physical_plant is changed by zero or one Changed_planned_physical_plant object. Each Changed_planned_physical_plant changes exactly one Planned_physical_plant object.

4.3.184 Planned_physical_plant to Functional_plant_satisfaction

Each Planned_physical_plant satisfies requirements for zero or more Functional_plant_satisfaction objects. Each Functional_plant_satisfaction has requirements satisfied by exactly one Planned_physical_plant object.

4.3.185 Planned_physical_plant to Location_in_plant

Each Planned_physical_plant contains zero or more Location_in_plant objects. Each Location_in_plant is located in zero or more Planned_physical_plant objects.

4.3.186 Planned_physical_plant to Sited_plant

Each Planned_physical_plant is used as zero or one Sited_plant object. Each Sited_plant is exactly one Planned_physical_plant object.

4.3.187 Planned_physical_plant_item to External_schema_context (as has_constrained_reference_of)

Each Planned_physical_plant_item has a constrained reference of zero or more External_schema_context objects. Each External_schema_context object has a constrained reference for one or more Planned_physical_plant_item.

ISO 10303-227:2005(E)

4.3.188 Planned_physical_plant_item to Piping_assembly_assignment

Each Planned_physical_plant_item is assigned by zero or one Piping_assembly_assignment object. Each Piping_assembly_assignment assigns exactly one Planned_physical_plant_item object.

4.3.189 Planned_physical_plant_item to Plant_item_connector_occurrence

Each Planned_physical_plant_item has zero or more Plant_item_connector_occurrence objects. Each Plant_item_connector_occurrence is part of zero or one Planned_physical_plant_item object.

4.3.190 Planned_physical_plant_item to Support_usage

Each Planned_physical_plant_item is supported by zero or more Support_usage objects. Each Support_usage identifies as supported exactly one Planned_physical_plant_item object. Each Planned_physical_plant_item supports zero or more Support_usage objects. Each Support_usage identifies as supporter exactly one Planned_physical_plant_item object.

4.3.191 Plant to Changed_plant

Each Plant is changed by zero or one Changed_plant object. Each Changed_plant changes exactly one Plant object.

4.3.192 Plant to External_classification

Each Plant is classified by zero or more External_classification objects. Each External_classification classifies zero or more Plant objects.

4.3.193 Plant to Functional_plant

Each Plant is used as zero or one Functional_plant object. Each Functional_plant is exactly one Plant object.

4.3.194 Plant to Planned_physical_plant

Each Plant is realized as zero or more Planned_physical_plant objects. Each Planned_physical_plant is the realization of exactly one Plant object.

4.3.195 Plant to Plant_process_capability

Each Plant produces zero or more Plant_process_capability objects. Each Plant_process_capability is produced by exactly one Plant object.

4.3.196 Plant to Sub_plant_relationship

Each Plant is used in zero or more Sub_plant_relationship objects. Each Sub_plant_relationship uses exactly one Plant object.

Each Plant contains zero or more Sub_plant_relationship objects. Each Sub_plant_relationship is contained in exactly one Plant object.

4.3.197 Plant_item to Changed_plant_item

Each Plant_item is changed by zero or one Changed_plant_item object. Each Changed_plant_item changes exactly one Plant_item object.

4.3.198 Plant_item to Document

Each Plant_item has reference of zero or more Document objects. Each Document is reference for zero or more Plant_item objects.

4.3.199 Plant_item to External_classification

Each Plant_item is classified by zero or more External_classification objects. Each External_classification classifies zero or more Plant_item objects.

4.3.200 Plant_item to Insulation

Each Plant_item is insulated by zero or more Insulation objects. Each Insulation insulates zero or one Plant_item object.

4.3.201 Plant_item to Plant_item_collection

Each Plant_item is the element in zero or more Plant_item_collection objects. Each Plant_item_collection identifies as an element of a collection exactly one Plant_item object.

Each Plant_item is the group for zero or more Plant_item_collection objects. Each Plant_item_collection identifies as a group exactly one Plant_item object.

4.3.202 Plant_item to Plant_item_design_view

Each Plant_item is defined as one or more Plant_item_design_view objects. Each Plant_item_design_view defines exactly one Plant_item object.

4.3.203 Plant_item to Plant_item_shape

Each Plant_item is spatially described by zero or one Plant_item_shape object. Each Plant_item_shape spatially describes exactly one Plant_item object.

4.3.204 Plant_item to Plant_item_weight

Each Plant_item is measured as having zero or more Plant_item_weight objects. Each Plant_item_weight is the measured weight of exactly one Plant_item object.

4.3.205 Plant_item to Reference_geometry

Each Plant_item references zero or more Reference_geometry objects. Each Reference_geometry is referenced by zero or more Plant_item objects.

4.3.206 Plant_item to Required_material_description

Each Plant_item satisfies zero or more Required_material_description objects. Each Required_material_description is satisfied by zero or more Plant_item objects.

4.3.207 Plant_item to Spare_plant_item_usage

Each Plant_item is primary plant_item in zero or more Spare_plant_item_usage objects. Each Spare_plant_item_usage has as primary plant item exactly one Plant_item object.

Each Plant_item is spare plant_item in zero or more Spare_plant_item_usage objects. Each Spare_plant_item_usage has as spare plant item exactly one Plant_item object.

4.3.208 Plant_item to User_defined_attribute_value

Each Plant_item is characterized by zero or more User_defined_attribute_value objects. Each User_defined_attribute_value characterizes exactly one Plant_item object.

4.3.209 Plant_item_collection to Changed_plant_item_collection

Each Plant_item_collection is changed by zero or one Changed_plant_item_collection object. Each Changed_plant_item_collection changes exactly one Plant_item_collection object.

4.3.210 Plant_item_connection to Changed_plant_item_connection

Each Plant_item_connection is changed by zero or one Changed_plant_item_connection object. Each Changed_plant_item_connection changes exactly one Plant_item_connection object.

4.3.211 Plant_item_connection to Connection_inspection_record

Each Plant_item_connection has zero or more Connection_inspection_record objects. Each Connection_inspection_record is part of exactly one Plant_item_connection object.

4.3.212 Plant_item_connection to Connection_material

Each Plant_item_connection uses one or more Connection_material objects. Each Connection_material is used by exactly one Plant_item_connection object.

4.3.213 Plant_item_connection to Schematic_element

Each Plant_item_connection is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Plant_item_connection objects.

4.3.214 Plant_item_connection_occurrence to Functional_connection_occurrence_satisfaction

Each Plant_item_connection_occurrence is functional requirements for zero or more Functional_connection_occurrence_satisfaction objects. Each Functional_connection_occurrence_satisfaction gets functional requirements from exactly one Plant_item_connection_occurrence object.

Each Plant_item_connection_occurrence satisfies requirements for zero or more Functional_connection_occurrence_satisfaction objects. Each Functional_connection_occurrence_satisfaction has requirements satisfied by exactly one Plant_item_connection_occurrence object.

4.3.215 Plant_item_connection_occurrence to Plant_item_connector_occurrence

Each Plant_item_connection_occurrence connects two or more Plant_item_connector_occurrence objects. Each Plant_item_connector_occurrence is connected by zero or one Plant_item_connection_occurrence object.

4.3.216 Plant_item_connector to Changed_plant_item_connector

Each Plant_item_connector is changed by zero or one Changed_plant_item_connector object. Each Changed_plant_item_connector changes exactly one Plant_item_connector object.

4.3.217 Plant_item_connector to Document

Each Plant_item_connector has reference of zero or more Document objects. Each Document is reference for zero or more Plant_item_connector objects.

4.3.218 Plant_item_connector to External_classification

Each Plant_item_connector is classified by zero or more External_classification objects. Each External_classification classifies zero or more Plant_item_connector objects.

4.3.219 Plant_item_connector to Mechanical_component

Each Plant_item_connector defines ancillary connectors for zero or more Mechanical_component objects. Each Mechanical_component has ancillary connectors defined by zero or more Plant_item_connector objects.

4.3.220 Plant_item_connector to Piping_component_inspection_record

Each Plant_item_connector has zero or more Piping_component_inspection_record objects. Each Piping_component_inspection_record is part of zero or one Plant_item_connector object.

4.3.221 Plant_item_connector to Required_material_description

Each Plant_item_connector has material requirements defined zero or more Required_material_description objects. Each Required_material_description defines material requirements zero or more Plant_item_connector objects.

4.3.222 Plant_item_connector to Shape_representation

Each Plant_item_connector has shape defined by zero or more Shape_representation objects. Each Shape_representation defines shape of zero or more Plant_item_connector objects.

ISO 10303-227:2005(E)

4.3.223 Plant_item_definition to Catalogue_item

Each Plant_item_definition is used as zero or more Catalogue_item objects. Each Catalogue_item is zero or one Plant_item_definition object.

4.3.224 Plant_item_definition to Connector_definition

Each Plant_item_definition has one or more Connector_definition objects. Each Connector_definition is part of zero or one Plant_item_definition object.

4.3.225 Plant_item_definition to Planned_physical_plant_item

Each Plant_item_definition defines zero or more Planned_physical_plant_item objects. Each Planned_physical_plant_item is defined by zero or one Plant_item_definition object.

4.3.226 Plant_item_instance to Plant_item_interference

Each Plant_item_instance is second item in zero or more Plant_item_interference objects. Each Plant_item_interference has as its second item exactly one Plant_item_instance object.

Each Plant_item_instance is first item in zero or more Plant_item_interference objects. Each Plant_item_interference has as its first item exactly one Plant_item_instance object.

4.3.227 Plant_item_instance to Plant_item_location

Each Plant_item_instance is located by zero or one Plant_item_location object. Each Plant_item_location locates exactly one Plant_item_instance object.

4.3.228 Plant_item_instance to Project_design_assignment

Each Plant_item_instance is assigned by zero or more Project_design_assignment objects. Each Project_design_assignment assigns exactly one Plant_item_instance object.

4.3.229 Plant_item_instance to Relative_item_location

Each Plant_item_instance is referenced item for zero or more Relative_item_location objects. Each Relative_item_location references exactly one Plant_item_instance object.

4.3.230 Plant_item_interference to Interfering_shape_element

Each Plant_item_interference has intersecting geometry of zero or more Interfering_shape_element objects. Each Interfering_shape_element is the intersecting geometry for exactly one Plant_item_interference object.

4.3.231 Plant_item_interference to Plant_item_interference_status

Each Plant_item_interference has a status of one or more Plant_item_interference_status objects. Each Plant_item_interference_status provides the status for exactly one Plant_item_interference object.

4.3.232 Plant_item_interference to Shape_interference_zone_usage

Each Plant_item_interference has zone of interference defined by zero or more Shape_interference_zone_usage objects. Each Shape_interference_zone_usage defines the zone of interference for exactly one Plant_item_interference object.

4.3.233 Plant_item_location to Changed_plant_item_location

Each Plant_item_location is changed by zero or one Changed_plant_item_location object. Each Changed_plant_item_location changes exactly one Plant_item_location object.

4.3.234 Plant_item_shape to Changed_plant_item_shape

Each Plant_item_shape is changed by zero or one Changed_plant_item_shape object. Each Changed_plant_item_shape changes exactly one Plant_item_shape object.

4.3.235 Plant_item_shape to Shape_representation

Each Plant_item_shape is defined using zero or more Shape_representation objects. Each Shape_representation defines exactly one Plant_item_shape object.

4.3.236 Plant_process_capability to Changed_plant_process_capability

Each Plant_process_capability is changed by zero or one Changed_plant_process_capability object. Each Changed_plant_process_capability changes exactly one Plant_process_capability object.

4.3.237 Plant_system to Changed_plant_system

Each Plant_system is changed by zero or one Changed_plant_system object. Each Changed_plant_system changes exactly one Plant_system object.

4.3.238 Plant_system to External_classification

Each Plant_system is classified by zero or more External_classification objects. Each External_classification classifies zero or more Plant_system objects.

4.3.239 Plant_system to Plant_item

Each Plant_system is composed of zero or more Plant_item objects. Each Plant_item is part of zero or more Plant_system objects.

4.3.240 Plant_system to Plant_system_assembly

Each Plant_system is super-system in zero or more Plant_system_assembly objects. Each Plant_system_assembly identifies as super-system exactly one Plant_system object.

Each Plant_system is sub-system in zero or more Plant_system_assembly objects. Each Plant_system_assembly identifies as sub-system exactly one Plant_system object.

ISO 10303-227:2005(E)

4.3.241 Plant_system to Schematic

Each Plant_system is represented by zero or more Schematic objects. Each Schematic represents zero or more Plant_system objects.

4.3.242 Plant_volume to Mechanical_system_arrangement_segment (as is_composed_of)

Each Plant_volume is composed of zero or more Mechanical_system_arrangement_segment objects. Each Mechanical_system_arrangement_segment is a component of zero or one Plant_volume object.

4.3.243 Point_and_line_representation to Survey_point

Each Point_and_line_representation is defined by one or more Survey_point objects. Each Survey_point defines zero or more Point_and_line_representation objects.

4.3.244 Raceway to Raceway_lane

Each Raceway contains zero or more Raceway_lane objects. Each Raceway_lane is contained in exactly one Raceway object.

4.3.245 Reference_geometry to Changed_reference_geometry

Each Reference_geometry is changed by zero or one Changed_reference_geometry object. Each Changed_reference_geometry changes exactly one Reference_geometry object.

4.3.246 Reference_geometry to Shape_representation_element

Each Reference_geometry is described by zero or more Shape_representation_element objects. Each Shape_representation_element provides description of zero or more Reference_geometry objects.

4.3.247 Required_material_description to Changed_required_material_description

Each Required_material_description is changed by zero or one Changed_required_material_description object. Each Changed_required_material_description changes exactly one Required_material_description object.

4.3.248 Required_material_description to Material_specification_selection

Each Required_material_description is satisfied by zero or more Material_specification_selection objects. Each Material_specification_selection satisfies zero or more Required_material_description objects.

4.3.249 Required_material_description to Schematic_element

Each Required_material_description is depicted on zero or more Schematic_element objects. Each Schematic_element depicts zero or more Required_material_description objects.

4.3.250 Route to Node

Each Route consists of zero or more Node objects. Each Node is part of exactly one Route object.

4.3.251 Route to Piping_system_line_segment

Each Route is composed of zero or more Piping_system_line_segment objects. Each Piping_system_line_segment is a component of zero or one Route object.

4.3.252 Schematic to Schematic_presentation_component

Each Schematic is comprised of one or more Schematic_presentation_component objects. Each Schematic_presentation_component is part of exactly one Schematic object.

4.3.253 Schematic_callout to Schematic_callout_dependency (as dependent callout)

Each Schematic_callout is the dependent callout in zero or more Schematic_callout_dependency objects. Each Schematic_callout_dependency has as the dependent callout exactly one Schematic_callout object.

4.3.254 Schematic_callout to Schematic_callout_dependency (as independent callout)

Each Schematic_callout is the independent callout in zero or more Schematic_callout_dependency objects. Each Schematic_callout_dependency has as the independent callout exactly one Schematic_callout object.

4.3.255 Schematic_callout to Schematic_element

Each Schematic_callout consists of one or more Schematic_element objects. Each Schematic_element is part of zero or one Schematic_callout object.

4.3.256 Schematic_curve to Schematic_symbol_definition

Each Schematic_curve is an element of zero or more Schematic_symbol_definition objects. Each Schematic_symbol_definition has zero or more Schematic_curve objects.

4.3.257 Schematic_element to Component_size_description

Each Schematic_element depicts zero or more Component_size_description objects. Each Component_size_description is depicted on zero or more Schematic_element objects.

4.3.258 Schematic_element to Document

Each Schematic_element depicts zero or more Document objects. Each Document is depicted on zero or more Schematic_element objects.

4.3.259 Schematic_element to Hvac_run

Each Schematic_element depicts zero or more Hvac_run objects. Each Hvac_run is depicted on zero or more Schematic_element objects.

ISO 10303-227:2005(E)

4.3.260 Schematic_element to Hvac_section

Each Schematic_element depicts zero or more Hvac_section objects. Each Hvac_section is depicted on zero or more Schematic_element objects.

4.3.261 Schematic_element to Mechanical_arrangement_specification

Each Schematic_element depicts zero or more Mechanical_arrangement_specification objects. Each Mechanical_arrangement_specification is depicted on zero or more Schematic_element objects.

4.3.262 Schematic_element to Piping_size_description

Each Schematic_element depicts zero or more Piping_size_description objects. Each Piping_size_description is depicted on zero or more Schematic_element objects.

4.3.263 Schematic_element to Piping_specification

Each Schematic_element depicts zero or more Piping_specification objects. Each Piping_specification is depicted on zero or more Schematic_element objects.

4.3.264 Schematic_element to Plant_item

Each Schematic_element depicts zero or more Plant_item objects. Each Plant_item is depicted on zero or more Schematic_element objects.

4.3.265 Schematic_point to Schematic_symbol_definition

Each Schematic_point is an element of zero or more Schematic_symbol_definition objects. Each Schematic_symbol_definition has zero or more Schematic_point objects.

4.3.266 Schematic_presentation_component to Schematic_callout

Each Schematic_presentation_component organizes zero or more Schematic_callout objects. Each Schematic_callout is organized by exactly one Schematic_presentation_component object.

4.3.267 Schematic_presentation_component to Schematic_element

Each Schematic_presentation_component organizes zero or more Schematic_element objects. Each Schematic_element is organized by exactly one Schematic_presentation_component object.

4.3.268 Schematic_presentation_component to Schematic_presentation_component_composition (as child)

Each Schematic_presentation_component is child in zero or more Schematic_presentation_component_composition objects. Each Schematic_presentation_component_composition identifies as child exactly one Schematic_presentation_component object.

4.3.269 Schematic_presentation_component to Schematic_presentation_component_composition (as parent)

Each Schematic_presentation_component is parent in zero or more Schematic_presentation_component_composition objects. Each Schematic_presentation_component_composition identifies as parent exactly one Schematic_presentation_component object.

4.3.270 Schematic_presentation_component to Title_block

Each Schematic_presentation_component has title information defined in zero or more Title_block objects. Each Title_block defines title information for exactly one Schematic_presentation_component object.

4.3.271 Schematic_symbol_definition to Schematic_symbol_occurrence

Each Schematic_symbol_definition is placed on a schematic as zero or more Schematic_symbol_occurrence objects. Each Schematic_symbol_occurrence places on the schematic zero or one Schematic_symbol_definition object.

4.3.272 Schematic_symbol_occurrence to Schematic_symbol_definition (as has/is an element of)

Each Schematic_symbol_occurrence is an element of zero or more Schematic_symbol_definition objects. Each Schematic_symbol_definition has zero or more Schematic_symbol_occurrence objects.

4.3.273 Schematic_symbol_occurrence to Schematic_symbol_definition (as is placed on schematic as)

Each Schematic_symbol_occurrence object is defined by zero or one Schematic_symbol_definition objects. Each Schematic_symbol_definition is placed on a Schematic as zero or more Schematic_symbol_occurrence objects.

4.3.274 Schematic_text to Schematic_symbol_definition

Each Schematic_text is an element of zero or more Schematic_symbol_definition objects. Each Schematic_symbol_definition has zero or more Schematic_text objects.

4.3.275 Shape_inspection_record to Inspection_condition

Each Shape_inspection_record is specified under zero or more Inspection_condition objects. Each Inspection_condition defines the environment for zero or more Shape_inspection_record objects.

4.3.276 Shape_inspection_record to Plant_item_connector

Each Shape_inspection_record has inspected shape defined by zero or more Plant_item_connector objects. Each Plant_item_connector defines inspected shape of zero or more Shape_inspection_record objects.

ISO 10303-227:2005(E)

4.3.277 Shape_representation to Shape_representation_element_usage

Each Shape_representation is defined by one or more Shape_representation_element_usage objects. Each Shape_representation_element_usage defines exactly one Shape_representation object.

4.3.278 Shape_representation_element to Shape_interference_zone_usage

Each Shape_representation_element defines a volume for zero or one Shape_interference_zone_usage object. Each Shape_interference_zone_usage has volume defined by exactly one Shape_representation_element object.

4.3.279 Shape_representation_element to Shape_representation_element_usage

Each Shape_representation_element provides a definition for zero or one Shape_representation_element_usage object. Each Shape_representation_element_usage has a definition provided by exactly one Shape_representation_element object.

4.3.280 Shape_representation_element_usage to Interfering_shape_element

Each Shape_representation_element_usage is the intersecting geometry of zero or more Interfering_shape_element objects. Each Interfering_shape_element uses as intersecting geometry exactly one Shape_representation_element_usage object.

4.3.281 Ship to Hull_applicability

Each Ship has product data for hulls defined by zero or more Hull_applicability objects. Each Hull_applicability defines product data for hulls of exactly one Ship object.

4.3.282 Site to Building

Each Site has located on it zero or more Building objects. Each Building is located on exactly one Site object.

4.3.283 Site to Changed_site

Each Site is changed by zero or one Changed_site object. Each Changed_site changes exactly one Site object.

4.3.284 Site to Location_in_site

Each Site is a reference frame for zero or more Location_in_site objects. Each Location_in_site has a reference frame provided by exactly one Site object.

4.3.285 Site to Site_feature

Each Site contains zero or more Site_feature objects. Each Site_feature is contained in exactly one Site object.

4.3.286 Site to Site_shape_representation

Each Site has shape defined by zero or more Site_shape_representation objects. Each Site_shape_representation defines the shape of exactly one Site object.

4.3.287 Site to Sited_plant

Each Site has located on it one or more Sited_plant objects. Each Sited_plant is located on exactly one Site object.

4.3.288 Site_feature to Changed_site_feature

Each Site_feature is changed by zero or one Changed_site_feature object. Each Changed_site_feature changes exactly one Site_feature object.

4.3.289 Site_shape_representation to Breakline

Each Site_shape_representation is constrained by zero or more Breakline objects. Each Breakline constrains zero or one Site_shape_representation object.

4.3.290 Site_shape_representation to Gis_position

Each Site_shape_representation has global position defined by zero or one Gis_position object. Each Gis_position defines the global position for exactly one Site_shape_representation object.

4.3.291 Sited_plant to Changed_sited_plant

Each Sited_plant is changed by zero or one Changed_sited_plant object. Each Changed_sited_plant changes exactly one Sited_plant object.

4.3.292 Stream_design_case to Line_less_piping_system

Each Stream_design_case defines potential material for zero or more Line_less_piping_system objects. Each Line_less_piping_system transports material for zero or more Stream_design_case objects.

4.3.293 Stream_design_case to Piping_system_line_segment

Each Stream_design_case defines potential material for zero or more Piping_system_line_segment objects. Each Piping_system_line_segment defines transport needs for zero or more Stream_design_case objects.

4.3.294 Stream_design_case to Service_operating_case

Each Stream_design_case defines zero or more Service_operating_case objects. Each Service_operating_case is defined by exactly one Stream_design_case object.

ISO 10303-227:2005(E)

4.3.295 Stream_design_case to Stream_phase

Each Stream_design_case is composed of one or more Stream_phase objects. Each Stream_phase is an element of exactly one Stream_design_case object.

4.3.296 Sub_plant_relationship to Changed_sub_plant_relationship

Each Sub_plant_relationship is changed by zero or one Changed_sub_plant_relationship object. Each Changed_sub_plant_relationship changes exactly one Sub_plant_relationship object.

4.3.297 Supplier to Catalogue_definition

Each Supplier publishes zero or more Catalogue_definition objects. Each Catalogue_definition is published by zero or one Supplier object.

4.3.298 Supplier to Supplied_equipment

Each Supplier supplies one or more Supplied_equipment objects. Each Supplied_equipment is supplied by exactly one Supplier object.

4.3.299 Support_constraints to Support_usage

Each Support_constraints constrains zero or more Support_usage objects. Each Support_usage is constrained by zero or one Support_constraints object.

Each Support_constraints constrains the motion in the negative x-direction of zero or more Support_usage objects. Each Support_usage has motion in the negative x-direction constrained by zero or one Support_constraints object.

Each Support_constraints constrains the motion in the positive x-direction of zero or more Support_usage objects. Each Support_usage has motion in the positive x-direction constrained by zero or one Support_constraints object.

Each Support_constraints constrains the motion in the negative y-direction of zero or more Support_usage objects. Each Support_usage has motion in the negative y-direction constrained by zero or one Support_constraints object.

Each Support_constraints constrains the motion in the positive y-direction of zero or more Support_usage objects. Each Support_usage has motion in the positive y-direction constrained by zero or one Support_constraints object.

Each Support_constraints constrains the motion in the negative z-direction of zero or more Support_usage objects. Each Support_usage has motion in the negative z-direction constrained by zero or one Support_constraints object.

Each Support_constraints constrains the motion in the positive z-direction of zero or more Support_usage objects. Each Support_usage has motion in the positive z-direction constrained by zero or one Support_constraints object.

Each `Support_constraints` constrains the negative rotation about the x-axis of zero or more `Support_usage` objects. Each `Support_usage` has the negative rotation about the x-axis constrained by zero or one `Support_constraints` object.

Each `Support_constraints` constrains the positive rotation about the x-axis of zero or more `Support_usage` objects. Each `Support_usage` has the positive rotation about the x-axis constrained by zero or one `Support_constraints` object.

Each `Support_constraints` constrains the negative rotation about the y-axis of zero or more `Support_usage` objects. Each `Support_usage` has the negative rotation about the y-axis constrained by zero or one `Support_constraints` object.

Each `Support_constraints` constrains the positive rotation about the y-axis of zero or more `Support_usage` objects. Each `Support_usage` has the positive rotation about the y-axis constrained by zero or one `Support_constraints` object.

Each `Support_constraints` constrains the negative rotation about the z-axis of zero or more `Support_usage` objects. Each `Support_usage` has the negative rotation about the z-axis constrained by zero or one `Support_constraints` object.

Each `Support_constraints` constrains the positive rotation about the z-axis of zero or more `Support_usage` objects. Each `Support_usage` has the positive rotation about the z-axis constrained by zero or one `Support_constraints` object.

4.3.300 `Support_usage_connection` to `Plant_item_connection_occurrence`

Each `Support_usage_connection` is detailed by zero or more `Plant_item_connection_occurrence` objects. Each `Plant_item_connection_occurrence` gives the details for zero or one `Support_usage_connection` object.

5 Application interpreted model

5.1 Mapping specification

This clause contains the mapping specification that shows how each UoF, application object, and attribute of this part of ISO 10303 (see clause 4) maps to one or more AIM constructs (see annex A). The mapping specification contains up to five items for each application object or attribute. These include: Application element; AIM element; Source; Rules; and Reference path.

Application element: Name of an application element as it appears in the application object definition in clause 4.2. Application object names begin with an upper case letter. Attribute names and assertions are listed after the application object to which they belong and are written in lower case.

AIM element: Name of an AIM element as it appears in the AIM (see annex A), the term 'IDENTICAL MAPPING', or the term 'PATH'. AIM entities are written in lower case. Attribute names of AIM entities are referred to as <entity name>.<attribute name>. The mapping of an application element may result in several related AIM elements. Each of these AIM elements requires an entry of its own in the specification. The term 'IDENTICAL MAPPING' indicates that both application objects of an application assertion map to the same AIM element. The term 'PATH' indicates that the application assertion maps to the entire reference path.

Source: For those AIM elements that are interpreted from the integrated resources, this is the number of the corresponding part of ISO 10303. For those AIM elements that are created for the purpose of this part of ISO 10303, this is the number of the part. For those AIM elements that are directly incorporated from an application interpreted construct (AIC), this is the AIC reference.

Rules: One or more numbers may be given that refer to rules that apply to the current AIM element or reference path. For rules that are derived from relationships between application objects, the same rule is referred to by the mapping entries of all the involved AIM elements. The expanded names of the rules are listed in the specification.

Reference path: To describe fully the mapping of an application object, it may be necessary to specify a reference path through several related AIM elements. The reference path documents the role of an AIM element relative to the AIM element in the row succeeding it. Two or more such related AIM elements define the interpretation of the integrated resources that satisfies the requirement specified by the application object. For each AIM element that has been created for use within this part of ISO 10303, a reference path up to its supertype from an integrated resource is specified.

For the expression of reference paths and the relationships between AIM elements the following notational conventions apply:

- a) []: multiple AIM elements or sections of the reference path are required to satisfy an information requirement;
- b) (): multiple AIM elements or sections of the reference path are identified as alternatives within the mapping to satisfy an information requirement;
- c) {}: enclosed section constrains the reference path to satisfy an informational requirement;

- d) ->: attribute references the entity or select type given in the following entry;
- e) <-: entity or select type is referenced by the attribute in the following entry;
- f) [i]: attribute is an aggregation of which a single member is given in the following entry;
- g) [n]: attribute is an aggregation of which member n is given in the following entry;
- h) =>: entity is a supertype of the entity given in the following entry;
- i) <=: entity is a subtype of the entity given in the following entry;
- j) =: the string, select, or enumeration type is constrained to a choice or value;
- k) \: line continuation for strings that wrap.

5.1.1 associative_schematics UoF

5.1.1.1 Schematic

AIM element: drawing_revision
 Source: ISO 10303-101
 Reference path: {drawing_revision
 drawing_revision.drawing_identifier ->
 drawing_definition
 drawing_definition.drawing_type = `schematic'}

5.1.1.1.1 id

AIM element: drawing_definition.drawing_number
 Source: ISO 10303-101
 Reference path: drawing_revision
 drawing_revision.drawing_identifier ->
 drawing_definition
 drawing_definition.drawing_number

5.1.1.1.2 version

AIM element: drawing_revision.revision_identifier
 Source: ISO 10303-101

5.1.1.1.3 type

AIM element: group.name
 Source: ISO 10303-41
 Reference path: drawing_revision
 classification_item = drawing_revision
 classification_item <-
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_assignment.assigned_class ->
 classification_role
 classification_role = 'schematic type classification'}
 classification_assignment

ISO 10303-227:2005(E)

```
classification_assignment.assigned_class ->
group
group.name
```

5.1.1.1.4 schematic to plant_system

AIM element: PATH

```
Reference path: drawing_revision <=
presentation_set
presentation_representation_select = presentation_set
presentation_representation_select <-
presented_item_representation.presentation
presented_item_representation
presented_item_representation.item ->
presented_item =>
presented_item_with_association
presented_item_with_association.items[i] ->
associated_item
associated_item = product_definition
product_definition =>
(electrical_system)
(ducting_system)
(instrumentation_and_control_system)
(piping_system)
(structural_system)
(cableway_system)
```

5.1.1.2 Schematic_callout

AIM element: draughting_callout
Source: ISO 10303-101

5.1.1.2.1 name

AIM element: representation_item.name
Source: ISO 10303-43
Reference path: draughting_callout <=
geometric_representation_item <=
representation_item
representation_item.name

5.1.1.2.2 schematic_callout to schematic_presentation_component

AIM element: PATH
Reference path: draughting_callout <=
geometric_representation_item <=
representation_item <-
representation.items[i]
representation =>
presentation_representation

5.1.1.2.3 schematic_callout to schematic_element

AIM element: PATH

Reference path: draughting_callout
 draughting_callout.contents ->
 draughting_callout_element
 (draughting_callout_element = annotation_text_occurrence =>)
 (draughting_callout_element = annotation_curve_occurrence =>)
 (draughting_callout_element = annotation_symbol_occurrence =>)
 annotation_occurrence

5.1.1.3 Schematic_callout_dependency

AIM element: draughting_callout_relationship

Source: ISO 10303-101

5.1.1.3.1 purpose

AIM element: draughting_callout_relationship.description

Source: ISO 10303-101

Reference path: draughting_callout_relationship
 draughting_callout_relationship.description

5.1.1.3.2 schematic_callout_dependency to schematic_callout (as

5.1.1.3.3 dependent)

AIM element: PATH

Reference path: draughting_callout_relationship
 draughting_callout_relationship.related_draughting_callout ->
 draughting_callout

5.1.1.3.4 schematic_callout_dependency to schematic_callout (as independent)

AIM element: PATH

Reference path: draughting_callout_relationship
 draughting_callout_relationship.relateing_draughting_callout ->
 draughting_callout

5.1.1.4 Schematic_curve

AIM element: annoation_curve_occurrence

Source: ISO 10303-46

5.1.1.4.1 defining_curve

AIM element: curve

Source: ISO 10303-42

Reference path: annoation_curve_occurrence
 annotation_occurrence <=
 styled_item
 styled_item.item ->

ISO 10303-227:2005(E)

```
representation_item =>  
geometric_representation_item =>  
curve
```

5.1.1.5 Schematic_element

AIM element: annotation_occurrence
Source: ISO 10303-46

5.1.1.5.1 style

AIM element: presentation_style_assignment
Source: ISO 10303-46
Reference path: annotation_occurrence <=
 styled_item
 styled_item.styles ->
 presentation_style_assignment

5.1.1.5.2 schematic_element to component_size_description (as depicts)

AIM element: PATH
Reference path: annotation_occurrence <=
 styled_item <=
 representation_item <-
 representation.items[i]
 representation =>
 {presentation_representation =>
 presentation_with_association}
 presentation_representation
 presentation_representation_select = presentation_representation
 presentation_representation_select <-
 presented_item_representation.presentation
 presented_item_representation
 presented_item_representation.item ->
 presented_item =>
 presented_item_with_association
 presented_item_with_association.items[i] ->
 associated_item
 (associated_item = representation)
 (associated_item = shape_dimension_representation)

5.1.1.5.3 schematic_element to document

AIM element: PATH
Reference path: annotation_occurrence <=
 styled_item <=
 representation_item <-
 representation.items[i]
 representation =>
 {presentation_representation =>
 presentation_with_association}
 presentation_representation


```

presentation_representation_select = presentation_representation
presentation_representation_select <-
presented_item_representation.presentation
presented_item_representation
presented_item_representation.item ->
presented_item =>
presented_item_with_association
presented_item_with_association.items[i] ->
associated_item
associated_item = document
document

```

5.1.1.5.4 schematic_element to ducting_system

AIM element: PATH

```

Reference path: annotation_occurrence <=
  styled_item <=
  representation_item <-
  representation.items[i]
  representation =>
  {presentation_representation =>
  presentation_with_association}
  presentation_representation
  presentation_representation_select = presentation_representation
  presentation_representation_select <-
  presented_item_representation.presentation
  presented_item_representation
  presented_item_representation.item ->
  presented_item =>
  presented_item_with_association
  presented_item_with_association.items[i] ->
  associated_item
  associated_item = ducting_system
  ducting_system

```

5.1.1.5.5 schematic_element to functional_connector

AIM element: PATH

```

Reference path: annotation_occurrence <=
  styled_item <=
  representation_item <-
  representation.items[i]
  representation =>
  {presentation_representation =>
  presentation_with_association}
  presentation_representation
  presentation_representation_select = presentation_representation
  presentation_representation_select <-
  presented_item_representation.presentation
  presented_item_representation

```

ISO 10303-227:2005(E)

```
presented_item_representation.item ->
presented_item =>
presented_item_with_association
presented_item_with_association.items[i] ->
associated_item
associated_item = plant_item_connector
plant_item_connector
```

5.1.1.5.6 schematic_element to hvac_plant_item_connector

AIM element: PATH

```
Reference path: annotation_occurrence <=
  styled_item <=
  representation_item <-
  representation.items[i]
  representation =>
  {presentation_representation =>
  presentation_with_association}
  presentation_representation
  presentation_representation_select = presentation_representation
  presentation_representation_select <-
  presented_item_representation.presentation
  presented_item_representation
  presented_item_representation.item ->
  presented_item =>
  presented_item_with_association
  presented_item_with_association.items[i] ->
  associated_item
  associated_item = plant_item_connector
  plant_item_connector
```

5.1.1.5.7 schematic_element to hvac_run

AIM element: PATH

```
Reference path: annotation_occurrence <=
  styled_item <=
  representation_item <-
  representation.items[i]
  representation =>
  {presentation_representation =>
  presentation_with_association}
  presentation_representation
  presentation_representation_select = presentation_representation
  presentation_representation_select <-
  presented_item_representation.presentation
  presented_item_representation
  presented_item_representation.item ->
  presented_item =>
  presented_item_with_association
  presented_item_with_association.items[i] ->
```

```

associated_item
associated_item = product_definition
product_definition =>
hvac_run_definition

```

5.1.1.5.8 schematic_element to hvac_section

AIM element: PATH

```

Reference path: annotation_occurrence <=
  styled_item <=
  representation_item <-
  representation.items[i]
  representation =>
  {presentation_representation =>
  presentation_with_association}
  presentation_representation
  presentation_representation_select = presentation_representation
  presentation_representation_select <-
  presented_item_representation.presentation
  presented_item_representation
  presented_item_representation.item ->
  presented_item =>
  presented_item_with_association
  presented_item_with_association.items[i] ->
  associated_item
  associated_item = product_definition
  product_definition =>
  hvac_section_definition

```

5.1.1.5.9 schematic_element to hvac_section_termination

AIM element: PATH

```

Reference path: annotation_occurrence <=
  styled_item <=
  representation_item <-
  representation.items[i]
  representation =>
  {presentation_representation =>
  presentation_with_association}
  presentation_representation
  presentation_representation_select = presentation_representation
  presentation_representation_select <-
  presented_item_representation.presentation
  presented_item_representation
  presented_item_representation.item ->
  presented_item =>
  presented_item_with_association
  presented_item_with_association.items[i] ->
  associated_item
  associated_item = hvac_section_termination

```

ISO 10303-227:2005(E)

hvac_section_termination

5.1.1.5.10 schematic_element to mechanical_arrangement_specification (as depicts)

AIM element: PATH

Reference path: annotation_occurrence <=
 styled_item <=
 representation_item <=
 representation.items[i]
 representation =>
 {presentation_representation =>
 presentation_with_association}
 presentation_representation
 presentation_representation_select = presentation_representation
 presentation_representation_select <=
 presented_item_representation.presentation
 presented_item_representation
 presented_item_representation.item ->
 presented_item =>
 presented_item_with_association
 presented_item_with_association.items[i] ->
 associated_item
 associated_item = document
 document

5.1.1.5.11 schematic_element to mechanical_system (as depicts)

AIM element: PATH

Reference path: annotation_occurrence <=
 styled_item <=
 representation_item <=
 representation.items[i]
 representation =>
 {presentation_representation =>
 presentation_with_association}
 presentation_representation
 presentation_representation_select = presentation_representation
 presentation_representation_select <=
 presented_item_representation.presentation
 presented_item_representation
 presented_item_representation.item ->
 presented_item =>
 presented_item_with_association
 presented_item_with_association.items[i] ->
 associated_item
 associated_item = mechanical_system
 mechanical_system

5.1.1.5.12 schematic_element to mechanical_system_arrangement (as depicts)

AIM element: PATH

Reference path: annotation_occurrence <=
 styled_item <=
 representation_item <=
 representation.items[i]
 representation =>
 {presentation_representation =>
 presentation_with_association}
 presentation_representation
 presentation_representation_select = presentation_representation
 presentation_representation_select <=
 presented_item_representation.presentation
 presented_item_representation
 presented_item_representation.item ->
 presented_item =>
 presented_item_with_association
 presented_item_with_association.items[i] ->
 associated_item
 associated_item = plant_arrangement_definition
 plant_arrangement_definition

5.1.1.5.13 schematic_element to mechanical_system_arrangement_segment (as depicts)

AIM element: PATH

Reference path: annotation_occurrence <=
 styled_item <=
 representation_item <=
 representation.items[i]
 representation =>
 {presentation_representation =>
 presentation_with_association}
 presentation_representation
 presentation_representation_select = presentation_representation
 presentation_representation_select <=
 presented_item_representation.presentation
 presented_item_representation
 presented_item_representation.item ->
 presented_item =>
 presented_item_with_association
 presented_item_with_association.items[i] ->
 associated_item
 associated_item = plant_arrangement_segment_definition
 plant_arrangement_segment_definition

5.1.1.5.14 schematic_element to mechanical_system_arrangement_segment_termination (as depicts)

AIM element: PATH

Reference path: annotation_occurrence <=
 styled_item <=
 representation_item <=
 representation.items[i]

ISO 10303-227:2005(E)

```
representation =>
{presentation_representation =>
presentation_with_association}
presentation_representation
presentation_representation_select = presentation_representation
presentation_representation_select <-
presented_item_representation.presentation
presented_item_representation
presented_item_representation.item ->
presented_item =>
presented_item_with_association
presented_item_with_association.items[i] ->
associated_item
associated_item = plant_arrangement_segment_termination
{plant_arrangement_segment_termination <=
shape_aspect
shape_aspect.name = 'mechanical arrangement segment termination'}
plant_arrangement_segment_termination
```

5.1.1.5.15 schematic_element to mechanical_system_arrangement_termination (as depicts)

AIM element: PATH

```
Reference path: annotation_occurrence <=
  styled_item <=
  representation_item <-
  representation.items[i]
  representation =>
  {presentation_representation =>
  presentation_with_association}
  presentation_representation
  presentation_representation_select = presentation_representation
  presentation_representation_select <-
  presented_item_representation.presentation
  presented_item_representation
  presented_item_representation.item ->
  presented_item =>
  presented_item_with_association
  presented_item_with_association.items[i] ->
  associated_item
  associated_item = plant_arrangement_segment_termination
  {plant_arrangement_segment_termination <=
  shape_aspect
  shape_aspect.name = 'mechanical arrangement termination'}
  plant_arrangement_segment_termination
```

5.1.1.5.16 schematic_element to piping_size_description

AIM element: PATH

```
Reference path: annotation_occurrence <=
  styled_item <=
```

```

representation_item <-
representation.items[i]
representation =>
{presentation_representation =>
presentation_with_association}
presentation_representation
presentation_representation_select = presentation_representation
presentation_representation_select <-
presented_item_representation.presentation
presented_item_representation
presented_item_representation.item ->
presented_item =>
presented_item_with_association
presented_item_with_association.items[i] ->
associated_item
(associated_item = representation)
(associated_item = shape_dimension_representation)

```

5.1.1.5.17 schematic_element to piping_specification

AIM element: PATH

```

Reference path: annotation_occurrence <=
  styled_item <=
  representation_item <-
  representation.items[i]
  representation =>
  {presentation_representation =>
  presentation_with_association}
  presentation_representation
  presentation_representation_select = presentation_representation
  presentation_representation_select <-
  presented_item_representation.presentation
  presented_item_representation
  presented_item_representation.item ->
  presented_item =>
  presented_item_with_association
  presented_item_with_association.items[i] ->
  associated_item
  associated_item = document
  document

```

5.1.1.5.18 schematic_element to piping_system

AIM element: PATH

```

Reference path: annotation_occurrence <=
  styled_item <=
  representation_item <-
  representation.items[i]
  representation =>
  {presentation_representation =>

```

ISO 10303-227:2005(E)

```
presentation_with_association}
presentation_representation
presentation_representation_select = presentation_representation
presentation_representation_select <-
presented_item_representation.presentation
presented_item_representation
presented_item_representation.item ->
presented_item =>
presented_item_with_association
presented_item_with_association.items[i] ->
associated_item
associated_item = piping_system
piping_system
```

5.1.1.5.19 schematic_element to piping_system_line

AIM element: PATH

```
Reference path: annotation_occurrence <=
  styled_item <=
    representation_item <-
    representation.items[i]
    representation =>
    {presentation_representation =>
    presentation_with_association}
    presentation_representation
    presentation_representation_select = presentation_representation
    presentation_representation_select <-
    presented_item_representation.presentation
    presented_item_representation
    presented_item_representation.item ->
    presented_item =>
    presented_item_with_association
    presented_item_with_association.items[i] ->
    associated_item
    associated_item = plant_line_definition
    plant_line_definition
```

5.1.1.5.20 schematic_element to piping_system_line_segment

AIM element: PATH

```
Reference path: annotation_occurrence <=
  styled_item <=
    representation_item <-
    representation.items[i]
    representation =>
    {presentation_representation =>
    presentation_with_association}
    presentation_representation
    presentation_representation_select = presentation_representation
    presentation_representation_select <-
```



```

presented_item_representation.presentation
presented_item_representation
presented_item_representation.item ->
presented_item =>
presented_item_with_association
presented_item_with_association.items[i] ->
associated_item
associated_item = plant_line_segment_definition
plant_line_segment_definition

```

5.1.1.5.21 schematic_element to piping_system_line_segment_termination

AIM element: PATH

```

Reference path: annotation_occurrence <=
  styled_item <=
    representation_item <-
      representation.items[i]
    representation =>
      {presentation_representation =>
        presentation_with_association}
    presentation_representation
    presentation_representation_select = presentation_representation
    presentation_representation_select <-
      presented_item_representation.presentation
      presented_item_representation
      presented_item_representation.item ->
      presented_item =>
      presented_item_with_association
      presented_item_with_association.items[i] ->
      associated_item
      associated_item = plant_line_segment_termination
      {plant_line_segment_termination <=
        shape_aspect
        shape_aspect.name = 'piping line segment termination'}
      plant_line_segment_termination

```

5.1.1.5.22 schematic_element to piping_system_line_termination

AIM element: PATH

```

Reference path: annotation_occurrence <=
  styled_item <=
    representation_item <-
      representation.items[i]
    representation =>
      {presentation_representation =>
        presentation_with_association}
    presentation_representation
    presentation_representation_select = presentation_representation
    presentation_representation_select <-
      presented_item_representation.presentation

```

ISO 10303-227:2005(E)

```
presented_item_representation
presented_item_representation.item ->
presented_item =>
presented_item_with_association
presented_item_with_association.items[i] ->
associated_item
associated_item = plant_line_segment_termination
{plant_line_segment_termination <=
shape_aspect
shape_aspect.name = 'piping line termination'}
plant_line_segment_termination
```

5.1.1.5.23 schematic_element to plant_item

AIM element: PATH

```
Reference path: annotation_occurrence <=
  styled_item <=
  representation_item <-
  representation.items[i]
  representation =>
  {presentation_representation =>
  presentation_with_association}
  presentation_representation
  presentation_representation_select = presentation_representation
  presentation_representation_select <-
  presented_item_representation.presentation
  presented_item_representation
  presented_item_representation.item ->
  presented_item =>
  presented_item_with_association
  presented_item_with_association.items[i] ->
  associated_item
  (associated_item = product_definition
  {product_definition
  product_definition.formation ->
  product_definition_formation
  product_definition_formation.of_product ->
  product
  product.frame_of_reference [i] ->
  product_context <=
  application_context_element
  application_context_element.name = 'plant item'}
  product_definition)
  (associated_item = product
  {product
  product.frame_of_reference [i] ->
  product_context <=
  application_context_element
  application_context_element.name = 'plant item'}
```

product)

5.1.1.5.24 schematic_element to plant_item_connection

AIM element: PATH

```
Reference path: annotation_occurrence <=
  styled_item <=
  representation_item <-
  representation.items[i]
  representation =>
  {presentation_representation =>
  presentation_with_association}
  presentation_representation
  presentation_representation_select = presentation_representation
  presentation_representation_select <-
  presented_item_representation.presentation
  presented_item_representation
  presented_item_representation.item ->
  presented_item =>
  presented_item_with_association
  presented_item_with_association.items[i] ->
  associated_item
  associated_item = plant_item_connection
  plant_item_connection
```

5.1.1.5.25 schematic_element to required_material_description

AIM element: PATH

```
Reference path: annotation_occurrence <=
  styled_item <=
  representation_item <-
  representation.items[i]
  representation =>
  {presentation_representation =>
  presentation_with_association}
  presentation_representation
  presentation_representation_select = presentation_representation
  presentation_representation_select <-
  presented_item_representation.presentation
  presented_item_representation
  presented_item_representation.item ->
  presented_item =>
  presented_item_with_association
  presented_item_with_association.items[i] ->
  associated_item
  associated_item = product_definition
  {product_definition
  product_definition.frame_of_reference ->
  {product_definition_context
  product_definition_context.life_cycle_stage = 'requirement definition'}}
```

ISO 10303-227:2005(E)

```
product_definition_context =>
application_context_element
application_context_element.name = 'material'}
product_definition
```

5.1.1.5.26 schematic_element to schematic_presentation_component

AIM element: PATH

```
Reference path: annotation_occurrence <=
                styled_item <=
                representation_item <-
                representation.items[i]
                representation =>
                presentation_representation
```

5.1.1.6 Schematic_point

AIM element: annotation_point_occurrence

Source: ISO 10303-46

```
Reference path: {annotation_point_occurrence <=
                annotation_occurrence <=
                styled_item
                styled_item.item ->
                representation_item =>
                geometric_representation_item =>
                point =>
                cartesian_point}
```

5.1.1.6.1 point_coordinates

AIM element: [cartesian_point.coordinates [1]]
[cartesian_point.coordinates [2]]

Source: ISO 10303-42

```
Reference path: annotation_point_occurrence <=
                annotation_occurrence <=
                styled_item
                styled_item.item ->
                representation_item =>
                geometric_representation_item =>
                point =>
                cartesian_point
                cartesian_point.coordinates
                [cartesian_point.coordinates [1]]
                [cartesian_point.coordinates [2]]
```

5.1.1.7 Schematic_presentation_component

AIM element: presentation_representation

Source: ISO 10303-46

5.1.1.7.1 schematic_presentation_component to schematic

AIM element: PATH

Reference path: (presentation_representation =>
 presentation_area <-
 area_in_set.area
 area_in_set
 area_in_set.in_set ->
 presentation_set =>
 {drawing_revision
 drawing_revision.drawing_identifier ->
 drawing_definition
 drawing_definition.drawing_type = 'schematic'}
 drawing_revision

5.1.1.8 Schematic_presentation_component_composition

AIM element: (presentation_representation_relationship)
 (representation_map)

Source: ISO 10303-46

5.1.1.8.1 clipping

AIM element: (camera_model_d2.view_window_clipping)
 (camera_model_d2_shape_clipping.shape_clipping)

Source: ISO 10303-46

Reference path: (presentation_representation_relationship <=
 representation_relationship_with_transformation <=
 representation_relationship_with_transformation.transformation_operator ->
 item_defined_transformation.transform_item_1 ->)
 (representation_map
 representation_map.mapping_origin ->)
 representation_item =>
 geometric_representation_item =>
 camera_model =>
 (camera_model_d2
 {camera_model_d2
 camera_model_d2.view_window_clipping = .True.}
 camera_model_d2.view_window_clipping)
 (camera_model_d2 =>
 camera_model_d2_shape_clipping
 camera_model_d2_shape_clipping.shape_clipping)

5.1.1.8.2 projection

AIM element: camera_model_d2

Source: ISO 10303-46

Reference path: (presentation_representation_relationship <=
 representation_relationship_with_transformation <=
 representation_relationship_with_transformation.transformation_operator ->
 item_defined_transformation.transform_item_1 ->)
 (representation_map
 representation_map.mapping_origin ->)
 representation_item =>

ISO 10303-227:2005(E)

```
geometric_representation_item =>  
camera_model =>  
camera_model_d2
```

5.1.1.8.3 schematic_presentation_component_composition to schematic_presentation_component (as parent)

AIM element: PATH

```
Reference path: (presentation_representation_relationship =>  
representation_relationship_with_transformation =>  
representation_relationship  
representation_relationship.rep_1 ->)  
(representation_map <-  
mapped_item.mapped_representation  
mapped_item <=  
representation_item<-  
representation.items [i])  
representation =>  
presentation_representation
```

5.1.1.8.4 schematic_presentation_component_composition to schematic_presentation_component (as child)

AIM element: PATH

```
Reference path: (presentation_representation_relationship =>  
representation_relationship_with_transformation =>  
representation_relationship  
representation_relationship.rep_2 ->)  
(representation_map <-  
mapped_item.mapping_origin ->  
representation_map  
representation_map.mapped_representation ->)  
representation =>  
presentation_representation
```

5.1.1.9 Schematic_symbol_definition

AIM element: (annotation_symbol)
(defined_symbol)

Source: ISO 10303-46

5.1.1.9.1 identifier

AIM element: identification_assignment.assigned_id

Source: ISO 10303-41

```
Reference path: (annotation_symbol  
identified_item = annotation_symbol)  
(defined_symbol  
identified_item = defined_symbol)  
identified_item <-  
applied_identification_assignment.items[i]  
applied_identification_assignment <=
```

identification_assignment
 identification_assignment.assigned_id

5.1.1.9.2 name

AIM element: representation_item.name
 Source: ISO 10303-43
 Reference path: (annotation_symbol <=
 mapped_item <=)
 (defined_symbol <=
 geometric_representation_item <=)
 representation_item
 representation_item.name

5.1.1.9.3 source

AIM element: external_source
 Source: ISO 10303-41
 Reference path: defined_symbol
 defined_symbol.definition ->
 defined_symbol_select
 defined_symbol_select = externally_defined_symbol
 externally_defined_symbol <=
 externally_defined_item
 externally_defined_item.source ->
 external_source

5.1.1.9.4 schematic_symbol_definition to schematic_curve

AIM element: PATH
 Reference path: annotation_symbol <=
 mapped_item
 mapped_item.mapping_source ->
 {representation_map =>
 symbol_representation_map}
 representation_map
 representation_map.mapped_representation ->
 {representation =>
 symbol_representation}
 representation
 representation.items[i] ->
 representation_item =>
 styled_item =>
 annotation_occurrence =>
 annotation_curve_occurrence

5.1.1.9.5 schematic_symbol_definition to schematic_point

AIM element: PATH
 Reference path: annotation_symbol <=
 mapped_item
 mapped_item.mapping_source ->

ISO 10303-227:2005(E)

```
{representation_map =>
symbol_representation_map}
representation_map
representation_map.mapped_representation ->
{representation =>
symbol_representation}
representation
representation.items[i] ->
representation_item =>
styled_item =>
annotation_occurrence =>
annotation_point_occurrence
```

5.1.1.9.6 schematic_symbol_definition to schematic_symbol_occurrence (as has/is an element of)

AIM element: PATH

```
Reference path: annotation_symbol <=
mapped_item
mapped_item.mapping_source ->
{representation_map =>
symbol_representation_map}
representation_map
representation_map.mapped_representation ->
{representation =>
symbol_representation}
representation
representation.items[i] ->
representation_item =>
styled_item =>
annotation_occurrence =>
annotation_symbol_occurrence
```

5.1.1.9.7 schematic_symbol_definition to schematic_symbol_occurrence (as is placed on schematic as)

AIM element: PATH

```
Reference path: annotation_symbol <=
mapped_item <=
representation_item <-
styled_item.item
styled_item =>
annotation_occurrence =>
annotation_symbol_occurrence
```

5.1.1.9.8 schematic_symbol_definition to schematic_text

AIM element: PATH

```
Reference path: annotation_symbol <=
mapped_item
mapped_item.mapping_source ->
{representation_map =>
```



```

symbol_representation_map}
representation_map
representation_map.mapped_representation ->
{representation =>
symbol_representation}
representation
representation.items[i] ->
representation_item =>
styled_item =>
annotation_occurrence =>
annotation_text_occurrence

```

5.1.1.10 Schematic_symbol_occurrence

AIM element: annotation_symbol_occurrence

Source: ISO 10303-46

5.1.1.11 Schematic_text

AIM element: annotation_text_occurrence

Source: ISO 10303-46

5.1.1.11.1 text_literal

AIM element: text_literal

Source: ISO 10303-46

Reference path: annotation_text_occurrence <=
 annotation_occurrence <=
 styled_item
 styled_item.item ->
 representation_item =>
 geometric_representation_item =>
 text_literal

5.1.1.12 Title_block

AIM element: annotation_symbol_occurrence

Source: ISO 10303-46

Reference path: {annotation_symbol_occurrence
 classification_item = annotation_symbol_occurrence
 classification_item <-
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_assignment.assigned_class ->
 classification_role
 classification_role = 'symbol type classification'}
 classification_assignment
 classification_assignment.assigned_classification ->
 group
 group.name = 'schematic title block'}

ISO 10303-227:2005(E)

5.1.1.12.1 approvals

AIM element: approval
Source: ISO 10303-41
Reference path: annotation_symbol_occurrence
approved_item = annotation_symbol_occurrence
approved_item <-
applied_approval_assignment.items[i]
applied_approval_assignment <=
approval_assignment
approval_assignment.assigned_approval ->
approval

5.1.1.12.2 contractor_information

AIM element: (organization)
(person_and_organization)
Source: ISO 10303-41
Reference path: annotation_symbol_occurrence
(plant_spatial_configuration_organization_item = annotation_symbol_occurrence
plant_spatial_configuration_organization_item <-
applied_organization_assignment.items[i]
applied_organization_assignment <=
{organization_assignment
organization_assignment.role ->
organization_role
organization_role.name = `contractor`}
organization_assignment
organization_assignment.assigned_organization ->
organization)
(plant_spatial_configuration_person_and_organization_item =
annotation_symbol_occurrence
plant_spatial_configuration_person_and_organization_item <-
applied_person_and_organization_assignment.items[i]
applied_person_and_organization_assignment <=
{person_and_organization_assignment
person_and_organization_assignment.role ->
person_and_organization_role
person_and_organization_role.name = `contractor`}
person_and_organization_assignment.assigned_person_and_organization ->
person_and_organization)

5.1.1.12.3 title_block to schematic_presentation_component

AIM element: PATH
Reference path: annotation_symbol_occurrence <=
annotation_occurrence <=
styled_item <=
representation_item <-
representation.items[i]
representation =>

presentation_representation

5.1.1.12.4 title_block to design_project

AIM element: PATH

Reference path: annotation_symbol_occurrence <=
 annotation_occurrence <=
 styled_item <=
 representation_item <=
 representation.items[i]
 representation <=
 {presentation_representation =>
 presentation_with_association}
 presentation_representation
 presentation_representation_select = presentation_representation
 presentation_representation_select <=
 presented_item_representation.presentation
 presented_item_representation
 presented_item_representation.item ->
 presented_item =>
 presented_item_with_association
 presented_item_with_association.items[i] ->
 associated_item
 associated_item = organizational_project
 organizational_project

5.1.2 cableway_component_characterization UoF

5.1.2.1 Cable

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context
 product_context_discipline_type_constraint
 value_for_application_context

Reference path: {[product
 classification_item = product
 classification_item <=
 applied_classification_assignment.items[i]

 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_assignment.assigned_class ->
 classification_role
 classification_role = 'cableway component type classification'}
 classification_assignment
 classification_assignment.assigned_classification ->
 [group
 group.name = 'cable']

ISO 10303-227:2005(E)

```
[group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group
group.name = 'electrical component']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]}
```

5.1.2.2 Cableway_component

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'cableway component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]}

5.1.2.2.1 cableway_component to cable

AIM element: PATH

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition <-
product_definition_relationship.relying_product_definition
product_definition_relationship
{product_definition_relationship.name = 'cable containment'}

```

product_definition_relationship.related_product_definition ->
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product

```

5.1.2.3 Cableway_connector

```

AIM element: plant_item_connector
Source:      ISO 10303-227
Reference path: plant_item_connector <=
shape_aspect
{ plant_item_connector
classification_item = plant_item_connector
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'cableway connector type classification' }
classification_assignment
classification_assignment.assigned_class ->
group =>
cableway_connector_class }

```

5.1.2.3.1 type

```

AIM element: group.name
Source:      ISO 10303-41
Reference path: plant_item_connector
classification_item = plant_item_connector
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'cableway connector type classification' }
classification_assignment
classification_assignment.assigned_class ->
{ group =>
cableway_connector_class }
group
group.name

```

5.1.2.4 Cableway_fitting

```

AIM element: cableway_component_definition
Source:      ISO 10303-227

```

ISO 10303-227:2005(E)

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: cableway_component_definition <=
product_definition
{cableway_component_definition
classification_item = cableway_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = 'cableway component type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'cableway fitting'}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'cableway component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]}

5.1.2.5 Cableway_piece

AIM element: cableway_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: cableway_component_definition <=
product_definition
{cableway_component_definition
classification_item = cableway_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = 'cableway component type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'cableway piece'}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'cableway component']
[product
product.frame_of_reference[i] ->

ISO 10303-227:2005(E)

```
product_context <=  
application_context_element  
application_context_element.name = 'plant item']}]}
```

5.1.2.6 Cableway_size_description

AIM element: representation

Source: ISO 10303-43

Reference path: {representation
(representation.name = 'cableway size description')
(representation.name = 'conduit size description')
(representation.name = 'raceway size description')}

5.1.2.6.1 fill_area

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum fill area')
(representation_item.name = 'minimum fill area'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum fill area'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum fill area'}}])
(representation.items[i] ->
{representation_item
representation_item.name = 'fill area'}})
representation_item =>
measure_representation_item <=
{measure_with_unit =>
area_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.2.6.2 cableway_size_description to cableway_component

AIM element: PATH

Reference path: representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition.definition ->
characterized_definition


```

characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
{product_definition =>
cableway_component_definition}
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product

```

5.1.2.6.3 cableway_size_description to changed_cableway_size_description

AIM element: IDENTICAL MAPPING

5.1.2.7 Conduit

AIM element: cableway_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: cableway_component_definition <=
product_definition
{cableway_component_definition
classification_item = cableway_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = 'cableway component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
cableway_component_class]
[group
group.name = 'conduit']
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment

ISO 10303-227:2005(E)

```
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'cableway component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]}
```

5.1.2.8 Conduit_size_description

AIM element: representation

Source: ISO 10303-43

Reference path: {representation
representation.name = 'conduit size description'}

5.1.2.8.1 outer_diameter

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum outer diameter')
(representation_item.name = 'minimum outer diameter'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum outer diameter'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum outer diameter'}}]
(representation.items[i] ->
{representation_item
representation_item.name = 'outer diameter'}})
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit

```
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.2.8.2 inner_diameter

```
AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path representation
(representation.items[i] ->
 {representation_item
 (representation_item.name = 'maximum inner diameter')
 (representation_item.name = 'minimum inner diameter'}})
([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum inner diameter'}}]
[representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum inner diameter'}}]
(representation.items[i] ->
 {representation_item
 representation_item.name = 'inner diameter'})
representation_item =>
measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.2.8.3 thickness

```
AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path representation
(representation.items[i] ->
 {representation_item
 (representation_item.name = 'maximum thickness')
 (representation_item.name = 'minimum thickness'}})
([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum thickness'}}]
[representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum thickness'}}]
(representation.items[i] ->
 {representation_item
 representation_item.name = 'thickness'})
representation_item =>
```

ISO 10303-227:2005(E)

```
measure_representation_item <=  
{ measure_with_unit =>  
length_measure_with_unit}  
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.2.9 Raceway

AIM element: cableway_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: cableway_component_definition <=
product_definition
{ cableway_component_definition
classification_item = cableway_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = 'cableway component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
cableway_component_class]
[group
group.name = 'raceway']}
{ product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)

```
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'cableway component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]}
```

5.1.2.9.1 raceway to raceway_lane

AIM element: PATH

Reference path: cableway_component_definition <=

```
product_definition <-
product_definition_relationship.relying_product_definition
product_definition_relationship
product_definition_relationship.related_product_definition ->
product_definition =>
cableway_component_definition
```

5.1.2.10 Raceway_lane

AIM element: cableway_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: cableway_component_definition <=

```
product_definition
{cableway_component_definition
classification_item = cableway_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = 'cableway component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
cableway_component_class]
[group
group.name = 'raceway lane']]
{product_definition
product_definition.formation ->
```

ISO 10303-227:2005(E)

```
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'cableway component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]
```

5.1.2.11 Raceway_size_description

AIM element: representation
Source: ISO 10303-43
Reference path: {representation
representation.name = 'raceway size description'}

5.1.2.11.1 outer_width

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum outer width')
(representation_item.name = 'minimum outer width'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum outer width'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum outer width'}}])

```
(representation.items[i] ->
{representation_item
representation_item.name = 'outer width'})
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.2.11.2 outer_height

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path representation

```
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum outer height')
(representation_item.name = 'minimum outer height'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum outer height'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum outer height'}}]
(representation.items[i] ->
{representation_item
representation_item.name = 'outer height'})
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.2.11.3 inner_width

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path representation

```
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum inner width')
(representation_item.name = 'minimum inner width'}})
([representation.items[i] ->
{representation_item
```

ISO 10303-227:2005(E)

```
representation_item.name = 'maximum inner width']]
[representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum inner width'}})
(representation.items[i] ->
 {representation_item
 representation_item.name = 'inner width'})
representation_item =>
measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
```

5.1.2.11.4 inner_height

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path representation
(representation.items[i] ->
 {representation_item
(representation_item.name = 'maximum inner height')
(representation_item.name = 'minimum inner height'}})
([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum inner height']]
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum inner height']])
(representation.items[i] ->
 {representation_item
 representation_item.name = 'inner height'})
representation_item =>
measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.3 change_information UoF

5.1.3.1 Change

AIM element: change_action

Source: ISO 10303-227

Reference path: change_action <=
directed_action

5.1.3.1.1 business_unit

AIM element: organization.name

Source: ISO 10303-41

Reference path: change_action

```

plant_spatial_configuration_organization_item = change_action
plant_spatial_configuration_organization_item <-
plant_spatial_configuration_organization_assignment.items[i]
plant_spatial_configuration_organization_assignment <=
organization_assignment
organization_assignment.assigned_organization ->
organization
organization.name

```

5.1.3.1.2 change_id

AIM element: action.name

Source: ISO 10303-41

Reference path: change_action <=

```

directed_action <=
executed_action <=
action
action.name

```

5.1.3.1.3 change_reason

AIM element: action_method.purpose

Source: ISO 10303-41

Reference path: change_action <=

```

directed_action <=
executed_action <=
action
action.chosen_method ->
action_method
action_method.purpose

```

5.1.3.1.4 change_summary

AIM element: action_method.description

Source: ISO 10303-41

Reference path: change_action <=

```

directed_action <=
executed_action <=
action
action.chosen_method ->
action_method
action_method.description

```

5.1.3.1.5 date

AIM element: (calendar_date)
([calendar_date]
[local_time])

ISO 10303-227:2005(E)

Source: ISO 10303-41
Rules: change_action_requires_date
Reference path: change_action
(dated_item = change_action
dated_item <-
applied_date_assignment.items[i]
applied_date_assignment <=
date_assignment
date_assignment.assigned_date ->
date =>
calendar_date)
(date_and_time_item = change_action
date_and_time_item <-
applied_date_and_time_assignment.items[i]
applied_date_and_time_assignment
applied_date_and_time_assignment.assigned_date_and_time ->
date_and_time
[date_and_time.date_component ->
date =>
calendar_date]
[date_and_time.time_component ->
local_time])

5.1.3.1.6 project_number

AIM element: organizational_project.name
Source: ISO 10303-41
Reference path: change_action
plant_spatial_configuration_organization_item = change_action
plant_spatial_configuration_organization_item <-
plant_spatial_configuration_organization_assignment.items[i]
plant_spatial_configuration_organization_assignment <=
organization_assignment
organization_assignment.assigned_organization ->
organization <-
organizational_project.responsible_organizations[i]
organizational_project
organizational_project.name

5.1.3.1.7 revision

AIM element: action_relationship
Source: ISO 10303-41
Reference path: change_action <=
directed_action <=
executed_action <=
action <-
(action_relationship.relying_action)
(action_relationship.related_action)
{ action_relationship

```

action_relationship.name = 'change revision'}
action_relationship

```

5.1.3.1.8 title

```

AIM element:  action_method.name
Source:       ISO 10303-41
Reference path: change_action <=
              directed_action <=
              executed_action <=
              action
              action.chosen_method ->
              action_method
              action_method.name

```

5.1.3.1.9 change to change_item

```

AIM element:  PATH
Reference path: change_action <=
              directed_action <=
              executed_action <=
              action <-
              action_assignment.assigned_action
              action_assignment =>
              plant_spatial_configuration_change_assignment
              plant_spatial_configuration_change_assignment.items[i] ->
              change_item

```

5.1.3.1.10 change to change_life_cycle_stage_usage

```

AIM element:  PATH
Rules:        version2_p41_object_role_selection
Reference path: change_action <=
              directed_action
              directed_action.directive ->
              action_directive
              action_directive.requests[i] ->
              versioned_action_request

```

5.1.3.2 Change_approval

```

AIM element:  applied_approval_assignment
Source:       ISO 10303-227
Rules:        change_life_cycle_stage_usage_requires_approval
Reference path: applied_approval_assignment <=
              approval_assignment

```

5.1.3.2.1 approval_date

```

AIM element:  (calendar_date)
              ([calendar_date]
              [local_time])
Source:       ISO 10303-41

```

ISO 10303-227:2005(E)

Rules: approval_requires_approval_date_time
Reference path: applied_approval_assignment <=
approval_assignment
approval_assignment.assigned_approval ->
approval <-
approval_date_time.dated_approval
approval_date_time
approval_date_time.date_time ->
date_time_select
(date_time_select = date
date =>
calendar_date)
(date_time_select = date_and_time
date_and_time
[date_and_time.date_component ->
date =>
calendar_date]
[date_and_time.time_component ->
local_time])

5.1.3.2.2 approver

AIM element: person
Source: ISO 10303-41
Rules: approval_requires_approval_person_organization
Reference path: applied_approval_assignment <=
approval_assignment
approval_assignment.assigned_approval ->
approval <-
approval_person_organization.authorized_approval
approval_person_organization
approval_person_organization.person_organization ->
person_organization_select
(person_organization_select = person)
(person_organization_select = person_and_organization
person_and_organization
person_and_organization.the_person ->
person)
person

5.1.3.2.3 approver_role

AIM element: approval_role.role
Source: ISO 10303-41
Rules: approval_requires_approval_person_organization
Reference path: applied_approval_assignment <=
approval_assignment
approval_assignment.assigned_approval ->
approval <-
approval_person_organization.authorized_approval

approval_person_organization
 approval_person_organization.role ->
 approval_role
 approval_role.role

5.1.3.3 Change_item

AIM element: change_item

Source: ISO 10303-227

Reference path: {change_item
 (change_item = line_branch_connection)
 (change_item = line_plant_item_branch_connection)
 (change_item = line_plant_item_connection)
 (change_item = line_termination_connection)
 (change_item = plant)
 (change_item = axis2_placement_2d)
 (change_item = axis2_placement_3d)
 (change_item = product)
 (change_item = plant_arrangement_definition)
 (change_item = plant_arrangement_segment_definition)
 (change_item = plant_arrangement_segment_termination)
 (change_item = product_definition_relationship)
 (change_item = reference_geometry)
 (change_item = electrical_system)
 (change_item = externally_defined_plant_item_definition)
 (change_item = ducting_system)
 (change_item = instrumentation_and_control_system)
 (change_item = mechanical_system)
 (change_item = piping_system)
 (change_item = plant_item_connection)
 (change_item = plant_item_connector)
 (change_item = plant_line_definition)
 (change_item = plant_line_segment_definition)
 (change_item = plant_line_segment_termination)
 (change_item = process_capability)
 (change_item = product_definition)
 (change_item = product_definition_shape)
 (change_item = sited_plant)
 (change_item = structural_system)
 (change_item = document)
 (change_item = site)
 (change_item = site_feature)
 (change_item = cableway_system)}

5.1.3.3.1 creation_date

AIM element: (calendar_date)

([calendar_date]
 [local_time])

ISO 10303-227:2005(E)

Source: ISO 10303-41
Rules: change_item_requires_creation_date
Reference path: change_item
(dated_item = change_item
dated_item <-
applied_date_assignment.items[i]
applied_date_assignment <=
{ date_assignment
date_assignment.role ->
date_role
date_role.name = 'creation date'}
date_assignment
date_assignment.assigned_date ->
date =>
calendar_date)
(date_and_time_item = change_item
date_and_time_item <-
applied_date_and_time_assignment.items[i]
applied_date_and_time_assignment <=
{ date_and_time_assignment
date_and_time_assignment.role ->
date_time_role
date_time_role.name = 'creation date'}
date_and_time_assignment
date_and_time_assignment.assigned_date_and_time ->
date_and_time
[date_and_time.date_component ->
date =>
calendar_date]
[date_and_time.time_component ->
local_time])

5.1.3.3.2 description

AIM element: action.description
Source: ISO 10303-41
Reference path: change_item <-
plant_spatial_configuration_change_assignment.items[i]
plant_spatial_configuration_change_assignment <=
action_assignment
action_assignment.assigned_action ->
action
action.description

5.1.3.3.3 item_owner

AIM element: person_and_organization
Source: ISO 10303-41
Reference path: change_item
plant_spatial_configuration_person_and_organization_item = change_item

```

plant_spatial_configuration_person_and_organization_item <-
plant_spatial_configuration_person_and_organization_assignment.items[i]
plant_spatial_configuration_person_and_organization_assignment <=
{person_and_organization_assignment
person_and_organization_assignment.role ->
person_and_organization_role
person_and_organization_role.name = 'owner'}
person_and_organization_assignment
person_and_organization_assignment.assigned_person_and_organization ->
person_and_organization

```

5.1.3.3.4 from_or_to

AIM element: object_role.name
Source: ISO 10303-41
Rules: version2_p41_object_role_selection
Reference path: change_item <-
plant_spatial_configuration_change_assignment.items[i]
plant_spatial_configuration_change_assignment <=
action_assignment
role_select = action_assignment
role_select <-
role_association.item_with_role
role_association
role_association.role ->
object_role
object_role.name
{(object_role.name = 'from')
(object_role.name = 'to')}

5.1.3.3.5 supersedence_status

AIM element: action_status.status
Source: ISO 10303-41
Reference path: change_item <-
plant_spatial_configuration_change_assignment.items[i]
plant_spatial_configuration_change_assignment <=
action_assignment
action_assignment.assigned_action ->
action =>
executed_action <-
action_status.assigned_action
action_status
action_status.status

5.1.3.4 Change_life_cycle_stage

AIM element: group
Source: ISO 10303-41

ISO 10303-227:2005(E)

5.1.3.4.1 name

AIM element: group.name
Source: ISO 10303-41

5.1.3.4.2 change_life_cycle_stage to change_life_cycle_stage_sequence (as predecessor)

AIM element: PATH
Reference path: group <-
 group_relationship.relate_group
 {group_relationship
 group_relationship.name = 'change life cycle stage sequence'}
 group_relationship

5.1.3.4.3 change_life_cycle_stage to change_life_cycle_stage_sequence (as successor)

AIM element: PATH
Reference path: group <-
 group_relationship.related_group
 {group_relationship
 group_relationship.name = 'change life cycle stage sequence'}
 group_relationship

5.1.3.4.4 change_life_cycle_stage to change_life_cycle_stage_usage

AIM element: PATH
Rules: change_life_cycle_stage_usage_requires_stage
Reference path: group <-
 group_assignment.assigned_group
 group_assignment =>
 change_life_cycle_stage_assignment

5.1.3.5 Change_life_cycle_stage_sequence

AIM element: group_relationship
Source: ISO 10303-41
Reference path: {group_relationship
 group_relationship.name = 'change life cycle stage sequence'}

5.1.3.6 Change_life_cycle_stage_usage

AIM element: change_life_cycle_stage_assignment
Source: ISO 10303-227
Reference path: change_life_cycle_stage_assignment <=
 group_assignment

5.1.3.6.1 date_of_activation

AIM element: (calendar_date)
 ([calendar_date]
 [local_time])
Source: ISO 10303-41
Reference path: change_life_cycle_stage_assignment
 (dated_item = change_life_cycle_stage_assignment
 dated_item <-


```

applied_date_assignment.items[i]
applied_date_assignment <=
{ date_assignment
date_assignment.role ->
date_role
date_role.name = 'activation date' }
date_assignment
date_assignment.assigned_date ->
date =>
calendar_date)
(date_and_time_item = change_life_cycle_stage_assignment
date_and_time_item <-
applied_date_and_time_assignment.items[i]
applied_date_and_time_assignment <=
{ date_and_time_assignment
date_and_time_assignment.role ->
date_time_role
date_time_role.name = 'activation date' }
date_and_time_assignment
date_and_time_assignment.assigned_date_and_time ->
date_and_time
[date_and_time.date_component ->
date =>
calendar_date]
[date_and_time.time_component ->
local_time])

```

5.1.3.6.2 date_of_completion

AIM element: (calendar_date)
 ([calendar_date]
 [local_time])

Source: ISO 10303-41

Reference path: change_life_cycle_stage_assignment
 (dated_item = change_life_cycle_stage_assignment
 dated_item <-
 applied_date_assignment.items[i]
 applied_date_assignment <=
 { date_assignment
 date_assignment.role ->
 date_role
 date_role.name = 'completion date' }
 date_assignment
 date_assignment.assigned_date ->
 date =>
 calendar_date)
 (date_and_time_item = change_life_cycle_stage_assignment
 date_and_time_item <-
 applied_date_and_time_assignment.items[i]

ISO 10303-227:2005(E)

```
applied_date_and_time_assignment <=  
{ date_and_time_assignment  
date_and_time_assignment.role ->  
date_time_role  
date_time_role.name = 'completion date'}  
date_and_time_assignment  
date_and_time_assignment.assigned_date_and_time ->  
date_and_time  
[date_and_time.date_component ->  
date =>  
calendar_date]  
[date_and_time.time_component ->  
local_time])
```

5.1.3.6.3 description

AIM element: group.description
Source: ISO 10303-41
Reference path: change_life_cycle_stage_assignment <=
group_assignment
group_assignment.assigned_group ->
group
group.description

5.1.3.6.4 change_life_cycle_stage_usage to change_approval

AIM element: PATH
Rules: change_life_cycle_stage_usage_requires_approval
Reference path: change_life_cycle_stage_assignment
change_life_cycle_stage_assignment.items[i] ->
change_life_cycle_stage_item
change_life_cycle_stage_item = action_directive
action_directive <-
directed_action.directive
directed_action =>
change_action
approval_item = change_action
approval_item <-
applied_approval_assignment.items[i]
applied_approval_assignment

5.1.3.7 Changed_cableway_size_description

AIM element: representation
Source: ISO 10303-43
Reference path: {product_definition_relationship
change_item = representation}

5.1.3.8 Changed_component_size_description

AIM element: representation
Source: ISO 10303-43

Reference path: {product_definition_relationship
change_item = representation}

5.1.3.9 Changed_document

AIM element: document
Source: ISO 10303-41
Reference path: {product_definition_relationship
change_item = document}

5.1.3.10 Changed_hvac_cross_section

AIM element: hvac_cross_section
Source: ISO 10303-227
Reference path: {hvac_cross_section <=
shape_aspect
change_item = shape_aspect}

5.1.3.11 Changed_hvac_access_opening

AIM element: shape_aspect
Source: ISO 10303-43
Reference path: {shape_aspect
change_item = shape_aspect}

5.1.3.12 Changed_hvac_branch_connection

AIM element: hvac_branch_connection
Source: ISO 10303-227
Reference path: {hvac_branch_connection <=
shape_aspect_relationship
change_item = shape_aspect_relationship}

5.1.3.13 Changed_hvac_component_thickness

AIM element: representation
Source: ISO 10303-43
Reference path: {representation
change_item = representation}

5.1.3.14 Changed_hvac_connector_service_characteristic

AIM element: property_definition
Source: ISO 10303-41
Reference path: {property_definition
change_item = property_definition}

5.1.3.15 Changed_hvac_plant_item_branch_connection

AIM element: hvac_plant_item_branch_connection
Source: ISO 10303-227
Reference path: {hvac_plant_item_branch_connection <=
shape_aspect_relationship
change_item = shape_aspect_relationship}

ISO 10303-227:2005(E)

5.1.3.16 Changed_hvac_run

AIM element: product_definition
Source: ISO 10303-41
Reference path: {product_definition
change_item = product_definition}

5.1.3.17 Changed_hvac_section

AIM element: hvac_section_definition
Source: ISO 10303-227
Reference path: {hvac_section_definition <=
product_definition
change_item = product_definition}

5.1.3.18 Changed_hvac_section_insulation

AIM element: product_definition_relationship
Source: ISO 10303-41
Reference path: {product_definition_relationship
change_item = product_definition_relationship}

5.1.3.19 Changed_hvac_section_to_section_connection

AIM element: hvac_termination_connection
Source: ISO 10303-227
Reference path: {hvac_termination_connection <=
shape_aspect_relationship
change_item = shape_aspect_relationship}

5.1.3.20 Changed_hvac_specification

AIM element: document
Source: ISO 10303-41
Reference path: {document
change_item = document}

5.1.3.21 Changed_line_assignment

AIM element: product_definition_relationship
Source: ISO 10303-41
Reference path: {product_definition_relationship
change_item = product_definition_relationship}

5.1.3.22 Changed_line_branch_connection

AIM element: line_branch_connection
Source: ISO 10303-227
Reference path: line_branch_connection <=
shape_aspect_relationship
{line_branch_connection
change_item = line_branch_connection}

5.1.3.23 Changed_line_plant_item_branch_connection

AIM element: line_plant_item_branch_connection

Source: ISO 10303-227
 Reference path: line_plant_item_branch_connection <=
 shape_aspect_relationship
 {line_plant_item_branch_connection
 change_item = line_plant_item_branch_connection}

5.1.3.24 Changed_line_plant_item_connection

AIM element: line_plant_item_connection
 Source: ISO 10303-227
 Reference path: line_plant_item_connection <=
 shape_aspect_relationship
 {line_plant_item_connection
 change_item = line_plant_item_connection}

5.1.3.25 Changed_line_to_line_connection

AIM element: line_termination_connection
 Source: ISO 10303-227
 Reference path: line_termination_connection <=
 shape_aspect_relationship
 {line_termination_connection
 change_item = line_termination_connection}

5.1.3.26 Changed_piping_specification

AIM element: document
 Source: ISO 10303-41
 Reference path: {document
 [document.kind ->
 document_type
 document_type.product_data_type = 'piping specification']
 [change_item = document]}

5.1.3.27 Changed_piping_system_line

AIM element: plant_line_definition
 Source: ISO 10303-227
 Reference path: plant_line_definition <=
 product_definition_with_associated_documents
 {plant_line_definition
 change_item = plant_line_definition}

5.1.3.28 Changed_piping_system_line_segment

AIM element: plant_line_segment_definition
 Source: ISO 10303-227
 Reference path: plant_line_segment_definition <=
 product_definition
 {plant_line_segment_definition
 change_item = plant_line_segment_definition}

ISO 10303-227:2005(E)

5.1.3.29 Changed_piping_system_line_segment_termination

AIM element: plant_line_segment_termination
Source: ISO 10303-227
Reference path: plant_line_segment_termination <=
shape_aspect
{plant_line_segment_termination
change_item = plant_line_segment_termination}

5.1.3.30 Changed_planned_physical_plant

AIM element: product_definition
Source: ISO 10303-41
Reference path: {product_definition
[product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product =>
plant]
[product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'physical occurrence']
[change_item = product_definition]}

5.1.3.31 Changed_plant

AIM element: plant
Source: ISO 10303-227
Reference path: plant <=
product
{plant
change_item = plant}

5.1.3.32 Changed_plant_item

AIM element: (product_definition)
(externally_defined_plant_item_definition)
(product)
Source: ISO 10303-41
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: ({[product_definition
change_item = product_definition]
[product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=

```

application_context_element
application_context_element.name = 'plant item'})
(externally_defined_plant_item_definition <=
[product_definition]
[externally_defined_item]
{[externally_defined_plant_item_definition
change_item = externally_defined_plant_item_definition]
[externally_defined_plant_item_definition <=
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'})
({[product
change_item = product]
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'})

```

5.1.3.33 Changed_plant_item_collection

AIM element: product_definition_relationship
Source: ISO 10303-41
Reference path: {product_definition_relationship
change_item = product_definition_relationship}

5.1.3.34 Changed_plant_item_connection

AIM element: plant_item_connection
Source: ISO 10303-227
Reference path: plant_item_connection <=
[shape_aspect_relationship]
[shape_aspect]
{plant_item_connection
change_item = plant_item_connection}

5.1.3.35 Changed_plant_item_connector

AIM element: (plant_item_connector)
(hvac_connector)
Source: ISO 10303-227
Reference path: (plant_item_connector) <=
(hvac_connector) <=
shape_aspect

ISO 10303-227:2005(E)

{plant_item_connector
change_item = plant_item_connector}

5.1.3.36 Changed_plant_item_location

AIM element: (axis2_placement_2d)
(axis2_placement_3d)
Source: ISO 10303-42
Reference path: {(axis2_placement_2d
change_item = axis2_placement_2d)
(axis2_placement_3d
change_item = axis2_placement_3d)}

5.1.3.37 Changed_plant_item_shape

AIM element: product_definition_shape
Source: ISO 10303-41
Reference path: {product_definition_shape
change_item = product_definition_shape}

5.1.3.38 Changed_plant_process_capability

AIM element: process_capability
Source: ISO 10303-227
Reference path: process_capability <=
property_definition
{process_capability
change_item = process_capability}

5.1.3.39 Changed_plant_system

AIM element: (electrical_system)
(ducting_system)
(instrumentation_and_control_system)
(mechanical_system)
(piping_system)
(structural_system)
(cableway_system)
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: (electrical_system <=)
(ducting_system <=)
(instrumentation_and_control_system <=)
(mechanical_system <=)
(piping_system <=)
(structural_system <=)
(cableway_system <=)
product_definition
{product_definition
product_definition.formation ->


```

product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant system'}
{(electrical_system
change_item = electrical_system)
(ducting_system
change_item = ducting_system)
(instrumentation_and_control_system
change_item = instrumentation_and_control_system)
(piping_system
change_item = piping_system)
(structural_system
change_item = structural_system)
(cableway_system
change_item = cableway_system)}

```

5.1.3.40 Changed_reference_geometry

AIM element: reference_geometry
Source: ISO 10303-227
Reference path: reference_geometry <=
derived_shape_aspect
{reference_geometry
change_item = reference_geometry}

5.1.3.41 Changed_required_material_description

AIM element: product_definition
Source: ISO 10303-41
Reference path: {product_definition
change_item = product_definition}

5.1.3.42 Changed_site

AIM element: site
Source: ISO 10303-227
Reference path: site <=
[characterized_object]
[property_definition]
{site
change_item = site}

5.1.3.43 Changed_site_feature

AIM element: site_feature
Source: ISO 10303-227
Reference path: site_feature <=
property_definition

ISO 10303-227:2005(E)

```
{site_feature  
change_item = site_feature}
```

5.1.3.44 Changed_sited_plant

AIM element: sited_plant
Source: ISO 10303-227
Reference path: sited_plant <=
property_definition
{sited_plant
change_item = sited_plant}

5.1.3.45 Changed_sub_plant_relationship

AIM element: product_definition_relationship
Source: ISO 10303-41
Reference path: {product_definition_relationship
change_item = product_definition_relationship}

5.1.4 connection UoF

5.1.4.1 Connection_definition

AIM element: plant_item_connection
Source: ISO 10303-227
Reference path: plant_item_connection <=
[shape_aspect_relationship]
[shape_aspect]
{shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
(application_context_element.name = 'functional definition')
(application_context_element.name = 'physical definition')}

5.1.4.1.1 connection_definition to connector_definition

AIM element: PATH
Reference path: (plant_item_connection <=
shape_aspect_relationship
[shape_aspect_relationship.relate_shape_aspect ->]
[shape_aspect_relationship.related_shape_aspect ->]
shape_aspect =>

```

plant_item_connector)
([plant_item_connection <=
shape_aspect_relationship
[shape_aspect_relationship.relate_shape_aspect ->]
[shape_aspect_relationship.related_shape_aspect ->]
shape_aspect =>
plant_item_connector]
[plant_item_connection <=
shape_aspect <-
shape_aspect_relationship.relate_shape_aspect
{shape_aspect_relationship.name = 'connection involvement'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect =>
plant_item_connector])

```

5.1.4.1.2 connection_definition to functional_connection_definition_satisfaction (as functional requirements)

AIM element: PATH

```

Reference path: plant_item_connection <=
{shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional definition'}
shape_aspect <-
shape_aspect_relationship.relate_shape_aspect
shape_aspect_relationship
{shape_aspect_relationship
shape_aspect_relationship.name = 'connection definition satisfaction'}

```

5.1.4.1.3 connection_definition to functional_connection_definition_satisfaction (as requirements)

AIM element: PATH satisfaction)

```

Reference path: plant_item_connection <=
{shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->

```

ISO 10303-227:2005(E)

```
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'physical definition'}
shape_aspect <-
shape_aspect_relationship.related_shape_aspect
shape_aspect_relationship
{shape_aspect_relationship
shape_aspect_relationship.name = 'connection definition satisfaction'}
```

5.1.4.1.4 connection_definition to plant_item_connection_occurrence

AIM element: PATH

```
Reference path: plant_item_connection <=
shape_aspect <-
shape_aspect_relationship.relate_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'usage'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
{shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
(application_context_element.name = 'functional occurrence')
(application_context_element.name = 'physical occurrence')}}
shape_aspect =>
plant_item_connection
```

5.1.4.2 Electricity_transference

AIM element: plant_item_connection

Source: ISO 10303-227

```
Reference path: plant_item_connection <=
[shape_aspect_relationship]
[shape_aspect]
```

```

{plant_item_connection
classification_item = plant_item_connection
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = 'connection type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
connection_functional_class]
[group
group.name = 'electricity transference']}

```

5.1.4.3 Flexible_connection

AIM element: plant_item_connection
Source: ISO 10303-227
Reference path: plant_item_connection <=

```

[shape_aspect_relationship]
[shape_aspect]
{plant_item_connection
classification_item = plant_item_connection
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = 'connection type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
connection_motion_class]
[group
group.name = 'flexible']}

```

5.1.4.4 Fluid_transference

AIM element: plant_item_connection
Source: ISO 10303-227
Reference path: plant_item_connection <=

```

[shape_aspect_relationship]
[shape_aspect]
{plant_item_connection
classification_item = plant_item_connection

```

ISO 10303-227:2005(E)

```
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = 'connection type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
connection_functional_class]
[group
group.name = 'fluid transference']}]
```

5.1.4.5 Functional_connection_definition_satisfaction

AIM element: shape_aspect_relationship

Source: ISO 10303-41

Reference path: {shape_aspect_relationship
[shape_aspect_relationship.name = 'connection definition satisfaction']
[[shape_aspect_relationship.relating_shape_aspect ->]
[shape_aspect_relationship.related_shape_aspect ->]
{shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
(application_context_element.name = 'functional definition')
(application_context_element.name = 'physical definition')}}
shape_aspect =>
plant_item_connection}]}

5.1.4.6 Functional_connection_occurrence_satisfaction

AIM element: shape_aspect_relationship

Source: ISO 10303-41

Reference path: {shape_aspect_relationship
[shape_aspect_relationship.name = 'connection occurrence satisfaction']
[[shape_aspect_relationship.relating_shape_aspect ->]
[shape_aspect_relationship.related_shape_aspect ->]
{shape_aspect

```

shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
(application_context_element.name = 'functional occurrence')
(application_context_element.name = 'physical occurrence')}}
shape_aspect =>
plant_item_connection]]}

```

5.1.4.7 Load_transference

```

AIM element: plant_item_connection
Source: ISO 10303-227
Reference path: plant_item_connection <=
[shape_aspect_relationship]
[shape_aspect]
{plant_item_connection
classification_item = plant_item_connection
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = connection type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
connection_functional_class]
[group
group.name = 'load transference']}]

```

5.1.4.8 Locked_orientation_connection

```

AIM element: plant_item_connection
Source: ISO 10303-227
Reference path: plant_item_connection <=
[shape_aspect_relationship]
[shape_aspect]
{plant_item_connection
classification_item = plant_item_connection

```

ISO 10303-227:2005(E)

```
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = connection type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
connection_motion_class]
[group
group.name = 'locked orientation']}]}
```

5.1.4.9 Plant_item_connection

AIM element: plant_item_connection

Source: ISO 10303-227

```
Reference path: plant_item_connection <=
[shape_aspect_relationship]
[shape_aspect]
{plant_item_connection
classification_item = plant_item_connection
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_assignment.assigned_class ->
classification_role
classification_role = 'connection type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
connection_motion_class]
[group
(group.name = 'flexible')
(group.name = 'locked orientation')]}
{shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
```



```

product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
(application_context_element.name = 'functional definition')
(application_context_element.name = 'physical definition')
(application_context_element.name = 'functional occurrence')
(application_context_element.name = 'physical occurrence')

```

5.1.4.9.1 connection_commitment_target

```

AIM element:  shape_aspect.description
Source:       ISO 10303-41
Reference path: plant_item_connection <=
              shape_aspect
              shape_aspect.description

```

5.1.4.9.2 connection_id

```

AIM element:  shape_aspect.name
Source:       ISO 10303-41
Reference path: plant_item_connection <=
              shape_aspect
              shape_aspect.name

```

5.1.4.9.3 description

```

AIM element:  shape_aspect_relationship.description
Source:       ISO 10303-41
Reference path: plant_item_connection <=
              shape_aspect_relationship
              shape_aspect_relationship.description

```

5.1.4.9.4 joint_fit_type

```

AIM element:  group.name
Source:       ISO 10303-41
Reference path: plant_item_connection
              classification_item = plant_item_connection
              classification_item <-
              applied_classification_assignment.items[i]
              applied_classification_assignment <=
              {classification_assignment
              classification_assignment.role ->
              classification_role
              classification_role.name = 'joint fit type'}
              classification_assignment.assigned_class ->
              group
              group.name
              {(group.name = 'shop joint')
              (group.name = 'field joint')
              (group.name = 'field fit joint')}

```

ISO 10303-227:2005(E)

5.1.4.9.5 plant_item_connection to connection_inspection_record

AIM element: PATH

Reference path: plant_item_connection <=
shape_aspect
shape_definition = shape_aspect
characterized_definition = shape_definition
characterized_definition <=
property_definition.definition
property_definition =>
{property_definition.description = 'connection inspection record'}
material_property

5.1.4.9.6 plant_item_connection to connection_material

AIM element: PATH

Reference path: plant_item_connection <=
shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition = product_definition
product_definition =>
connection_material_definition

5.1.4.9.7 plant_item_connection to changed_plant_item_connection

AIM element: IDENTICAL MAPPING

5.1.4.10 Plant_item_connection_occurrence

AIM element: plant_item_connection

Source: ISO 10303-227

Reference path: plant_item_connection <=
[shape_aspect_relationship]
[shape_aspect]
{shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element

```
(application_context_element.name = 'functional occurrence')
(application_context_element.name = 'physical occurrence')}
```

5.1.4.10.1 plant_item_connection_occurrence to functional_connection_occurrence_satisfaction (as functional requirements)

AIM element: PATH

```
Reference path: plant_item_connection <=
  { shape_aspect
  shape_aspect.of_shape ->
  product_definition_shape <=
  property_definition
  property_definition.definition ->
  characterized_definition
  characterized_definition = characterized_product_definition
  characterized_product_definition
  characterized_product_definition = product_definition
  product_definition
  product_definition.frame_of_reference ->
  product_definition_context <=
  application_context_element
  application_context_element.name = 'functional occurrence'}
  shape_aspect <-
  shape_aspect_relationship.relatng_shape_aspect
  shape_aspect_relationship
  { shape_aspect_relationship
  shape_aspect_relationship.name = 'connection occurrence satisfaction'}
```

5.1.4.10.2 plant_item_connection_occurrence to functional_connection_occurrence_satisfaction (as requirements satisfaction)

AIM element: PATH

```
Reference path: plant_item_connection <=
  { shape_aspect
  shape_aspect.of_shape ->
  product_definition_shape <=
  property_definition
  property_definition.definition ->
  characterized_definition
  characterized_definition = characterized_product_definition
  characterized_product_definition
  characterized_product_definition = product_definition
  product_definition
  product_definition.frame_of_reference ->
  product_definition_context <=
  application_context_element
  application_context_element.name = 'physical occurrence'}
  shape_aspect <-
  shape_aspect_relationship.related_shape_aspect
  shape_aspect_relationship
```

ISO 10303-227:2005(E)

```
{shape_aspect_relationship
  shape_aspect_relationship.name = 'connection occurrence satisfaction'}
```

5.1.4.10.3 plant_item_connection_occurrence to plant_item_connector_occurrence

AIM element: PATH

```
Reference path: plant_item_connection <=
  shape_aspect_relationship
  [shape_aspect_relationship.relate_shape_aspect ->]
  [shape_aspect_relationship.related_shape_aspect ->]
  shape_aspect =>
  plant_item_connector
```

5.1.5 connector UoF

5.1.5.1 Branch_hole

AIM element: plant_item_connector

Source: ISO 10303-227

```
Reference path: plant_item_connector <=
  shape_aspect
  {plant_item_connector
  classification_item = plant_item_connector
  classification_item <-
  applied_classification_assignment.items[i]
  applied_classification_assignment <=
  {classification_assignment
  classification_assignment.role ->
  classification_role
  classification_role = 'connector end type classification'}
  classification_assignment
  classification_assignment.assigned_class ->
  [group =>
  connector_end_type_class]
  [group
  group.name = 'branch hole']}
```

5.1.5.1.1 diameter

#1: The diameter is for the individual connector.

#2: The diameter is for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

```
Reference path: plant_item_connector <=
  #1: (shape_aspect <-
  dimensional_size.applies_to
  dimensional_size
  dimensional_characteristic = dimensional_size
```

```

dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'piping connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'diameter'})
#2: ({shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
piping_component_class}
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum diameter')
(representation_item.name = 'minimum diameter')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum diameter'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum diameter'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}

```

ISO 10303-227:2005(E)

```
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.5.2Buttweld

```
AIM element: plant_item_connector  
Source:      ISO 10303-227  
Reference path: plant_item_connector <=  
shape_aspect  
{plant_item_connector  
classification_item = plant_item_connector  
classification_item <-  
applied_classification_assignment.items[i]  
applied_classification_assignment <=  
{classification_assignment  
classification_assignment.role ->  
classification_role  
classification_role = 'connector end engagement type classification'}  
classification_assignment  
classification_assignment.assigned_class ->  
[group =>  
piping_connector_class]  
[group  
group.name = 'buttweld']}
```

5.1.5.2.1 root_gap

```
AIM element: [measure_with_unit.value_component]  
[measure_with_unit.unit_component]  
Source:      ISO 10303-41  
Rules:       subtype_mandatory_shape_representation  
Reference path: plant_item_connector <=  
shape_aspect <-  
[shape_aspect_relationship.relate_shape_aspect  
{shape_aspect_relationship  
shape_aspect_relationship.name = 'connector dimensional aspect'}  
shape_aspect_relationship  
shape_aspect_relationship.related_shape_aspect ->  
shape_aspect <-  
shape_aspect_relationship.relate_shape_aspect]  
[shape_aspect_relationship.relate_shape_aspect  
{shape_aspect_relationship  
shape_aspect_relationship.name = 'connector dimensional aspect'}  
shape_aspect_relationship  
shape_aspect_relationship.related_shape_aspect ->  
shape_aspect <-  
shape_aspect_relationship.related_shape_aspect]  
shape_aspect_relationship =>  
dimensional_location
```

```

dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'piping connector dimensional shape' }
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'root gap' }
representation_item =>
measure_representation_item <=
{ measure_with_unit =>
length_measure_with_unit }
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.5.3 Catalogue_connector

AIM element: catalogue_connector

Source: ISO 10303-227

Reference path: catalogue_connector <=

```

[externally_defined_item]
[shape_aspect
{ shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object}]

```

5.1.5.3.1 catalogue_connector to connector_definition (is defined by)

AIM element: PATH

Reference path: catalogue_connector <=

```

shape_aspect <-
shape_aspect_relationship.related_shape_aspect
{ shape_aspect_relationship
shape_aspect_relationship.name = 'definition usage' }
shape_aspect_relationship
shape_aspect_relationship.relate_shape_aspect ->
shape_aspect =>
plant_item_connector

```

ISO 10303-227:2005(E)

5.1.5.4 Clamped

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: plant_item_connector <=
shape_aspect
{plant_item_connector
classification_item = plant_item_connector
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'connector end engagement type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
piping_connector_class]
[group
group.name = 'clamped']}

5.1.5.5 Connector_definition

AIM element: (plant_item_connector)

(hvac_connector)

Source: ISO 10303-227

Reference path: (plant_item_connector) <=
(hvac_connector) <=
shape_aspect
{shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
(application_context_element.name = 'functional definition')
(application_context_element.name = 'physical definition')}

5.1.5.5.1 connector_definition to catalogue_connector (is defined as)

AIM element: PATH

Reference path: (plant_item_connector) <=


```

(hvac_connector) <=
shape_aspect <-
shape_aspect_relationship.related_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'catalogue usage'}
shape_aspect_relationship
shape_aspect_relationship.relateing_shape_aspect ->
shape_aspect =>
catalogue_connector

```

5.1.5.5.2 connector_definition to functional_connector_definition_satisfaction (as functional requirements for)

AIM element: PATH

```

Reference path: (plant_item_connector) <=
(hvac_connector) <=
shape_aspect
{shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional definition'}
shape_aspect <-
shape_aspect_relationship.relateing_shape_aspect
shape_aspect_relationship
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector definition satisfaction'}

```

5.1.5.5.3 connector_definition to functional_connector_definition_satisfaction (as satisfies requirements for)

AIM element: PATH

```

Reference path: (plant_item_connector) <=
(hvac_connector) <=
{shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition

```

ISO 10303-227:2005(E)

```
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'physical definition'}
shape_aspect <-
shape_aspect_relationship.related_shape_aspect
shape_aspect_relationship
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector definition satisfaction'}
```

5.1.5.5.4 connector_definition to plant_item_connector_occurrence

AIM element: PATH

Rules: application_context_requires_ap_definition
dependent_instantiable_application_context
dependent_instantiable_product_definition_context
product_definition_context_name_constraint

Reference path: (plant_item_connector) <=
(hvac_connector) <=
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'usage'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
{shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
(application_context_element.name = 'functional occurrence')
(application_context_element.name = 'physical occurrence')}}
shape_aspect =>
plant_item_connector

5.1.5.6 Electrical_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: plant_item_connector <=
 shape_aspect
 {plant_item_connector
 classification_item = plant_item_connector
 classification_item <-
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role
 classification_role = 'connector function type classification'}
 classification_assignment
 classification_assignment.assigned_class ->
 group =>
 electrical_connector_class}

5.1.5.6.1 type

AIM element: group.name

Source: ISO 10303-41

Reference path: plant_item_connector
 classification_item = plant_item_connector
 classification_item <-
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role
 classification_role.name = 'electrical connector type classification'}
 classification_assignment
 classification_assignment.assigned_class ->
 {group =>
 electrical_connector_class}
 group
 group.name

5.1.5.7 Female_end

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: plant_item_connector <=
 shape_aspect
 {plant_item_connector
 classification_item = plant_item_connector
 classification_item <-
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role

ISO 10303-227:2005(E)

```
classification_role = 'connector end type classification'}
classification_assignment
classification_assignment.assigned_group ->
[group =>
connector_end_type_class]
[group
group.name = 'female end']}]}
```

5.1.5.7.1 depth

#1: The depth is for the individual connector.

#2: The depth is for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: plant_item_connector <=
#1: (shape_aspect <-
[shape_aspect_relationship.relying_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.relying_shape_aspect]
[shape_aspect_relationship.relying_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'piping connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'depth'})

```

#2: ({shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
piping_component_class}
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'piping connector class dimension'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum depth')
(representation_item.name = 'minimum depth')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum depth'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum depth'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.5.7.2 hub_inside_diameter

#1: The diameter is for the individual connector.

#2: The diameter is for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

ISO 10303-227:2005(E)

```
Rules:      subtype_exclusive_characterized_object
           subtype_mandatory_shape_representation
Reference path: plant_item_connector <=
           #1: (shape_aspect <-
           dimensional_size.applies_to
           dimensional_size
           dimensional_characteristic = dimensional_size
           dimensional_characteristic <-
           dimensional_characteristic_representation.dimension
           dimensional_characteristic_representation
           dimensional_characteristic_representation.representation ->
           shape_dimension_representation <=
           shape_representation <=
           {representation
           representation.name = 'piping connector dimensional shape'}
           representation
           representation.items[i] ->
           {representation_item
           representation_item.name = 'hub inside diameter'})

           #2: ({shape_aspect
           shape_aspect.of_shape ->
           product_definition_shape <=
           property_definition
           property_definition.definition ->
           characterized_definition
           characterized_definition = characterized_object
           characterized_object =>
           piping_component_class}
           shape_aspect
           shape_definition = shape_aspect
           shape_definition
           characterized_definition = shape_definition
           characterized_definition <-
           property_definition.definition
           property_definition
           represented_definition = property_definition
           represented_definition <-
           property_definition_representation.definition
           property_definition_representation
           property_definition_representation.used_representation ->
           {representation
           representation.name = 'piping connector class dimension'}
           representation
           (representation.items[i] ->
           {representation_item
           (representation_item.name = 'maximum hub inside diameter')
           (representation_item.name = 'minimum hub inside diameter')}))
```

```
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum hub inside diameter'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum hub inside diameter'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.5.7.3 hub_length

#1: The length is for the individual connector.

#2: The length is for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: plant_item_connector <=
#1: (shape_aspect <-
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'piping connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'hub length'})

```
#2: ({shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
```

ISO 10303-227:2005(E)

```
    piping_component_class }
    shape_aspect
    shape_definition = shape_aspect
    shape_definition
    characterized_definition = shape_definition
    characterized_definition <-
    property_definition.definition
    property_definition
    represented_definition = property_definition
    represented_definition <-
    property_definition_representation.definition
    property_definition_representation
    property_definition_representation.used_representation ->
    {representation
    representation.name = 'piping connector class dimension'}
    representation
    (representation.items[i] ->
    {representation_item
    (representation_item.name = 'maximum hub length')
    (representation_item.name = 'minimum hub length'}})
    ([representation.items[i] ->
    {representation_item
    representation_item.name = 'maximum hub length'}}]
    [representation.items[i] ->
    {representation_item
    representation_item.name = 'minimum hub length'}}])
    representation_item =>
    measure_representation_item <=
    {measure_with_unit =>
    length_measure_with_unit}
    measure_with_unit
    [measure_with_unit.value_component]
    [measure_with_unit.unit_component]
```

5.1.5.7.4 hub_outside_diameter

#1: The diameter is for the individual connector.

#2: The diameter is for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: plant_item_connector <=

```
#1: (shape_aspect <-
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
```



```

dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'piping connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'hub outside diameter'}}

#2: ({shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
piping_component_class}
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'piping connector class dimension'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum hub outside diameter')
(representation_item.name = 'minimum hub outside diameter')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum hub outside diameter'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum hub outside diameter'}}])
representation_item =>

```

ISO 10303-227:2005(E)

```
measure_representation_item <=  
{ measure_with_unit =>  
length_measure_with_unit}  
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.5.8 Flanged

```
AIM element: plant_item_connector  
Source: ISO 10303-227  
Reference path: plant_item_connector <=  
shape_aspect  
{ plant_item_connector  
classification_item = plant_item_connector  
classification_item <-  
applied_classification_assignment.items[i]  
applied_classification_assignment <=  
{ classification_assignment  
classification_assignment.role ->  
classification_role  
classification_role = 'connector end engagement type classification'}  
classification_assignment  
classification_assignment.assigned_class ->  
[group =>  
piping_connector_class]  
[group  
group.name = 'flanged']}
```

5.1.5.9 Flanged_end

```
AIM element: plant_item_connector  
Source: ISO 10303-227  
Reference path: plant_item_connector <=  
shape_aspect  
{ plant_item_connector  
classification_item = plant_item_connector  
classification_item <-  
applied_classification_assignment.items[i]  
applied_classification_assignment <=  
{ classification_assignment  
classification_assignment.role ->  
classification_role  
classification_role = 'connector end type classification'}  
classification_assignment  
classification_assignment.assigned_class ->  
[group =>  
connector_end_type_class]  
[group  
group.name = 'flanged end']}
```

5.1.5.9.1 face_finish

AIM element: descriptive_representation_item.description
 Source: ISO 10303-45
 Reference path: plant_item_connector <=
 shape_aspect
 shape_definition = shape_aspect
 shape_definition
 characterized_definition = shape_definition
 characterized_definition <=
 property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <=
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'face finish'}
 representation_item =>
 descriptive_representation_item
 descriptive_representation_item.description

5.1.5.9.2 flange_inside_diameter

#1: The diameter is for the individual connector.
 #2: The diameter is for the definition of a family of piping components.
 AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
 Source: ISO 10303-41
 Rules: subtype_exclusive_characterized_object
 subtype_mandatory_shape_representation
 Reference path: plant_item_connector <=
 #1: (shape_aspect <=
 dimensional_size.applies_to
 dimensional_size
 dimensional_characteristic = dimensional_size
 dimensional_characteristic <=
 dimensional_characteristic_representation.dimension
 dimensional_characteristic_representation
 dimensional_characteristic_representation.representation ->
 shape_dimension_representation <=
 shape_representation <=
 {representation
 representation.name = 'piping connector dimensional shape'}
 representation
 representation.items[i] ->
 {representation_item

ISO 10303-227:2005(E)

```
representation_item.name = 'flange inside diameter'})
#2: ({shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
piping_component_class}
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'piping connector class dimension'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum flange inside diameter')
(representation_item.name = 'minimum flange inside diameter')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum flange inside diameter'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum flange inside diameter'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.5.9.3 flange_outside_diameter

#1: The diameter is for the individual connector.

#2: The diameter is for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

Source:      ISO 10303-41
Rules:      subtype_exclusive_characterized_object
           subtype_mandatory_shape_representation
Reference path: plant_item_connector <=
           #1: (shape_aspect <-
           dimensional_size.applies_to
           dimensional_size
           dimensional_characteristic = dimensional_size
           dimensional_characteristic <-
           dimensional_characteristic_representation.dimension
           dimensional_characteristic_representation
           dimensional_characteristic_representation.representation ->
           shape_dimension_representation <=
           shape_representation <=
           { representation
           representation.name = 'piping connector dimensional shape' }
           representation
           representation.items[i] ->
           { representation_item
           representation_item.name = 'flange outside diameter' })
           #2: ({ shape_aspect
           shape_aspect.of_shape ->
           product_definition_shape <=
           property_definition
           property_definition.definition ->
           characterized_definition
           characterized_definition = characterized_object
           characterized_object =>
           piping_component_class }
           shape_aspect
           shape_definition = shape_aspect
           shape_definition
           characterized_definition = shape_definition
           characterized_definition <-
           property_definition.definition
           property_definition
           represented_definition = property_definition
           represented_definition <-
           property_definition_representation.definition
           property_definition_representation
           property_definition_representation.used_representation ->
           { representation
           representation.name = 'piping connector class dimension' }
           representation
           (representation.items[i] ->
           { representation_item
           (representation_item.name = 'maximum flange outside diameter')
           (representation_item.name = 'minimum flange outside diameter' )})

```

ISO 10303-227:2005(E)

```
([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum flange outside diameter'}}]
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum flange outside diameter'}}])
representation_item =>
measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
```

5.1.5.9.4 flange_thickness

#1: The thickness is for the individual connector.

#2: The thickness is for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: plant_item_connector <=

```
#1: (shape_aspect <-
 [shape_aspect_relationship.relating_shape_aspect
 {shape_aspect_relationship
 shape_aspect_relationship.name = 'connector dimensional aspect'}
 shape_aspect_relationship
 shape_aspect_relationship.related_shape_aspect ->
 shape_aspect <-
 shape_aspect_relationship.relating_shape_aspect]
 [shape_aspect_relationship.relating_shape_aspect
 {shape_aspect_relationship
 shape_aspect_relationship.name = 'connector dimensional aspect'}
 shape_aspect_relationship
 shape_aspect_relationship.related_shape_aspect ->
 shape_aspect <-
 shape_aspect_relationship.related_shape_aspect]
 shape_aspect_relationship =>
 dimensional_location
 dimensional_characteristic = dimensional_location
 dimensional_characteristic <-
 dimensional_characteristic_representation.dimension
 dimensional_characteristic_representation
 dimensional_characteristic_representation.representation ->
 shape_dimension_representation <=
 shape_representation <=
 {representation
```

```

representation.name = 'piping connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'flange thickness'})
#2: ({shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
piping_component_class}
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'piping connector class dimension'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum flange thickness')
(representation_item.name = 'minimum flange thickness')})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum flange thickness'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum flange thickness'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

ISO 10303-227:2005(E)

5.1.5.9.5 raised_face_diameter

#1: The diameter is for the individual connector.

#2: The diameter is for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_externally_defined_item

Reference path: plant_item_connector <=
#1: (shape_aspect <-
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'piping connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'raised face diameter'})
#2: ({shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
piping_component_class}
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'piping connector class dimension'}


```

representation
(representation.items[i] ->
 {representation_item
 (representation_item.name = 'maximum raised face diameter')
 (representation_item.name = 'minimum raised face diameter'}})
([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum raised face diameter'}]
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum raised face diameter'}}]
 representation_item =>
 measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

```

5.1.5.9.6 raised_face_height

#1: The height is for the individual connector.

#2: The height is for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
 subtype_mandatory_externally_defined_item

Reference path: plant_item_connector <=

```

#1: (shape_aspect <-
 [shape_aspect_relationship.relying_shape_aspect
 {shape_aspect_relationship
 shape_aspect_relationship.name = 'connector dimensional aspect'}
 shape_aspect_relationship
 shape_aspect_relationship.related_shape_aspect ->
 shape_aspect <-
 shape_aspect_relationship.relying_shape_aspect]
 [shape_aspect_relationship.relying_shape_aspect
 {shape_aspect_relationship
 shape_aspect_relationship.name = 'connector dimensional aspect'}
 shape_aspect_relationship
 shape_aspect_relationship.related_shape_aspect ->
 shape_aspect <-
 shape_aspect_relationship.related_shape_aspect]
 shape_aspect_relationship =>
 dimensional_location
 dimensional_characteristic = dimensional_location
 dimensional_characteristic <-
 dimensional_characteristic_representation.dimension

```

ISO 10303-227:2005(E)

```
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'piping connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'raised face height'})
#2: ({shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
piping_component_class}
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'piping connector class dimension'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum raised face height')
(representation_item.name = 'minimum raised face height'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum raised face height'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum raised face height'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
```

```

measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.5.9.7 ring_bottom_radius

```

AIM element: [measure_with_unit.value_component]
             [measure_with_unit.unit_component]
Source:      ISO 10303-41
Rules:       subtype_mandatory_shape_representation
Reference path: plant_item_connector <=
              shape_aspect <-
              dimensional_size.applies_to
              dimensional_size
              dimensional_characteristic = dimensional_size
              dimensional_characteristic <-
              dimensional_characteristic_representation.dimension
              dimensional_characteristic_representation
              dimensional_characteristic_representation.representation ->
              shape_dimension_representation <=
              shape_representation <=
              {representation
              representation.name = 'piping connector dimensional shape'}
              representation
              representation.items[i] ->
              {representation_item
              representation_item.name = 'ring bottom radius'}
              representation_item =>
              measure_representation_item <=
              {measure_with_unit =>
              length_measure_with_unit}
              measure_with_unit
              [measure_with_unit.value_component]
              [measure_with_unit.unit_component]

```

5.1.5.9.8 ring_diameter

```

AIM element: [measure_with_unit.value_component]
             [measure_with_unit.unit_component]
Source:      ISO 10303-41
Reference path: plant_item_connector <=
              shape_aspect <-
              dimensional_size.applies_to
              dimensional_size
              dimensional_characteristic = dimensional_size
              dimensional_characteristic <-
              dimensional_characteristic_representation.dimension
              dimensional_characteristic_representation
              dimensional_characteristic_representation.representation ->
              shape_dimension_representation <=

```

ISO 10303-227:2005(E)

```
shape_representation <=  
{representation  
representation.name = 'piping connector dimensional shape'}  
representation  
representation.items[i] ->  
{representation_item  
representation_item.name = 'ring diameter'}  
representation_item =>  
measure_representation_item <=  
{measure_with_unit =>  
length_measure_with_unit}  
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.5.9.9 ring_width

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: plant_item_connector <=
shape_aspect <-
[shape_aspect_relationship.relying_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.relying_shape_aspect]
[shape_aspect_relationship.relying_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'piping connector dimensional shape'}
representation

```

representation.items[i] ->
{representation_item
representation_item.name = 'ring width'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.5.9.10 face_type

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: plant_item_connector <=

```

shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'face type'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

```

5.1.5.10 Flared_end

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: plant_item_connector <=

```

shape_aspect
{plant_item_connector
classification_item = plant_item_connector
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role

```

ISO 10303-227:2005(E)

```
classification_role = 'connector end type classification'}
classification_assignment
classification_assignment.assigned_group ->
[group =>
connector_end_type_class]
[group
group.name = 'flared end']}
```

5.1.5.10.1 diameter

#1: The diameter is for the individual connector.

#2: The diameter is for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: plant_item_connector <=
#1: (shape_aspect <-
[shape_aspect_relationship.relating_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect_relationship.relating_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'piping connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'diameter'})

```

#2: ({shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
piping_component_class}
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'piping connector class dimension'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum diameter')
(representation_item.name = 'minimum diameter')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum diameter'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum diameter'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.5.10.2 thickness

#1: The thickness is for the individual connector.

#2: The thickness is for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

ISO 10303-227:2005(E)

```
Rules:      subtype_exclusive_characterized_object
            subtype_mandatory_shape_representation
Reference path: plant_item_connector <=
            #1: (shape_aspect <-
                [shape_aspect_relationship.relying_shape_aspect
                 {shape_aspect_relationship
                  shape_aspect_relationship.name = 'connector dimensional aspect'}
                 shape_aspect_relationship
                 shape_aspect_relationship.related_shape_aspect ->
                 shape_aspect <-
                 shape_aspect_relationship.relying_shape_aspect]
                [shape_aspect_relationship.relying_shape_aspect
                 {shape_aspect_relationship
                  shape_aspect_relationship.name = 'connector dimensional aspect'}
                 shape_aspect_relationship
                 shape_aspect_relationship.related_shape_aspect ->
                 shape_aspect <-
                 shape_aspect_relationship.related_shape_aspect]
                shape_aspect_relationship =>
                dimensional_location
                dimensional_characteristic = dimensional_location
                dimensional_characteristic <-
                dimensional_characteristic_representation.dimension
                dimensional_characteristic_representation
                dimensional_characteristic_representation.representation ->
                shape_dimension_representation <=
                shape_representation <=
                {representation
                 representation.name = 'piping connector dimensional shape'}
                representation
                representation.items[i] ->
                {representation_item
                 representation_item.name = 'thickness'})

            #2: ({shape_aspect
                 shape_aspect.of_shape ->
                 product_definition_shape <=
                 property_definition
                 property_definition.definition ->
                 characterized_definition
                 characterized_definition = characterized_object
                 characterized_object =>
                 piping_component_class}
                shape_aspect
                shape_definition = shape_aspect
                shape_definition
                characterized_definition = shape_definition
                characterized_definition <-
```



```

property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'piping connector class dimension'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum thickness')
(representation_item.name = 'minimum thickness')}}
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum thickness'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum thickness'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.5.11 Functional_connector

AIM element: (plant_item_connector)
(hvac_connector)

Source: ISO 10303-227

Reference path: (plant_item_connector) <=
(hvac_connector) <=
shape_aspect
{shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=

ISO 10303-227:2005(E)

```
application_context_element
application_context_element.name = 'functional occurrence'}
```

5.1.5.11.1 functional_connector_to_functional_connector_occurrence_satisfaction

AIM element: PATH

```
Reference path: (plant_item_connector) <=
(hvac_connector) <=
shape_aspect <-
shape_aspect_relationship.relatng_shape_shape
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector occurrence satisfaction'}
```

5.1.5.12 Functional_connector_definition_satisfaction

AIM element: shape_aspect_relationship

Source: ISO 10303-41

```
Reference path: {shape_aspect_relationship
shape_aspect_relationship.name = 'connector definition satisfaction'}
```

5.1.5.13 Functional_connector_occurrence_satisfaction

AIM element: shape_aspect_relationship

Source: ISO 10303-41

```
Reference path: {shape_aspect_relationship
shape_aspect_relationship.name = 'connector occurrence satisfaction'}
```

5.1.5.14 Grooved_end

AIM element: plant_item_connector

Source: ISO 10303-227

```
Reference path: plant_item_connector <=
shape_aspect
{plant_item_connector
classification_item = plant_item_connector
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'connector end type classification'}
classification_assignment
classification_assignment.assigned_group ->
[group =>
connector_end_type_class]
[group
group.name = 'grooved end']}]
```

5.1.5.14.1 width

#1: The width is for the individual connector.

#2: The width is for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: plant_item_connector <=
#1: (shape_aspect <-
[shape_aspect_relationship.relate_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect_relationship.relate_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'piping connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'width'})

#2: ({shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
piping_component_class}
shape_aspect
shape_definition = shape_aspect

ISO 10303-227:2005(E)

```
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'piping connector class dimension'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum width')
(representation_item.name = 'minimum width')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum width'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum width'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.5.14.2 depth

#1: The depth is for the individual connector.

#2: The depth is for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: plant_item_connector <=
#1: (shape_aspect <-
[shape_aspect_relationship.relying_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.relying_shape_aspect]

```
[shape_aspect_relationship.relater_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'piping connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'depth'})
```

```
#2: ({shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
piping_component_class}
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'piping connector class dimension'}
representation
(representation.items[i] ->
```

ISO 10303-227:2005(E)

```
{representation_item
(representation_item.name = 'maximum depth')
(representation_item.name = 'minimum depth')}}
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum depth'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum depth'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.5.14.3 distance_from_end

#1: The distance_from_end is for the individual connector.

#2: The distance_from_end is for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: plant_item_connector <=
#1: (shape_aspect <-
[shape_aspect_relationship.relate_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect_relationship.relate_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->

```

shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'piping connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'distance from end'})

```

```

#2: ({shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
piping_component_class}
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'piping connector class dimension'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum distance from end')
(representation_item.name = 'minimum distance from end')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum distance from end'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum distance from end'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit

```

ISO 10303-227:2005(E)

[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.5.15 Male_end

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: plant_item_connector <=
shape_aspect
{plant_item_connector
classification_item = plant_item_connector
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'connector end type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
connector_end_type_class]
[group
group.name = 'male end']}

5.1.5.15.1 inner_end_preparation

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: plant_item_connector <=
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'inner end preparation'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

5.1.5.15.2 outer_end_preparation

AIM element: descriptive_representation_item.description
 Source: ISO 10303-45
 Reference path: plant_item_connector <=
 shape_aspect
 shape_definition = shape_aspect
 shape_definition
 characterized_definition = shape_definition
 characterized_definition <=
 property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <=
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'outer end preparation'}
 representation_item =>
 descriptive_representation_item
 descriptive_representation_item.description

5.1.5.16 Mechanical_connector

AIM element: plant_item_connector
 Source: ISO 10303-227
 Reference path: plant_item_connector <=
 shape_aspect
 {plant_item_connector
 classification_item = plant_item_connector
 classification_item <=
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role
 classification_role = 'connector function type classification'}
 classification_assignment
 classification_assignment.assigned_class ->
 group =>
 mechanical_connector_class}

5.1.5.16.1 connector_type

AIM element: group.name
 Source: ISO 10303-41
 Reference path: plant_item_connector <=
 shape_aspect

ISO 10303-227:2005(E)

```
{plant_item_connector
classification_item = plant_item_connector
classification_item <-applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
group_role
group_role.name = 'connector type'}
classification_assignment
classification_assignment.assigned_class ->
mechanical_connector_class <=
group
group.name
```

5.1.5.16.2 torque_direction

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: plant_item_connector <=

```
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'torque direction'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
{(descriptive_representation_item.description = 'forward')
(descriptive_representation_item.description = 'reverse')
(descriptive_representation_item.description = 'none')
(descriptive_representation_item.description = 'stuck')}
```

5.1.5.16.3 specification

AIM element: document_usage_constraint.subject_element_value

Source: ISO 10303-41

Reference path: plant_item_connector

```
document_item = plant_item_connector
document_item <-
```

```

applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
{ document
document.kind ->
document_type
document_type.product_data_type = 'mechanical connector specification'}
document <-
document_usage_constraint.source
document_usage_constraint
document_usage_constraint.subject_element_value

```

5.1.5.16.4 name

AIM element: shape_aspect.description
Source: ISO 10303-41
Reference path: plant_item_connector <=
shape_aspect
shape_aspect.description

5.1.5.16.5 mechanical_connector to component_size_description (as has_a_size_described_by)

AIM element: PATH
Reference path: plant_item_connector <=
shape_aspect <-
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation

5.1.5.16.6 mechanical_connector to user_defined_attribute_value (as user_defined_parameter)

AIM element: PATH
Reference path: plant_item_connector <=
shape_aspect <-
represented_definition = shape_aspect
represented_definition <- property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{(measure_representation_item <=)
(descriptive_representation_item <=)
representation_item <-
representation.items[i]
representation
representation.name = 'user defined parameter'}

ISO 10303-227:2005(E)

5.1.5.17 Node

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: plant_item_connector <=
shape_aspect
{ shape_aspect
[shape_aspect.description = 'node']
[shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional occurrence']}]}

5.1.5.17.1 node to route

AIM element: PATH

Reference path: plant_item_connector <=
shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition <-
product_definition_relationship.related_product_definition
product_definition_relationship
product_definition_relationship.related_product_definition ->
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape =>
plant_item_route

5.1.5.17.2 node to plant_system

AIM element: PATH

Reference path: plant_item_connector <=
 shape_aspect
 shape_aspect.of_shape ->
 product_definition_shape <=
 property_definition
 property_definition.definition ->
 characterized_definition
 characterized_definition = characterized_product_definition
 characterized_product_definition
 characterized_product_definition = product_definition
 product_definition <=
 (electrical_system)
 (ducting_system)
 (instrumentation_and_control_system)
 (mechanical_system)
 (piping_system)
 (structural_system)
 (cableway_system)
 (hvac_system)

5.1.5.18 Physical_connectorAIM element: (plant_item_connector)
(hvac_connector)

Source: ISO 10303-227

Reference path: (plant_item_connector) <=
 (hvac_connector) <=
 shape_aspect
 { shape_aspect
 shape_aspect.of_shape ->
 product_definition_shape <=
 property_definition
 property_definition.definition ->
 characterized_definition
 characterized_definition = characterized_product_definition
 characterized_product_definition
 characterized_product_definition = product_definition
 product_definition
 product_definition.frame_of_reference ->
 product_definition_context <=
 application_context_element
 application_context_element.name = 'physical occurrence'}

5.1.5.18.1 physical_connector to functional_connector_occurrence_satisfaction

AIM element: PATH

Reference path: (plant_item_connector) <=

ISO 10303-227:2005(E)

```
(hvac_connector) <=  
shape_aspect <-  
shape_aspect_relationship.related_shape_aspect  
{shape_aspect_relationship  
shape_aspect_relationship.name = 'connector occurrence satisfaction'}
```

5.1.5.19 Piping_connector

AIM element: plant_item_connector

Source: ISO 10303-227

```
Reference path: plant_item_connector <=  
shape_aspect  
{plant_item_connector  
classification_item = plant_item_connector  
classification_item <-  
applied_classification_assignment.items[i]  
applied_classification_assignment <=  
{classification_assignment  
classification_assignment.role ->  
classification_role  
classification_role = 'connector function type classification'}  
classification_assignment  
classification_assignment.assigned_class ->  
group =>  
piping_connector_class}  
{(plant_item_connector)  
(plant_item_connector  
classification_item = plant_item_connector  
classification_item <-  
applied_classification_assignment.items[i]  
applied_classification_assignment <=  
{classification_assignment  
classification_assignment.role ->  
classification_role  
(classification_role = 'connector end type classification')  
(classification_role = 'connector end engagement type classification')}  
classification_assignment  
classification_assignment.assigned_class ->  
group =>  
connector_end_type_class)}
```

5.1.5.19.1 connector_flow_direction

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

```
Reference path: plant_item_connector <=  
shape_aspect  
shape_definition = shape_aspect  
shape_definition  
characterized_definition = shape_definition
```

```

characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'flow direction'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
{(descriptive_representation_item.description = 'inlet')
(descriptive_representation_item.description = 'outlet')
(descriptive_representation_item.description = 'both')}

```

5.1.5.19.2 connector_specifications

AIM element: document_usage_constraint.subject_element_value

Source: ISO 10303-41

Reference path: plant_item_connector

```

document_item = plant_item_connector
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
{document
document.kind ->
document_type
document_type.product_data_type = 'connector specification'}
document <-
document_usage_constraint.source
document_usage_constraint
document_usage_constraint.subject_element_value

```

5.1.5.19.3 name

AIM element: shape_aspect.description

Source: ISO 10303-41

Reference path: plant_item_connector <=

```

shape_aspect
shape_aspect.description

```

5.1.5.19.4 piping_connector to piping_connector_service_characteristic

AIM element: PATH

ISO 10303-227:2005(E)

Reference path: plant_item_connector <=
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <=
property_definition.definition
{property_definition
property_definition.name = 'service characteristics'}
property_definition

5.1.5.19.5 piping_connector to piping_size_description

AIM element: PATH

Reference path: plant_item_connector <=
shape_aspect <=
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <=
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation

5.1.5.20 Piping_connector_service_characteristic

AIM element: property_definition

Source: ISO 10303-41

Reference path: {property_definition
property_definition.name = 'service characteristics'}

5.1.5.20.1 design_pressure

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: property_definition
represented_definition = property_definition
represented_definition <=
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'design service characteristics'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'pressure')
(representation_item.name = 'maximum pressure')
(representation_item.name = 'minimum pressure')}})


```

([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum pressure'}}
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum pressure'}}])
representation_item =>
measure_representation_item <=
measure_with_unit
[{measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
[{measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component]

```

5.1.5.20.2 design_temperature

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'design service characteristics'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'temperature')
(representation_item.name = 'maximum temperature')
(representation_item.name = 'minimum temperature'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum temperature'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum temperature'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
thermodynamic_temperature_measure_with_unit}
measure_with_unit

ISO 10303-227:2005(E)

[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.5.20.3 piping_connector_service_characteristic to service_operating_case

AIM element: PATH

Reference path: property_definition <-
property_definition_relationship.related_property_definition
property_definition_relationship

5.1.5.21 Plant_item_connector

AIM element: (plant_item_connector)
(hvac_connector)

Source: ISO 10303-227

Reference path: (plant_item_connector) <=
(hvac_connector) <=
shape_aspect
{ shape_aspect
shape_aspect.product_definitional = TRUE}

5.1.5.21.1 connect_point

AIM element: cartesian_point

Source: ISO 10303-42

Reference path: (plant_item_connector) <=
(hvac_connector) <=
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'connect point' }
representation_item =>
geometric_representation_item =>
point =>
cartesian_point

5.1.5.21.2 plant_item_connector_id

AIM element: shape_aspect.name

Source: ISO 10303-41

Reference path: (plant_item_connector) <=
 (hvac_connector) <=
 shape_aspect
 shape_aspect.name

5.1.5.21.3 plant_item_connector to changed_plant_item_connector

AIM element: IDENTICAL MAPPING

5.1.5.21.4 plant_item_connector to external_classification

AIM element: PATH

Reference path: (plant_item_connector) <=
 (hvac_connector) <=
 classification_item = plant_item_connector
 classification_item <-
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role
 classification_role = 'connector type classification'}
 classification_assignment
 classification_assignment.assigned_class ->
 group =>
 externally_defined_class

5.1.5.21.5 plant_item_connector to required_material_description

AIM element: PATH

Reference path: (plant_item_connector) <=
 (hvac_connector) <=
 shape_aspect
 shape_definition = shape_aspect
 shape_definition
 characterized_definition = shape_definition
 characterized_definition <-
 property_definition.definition
 {property_definition =>
 material_property =>
 required_material_property}
 property_definition <-
 property_definition_relationship.related_property_definition
 {property_definition_relationship
 property_definition_relationship.name = 'requirement allocation'}
 property_definition_relationship
 property_definition_relationship.relating_property_definition ->
 {property_definition =>
 material_property}
 property_definition
 property_definition.definition ->

ISO 10303-227:2005(E)

```
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
```

5.1.5.21.6 plant_item_connector to shape_representation

```
AIM element:  PATH
Rules:       subtype_mandatory_shape_representation
Reference path: (plant_item_connector) <=
              (hvac_connector) <=
              shape_aspect
              represented_definition = shape_aspect
              represented_definition <-
              property_definition_representation.definition
              property_definition_representation
              property_definition_representation.used_representation ->
              representation =>
              shape_representation =>
              (plant_csg_shape_representation)
              (hybrid_shape_representation)
```

5.1.5.22 Plant_item_connector_occurrence

```
AIM element:  plant_item_connector
Source:       ISO 10303-227
Reference path: (plant_item_connector) <=
              (hvac_connector) <=
              shape_aspect
              { shape_aspect
              shape_aspect.of_shape ->
              product_definition_shape <=
              property_definition
              property_definition.definition ->
              characterized_definition
              characterized_definition = characterized_product_definition
              characterized_product_definition
              characterized_product_definition = product_definition
              product_definition
              product_definition.frame_of_reference ->
              product_definition_context <=
              application_context_element
              (application_context_element.name = 'functional occurrence')
              (application_context_element.name = 'physical occurrence')}
```

5.1.5.22.1 orientation

```
AIM element:  (axis2_placement_2d)
              (axis2_placement_3d)
Source:       ISO 10303-42
```

```

Reference path: (plant_item_connector) <=
(hvac_connector) <=
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'connector orientation'}
representation_item =>
geometric_representation_item =>
{placement
placement.location ->
cartesian_point <=
point <=
geometric_representation_item <=
representation_item
representation_item.name = 'connect point'}
placement =>
(axis2_placement_2d)
(axis2_placement_3d)

```

5.1.5.23 Pressure_fit

AIM element: plant_item_connector

Source: ISO 10303-227

```

Reference path: plant_item_connector <=
shape_aspect
{plant_item_connector
classification_item = plant_item_connector
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'connector end engagement type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
piping_connector_class]
[group
group.name = 'pressure fit']}

```

5.1.5.24 Service_operating_case

AIM element: property_definition_relationship

ISO 10303-227:2005(E)

Source: ISO 10303-45

Reference path: {property_definition_relationship
[property_definition_relationship.relatng_property_definition ->
property_definition =>
stream_design_case]
[property_definition_relationship.related_property_definition ->
property_definition
property_definition.name = 'service characteristics']}

5.1.5.24.1 duration

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: property_definition_relationship
property_definition_relationship.related_property_definition ->
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'service operating characteristics'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'duration')
(representation_item.name = 'maximum duration')
(representation_item.name = 'minimum duration')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum duration'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum duration'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
time_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.5.24.2 frequency

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

```

Reference path: property_definition_relationship
property_definition_relationship.related_property_definition ->
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'service operating characteristics'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'frequency')
(representation_item.name = 'maximum frequency')
(representation_item.name = 'minimum frequency')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum frequency'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum frequency'}}])
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.5.24.3 name

AIM element: property_definition_relationship.description
Source: ISO 10303-45

5.1.5.24.4 operating_pressure

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

```

Reference path: property_definition_relationship
property_definition_relationship.related_property_definition ->
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'service operating characteristics'}
representation
(representation.items[i] ->

```

ISO 10303-227:2005(E)

```
{representation_item
(representation_item.name = 'pressure')
(representation_item.name = 'maximum pressure')
(representation_item.name = 'minimum pressure'))
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum pressure'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum pressure'}]])
representation_item =>
measure_representation_item <=
measure_with_unit
[{measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
[{measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component]
```

5.1.5.24.5 operating_temperature

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: property_definition_relationship
property_definition_relationship.related_property_definition ->
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'service operating characteristics'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'temperature')
(representation_item.name = 'maximum temperature')
(representation_item.name = 'minimum temperature'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum temperature'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum duration'}]])


```

representation_item =>
measure_representation_item <=
{ measure_with_unit =>
thermodynamic_temperature_measure_with_unit }
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.5.25 Socket

```

AIM element: plant_item_connector
Source: ISO 10303-227
Reference path: plant_item_connector <=
shape_aspect
{ plant_item_connector
classification_item = plant_item_connector
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'connector end engagement type classification' }
classification_assignment
classification_assignment.assigned_class ->
[group =>
piping_connector_class]
[group
group.name = 'socket' ] }

```

5.1.5.25.1 set_back

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: plant_item_connector <=
shape_aspect <-
[shape_aspect_relationship.relying_shape_aspect
{ shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect' }
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.relying_shape_aspect]
[shape_aspect_relationship.relying_shape_aspect
{ shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect' }
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->

```

ISO 10303-227:2005(E)

```
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'piping connector dimensional shape'}
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'set back' }
representation_item =>
measure_representation_item <=
{ measure_with_unit =>
length_measure_with_unit }
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.5.26 Structural_load_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: plant_item_connector <=

```
shape_aspect
{ plant_item_connector
classification_item = plant_item_connector
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'connector function type classification'}
classification_assignment
classification_assignment.assigned_class ->
group =>
structural_load_connector_class }
```

5.1.5.26.1 type

AIM element: group.name

Source: ISO 10303-41

Reference path: plant_item_connector
 classification_item = plant_item_connector
 classification_item <-
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role
 classification_role.name = 'connector function type classification'}
 classification_assignment
 classification_assignment.assigned_class ->
 {group =>
 structural_load_connector_class}
 group
 group.name

5.1.5.27 Stub_in

AIM element: plant_item_connector
 Source: ISO 10303-227
 Reference path: plant_item_connector <=
 shape_aspect
 {plant_item_connector
 classification_item = plant_item_connector
 classification_item <-
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role
 classification_role = 'connector end engagement type classification'}
 classification_assignment
 classification_assignment.assigned_class ->
 [group =>
 piping_connector_class]
 [group
 group.name = 'stub in']}

5.1.5.27.1 stub_in_depth

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
 Source: ISO 10303-41
 Rules: subtype_mandatory_shape_representation
 Reference path: plant_item_connector <=
 shape_aspect <-
 [shape_aspect_relationship.relate_shape_aspect
 {shape_aspect_relationship
 shape_aspect_relationship.name = 'connector dimensional aspect'}
 shape_aspect_relationship

ISO 10303-227:2005(E)

```
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.relying_shape_aspect]
[shape_aspect_relationship.relying_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'piping connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'stub in depth'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.5.28 Threaded

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: plant_item_connector <=

```
shape_aspect
{plant_item_connector
classification_item = plant_item_connector
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'connector end engagement type classification'}
classification_assignment
```

```

classification_assignment.assigned_class ->
[group =>
piping_connector_class]
[group
group.name = 'threaded']}

```

5.1.5.28.1 thread_engagement_depth

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source:      ISO 10303-41
Rules:      subtype_mandatory_shape_representation
Reference path: plant_item_connector <=
shape_aspect <-
[shape_aspect_relationship.relating_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect_relationship.relating_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'connector dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'piping connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'thread engagement depth'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit

```

ISO 10303-227:2005(E)

```
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.6 hvac_component_characterization UoF

5.1.6.1 Cross_section_flat_oval

```
AIM element: hvac_cross_section  
Source: ISO 10303-227  
Reference path: hvac_cross_section <=  
shape_aspect  
{shape_aspect.description = 'flat oval'}
```

5.1.6.1.1 height

```
AIM element: [measure_with_unit.value_component]  
[measure_with_unit.unit_component]  
Source: ISO 10303-41  
Rules: subtype_mandatory_shape_representation  
Reference path: hvac_cross_section <=  
shape_aspect <-  
[shape_aspect_relationship.relying_shape_aspect  
{shape_aspect_relationship  
shape_aspect_relationship.name = 'cross section dimensional aspect'}  
shape_aspect_relationship  
shape_aspect_relationship.related_shape_aspect ->  
shape_aspect <-  
shape_aspect_relationship.relying_shape_aspect]  
[shape_aspect_relationship.relying_shape_aspect  
{shape_aspect_relationship  
shape_aspect_relationship.name = 'cross section dimensional aspect'}  
shape_aspect_relationship  
shape_aspect_relationship.related_shape_aspect ->  
shape_aspect <-  
shape_aspect_relationship.related_shape_aspect]  
shape_aspect_relationship =>  
dimensional_location  
dimensional_characteristic = dimensional_location  
dimensional_characteristic <-  
dimensional_characteristic_representation.dimension  
dimensional_characteristic_representation  
dimensional_characteristic_representation.representation ->  
shape_dimension_representation <=  
shape_representation <=  
{representation  
representation.name = 'hvac connector dimensional shape'}  
representation  
representation.items[i] ->  
{representation_item  
representation_item.name = 'height'}
```

```

representation_item =>
measure_representation_item <=
{ measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.1.2 width

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

```

Reference path: hvac_cross_section <=
shape_aspect <-
[shape_aspect_relationship.relating_shape_aspect
{ shape_aspect_relationship
shape_aspect_relationship.name = 'cross section dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect_relationship.relating_shape_aspect
{ shape_aspect_relationship
shape_aspect_relationship.name = 'cross section dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'hvac connector dimensional shape'}
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'width'}
representation_item =>
measure_representation_item <=
{ measure_with_unit =>
length_measure_with_unit}
measure_with_unit

```

ISO 10303-227:2005(E)

[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.6.2 Cross_section_non_standard

AIM element: hvac_cross_section
Source: ISO 10303-227
Reference path: hvac_cross_section <=
shape_aspect
{shape_aspect.description = 'non standard'}

5.1.6.2.1 cross_section_boundary

AIM element: curve
Source: ISO 10303-42
Reference path: hvac_cross_section <=
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <=
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <=
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'cross section representation'}
representation.items[i] ->
{representation_item
representation_item.name = 'closed bounded curve'}
representation_item =>
geometric_representation_item =>
curve

5.1.6.3 Cross_section_radiused_corner

AIM element: hvac_cross_section
Source: ISO 10303-227
Reference path: hvac_cross_section <=
shape_aspect
{shape_aspect.description = 'radiused corner'}

5.1.6.3.1 height

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation


```

Reference path: hvac_cross_section <=
  shape_aspect <-
  [shape_aspect_relationship.relating_shape_aspect
  {shape_aspect_relationship
  shape_aspect_relationship.name = 'cross section dimensional aspect'}
  shape_aspect_relationship
  shape_aspect_relationship.related_shape_aspect ->
  shape_aspect <-
  shape_aspect_relationship.relating_shape_aspect]
  [shape_aspect_relationship.relating_shape_aspect
  {shape_aspect_relationship
  shape_aspect_relationship.name = 'cross section dimensional aspect'}
  shape_aspect_relationship
  shape_aspect_relationship.related_shape_aspect ->
  shape_aspect <-
  shape_aspect_relationship.related_shape_aspect]
  shape_aspect_relationship =>
  dimensional_location
  dimensional_characteristic = dimensional_location
  dimensional_characteristic <-
  dimensional_characteristic_representation.dimension
  dimensional_characteristic_representation
  dimensional_characteristic_representation.representation ->
  shape_dimension_representation <=
  shape_representation <=
  {representation
  representation.name = 'hvac connector dimensional shape'}
  representation
  representation.items[i] ->
  {representation_item
  representation_item.name = 'height'}
  representation_item =>
  measure_representation_item <=
  {measure_with_unit =>
  length_measure_with_unit}
  measure_with_unit
  [measure_with_unit.value_component]
  [measure_with_unit.unit_component]

```

5.1.6.3.2 width

```

AIM element: [measure_with_unit.value_component]
             [measure_with_unit.unit_component]
Source:      ISO 10303-41
Rules:       subtype_mandatory_shape_representation
Reference path: hvac_cross_section <=
  shape_aspect <-
  [shape_aspect_relationship.relating_shape_aspect
  {shape_aspect_relationship

```

ISO 10303-227:2005(E)

```
shape_aspect_relationship.name = 'cross section dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect_relationship.relate_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'cross section dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimensional_location
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'width'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.3.3 corner_radius

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_cross_section <=

```
shape_aspect <-
[shape_aspect_relationship.relate_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'cross section dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
```

```

shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect_relationship.relatng_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'cross section dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimensional
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'corner radius'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.4 Cross_section_rectangular

AIM element: hvac_cross_section
Source: ISO 10303-227
Reference path: hvac_cross_section <=
shape_aspect
{shape_aspect.description = 'rectangular'}

5.1.6.4.1 height

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_cross_section <=
shape_aspect <-
[shape_aspect_relationship.relatng_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'cross section dimensional aspect'}]

ISO 10303-227:2005(E)

```
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.relying_shape_aspect]
[shape_aspect_relationship.relying_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'cross section dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'height'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.4.2 width

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_cross_section <=

```
shape_aspect <-
[shape_aspect_relationship.relying_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'cross section dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.relying_shape_aspect]
```

```

[shape_aspect_relationship.relater_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'cross section dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'width'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.5 Cross_section_round

AIM element: hvac_cross_section

Source: ISO 10303-227

Reference path: hvac_cross_section <=
 shape_aspect
 {shape_aspect.description = 'round'}

5.1.6.5.1 radius

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_cross_section <=
 shape_aspect <-
 [shape_aspect_relationship.relater_shape_aspect
 {shape_aspect_relationship
 shape_aspect_relationship.name = 'cross section dimensional aspect'}
 shape_aspect_relationship

ISO 10303-227:2005(E)

```
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.relying_shape_aspect]
[shape_aspect_relationship.relying_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'cross section dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'radius'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.6 Hvac_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_connector <=

```
shape_aspect
{shape_aspect
shape_aspect.product_definitional = TRUE}
```

5.1.6.6.1 name

AIM element: shape_aspect.name

Source: ISO 10303-41

Reference path: hvac_connector <=

```
shape_aspect
shape_aspect.name
```

5.1.6.6.2 hvac_connector_specification

AIM element: document
 Source: ISO 10303-41
 Reference path: hvac_connector
 document_item = hvac_connector
 document_item <-
 applied_document_reference.items[i]
 applied_document_reference <=
 document_reference
 document_reference.assigned_document ->
 { document
 document.kind ->
 document_type
 document_type.product_data_type = 'hvac connector specification'}
 document

5.1.6.6.3 hvac_joint_inspection_specification

AIM element: document
 Source: ISO 10303-41
 Reference path: hvac_connector
 document_item = hvac_connector
 document_item <-
 applied_document_reference.items[i]
 applied_document_reference <=
 document_reference
 document_reference.assigned_document ->
 { document
 document.kind ->
 document_type
 document_type.product_data_type = 'hvac connector inspection specification'}
 document

5.1.6.6.4 connector_flow_direction

AIM element: descriptive_representation_item.description
 Source: ISO 10303-45
 Reference path: hvac_connector <=
 shape_aspect
 shape_definition = shape_aspect
 shape_definition
 characterized_definition = shape_definition
 characterized_definition <-
 property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <-
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->

ISO 10303-227:2005(E)

```
representation
{representation.name = 'hvac connector characteristics'}
representation.items[i] ->
{representation_item
representation_item.name = 'flow direction'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
```

5.1.6.6.5 hvac_joint_test_specification

```
AIM element: document
Source: ISO 10303-41
Reference path: hvac_connector
document_item = hvac_connector
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
{document
document.kind ->
document_type
document_type.product_data_type = 'hvac connector test specification'}
document
```

5.1.6.6.6 hvac_joint_engagement_length

```
AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: hvac_connector <=
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'engagement length'}
representation_item =>
measure_representation_item <=
```



```

{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.6.7 hvac_joint_joining_type

AIM element: group.name

Source: ISO 10303-41

Reference path: hvac_connector

```

classification_item = hvac_connector
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'hvac joint joining type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name

```

5.1.6.6.8 hvac_joint_sealant_type

AIM element: group.name

Source: ISO 10303-41

Reference path: hvac_connector

```

classification_item = hvac_connector
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'hvac joint sealant type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name

```

5.1.6.6.9 hvac_joint_joint_type

AIM element: group.name

Source: ISO 10303-41

Reference path: hvac_connector

```

classification_item = hvac_connector
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=

```

ISO 10303-227:2005(E)

```
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'hvac joint type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name
```

5.1.6.6.10 hvac_joint_tightness

AIM element: group.name

Source: ISO 10303-41

Reference path: hvac_connector

```
classification_item = hvac_connector
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'hvac joint tightness classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name
```

5.1.6.6.11 hvac_connector to hvac_cross_section

AIM element: PATH

Reference path: hvac_connector <=

```
shape_aspect <-
shape_aspect_relationship.relating_shape_aspect
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect =>
hvac_cross_section
```

5.1.6.6.12 hvac_connector to hvac_connector_service_characteristic

AIM element: PATH

Reference path: hvac_connector <=

```
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
{ property_definition
property_definition.name = 'hvac service characteristics'}
property_definition
```

5.1.6.7 Hvac_connector_service_characteristic

AIM element: property_definition
 Source: ISO 10303-41
 Reference path: property_definition
 {property_definition.name = 'hvac service characteristic'}

5.1.6.7.1 design_pressure

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
 Source: ISO 10303-41
 Reference path: property_definition
 represented_definition = property_definition
 represented_definition <-
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 representation
 {representation.name = 'design service characteristics'}
 (representation.items[i] ->
 {representation_item
 (representation_item.name = 'pressure')
 (representation_item.name = 'maximum pressure')
 (representation_item.name = 'minimum pressure')}}
 ([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum pressure'}]
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum pressure'}]))
 representation_item =>
 measure_representation_item <=
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.6.7.2 design_temperature

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
 Source: ISO 10303-41
 Reference path: property_definition
 represented_definition = property_definition
 represented_definition <-
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 representation
 {representation.name = 'design service characteristics'}
 (representation.items[i] ->

ISO 10303-227:2005(E)

```
{representation_item
(representation_item.name = 'temperature')
(representation_item.name = 'maximum temperature')
(representation_item.name = 'minimum temperature'))
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum temperature'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum temperature'}])
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.7.3 Hvac_connector_service_characteristic to changed_hvac_connector_service_characteristic

AIM element: IDENTICAL MAPPING

5.1.6.7.4 hvac_connector_service_characteristic to service_operating_case

AIM element: PATH

Reference path: property_definition <-
property_definition_relationship.related_property_definition
property_definition_relationship

5.1.6.8 Hvac_cross_section

AIM element: hvac_cross_section

Source: ISO 10303-227

Reference path: hvac_cross_section <=
shape_aspect

5.1.6.8.1 equivalent_diameter

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_cross_section <=
shape_aspect <-
[shape_aspect_relationship.relate_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'cross section dimensional aspect'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect_relationship.relate_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'cross section dimensional aspect'}]

```

shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac connector dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'equivalent diameter'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.8.2 Hvac_cross_section to changed_hvac_cross_section

AIM element: IDENTICAL MAPPING

5.1.6.9 Hvac_plant_item_branch_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_connector <=

```

shape_aspect
{shape_aspect
shape_aspect.description = 'hvac plant item branch connector'}

```

5.1.6.9.1 hvac_plant_item_branch_connector to hvac_plant_item_branch_connection

AIM element: PATH

Reference path: hvac_connector <=

```

shape_aspect <-
shape_aspect_relationship.related_shape_aspect
shape_aspect_relationship =>
hvac_plant_item_branch_connection

```

5.1.6.10 Hvac_plant_item_connector

AIM element: hvac_connector

ISO 10303-227:2005(E)

Source: ISO 10303-227

Reference path: hvac_connector <=
shape_aspect
{ shape_aspect
shape_aspect.description = 'hvac plant item connector' }

5.1.6.10.1 hvac_plant_item_connector to hvac_plant_item_connection

AIM element: PATH

Reference path: hvac_connector <=
shape_aspect <-
shape_aspect_relationship.related_shape_aspect
shape_aspect_relationship =>
hvac_plant_item_connection

5.1.6.11 Hvac_access_opening

AIM element: shape_aspect

Source: ISO 10303-41

Reference path: shape_aspect
{ shape_aspect.description = 'hvac access opening' }

5.1.6.11.1 shape

AIM element: curve

Source: ISO 10303-42

Reference path: shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{ representation.name = 'hvac access opening representation' }
representation.items[i] ->
representation_item
{ representation_item
representation_item.name = 'hvac access opening shape' }
representation_item =>
geometric_representation_item =>
curve

5.1.6.11.2 access_opening_id

AIM element: shape_aspect.name

Source: ISO 10303-41

5.1.6.11.3 access_type

AIM element: group.name
 Source: ISO 10303-41
 Reference path: shape_aspect
 classification_item = shape_aspect
 classification_item <-
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role
 classification_role.name = 'hvac access opening type classification'}
 classification_assignment
 classification_assignment.assigned_class ->
 group
 group.name

5.1.6.11.4 Hvac_access_opening to changed_hvac_access_opening

AIM element: IDENTICAL MAPPING

5.1.6.12 Hvac_band_support

AIM element: hvac_support_definition
 Source: ISO 10303-227
 Rules: dependent_instantiable_product_context
 product_context_discipline_type_constraint
 value_for_application_context

Reference path: hvac_support_definition <=
 product_definition
 {hvac_support_definition
 classification_item = hvac_support_definition
 classification_item <-
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role
 classification_role.name = 'plant item type classification'}
 classification_assignment
 classification_assignment.assigned_class ->
 [group =>
 hvac_support_class]
 [group
 group.name = 'hvac band support']
 {product_definition
 product_definition.formation ->
 product_definition_formation
 product_definition_formation.of_product ->

ISO 10303-227:2005(E)

```
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'hvac support']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]
```

5.1.6.12.1 band_size

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-

41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_support_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
{property_definition =>
product_definition_shape}
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'hvac band support dimensional shape'}
representation
representation.items[i] ->
```



```

{representation_item
representation_item.name = 'band size'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.12.2 hanger_attachment_loc

```

AIM element: cartesian_point
Source:      ISO 10303-42
Rules:      subtype_mandatory_shape_representation
Reference path: hvac_support_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'attachment point'}
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'hvac band support attachment shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'attachment loc'}
representation_item =>
geometric_representation_item =>
point =>
cartesian_point

```

5.1.6.13 Hvac_bend

```

AIM element: hvac_component_definition
Source:      ISO 10303-227
Rules:      dependent_instantiable_product_context
            product_context_discipline_type_constraint

```

ISO 10303-227:2005(E)

```
value_for_application_context
Reference path: hvac_component_definition <=
product_definition
{hvac_component_definition
classification_item = hvac_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_fitting_class]
[group
group.name = 'hvac bend']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'hvac fitting']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}
```

5.1.6.13.1 length

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 [shape_aspect <-
 shape_aspect_relationship.relate_shape_aspect]
 [shape_aspect <-
 shape_aspect_relationship.related_shape_aspect]
 shape_aspect_relationship =>
 dimensional_location
 dimensional_characteristic = dimensional_location
 dimensional_characteristic <-
 dimensional_characteristic_representation.dimension
 dimensional_characteristic_representation
 dimensional_characteristic_representation.representation ->
 shape_dimension_representation <=
 shape_representation <=
 {representation
 representation.name = 'hvac bend dimensional shape'}
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'length'}
 representation_item =>
 measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.6.13.2 bend_path

AIM element: curve

Source: ISO 10303-42

Reference path: hvac_component_definition <=
 product_definition
 characterized_product_definition = product_definition

ISO 10303-227:2005(E)

```
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect
{shape_aspect.name = 'bend path'}
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac bend representation'}
representation.items[i] ->
{representation_item
representation_item.name = 'bend path'}
representation_item =>
geometric_representation_item =>
curve
```

5.1.6.13.3 end_1_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
hvac_connector
```

5.1.6.13.4 end_2_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <=
 property_definition.definition
 property_definition =>
 product_definition_shape <=
 shape_aspect.of_shape
 {shape_aspect
 shape_aspect.description = 'end 2'}
 shape_aspect =>
 hvac_connector

5.1.6.14 Hvac_component

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context
 product_context_discipline_type_constraint
 value_for_application_context

Reference path: {[product
 classification_item = product
 classification_item <=
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role
 classification_role = 'hvac component type classification'}
 classification_assignment
 classification_assignment.assigned_class ->
 group
 group.name = 'hvac component'}
 [product
 product.frame_of_reference[i] ->
 product_context<=
 application_context_element
 application_context_element.name = 'plant item']}]

5.1.6.14.1 design_flow_rate

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

ISO 10303-227:2005(E)

```
Reference path: product <-
  product_definition_formation.of_product
  product_definition_formation <-
  product_definition.formation
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition <-
  property_definition_representation.definition
  property_definition_representation
  property_definition_representation.used_representation ->
  representation
  {representation.name = 'hvac flow characteristics'}
  (representation.items[i] ->
  {representation_item
  (representation_item.name = 'flow rate')
  (representation_item.name = 'maximum flow rate')
  (representation_item.name = 'minimum flow rate'}})
  ([representation.items[i] ->
  {representation_item
  representation_item.name = 'maximum flow rate'}]
  [representation.items[i] ->
  {representation_item
  representation_item.name = 'minimum flow rate'}})
  representation_item =>
  measure_representation_item <=
  measure_with_unit
  [measure_with_unit.value_component]
  [measure_with_unit.unit_component]
```

5.1.6.14.2 design_flow_condition

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

```
Reference path: product <-
  product_definition_formation.of_product
  product_definition_formation <-
  product_definition.formation
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition <-
  property_definition_representation.definition
```

```

property_definition_representation
property_definition_representation.used_representation ->
representation
{representation
representation.name = 'hvac flow characteristics'}
representation.items[i] ->
{representation_item
representation_item.name = 'design flow condition'})
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

```

5.1.6.14.3 design_pressure

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

```

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac flow characteristics'}
(representation.items[i] ->
{representation_item
(representation_item.name = 'pressure')
(representation_item.name = 'maximum pressure')
(representation_item.name = 'minimum pressure')}}
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum pressure'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum pressure'}}])
representation_item =>
measure_representation_item <=
measure_with_unit

```

ISO 10303-227:2005(E)

[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.6.14.4 design_temperature

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac flow characteristics'}
(representation.items[i] ->
{representation_item
(representation_item.name = 'temperature')
(representation_item.name = 'maximum temperature')
(representation_item.name = 'minimum temperature'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum temperature'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum temperature'}}])
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.6.14.5 pressure_loss_coefficient

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: product <-
product_definition_formation.of_product


```

product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac flow characteristics'}
(representation.items[i] ->
{representation_item
(representation_item.name = 'pressure loss coefficient')
(representation_item.name = 'maximum pressure loss coefficient')
(representation_item.name = 'minimum pressure loss coefficient')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum pressure loss coefficient'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum pressure loss coefficient'}}])
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.14.6 pressure_drop

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-

ISO 10303-227:2005(E)

```
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac flow characteristics'}
(representation.items[i] ->
{representation_item
(representation_item.name = 'pressure drop')
(representation_item.name = 'maximum pressure drop')
(representation_item.name = 'minimum pressure drop')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum pressure drop'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum pressure drop'}])
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.14.7 velocity

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'hvac flow characteristics'}
representation
(representation.items[i] ->

```

{representation_item
(representation_item.name = 'velocity')
(representation_item.name = 'maximum velocity')
(representation_item.name = 'minimum velocity'))
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum velocity'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum velocity'}])
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.14.8 correction_factor

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO10303-41

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'hvac flow characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'correction factor'}
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

ISO 10303-227:2005(E)

5.1.6.14.9 hvac_component to hvac_component_thickness

AIM element: PATH

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac component thickness'}

5.1.6.14.10 hvac_component to hvac_access_opening

AIM element: PATH

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect

5.1.6.15 Hvac_component_thickness

AIM element: representation

Source: ISO 10303-43

Reference path: representation
{representation.name = 'hvac component thickness'}

5.1.6.15.1 sheet_metal_thickness

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: representation
{representation.name = 'hvac component thickness'}

```

(representation.items[i] ->
 {representation_item
 (representation_item.name = 'thickness')
 (representation_item.name = 'maximum thickness')
 (representation_item.name = 'minimum thickness'}})
([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum thickness'}]
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum thickness'}])
representation_item =>
measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

```

5.1.6.15.2 thickness_type

AIM element: descriptive_representation_item
Source: ISO 10303-45
Reference path: representation
{representation
representation.name = 'hvac component thickness'}
representation.items[i] ->
{representation_item
representation_item.name = 'thickness type'})
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

5.1.6.15.3 Hvac_component_thickness to changed_hvac_component_thickness

AIM element: IDENTICAL MAPPING

5.1.6.16 Hvac_coupling

AIM element: hvac_component_definition
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: hvac_component_definition <=
product_definition
{hvac_component_definition
classification_item = hvac_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=

ISO 10303-227:2005(E)

```
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_fitting_class]
[group
group.name = 'hvac coupling']]
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'hvac fitting']}
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]}
```

5.1.6.16.1 offset_x

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=

product_definition

characterized_product_definition = product_definition

characterized_product_definition

characterized_definition = characterized_product_definition

```

characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac coupling dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'offset x'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.16.2 offset_y

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-

ISO 10303-227:2005(E)

```
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac coupling dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'offset y'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.16.3 length

```
AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
```



```

dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac coupling dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.16.4 end_1_connector

AIM element: hvac_connector

Source: ISO 10303-227

```

Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
hvac_connector

```

5.1.6.16.5 end_2_connector

AIM element: hvac_connector

Source: ISO 10303-227

```

Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition

```

ISO 10303-227:2005(E)

```
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 2' }
shape_aspect =>
hvac_connector
```

5.1.6.17 Hvac_ducting

AIM element: product
Source: ISO 10303-41
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group
group.name = 'hvac ducting']
[group <-
group_relationship.related_group
{group_relationship
group_relationship.name = 'usage classification'}
group_relationship
group_relationship.relying_group ->
group
group.name = 'ducting component']
[group <-
group_relationship.related_group
{group_relationship
group_relationship.name = 'usage_classification'}
group_relationship
group_relationship.relying_group ->
group
group.name = 'hvac component']]
[product
product.frame_of_reference[i] ->
product_context<=

```

application_context_element
application_context_element.name = 'plant item']]

```

5.1.6.17.1 duct_seam

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

```

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac ducting characteristics'}
representation.items[i] ->
{representation_item
representation_item.name = 'duct seam'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

```

5.1.6.17.2 length

AIM element: [measure_with_unit.value_component]

[measure_with_unit.unit_component]

Source: ISO 10303-41

```

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape

```

ISO 10303-227:2005(E)

```
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac ducting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.17.3 end_1_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: product <-

```
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
hvac_connector
```

5.1.6.17.4 end_2_connector

AIM element: hvac_connector

Source: ISO 10303-227

```

Reference path: product <-
    product_definition_formation.of_product
    product_definition_formation <-
    product_definition.formation
    product_definition
    characterized_product_definition = product_definition
    characterized_product_definition
    characterized_definition = characterized_product_definition
    characterized_definition <-
    property_definition.definition
    property_definition =>
    product_definition_shape <-
    shape_aspect.of_shape
    { shape_aspect
    shape_aspect.description = 'end 2'}
    shape_aspect =>
    hvac_connector

```

5.1.6.17.5 duct_path

AIM element: curve

Source: ISO 10303-42

```

Reference path: product <-
    product_definition_formation.of_product
    product_definition_formation <-
    product_definition.formation
    product_definition
    characterized_product_definition = product_definition
    characterized_product_definition
    characterized_definition = characterized_product_definition
    characterized_definition <-
    property_definition.definition
    property_definition =>
    product_definition_shape <-
    shape_aspect.of_shape
    shape_aspect
    { shape_aspect.name = 'duct path'}
    shape_definition = shape_aspect
    shape_definition
    characterized_definition = shape_definition
    characterized_definition <-
    property_definition.definition
    property_definition
    represented_definition = property_definition
    represented_definition <-
    property_definition_representation.definition

```

ISO 10303-227:2005(E)

```
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'duct path representation'}
representation.items[i] ->
{representation_item
representation_item.name = 'duct path'}
representation_item =>
geometric_representation_item =>
curve
```

5.1.6.17.6 friction_factor

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

```
Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'hvac ducting characteristics'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'friction factor')
(representation_item.name = 'maximum friction factor')
(representation_item.name = 'minimum friction factor')}}
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum friction factor'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum friction factor'}}])
representation_item =>
measure_representation_item <=
measure_with_unit
```

[measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.6.17.7 roughness

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: product <-
 product_definition_formation.of_product
 product_definition_formation <-
 product_definition.formation
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <-
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 {representation
 representation.name = 'hvac ducting characteristics'}
 representation
 (representation.items[i] ->
 {representation_item
 (representation_item.name = 'roughness')
 (representation_item.name = 'maximum roughness')
 (representation_item.name = 'minimum roughness')}})
 ([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum roughness'}}]
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum roughness'}}])
 representation_item =>
 measure_representation_item <=
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.6.18 Hvac_elbow_90deg_reducing

AIM element: hvac_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
 product_context_discipline_type_constraint

ISO 10303-227:2005(E)

```
value_for_application_context
Reference path: hvac_component_definition <=
product_definition
{hvac_component_definition
classification_item = hvac_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_fitting_class]
[group
group.name = 'hvac elbow 90deg reducing']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'hvac fitting']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}
```


5.1.6.18.1 angle

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 [shape_aspect <-
 shape_aspect_relationship.relating_shape_aspect]
 [shape_aspect <-
 shape_aspect_relationship.related_shape_aspect]
 shape_aspect_relationship =>
 dimensional_location
 dimensional_characteristic = dimensional_location
 dimensional_characteristic <-
 dimensional_characteristic_representation.dimension
 dimensional_characteristic_representation
 dimensional_characteristic_representation.representation ->
 shape_dimension_representation <=
 shape_representation <=
 {representation
 representation.name = 'hvac elbow dimensional shape'}
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'angle'}
 representation_item =>
 measure_representation_item <=
 {measure_with_unit =>
 plane_angle_measure_with_unit}
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.6.18.2 throat_radius

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

ISO 10303-227:2005(E)

Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
[shape_aspect <=
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <=
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <=
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac elbow dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'throat radius'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.6.18.3 heel_radius

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=

```

property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimensional_location
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac elbow dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'heel radius'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.18.4 heel_radius_centre_offset

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]

```

ISO 10303-227:2005(E)

```
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac elbow dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'radius centre offset'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.18.5 end_1_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
hvac_connector
```

5.1.6.18.6 end_2_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=
product_definition

```

characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
hvac_connector

```

5.1.6.18.7 hvac_elbow_90deg_reducing_to_splitter

AIM element: PATH

Reference path: hvac_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect
{ shape_aspect.description = 'splitter'}

```

5.1.6.19 Hvac_elbow_centred

AIM element: hvac_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: hvac_component_definition <=

```

product_definition
{ hvac_component_definition
classification_item = hvac_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>

```

ISO 10303-227:2005(E)

```
hvac_fitting_class]
[group
group.name = 'hvac elbow centred']]
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'hvac fitting']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]}
```

5.1.6.19.1 angle

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]

```

[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac elbow dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'angle'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
plane_angle_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.19.2 width

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-

```

ISO 10303-227:2005(E)

```
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac elbow dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'width'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.19.3 height

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
```



```

representation.name = 'hvac elbow dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'height'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.19.4 throat_radius

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac elbow dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'throat radius'}
representation_item =>

```

ISO 10303-227:2005(E)

```
measure_representation_item <=  
{ measure_with_unit =>  
length_measure_with_unit}  
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.6.19.5 heel_radius

```
AIM element: [measure_with_unit.value_component]  
[measure_with_unit.unit_component]  
Source: ISO 10303-41  
Rules: subtype_mandatory_shape_representation  
Reference path: hvac_component_definition <=  
product_definition  
characterized_product_definition = product_definition  
characterized_product_definition  
characterized_definition = characterized_product_definition  
characterized_definition <-  
property_definition.definition  
property_definition =>  
product_definition_shape <-  
shape_aspect.of_shape  
[shape_aspect <-  
shape_aspect_relationship.relating_shape_aspect]  
[shape_aspect <-  
shape_aspect_relationship.related_shape_aspect]  
shape_aspect_relationship =>  
dimensional_location  
dimensional_characteristic = dimensional_location  
dimensional_characteristic <-  
dimensional_characteristic_representation.dimension  
dimensional_characteristic_representation  
dimensional_characteristic_representation.representation ->  
shape_dimension_representation <=  
shape_representation <=  
{ representation  
representation.name = 'hvac elbow dimensional shape'}  
representation  
representation.items[i] ->  
{ representation_item  
representation_item.name = 'heel radius'}  
representation_item =>  
measure_representation_item <=  
{ measure_with_unit =>  
length_measure_with_unit}  
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.6.19.6 end_1_connector

AIM element: hvac_connector

Source: ISO 10303-227

```

Reference path: hvac_component_definition <=
    product_definition
    characterized_product_definition = product_definition
    characterized_product_definition
    characterized_definition = characterized_product_definition
    characterized_definition <-
    property_definition.definition
    property_definition =>
    product_definition_shape <-
    shape_aspect.of_shape
    {shape_aspect
    shape_aspect.description = 'end 1'}
    shape_aspect =>
    hvac_connector

```

5.1.6.19.7 end_2_connector

AIM element: hvac_connector

Source: ISO 10303-227

```

Reference path: hvac_component_definition <=
    product_definition
    characterized_product_definition = product_definition
    characterized_product_definition
    characterized_definition = characterized_product_definition
    characterized_definition <-
    property_definition.definition
    property_definition =>
    product_definition_shape <-
    shape_aspect.of_shape
    {shape_aspect
    shape_aspect.description = 'end 2'}
    shape_aspect =>
    hvac_connector

```

5.1.6.19.8 hvac_elbow_centred_to_splitter

AIM element: PATH

```

Reference path: hvac_component_definition <=
    product_definition
    characterized_product_definition = product_definition
    characterized_product_definition
    characterized_definition = characterized_product_definition
    characterized_definition <-
    property_definition.definition
    property_definition =>
    product_definition_shape <-
    shape_aspect.of_shape

```

ISO 10303-227:2005(E)

```
shape_aspect
{shape_aspect.description = 'splitter'}
```

5.1.6.20 Hvac_elbow_mitre

```
AIM element: hvac_component_definition
Source:      ISO 10303-227
Rules:      dependent_instantiable_product_context
            product_context_discipline_type_constraint
            value_for_application_context
Reference path: hvac_component_definition <=
                product_definition
                {hvac_component_definition
                 classification_item = hvac_component_definition
                 classification_item <-
                 applied_classification_assignment.items[i]
                 applied_classification_assignment <=
                 {classification_assignment
                  classification_assignment.role ->
                  classification_role
                  classification_role = 'hvac fitting type classification'}
                 classification_assignment
                 classification_assignment.assigned_class ->
                 [group =>
                  hvac_fitting_class]
                 [group
                  group.name = 'hvac elbow mitre']}
                {product_definition
                 product_definition.formation ->
                 product_definition_formation
                 product_definition_formation.of_product ->
                 [product
                  classification_item = product
                  classification_item <-
                  applied_classification_assignment.items[i]
                  applied_classification_assignment <=
                  {classification_assignment
                   classification_assignment.role ->
                   classification_role
                   classification_role = 'hvac fitting type classification'}
                  classification_assignment
                  classification_assignment.assigned_class ->
                  (group)
                  (group <-
                   group_relationship.related_group
                   group_relationship
                   group_relationship.relating_group ->
                   group)
                  group.name = 'hvac fitting']}
```

```
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]
```

5.1.6.20.1 angle_first_section

```
AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac elbow dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'angle first section'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
plane_angle_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

ISO 10303-227:2005(E)

5.1.6.20.2 angle_last_section

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac elbow dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'angle last section'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
plane_angle_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.6.20.3 number_of_sections

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: hvac_component_definition <=
product_definition

```

characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'hvac elbow characteristics'}
representation
{representation_item
representation_item.name = 'number of sections'}
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component
{measure_with_unit.value_component ->
measure_value
measure_value = count_measure}]
[measure_with_unit.unit_component]

```

5.1.6.20.4 throat_radius

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-

ISO 10303-227:2005(E)

```
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac elbow dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'throat radius'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.20.5 heel_radius

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
```



```

representation.name = 'hvac elbow dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'heel radius'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.20.6 end_1_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
hvac_connector

```

5.1.6.20.7 end_2_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
hvac_connector

```

ISO 10303-227:2005(E)

5.1.6.20.8 sweep_angle

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
[shape_aspect <=
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <=
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <=
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac elbow dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'sweep_angle'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
plane_angle_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.6.20.9 hvac_elbow_mitre_to_splitter

AIM element: PATH
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition

```

characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect
{shape_aspect.description = 'splitter'}

```

5.1.6.21 Hvac_end_fitting

AIM element: hvac_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: hvac_component_definition <=
product_definition
{hvac_component_definition
classification_item = hvac_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_fitting_class]
[group
group.name = 'hvac end fitting']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)

ISO 10303-227:2005(E)

```
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'hvac fitting']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]
```

5.1.6.21.1 opening_type

AIM element: group.name

Source: ISO 10303-41

Reference path: shape_aspect

```
classification_item = shape_aspect
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'hvac end fitting opening type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name
```

5.1.6.21.2 end_1_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
hvac_connector
```

5.1.6.22 Hvac_equipment

AIM element: product
 Source: ISO 10303-41
 Rules: dependent_instantiable_product_context
 product_context_discipline_type_constraint
 value_for_application_context

Reference path: {[product
 classification_item = product
 classification_item <-
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role
 classification_role = 'hvac component type classification'}
 classification_assignment
 classification_assignment.assigned_class ->
 [group
 group.name = 'hvac equipment']
 [group <-
 group_relationship.related_group
 {group_relationship
 group_relationship.name = 'usage classification'}
 group_relationship
 group_relationship.relying_group ->
 group
 group.name = 'hvac component']]
 [product
 product.frame_of_reference[i] ->
 product_context<=
 application_context_element
 application_context_element.name = 'plant item']]}

5.1.6.22.1 hvac_equipment to hvac_flow_control_device

AIM element: PATH
 Reference path: product <-
 product_definition_formation.of_product
 product_definition_formation <-
 product_definition.formation
 product_definition <-
 product_definition_relationship.relying_product_definition
 product_definition_relationship
 {product_definition_relationship.name = 'flow control'}
 product_definition_relationship.related_product_definition ->
 product_definition
 product_definition.formation ->
 product_definition_formation

ISO 10303-227:2005(E)

product_definition_formation.of_product ->
product

5.1.6.23 Hvac_fitting

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group
group.name = 'hvac fitting']
[group <-
group_relationship.related_group
{group_relationship
group_relationship.name = 'usage classification'}
group_relationship
group_relationship.relating_group ->
group
group.name = 'hvac component']]
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]}

5.1.6.24 Hvac_flow_control_device

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment

```

classification_assignment.role ->
classification_role
classification_role = 'hvac component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group
group.name = 'hvac flow control device']
[group <-
group_relationship.related_group
{group_relationship
group_relationship.name = 'usage classification'}
group_relationship
group_relationship.relating_group ->
group
group.name = 'hvac component']}
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.6.24.1 end_1_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: product <-

```

product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
hvac_connector

```

5.1.6.24.2 end_2_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: product <-

```

product_definition_formation.of_product
product_definition_formation <-

```

ISO 10303-227:2005(E)

```
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 2' }
shape_aspect =>
hvac_connector
```

5.1.6.24.3 control_point_nominal_value

AIM element: measure_with_unit.value_component

Source: ISO 10303-41

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{ representation.name = 'flow control device characteristics' }
representation.items[i] ->
{ representation_item
representation_item.name = 'control point nominal value' }
representation_item =>
measure_representation_item <=
measure_with_unit
measure_with_unit.value_component

5.1.6.24.4 control_point_min_value

AIM element: measure_with_unit.value_component

Source: ISO 10303-41

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-


```

product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'flow control device characteristics'}
representation.items[i] ->
{representation_item
representation_item.name = 'control point minimum value'}
representation_item =>
measure_representation_item <=
measure_with_unit
measure_with_unit.value_component

```

5.1.6.24.5 control_point_max_value

AIM element: measure_with_unit.value_component

Source: ISO 10303-41

Reference path: product <-

```

product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'flow control device characteristics'}
representation.items[i] ->
{representation_item
representation_item.name = 'control point maximum value'}
representation_item =>
measure_representation_item <=
measure_with_unit
measure_with_unit.value_component

```

ISO 10303-227:2005(E)

5.1.6.24.6 control_point_set_point_value

AIM element: measure_with_unit.value_component

Source: ISO 10303-41

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'flow control device characteristics'}
representation.items[i] ->
{representation_item
representation_item.name = 'control point set point value'}
representation_item =>
measure_representation_item <=
measure_with_unit
measure_with_unit.value_component

5.1.6.25 Hvac_gasket

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group
group.name = 'hvac gasket']
[group <-
group_relationship.related_group

```

{group_relationship
group_relationship.name = 'usage classification'}
group_relationship
group_relationship.relating_group ->
group
group.name = 'hvac component']]
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.6.25.1 gasket_thickness

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac gasket dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'thickness'}
representation_item =>
measure_representation_item <=

```

ISO 10303-227:2005(E)

```
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.25.2 end_1_connector

AIM element: hvac_connector
Source: ISO 10303-227
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
hvac_connector

5.1.6.25.3 end_2_connector

AIM element: hvac_connector
Source: ISO 10303-227
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
hvac_connector

5.1.6.26 Hvac_hanger

AIM element: hvac_support_definition
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

```

Reference path: hvac_support_definition <=
  product_definition
  { hvac_support_definition
  classification_item = hvac_support_definition
  classification_item <-
  applied_classification_assignment.items[i]
  applied_classification_assignment <=
  { classification_assignment
  classification_assignment.role ->
  classification_role
  classification_role.name = 'plant item type classification'}
  classification_assignment
  classification_assignment.assigned_class ->
  [group =>
  hvac_support_class]
  [group
  group.name = 'hvac hanger']]
  { product_definition
  product_definition.formation ->
  product_definition_formation
  product_definition_formation.of_product ->
  [product
  classification_item = product
  classification_item <-
  applied_classification_assignment.items[i]
  applied_classification_assignment <=
  { classification_assignment
  classification_assignment.role ->
  classification_role
  classification_role.name = 'plant item type classification'}
  classification_assignment
  classification_assignment.assigned_class ->
  (group)
  (group <-
  group_relationship.related_group
  group_relationship
  group_relationship.relating_group ->
  group)
  group.name = 'hvac support']
  [product
  product.frame_of_reference[i] ->
  product_context <=
  application_context_element
  application_context_element.name = 'plant item']]

```

5.1.6.26.1 upper_attachment_loc

AIM element: cartesian_point

Source: ISO 10303-42

ISO 10303-227:2005(E)

Rules: subtype_mandatory_shape_representation
Reference path: hvac_support_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'attachment point' }
shape_aspect
represented_definition = shape_aspect
represented_definition <=
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{ representation
representation.name = 'hvac hanger attachment shape' }
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'upper attachment loc' }
representation_item =>
geometric_representation_item =>
point =>
cartesian_point

5.1.6.26.2 upper_attachment_type

AIM element: descriptive_representation_item.description
Source: ISO 10303-45
Rules: subtype_mandatory_shape_representation
Reference path: hvac_support_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'attachment point' }
shape_aspect
represented_definition = shape_aspect

```

represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'hvac hanger dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'upper attachment type'}
representation_item =>
descriptive_representation_item <=
descriptive_representation_item.description

```

5.1.6.26.3 hanger_size

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_support_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
{property_definition =>
product_definition_shape}
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'hvac hanger dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'hanger size'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

ISO 10303-227:2005(E)

5.1.6.26.4 hvac_hanger to hvac_band_support

AIM element: PATH

```
Reference path: hvac_support_definition <=
  {hvac_support_definition
  classification_item = hvac_support_definition
  classification_item <-
  applied_classification_assignment.items[i]
  applied_classification_assignment <=
  {classification_assignment
  classification_assignment.role ->
  classification_role
  classification_role.name = 'plant item type classification'}
  classification_assignment
  classification_assignment.assigned_class ->
  [group =>
  hvac_support_class]
  [group
  group.name = 'hvac hanger']}
  product_definition <-
  product_definition_relationship.relater_product_definition
  {product_definition_relationship
  product_definition_relationship.name = 'support'
  product_definition_relationship
  product_definition_relationship.related_product_definition =>
  product_definition =>
  hvac_support_definition <=
  {hvac_support_definition
  classification_item = hvac_support_definition
  classification_item <-
  applied_classification_assignment.items[i]
  applied_classification_assignment <=
  {classification_assignment
  classification_assignment.role ->
  classification_role
  classification_role.name = 'plant item type classification'}
  classification_assignment
  classification_assignment.assigned_class ->
  [group =>
  hvac_support_class]
  [group
  group.name = 'hvac band support']}
```

5.1.6.26.5 hvac_hanger to hvac_trapeze_bar

AIM element: PATH

```
Reference path: hvac_support_definition <=
  {hvac_support_definition
  classification_item = hvac_support_definition
  classification_item <-
```



```

applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_support_class]
[group
group.name = 'hvac hanger']]
product_definition <-
product_definition_relationship.relating_product_definition
{product_definition_relationship
product_definition_relationship.name = 'support'}
product_definition_relationship
product_definition_relationship.related_product_definition =>
product_definition =>
hvac_support_definition <=
{hvac_support_definition
classification_item = hvac_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_support_class]
[group
group.name = 'hvac trapeze bar']]

```

5.1.6.27 Hvac_instrument

AIM element: product
Source: ISO 10303-41
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment

ISO 10303-227:2005(E)

```
classification_assignment.role ->
classification_role
classification_role = 'hvac component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group
group.name = 'hvac instrument']
[group <-
group_relationship.related_group
{group_relationship
group_relationship.name = 'usage classification'}
group_relationship
group_relationship.relating_group ->
group
group.name = 'hvac component']]
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]}
```

5.1.6.27.1 units

AIM element: measure_with_unit.unit_component

Source: ISO 10303-41

Reference path: product <-

```
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac instrument characteristics'}
representation.items[i] ->
representation_item =>
{(representation_item.name = 'low range')
(representation_item.name = 'high range')
(representation_item.name = 'low alarm')
(representation_item.name = 'high alarm')}
measure_representation_item <=
```

```

measure_with_unit
measure_with_unit.unit_component

```

5.1.6.27.2 low_range

AIM element: measure_with_unit.value_component

Source: ISO 10303-41

```

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac instrument characteristics'}
representation.items[i] ->
{representation_item
representation_item.name = 'low range'}
representation_item =>
measure_representation_item <=
measure_with_unit
measure_with_unit.value_component

```

5.1.6.27.3 high_range

AIM element: measure_with_unit.value_component

Source: ISO 10303-41

```

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation

```

ISO 10303-227:2005(E)

```
{representation.name = 'hvac instrument characteristics'}
representation.items[i] ->
{representation_item
representation_item.name = 'high range'}
representation_item =>
measure_representation_item <=
measure_with_unit
measure_with_unit.value_component
```

5.1.6.27.4 type

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac instrument characteristics'}
representation.items[i] ->
{representation_item
representation_item.name = 'type'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

5.1.6.27.5 parameter_measured

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition

```

characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac instrument characteristics'}
representation.items[i] ->
{representation_item
representation_item.name = 'parameter measured'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

```

5.1.6.27.6 low_alarm

AIM element: measure_with_unit.value_component

Source: ISO 10303-41

Reference path: product <-

```

product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac instrument characteristics'}
representation.items[i] ->
{representation_item
representation_item.name = 'low alarm'}
representation_item =>
measure_representation_item <=
measure_with_unit
measure_with_unit.value_component

```

5.1.6.27.7 high_alarm

AIM element: measure_with_unit.value_component

Source: ISO 10303-41

ISO 10303-227:2005(E)

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac instrument characteristics'}
representation.items[i] ->
{representation_item
representation_item.name = 'high alarm'}
representation_item =>
measure_representation_item <=
measure_with_unit
measure_with_unit.value_component

5.1.6.27.8 nameplate_inscription

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac instrument characteristics'}
representation.items[i] ->
{representation_item
representation_item.name = 'nameplate inscription'}

```

representation_item =>
descriptive_representation_item
descriptive_representation_item.description

```

5.1.6.27.9 divisions

```

AIM element: descriptive_representation_item.description
Source: ISO 10303-45
Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac instrument characteristics'}
representation.items[i] ->
{representation_item
representation_item.name = 'divisions'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

```

5.1.6.27.10 hvac_instrument to hvac_flow_control_device

```

AIM element: PATH
Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition <-
product_definition_relationship.relater_product_definition
product_definition_relationship
{product_definition_relationship.name = 'data provision'}
product_definition_relationship.related_product_definition ->
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product

```

ISO 10303-227:2005(E)

5.1.6.28 Hvac_intermediate_reinforcement

AIM element: hvac_component_definition
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: hvac_component_definition <=
product_definition
{hvac_component_definition
classification_item = hvac_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_fitting_class]
[group
group.name = 'hvac intermediate reinforcement']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'hvac reinforcement']
[product
product.frame_of_reference[i] ->


```

product_context <=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.6.28.1 distance_along_centreline_from_connector

```

AIM element: [measure_with_unit.value_component]
             [measure_with_unit.unit_component]
Source:      ISO 10303-41
Rules:       subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
                product_definition
                characterized_product_definition = product_definition
                characterized_product_definition
                characterized_definition = characterized_product_definition
                characterized_definition <-
                property_definition.definition
                property_definition =>
                product_definition_shape <-
                shape_aspect.of_shape
                [{shape_aspect =>
                hvac_connector}
                shape_aspect <-
                shape_aspect_relationship.relating_shape_aspect]
                [{shape_aspect
                shape_aspect.name = 'hvac intermediate reinforcement position'}
                shape_aspect <-
                shape_aspect_relationship.related_shape_aspect]
                shape_aspect_relationship =>
                dimensional_location
                dimensional_characteristic = dimensional_location
                dimensional_characteristic <-
                dimensional_characteristic_representation.dimensional
                dimensional_characteristic_representation
                dimensional_characteristic_representation.representation ->
                shape_dimension_representation <=
                shape_representation property_definition
                represented_definition = property_definition
                represented_definition <-
                property_definition_representation.definition
                property_definition_representation
                property_definition_representation.used_representation ->
                {representation
                representation.name = 'hvac reinforcement dimensional shape'}
                representation
                representation.items[i] ->
                {representation_item
                representation_item.name = 'distance along centreline from connector'}
                representation_item =>

```

ISO 10303-227:2005(E)

```
measure_representation_item <=  
{ measure_with_unit =>  
length_measure_with_unit}  
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.6.29 Hvac_joint_reinforcement

AIM element: hvac_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: hvac_component_definition <=
product_definition
{ hvac_component_definition
classification_item = hvac_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'hvac joint reinforcement'}
{ product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->

```

group)
group.name = 'hvac reinforcement']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.6.30 Hvac_offset_centred

AIM element: hvac_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: hvac_component_definition <=
product_definition
{hvac_component_definition
classification_item = hvac_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_fitting_class]
[group
group.name = 'hvac offset centred']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-

ISO 10303-227:2005(E)

```
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'hvac fitting']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]
```

5.1.6.30.1 angle

```
AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac offset centred dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'angle'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
```

```

plane_angle_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.30.2 offset

```

AIM element: [measure_with_unit.value_component]
              [measure_with_unit.unit_component]
Source:      ISO 10303-41
Rules:       subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
                product_definition
                characterized_product_definition = product_definition
                characterized_product_definition
                characterized_definition = characterized_product_definition
                characterized_definition <-
                property_definition.definition
                property_definition =>
                product_definition_shape <-
                shape_aspect.of_shape
                [shape_aspect <-
                shape_aspect_relationship.relating_shape_aspect]
                [shape_aspect <-
                shape_aspect_relationship.related_shape_aspect]
                shape_aspect_relationship =>
                dimensional_location
                dimensional_characteristic = dimensional_location
                dimensional_characteristic <-
                dimensional_characteristic_representation.dimension
                dimensional_characteristic_representation
                dimensional_characteristic_representation.representation ->
                shape_dimension_representation <=
                shape_representation <=
                {representation
                representation.name = 'hvac offset centred dimensional shape'}
                representation
                representation.items[i] ->
                {representation_item
                representation_item.name = 'offset'}
                representation_item =>
                measure_representation_item <=
                {measure_with_unit =>
                length_measure_with_unit}
                measure_with_unit
                [measure_with_unit.value_component]
                [measure_with_unit.unit_component]

```

ISO 10303-227:2005(E)

5.1.6.30.3 length

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac offset centred dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.6.30.4 throat_radius

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation

```

Reference path: hvac_component_definition <=
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition =>
  product_definition_shape <-
  shape_aspect.of_shape
  [shape_aspect <-
  shape_aspect_relationship.relating_shape_aspect]
  [shape_aspect <-
  shape_aspect_relationship.related_shape_aspect]
  shape_aspect_relationship =>
  dimensional_location
  dimensional_characteristic = dimensional_location
  dimensional_characteristic <-
  dimensional_characteristic_representation.dimension
  dimensional_characteristic_representation
  dimensional_characteristic_representation.representation ->
  shape_dimension_representation <=
  shape_representation <=
  {representation
  representation.name = 'hvac offset centred dimensional shape'}
  representation
  representation.items[i] ->
  {representation_item
  representation_item.name = 'throat radius'}
  representation_item =>
  measure_representation_item <=
  {measure_with_unit =>
  length_measure_with_unit}
  measure_with_unit
  [measure_with_unit.value_component]
  [measure_with_unit.unit_component]

```

5.1.6.30.5 heel_radius

```

AIM element: [measure_with_unit.value_component]
             [measure_with_unit.unit_component]
Source:      ISO 10303-41
Rules:       subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-

```

ISO 10303-227:2005(E)

```
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimensional
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac offset centred dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'heel radius'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.30.6 end_1_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
hvac_connector
```


5.1.6.30.7 end_2_connector

AIM element: hvac_connector

Source: ISO 10303-227

```

Reference path: hvac_component_definition <=
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition =>
  product_definition_shape <-
  shape_aspect.of_shape
  {shape_aspect
  shape_aspect.description = 'end 2'}
  shape_aspect =>
  hvac_connector

```

5.1.6.30.8 hvac_offset_centred to splitter

AIM element: PATH

```

Reference path: hvac_component_definition <=
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition =>
  product_definition_shape <-
  shape_aspect.of_shape
  shape_aspect
  {shape_aspect.description = 'splitter'}

```

5.1.6.31 Hvac_offset_ogee_centred

AIM element: hvac_component_definition

Source: ISO 10303-227

```

Rules: dependent_instantiable_product_context
  product_context_discipline_type_constraint
  value_for_application_context

```

```

Reference path: hvac_component_definition <=
  product_definition
  {hvac_component_definition
  classification_item = hvac_component_definition
  classification_item <-
  applied_classification_assignment.items[i]
  applied_classification_assignment <=
  {classification_assignment
  classification_assignment.role ->

```

ISO 10303-227:2005(E)

```
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_fitting_class]
[group
group.name = 'hvac offset ogee centred']]
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'hvac fitting']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]}
```

5.1.6.31.1 angle

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition

```

property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac offset ogee centred dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'angle'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
plane_angle_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.31.2 offset

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-

```

ISO 10303-227:2005(E)

```
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac offset ogee centred dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'offset'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.31.3 length

```
AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
```

```

dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac offset ogee centred dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.31.4 throat_radius

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac offset ogee centred dimensional shape'}

```

ISO 10303-227:2005(E)

```
representation
representation.items[i] ->
{representation_item
representation_item.name = 'throat radius'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.31.5 heel_radius

```
AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac offset ogee centred dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'heel radius'}
representation_item =>
measure_representation_item <=
```

```

{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.31.6 end_1_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
hvac_connector

```

5.1.6.31.7 end_2_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
hvac_connector

```

5.1.6.32 Hvac_plenum

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

ISO 10303-227:2005(E)

```
Reference path: {[product
  classification_item = product
  classification_item <-
  applied_classification_assignment.items[i]
  applied_classification_assignment <=
  {classification_assignment
  classification_assignment.role ->
  classification_role
  classification_role = 'hvac component type classification'}
  classification_assignment
  classification_assignment.assigned_class ->
  [group
  group.name = 'hvac plenum']
  [group <-
  group_relationship.related_group
  {group_relationship
  group_relationship.name = 'usage classification'}
  group_relationship
  group_relationship.relater_group ->
  group
  group.name = 'hvac component']]
  [product
  product.frame_of_reference[i] ->
  product_context <=
  application_context_element
  application_context_element.name = 'plant item']}]}
```

5.1.6.32.1 hvac_plenum to hvac_connector

AIM element: PATH

```
Reference path: product <-
  product_definition_formation.of_product
  product_definition_formation
  product_definition_formation.definition->
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition =>
  product_definition_shape <-
  shape_aspect.of_shape
  shape_aspect =>
  hvac_connector
```

5.1.6.33 Hvac_reinforcement

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group
group.name = 'hvac reinforcement']
[group <-
group_relationship.related_group
{group_relationship
group_relationship.name = 'usage classification'}
group_relationship
group_relationship.relating_group ->
group
group.name = 'hvac component'}]
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]}

5.1.6.33.1 reference_connector

AIM element: hvac_connector
Source: ISO 10303-227
Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition_formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'reference connector'}

ISO 10303-227:2005(E)

shape_aspect =>
hvac_connector

5.1.6.33.2 hvac_reinforcement_size

AIM element: descriptive_representation_item.description
Source: ISO 10303-45
Rules: subtype_mandatory_shape_representation
Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac reinforcement dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'size'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

5.1.6.33.3 hvac_reinforcement_to_hvac_ducting

AIM element: PATH
Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-

```

product_definition.formation
product_definition <-
product_definition_relationship.related_product_definition
{product_definition_relationship
product_definition_relationship.name = 'hvac reinforcing'}
product_definition_relationship.relating_product_definition ->
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
{product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac component type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'hvac ducting'}
product

```

5.1.6.33.4 hvac_reinforcement to hvac_fitting

AIM element: PATH

Reference path: product <-

```

product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition <-
product_definition_relationship.related_product_definition
{product_definition_relationship
product_definition_relationship.name = 'hvac reinforcing'}
product_definition_relationship.relating_product_definition ->
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
{product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role

```

ISO 10303-227:2005(E)

```
classification_role = 'hvac component type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'hvac fitting'}
product
```

5.1.6.34 Hvac_single_wire_support

AIM element: hvac_support_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: hvac_support_definition <=
product_definition
{hvac_support_definition
classification_item = hvac_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_support_class]
[group
group.name = 'hvac single wire support']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group

```

group_relationship
group_relationship.relatng_group ->
group)
group.name = 'hvac support']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.6.34.1 upper_attach_loc

```

AIM element: cartesian_point
Source: ISO 10303-42
Rules: subtype_mandatory_shape_representation
Reference path: hvac_support_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'attachment point'}
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'hvac single wire support attachment shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'upper attach loc'}
representation_item =>
geometric_representation_item =>
point =>
cartesian_point

```

5.1.6.34.2 duct_attach_loc

```

AIM element: cartesian_point
Source: ISO 10303-42
Rules: subtype_mandatory_shape_representation

```

ISO 10303-227:2005(E)

```
Reference path: hvac_support_definition <=
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition =>
  product_definition_shape <-
  shape_aspect.of_shape
  { shape_aspect
  shape_aspect.description = 'attachment point' }
  shape_aspect <-
  shape_aspect_relationship.related_shape_aspect
  shape_aspect_relationship
  shape_aspect_relationship.relying_shape_aspect ->
  { shape_aspect
  shape_aspect.of_shape ->
  product_definition_shape <=
  property_definition
  property_definition.definition ->
  characterized_definition
  characterized_definition = characterized_product_definition
  characterized_product_definition
  characterized_product_definition = product_definition
  product_definition
  product_definition.formation ->
  product_definition_formation
  product_definition_formation.of_product ->
  product
  classification_item = product
  classification_item <-
  applied_classification_assignment.items[i]
  applied_classification_assignment <=
  { classification_assignment
  classification_assignment.role ->
  classification_role
  classification_role = 'hvac component type classification' }
  classification_assignment
  classification_assignment.assigned_class ->
  group
  group.name = 'hvac ducting' }
  shape_aspect
  represented_definition = shape_aspect
  represented_definition <-
  property_definition_representation.definition
  property_definition_representation
  property_definition_representation.used_representation ->
```

```

{representation
representation.name = 'hvac single wire support attachment shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'duct attach loc'}
representation_item =>
geometric_representation_item =>
point =>
cartesian_point

```

5.1.6.34.3 single_wire_hanger_size

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_support_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
{property_definition =>
product_definition_shape}
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'hvac single wire support dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'single wire hanger size'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.35 Hvac_support

```

AIM element: product
Source: ISO 10303-41

```

ISO 10303-227:2005(E)

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group
group.name = 'hvac support']
[group
group_relationship.related_group
group_relationship
{group_relationship.name = 'usage classification'}
group_relationship.relating_group ->
group
group.name = 'support component']]
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]}

5.1.6.36 Hvac_takeoff

AIM element: hvac_component_definition
Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: hvac_component_definition <=
product_definition
{hvac_component_definition
classification_item = hvac_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->


```

[group =>
hvac_fitting_class]
[group
group.name = 'hvac takeoff']]
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'hvac fitting']}
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.6.36.1 end_1_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}

```

ISO 10303-227:2005(E)

shape_aspect =>
hvac_connector

5.1.6.36.2 end_2_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 2' }
shape_aspect =>
hvac_connector

5.1.6.36.3 end_3_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end ' }
shape_aspect =>
hvac_connector

5.1.6.36.4 centre_to_end_1_length

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition

```

characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac takeoff dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre to end 1 length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.36.5 centre_to_end_2_length

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape

```

ISO 10303-227:2005(E)

```
[shape_aspect <-
shape_aspect_relationship.relater_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac takeoff dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre to end 2 length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.36.6 centre_to_end_3_length

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relater_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location

```

dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac takeoff dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre to end 3 length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.36.7 takeoff_angle

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=

```

ISO 10303-227:2005(E)

```
shape_representation <=  
{representation  
representation.name = 'hvac takeoff dimensional shape'}  
representation  
representation.items[i] ->  
{representation_item  
representation_item.name = 'takeoff angle'}  
representation_item =>  
measure_representation_item <=  
{measure_with_unit =>  
plane_angle_measure_with_unit}  
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.6.37 Hvac_transition

AIM element: hvac_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: hvac_component_definition <=
product_definition
{hvac_component_definition
classification_item = hvac_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_fitting_class]
[group
group.name = 'hvac transition']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment

```

classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'hvac fitting']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.6.37.1 offset_x

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac transition dimensional shape'}

```

ISO 10303-227:2005(E)

```
representation
representation.items[i] ->
{representation_item
representation_item.name = 'offset x'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.37.2 offset_y

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac transition dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'offset y'}
representation_item =>
measure_representation_item <=
```



```

{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.37.3 length

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac transition dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

ISO 10303-227:2005(E)

5.1.6.37.4 end_1_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
hvac_connector

5.1.6.37.5 end_2_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
hvac_connector

5.1.6.38 Hvac_transition_slanted

AIM element: hvac_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: hvac_component_definition <=
product_definition
{hvac_component_definition
classification_item = hvac_component_definition
classification_item <=

```

applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_fitting_class]
[group
group.name = 'hvac transition slanted']]
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'hvac fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'hvac fitting']}
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.6.38.1 slant_angle

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition

ISO 10303-227:2005(E)

```
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_shape]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac transition slanted dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'slant angle'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
plane_angle_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.38.2 length

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
```

```

shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hvac transition slanted dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.6.38.3 end_1_connector

AIM element: hvac_connector

Source: ISO 10303-227

Reference path: hvac_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
hvac_connector

```

5.1.6.38.4 end_2_connector

AIM element: hvac_connector

ISO 10303-227:2005(E)

Source: ISO 10303-227

Reference path: hvac_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 2' }
shape_aspect =>
hvac_connector

5.1.6.39 Hvac_trapeze_bar

AIM element: hvac_support_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: hvac_support_definition <=
product_definition
{ hvac_support_definition
classification_item = hvac_support_definition
classification_item <=
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification' }
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_support_class]
[group
group.name = 'hvac trapeze bar'] }
{ product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <=
applied_classification_assignment.items[i]
applied_classification_assignment <=

```

{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'hvac support']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.6.39.1 trapeze_bar_size

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: hvac_support_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
{property_definition =>
product_definition_shape}
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'hvac trapeze bar dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'trapeze bar size'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>

```

ISO 10303-227:2005(E)

```
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.39.2 hanger1_att_loc

```
AIM element: cartesian_point
Source:      ISO 10303-42
Rules:      subtype_mandatory_shape_representation
Reference path: hvac_support_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'attachment point 1'}
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'hvac trapeze bar attachment 1 shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'hanger 1 attach loc'}
representation_item =>
geometric_representation_item =>
point =>
cartesian_point
```

5.1.6.39.3 hanger1_att_type

```
AIM element: descriptive_representation_item.description
Source:      ISO 10303-45
Rules:      subtype_mandatory_shape_representation
Reference path: hvac_support_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
```



```

property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'attachment point 1' }
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{ representation
representation.name = 'hvac trapeze bar attachment1 shape' }
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'hanger1 attachment type' }
representation_item =>
descriptive_representation_item <=
descriptive_representation_item.description

```

5.1.6.39.4 hanger2_att_loc

```

AIM element: cartesian_point
Source: ISO 10303-42
Rules: subtype_mandatory_shape_representation
Reference path: hvac_support_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'attachment point 2' }
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{ representation
representation.name = 'hvac trapeze bar attachment2 shape' }
representation
representation.items[i] ->

```

ISO 10303-227:2005(E)

```
{representation_item
representation_item.name = 'hanger2 attach loc'}
representation_item =>
geometric_representation_item =>
point =>
cartesian_point
```

5.1.6.39.5 hanger2_att_type

```
AIM element: descriptive_representation_item.description
Source:      ISO 10303-45
Rules:      subtype_mandatory_shape_representation
Reference path: hvac_support_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'attachment point 2'}
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'hvac trapeze bar attachment2 shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'hanger2 attachment type'}
representation_item =>
descriptive_representation_item <=
descriptive_representation_item.description
```

5.1.6.39.6 hvac_trapeze_bar to hvac_trapeze_support

```
AIM element: PATH
Reference path: hvac_support_definition <=
{hvac_support_definition
classification_item = hvac_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
```

```

classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_support_class]
[group
group.name = 'hvac trapeze bar']]
product_definition <-
product_definition_relationship.related_product_definition
{product_definition_relationship =>
product_definition_usage =>
assembly_component_usage}
product_definition_relationship
product_definition_relationship.relying_product_definition =>
product_definition =>
hvac_support_definition <=
{hvac_support_definition
classification_item = hvac_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_support_class]
[group
group.name = 'hvac trapeze support']]

```

5.1.6.40 Hvac_trapeze_support

AIM element: hvac_support_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: hvac_support_definition <=
product_definition
{hvac_support_definition
classification_item = hvac_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment

ISO 10303-227:2005(E)

```
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
hvac_support_class]
[group
group.name = 'hvac trapeze support']}]
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'hvac support']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]}
```

5.1.6.41 Splitter

AIM element: shape_aspect
Source: ISO 10303-41
Reference path: shape_aspect
{shape_aspect.description = 'splitter'}

5.1.6.41.1 splitter_id

AIM element: shape_aspect.name
Source: ISO 10303-41

5.1.6.41.2 splitter_radius

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
 Source: ISO 10303-41
 Reference path: shape_aspect
 shape_definition = shape_aspect
 shape_definition
 characterized_definition = shape_definition
 characterized_definition <-
 property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <-
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 representation
 {representation.name = 'splitter dimensional representation'}
 representation.items[i] ->
 {representation_item
 representation_item.name = 'radius'}
 representation_item =>
 measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.6.41.3 splitter_radius_centre_offset

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
 Source: ISO 10303-41
 Reference path: shape_aspect
 shape_definition = shape_aspect
 shape_definition
 characterized_definition = shape_definition
 characterized_definition <-
 property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <-
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 representation
 {representation.name = 'splitter dimensional representation'}
 representation.items[i] ->

ISO 10303-227:2005(E)

```
{representation_item
representation_item.name = 'radius centre offset'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.6.41.4 straight_portion_length

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'splitter dimensional representation'}
representation.items[i] ->
{representation_item
representation_item.name = 'straight portion length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.7 hvac_system_functional_characterization UoF

5.1.7.1Hvac_branch_connection

AIM element: hvac_branch_connection

Source: ISO 10303-227

Reference path: hvac_branch_connection <=
shape_aspect_relationship
{shape_aspect_relationship
[shape_aspect_relationship.description = 'branch location']}

```

[shape_aspect_relationship.relating_shape_aspect ->
shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition =>
hvac_section_definition]
[shape_aspect_relationship.related_shape_aspect ->
shape_aspect =>
hvac_section_termination]]}

```

5.1.7.1.1 branch_sequence_id

AIM element: shape_aspect_relationship.name

Source: ISO 10303-41

Reference path: hvac_branch_connection <=

```

{shape_aspect_relationship
shape_aspect_relationship.relating_shape_aspect ->
shape_aspect
shape_aspect.of_shape ->
product_definition_shape <-
[shape_aspect.of_shape
shape_aspect
shape_aspect.description = 'termination 1']
[shape_aspect.of_shape
shape_aspect
shape_aspect.description = 'termination 2']}
shape_aspect_relationship
shape_aspect_relationship.name

```

5.1.7.1.2 hvac_branch_connection to changed_hvac_branch_connection

AIM element: IDENTICAL MAPPING

5.1.7.2 Hvac_plant_item_branch_connection

AIM element: hvac_plant_item_branch_connection

Source: ISO 10303-227

Reference path: hvac_plant_item_branch_connection <=

```

shape_aspect_relationship
{shape_aspect_relationship
[shape_aspect_relationship.relating_shape_aspect ->
shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition

```

ISO 10303-227:2005(E)

```
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition =>
hvac_section_definition]
[shape_aspect_relationship.related_shape_aspect ->
shape_aspect =>
plant_item_connector]}
```

5.1.7.2.1 branch_sequence_id

AIM element: shape_aspect_relationship.name

Source: ISO 10303-41

Reference path: hvac_plant_item_branch_connection <=
{ shape_aspect_relationship
shape_aspect_relationship.relating_shape_aspect ->
shape_aspect
shape_aspect.of_shape ->
product_definition_shape <-
[shape_aspect.of_shape
shape_aspect
shape_aspect.description = 'termination 1']
[shape_aspect.of_shape
shape_aspect
shape_aspect.description = 'termination 2']}
shape_aspect_relationship
shape_aspect_relationship.name

5.1.7.2.2 hvac_plant_item_branch_connection to changed_hvac_plant_item_branch_connection

AIM element: IDENTICAL MAPPING

5.1.7.3 Hvac_plant_item_connection

AIM element: hvac_plant_item_connection

Source: ISO 10303-227

Reference path: hvac_plant_item_connection <=
shape_aspect_relationship
{ shape_aspect_relationship
[shape_aspect_relationship.relating_shape_aspect ->
shape_aspect =>
hvac_section_termination]
[shape_aspect_relationship.related_shape_aspect ->
shape_aspect =>
plant_item_connector]}

5.1.7.4 Hvac_plant_item_termination

AIM element: hvac_section_termination

Source: ISO 10303-227

Reference path: hvac_section_termination <=
 shape_aspect

5.1.7.4.1 hvac_plant_item_termination to hvac_plant_item_connection

AIM element: PATH

Reference path: hvac_section_termination <=
 shape_aspect <-
 shape_aspect_relationship.relatng_shape_aspect->
 shape_aspect =>
 hvac_section_termination

5.1.7.5 Hvac_run

AIM element: hvac_run_definition

Source: ISO 10303-227

Reference path: hvac_run_definition <=
 product_definition
 {product_definition
 product_definition.frame_of_reference ->
 product_definition_context <=
 application_context_element
 application_context_element.name = 'functional definition'}

5.1.7.5.1 hvac_run_id

AIM element: product_definition.id

Source: ISO 10303-41

Reference path: hvac_run_definition <=
 product_definition
 product_definition.id

5.1.7.5.2 hvac_run to changed_hvac_run

AIM element: IDENTICAL MAPPING

5.1.7.5.3 hvac_run to hvac_section

AIM element: PATH

Reference path: hvac_run_definition <=
 product_definition <-
 product_definition_relationship.relatng_definition
 product_definition_relationship
 product_definition_relationship.related_definition ->
 product_definition =>
 hvac_section_definition

5.1.7.6 Hvac_run_termination

AIM element: hvac_section_termination

Source: ISO 10303-227

Reference path: hvac_section_termination <=
 shape_aspect
 {[shape_aspect

ISO 10303-227:2005(E)

```
shape_aspect.name = 'hvac run termination']
[shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition_relationship
product_definition_relationship
[product_definition_relationship.related_product_definition ->
{product_definition =>
hvac_section_definition}
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional definition']
[product_definition_relationship.relatng_product_definition ->
{product_definition =>
hvac_run_definition}
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional definition']]}
```

5.1.7.6.1 location

AIM element: cartesian_point

Source: ISO 10303-42

Reference path: hvac_section_termination <=

```
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'hvac section termination position'}
representation
representation.items[i] ->
representation_item =>
geometric_representation_item =>
point =>
cartesian_point
```

5.1.7.6.2 start_or_end

AIM element: descriptive_representation_item.description
 Source: ISO 10303-45
 Reference path: hvac_section_termination <=
 shape_aspect
 represented_definition = shape_aspect
 represented_definition <=
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 {representation
 representation.name = 'hvac section termination position'}
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'start or end'}
 representation_item =>
 descriptive_representation_item
 descriptive_representation_item.description
 {(descriptive_representation_item.description = 'start')
 (descriptive_representation_item.description = 'end')}

5.1.7.6.3 hvac_run_termination to hvac_run

AIM element: PATH
 Reference path: hvac_section_termination <=
 shape_aspect
 shape_aspect.of_shape ->
 product_definition_shape <=
 property_definition
 property_definition.definition ->
 characterized_definition
 characterized_definition = characterized_product_definition
 characterized_product_definition
 characterized_product_definition = product_definition_relationship
 product_definition_relationship
 product_definition_relationship.relater_product_definition ->
 {product_definition
 product_definition.frame_of_reference ->
 product_definition_context <=
 application_context_element
 application_context_element.name = 'functional definition'}
 product_definition =>
 hvac_run_definition

5.1.7.7 Hvac_section

AIM element: hvac_section_definition
 Source: ISO 10303-227

ISO 10303-227:2005(E)

Reference path: hvac_section_definition <=
product_definition
{product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional definition'}

5.1.7.7.1 pressure_drop

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: hvac_section_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac section characteristics'}
(representation.items[i] ->
{representation_item
(representation_item.name = 'pressure drop')
(representation_item.name = 'maximum pressure drop')
(representation_item.name = 'minimum pressure drop'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum pressure drop'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum pressure drop'}}]
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.7.7.2 flow_rate

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

```

Reference path: hvac_section_definition <=
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition <-
  represented_definition = property_definition
  represented_definition <-
  property_definition_representation.definition
  property_definition_representation
  property_definition_representation.used_representation ->
  representation
  {representation.name = 'hvac section characteristics'}
  (representation.items[i] ->
  {representation_item
  (representation_item.name = 'flow rate')
  (representation_item.name = 'maximum flow rate')
  (representation_item.name = 'minimum flow rate'}})
  ([representation.items[i] ->
  {representation_item
  representation_item.name = 'maximum flow rate'}}]
  [representation.items[i] ->
  {representation_item
  representation_item.name = 'minimum flow rate'}}])
  representation_item =>
  measure_representation_item <=
  measure_with_unit
  [measure_with_unit.value_component]
  [measure_with_unit.unit_component]

```

5.1.7.7.3 velocity

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

```

Reference path: hvac_section_definition <=
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition <-
  represented_definition = property_definition
  represented_definition <-
  property_definition_representation.definition
  property_definition_representation

```

ISO 10303-227:2005(E)

```
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac section characteristics'}
(representation.items[i] ->
{representation_item
(representation_item.name = 'velocity')
(representation_item.name = 'maximum velocity')
(representation_item.name = 'minimum velocity')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum velocity'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum velocity'}}])
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.7.7.4 equivalent_diameter

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: hvac_section_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac section characteristics'}
(representation.items[i] ->
{representation_item
(representation_item.name = 'equivalent diameter')
(representation_item.name = 'maximum equivalent diameter')
(representation_item.name = 'minimum equivalent diameter')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum equivalent diameter'}}]
[representation.items[i] ->

```

{representation_item
representation_item.name = 'minimum equivalent diameter'}})
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.7.7.5 equivalent_length

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: hvac_section_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac section characteristics'}
(representation.items[i] ->
{representation_item
(representation_item.name = 'equivalent length')
(representation_item.name = 'maximum equivalent length')
(representation_item.name = 'minimum equivalent length'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum equivalent length'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum equivalent length'}}]
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.7.7.6 friction_factor

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

ISO 10303-227:2005(E)

Reference path: hvac_section_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition <=
represented_definition = property_definition
represented_definition <=
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac section characteristics'}
(representation.items[i] ->
{representation_item
(representation_item.name = 'friction factor')
(representation_item.name = 'maximum friction factor')
(representation_item.name = 'minimum friction factor')}}
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum friction factor'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum friction factor'}}])
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.7.7.7 hvac_section_id

AIM element: hvac_section_definition.id
Source: ISO 10303-41
Reference path: hvac_section_definition <=
product_definition
product_definition.id

5.1.7.7.8 roughness

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: hvac_section_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition


```

characterized_definition <-
property_definition.definition
property_definition <-
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'hvac section characteristics'}
(representation.items[i] ->
{representation_item
(representation_item.name = 'roughness')
(representation_item.name = 'maximum roughness')
(representation_item.name = 'minimum roughness')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum roughness'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum roughness'}])
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.7.7.9 hvac_section to changed_hvac_section

AIM element: IDENTICAL MAPPING

5.1.7.7.10 hvac_section to hvac_branch_connection

AIM element: PATH

```

Reference path: hvac_section_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect
shape_aspect_relationship =>
hvac_branch_connection

```

ISO 10303-227:2005(E)

5.1.7.7.11 hvac_section to hvac_plant_item_branch_connection

AIM element: PATH

Reference path: hvac_section_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
shape_aspect <=
shape_aspect_relationship.relatng_shape_aspect
shape_aspect_relationship =>
hvac_plant_item_branch_connection

5.1.7.7.12 hvac_section to hvac_section_insulation

AIM element: PATH

Reference path: hvac_section_definition <=
product_definition <=
product_definition_relationship.relatng_product_definition
product_definition_relationship
{product_definition_relationship
product_definition_relationship.name = 'hvac section insulation'}

5.1.7.7.13 hvac_section to stream_design_case

AIM element: PATH

Reference path: hvac_section_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
stream_design_case

5.1.7.7.14 hvac_section to hvac_section_termination

AIM element: PATH

Reference path: hvac_section_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>

```

product_definition_shape <-
shape_aspect.of_shape
shape_aspect <=
hvac_section_termination

```

5.1.7.8 Hvac_section_branch_termination

```

AIM element: hvac_section_termination
Source:      ISO 10303-227
Reference path: hvac_section_termination <=
              shape_aspect

```

5.1.7.8.1 hvac_section_branch_termination to hvac_branch_connection

```

AIM element:  PATH
Reference path: hvac_section_termination <=
              shape_aspect <-
              shape_aspect_relationship.related_shape_aspect
              shape_aspect_relationship =>
              hvac_branch_connection

```

5.1.7.9 Hvac_section_component_assignment

```

AIM element: product_definition_relationship
Source:      ISO 10303-41

```

5.1.7.9.1 hvac_section_component_assignment to hvac_section

```

AIM element:  PATH
Reference path: product_definition_relationship
              {product_definition_relationship
              product_definition_relationship.name = 'hvac section component assignment'}
              product_definition_relationship.relateing_product_definition ->
              product_definition =>
              hvac_section_definition

```

5.1.7.9.2 hvac_section_component_assignment to hvac_component

```

AIM element:  PATH
Reference path: product_definition_relationship
              {product_definition_relationship
              product_definition_relationship.name = 'hvac section component assignment'}
              product_definition_relationship.related_product_definition ->
              product_definition
              product_definition.formation ->
              product_definition_formation
              product_definition_formation.of_product ->
              {[product
              classification_item = product
              classification_item <-
              applied_classification_assignment.items[i]
              applied_classification_assignment <=
              {classification_assignment

```

ISO 10303-227:2005(E)

```
classification_assignment.role ->
classification_role
classification_role = 'hvac component type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'hvac component']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}]
product
```

5.1.7.10 Hvac_section_insulation

AIM element: product_definition_relationship

Source: ISO 10303-41

Reference path: {product_definition_relationship
[product_definition_relationship.name = 'hvac section insulation']
[product_definition_relationship.relating_product_definition ->
product_definition =>
hvac_section_definition]}

5.1.7.10.1 insulation_thickness

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: product_definition_relationship
characterized_product_definition = product_definition_relationship
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
{property_definition =>
product_definition_shape}
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
{property_definition_representation =>
shape_definition_representation}
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'hvac section insulation characteristics'}
representation
(representation.items[i] ->
{representation_item

```
(representation_item.name = 'thickness')
(representation_item.name = 'maximum thickness')
(representation_item.name = 'minimum thickness'))
([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum thickness'}}]
[representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum thickness'}}])
representation_item =>
measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.7.10.2 insulation_type

AIM element: product.name
Source: ISO 10303-41
Reference path: product_definition_relationship
product_definition_relationship.related_product_definition ->
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.name

5.1.7.10.3 insulation_description

AIM element: product_definition_relationship.description
Source: ISO 10303-41

5.1.7.10.4 insulation_specification

AIM element: document
Source: ISO 10303-41
Reference path: product_definition_relationship
document_item = product_definition_relationship
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
{document
document.kind ->
document_type
document_type.product_data_type = 'hvac insulation specification'}
document

ISO 10303-227:2005(E)

5.1.7.10.5 hvac_section_insulation to changed_hvac_section_insulation

AIM element: IDENTICAL MAPPING

5.1.7.11Hvac_section_termination

AIM element: hvac_section_termination

Source: ISO 10303-227

Reference path: hvac_section_termination <=
shape_aspect

5.1.7.11.1 flow_direction

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: hvac_section_definition <=
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <=
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <=
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'flow direction'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
{(descriptive_representation_item.description = 'both')
(descriptive_representation_item.description = 'in')
(descriptive_representation_item.description = 'out')
(descriptive_representation_item.description = 'not specified')}

5.1.7.12 Hvac_section_to_section_connection

AIM element: hvac_termination_connection

Source: ISO 10303-227

Reference path: hvac_termination_connection <=
shape_aspect_relationship

5.1.7.12.1 section_to_section_connection_id

AIM element: shape_aspect_relationship.name

Source: ISO 10303-41

Reference path: hvac_termination_connection <=
 shape_aspect_relationship
 shape_aspect_relationship.name

5.1.7.12.2 hvac_section_to_section_connection to changed_hvac_section_to_section_connection

AIM element: IDENTICAL MAPPING

5.1.7.12.3 hvac_section_to_section_connection to hvac_section_to_section_termination

AIM element: PATH

Reference path: hvac_termination_connection <=
 shape_aspect_relationship
 [shape_aspect_relationship.relate_shape_aspect ->
 shape_aspect =>
 hvac_termination_connection]
 [shape_aspect_relationship.related_shape_aspect ->
 shape_aspect =>
 hvac_termination_connection]

5.1.7.13 Hvac_section_to_section_termination

AIM element: hvac_section_termination

Source: ISO 10303-227

Reference path: hvac_section_termination <=
 shape_aspect

5.1.7.14 Hvac_specification

AIM element: document

Source: ISO 10303-41

Reference path: {document
 document.kind ->
 document_type
 document_type.product_data_type = 'hvac specification'}

5.1.7.14.1 hvac_specification_id

AIM element: document.id

Source: ISO 10303-41

5.1.7.14.2 name

AIM element: document.name

Source: ISO 10303-41

5.1.7.14.3 owner

AIM element: (organization.name)
 ([person.first_name]
 [person.last_name])

Source: ISO 10303-41

Reference path: document
 (plant_spatial_configuration_organization_item = document
 plant_spatial_configuration_organization_item <-

ISO 10303-227:2005(E)

```
plant_spatial_configuration_organization_assignment.items[i]
plant_spatial_configuration_organization_assignment <=
{organization_assignment
organization_assignment.role ->
organization_role
organization_role.name = 'owner'}
organization_assignment
organization_assignment.assigned_organization ->
organization
organization.name)
(plant_spatial_configuration_person_item = document
plant_spatial_configuration_person_item <-
plant_spatial_configuration_person_assignment.items[i]
plant_spatial_configuration_person_assignment <=
{person_assignment
person_assignment.role ->
person_role
person_role.name = 'owner'}
person_assignment
person_assignment.assigned_person ->
person
[person.first_name]
[person.last_name])
```

5.1.7.14.4 service_description

AIM element: document_usage_constraint

Source: ISO 10303-41

Reference path: document <-

```
document_usage_constraint.source
document_usage_constraint
{document_usage_constraint
document_usage_constraint.subject_element = 'service description'}
```

5.1.7.14.5 hvac_specification to changed_hvac_specification

AIM element: IDENTICAL MAPPING

5.1.7.14.6 hvac_specification to hvac_section

AIM element: PATH

Reference path: document <-

```
document_reference.assigned_document
document_reference =>
applied_document_reference
applied_document_reference.items[i] ->
document_item
document_item = plant_line_segment_definition
hvac_section_definition
```


5.1.8 hybrid_shape_representation UoF

5.1.8.1 B_rep_element

AIM element: manifold_solid_brep
Source: ISO 10303-42

5.1.8.2 Conic

AIM element: conic
Source: ISO 10303-42

5.1.8.3 Curve

AIM element: curve
Source: ISO 10303-42

5.1.8.4 Free_form_curve

AIM element: b_spline_curve
Source: ISO 10303-42

5.1.8.5 Line

AIM element: line
Source: ISO 10303-42

5.1.8.6 Point

AIM element: point
Source: ISO 10303-42

5.1.8.7 Polygon

AIM element: polyline
Source: ISO 10303-42

5.1.8.8 Surface

AIM element: surface
Source: ISO 10303-42

5.1.8.9 Vector

AIM element: vector
Source: ISO 10303-42

5.1.8.10 Wire_and_surface_element

AIM element: geometric_representation_item
Source: ISO 10303-42

5.1.9 mechanical_component_characterization UoF

5.1.9.1 mechanical_family_definition

AIM element: mechanical_component_class
Source: ISO 10303-227
Reference path: mechanical_component_class <=
[group]

ISO 10303-227:2005(E)

[characterized_object]

5.1.9.1.1 classification_description

AIM element: group_relationship.related_group

Source: ISO 10303-41

Reference path: mechanical_component_class <=
group
group_relationship.related_group

5.1.9.1.2 mechanical_family_definition to user_defined_attribute_value (as user_defined_parameter)

AIM element: PATH

Reference path: mechanical_component_class <=
[group]
[characterized_object]
characterized_definition = characterized_object
characterized_definition <=
property_definition.definition
property_definition <=
represented_definition = property_definition
represented_definition <=
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{(measure_representation_item <=)
(descriptive_representation_item <=)
representation_item <=
representation.items[i]
representation
representation.name = 'user defined parameter'}

5.1.9.2 Component_size_description

#1: The attributes are for the definition of a family of mechanical components.

#2: The attributes are for the individual mechanical component.

AIM element: #1: (shape_dimension_representation)

#2: (representation)

Source: ISO 10303-43, ISO 10303-47

Reference path: {(shape_dimension_representation <=
shape_representation <=
representation)
(representation)
document_item = representation
document_item <=
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->

```

document
document.kind ->
document_type
document_type.product_data_type = 'dimensional standard'
#1: ((shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'mechanical component dimensions'})
({representation
representation.name = 'mechanical component size'})
representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
(represented_definition
represented_definition = property_definition
{property_definition =>
product_definition_shape}
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition =>
mechanical_component_definition)
(represented_definition
represented_definition = shape_aspect
shape_aspect =>
plant_item_connector}))

#2: ({[representation
representation.name = 'mechanical component class size']
[representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
mechanical_component_class]})

```

5.1.9.2.1 diameter

#1: The attributes are for the definition of a family of mechanical components.

ISO 10303-227:2005(E)

#2: The attributes are for the individual mechanical component.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: #1: (shape_dimension_representation <=
shape_representation <=
representation)
#2: (representation)
representation.items[i] ->
{representation_item
(representation_item.name = 'diameter')
(representation_item.name = 'maximum diameter')
(representation_item.name = 'minimum diameter')}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.9.2.2 dimensional_standard

#1: The attributes are for the definition of a family of mechanical components.

#2: The attributes are for the individual mechanical component.

AIM element: document
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: #1: (shape_dimension_representation <=
shape_representation <=
representation)
#2: (representation)
document_item = representation
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document
{document.kind ->
document_type
document_type.product_data_type = 'dimensional standard'}

5.1.9.2.3 height

#1: The attributes are for the definition of a family of mechanical components.

#2: The attributes are for the individual mechanical component.

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
 Source: ISO 10303-41
 Reference path: #1: (shape_dimension_representation <=
 shape_representation <=
 representation)
 #2: (representation)
 representation.items[i] ->
 {representation_item
 (representation_item.name = 'height')
 (representation_item.name = 'maximum height')
 (representation_item.name = 'minimum height')}
 representation_item =>
 measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.9.2.4 machined_from_stock

#1: The attributes are for the definition of a family of mechanical components.
 #2: The attributes are for the individual mechanical component.

AIM element: [descriptive_representation_item.description]
 [descriptive_representation_item.description]
 Source: ISO 10303-45
 Reference path: #1: (shape_dimension_representation <=
 shape_representation <=
 representation)
 #2: (representation)
 representation.items[i] ->
 representation_item =>
 descriptive_representation_item
 descriptive_representation_item.description

5.1.9.2.5 outside_measurement

#1: The attributes are for the definition of a family of mechanical components.
 #2: The attributes are for the individual mechanical component.

AIM element: [descriptive_representation_item.description]
 [descriptive_representation_item.description]
 Source: ISO 10303-45
 Reference path: #1: (shape_dimension_representation <=
 shape_representation <=
 representation)

ISO 10303-227:2005(E)

```
#2: (representation)
representation.items[i] ->
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
```

5.1.9.2.6 overall_length

#1: The attributes are for the definition of a family of mechanical components.

#2: The attributes are for the individual mechanical component.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: #1: (shape_dimension_representation <=
shape_representation <=
representation)

```
#2: (representation)
representation.items[i] ->
{representation_item
(representation_item.name = 'overall length')
(representation_item.name = 'maximum overall length')
(representation_item.name = 'minimum overall length')}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.9.2.7 thickness

#1: The attributes are for the definition of a family of mechanical components.

#2: The attributes are for the individual mechanical component.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: #1: (shape_dimension_representation <=
shape_representation <=
representation)

```
#2: (representation)
representation.items[i] ->
{representation_item
(representation_item.name = 'thickness')
(representation_item.name = 'maximum thickness')}
```

```
(representation_item.name = 'minimum thickness')
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.9.2.8 width

#1: The attributes are for the definition of a family of mechanical components.

#2: The attributes are for the individual mechanical component.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: #1: (shape_dimension_representation <=
shape_representation <=
representation)
#2: (representation)
representation.items[i] ->
{representation_item
(representation_item.name = 'width')
(representation_item.name = 'maximum width')
(representation_item.name = 'minimum width')}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.9.2.9 component_size_description to user_defined_attribute_value (as user_defined_parameter)

AIM element: PATH

Reference path: #1: ((shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'mechanical component dimensions'})
({representation
representation.name = 'mechanical component size'})
representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
(represented_definition
represented_definition = property_definition

ISO 10303-227:2005(E)

```
{property_definition =>
product_definition_shape})
(represented_definition
represented_definition = shape_aspect
{shape_aspect =>
plant_item_connector}))
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{(measure_representation_item <=)
(descriptive_representation_item <=)
representation_item <-
representation.items[i]
representation
representation.name = 'user defined parameter'}})
#2: ({[representation
representation.name = 'mechanical component class size']
[representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
mechanical_component_class]}
(represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{(measure_representation_item <=)
(descriptive_representation_item <=)
representation_item <-
representation.items[i]
representation
representation.name = 'user defined parameter'}}))
```

5.1.9.3 Mechanical_component

#1: The attributes are for the individual mechanical component.

#2: The attributes are for the definition of a class of mechanical components.

AIM element: #1 (mechanical_component_definition)

#2 (mechanical_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: (mechanical_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item'})
(mechanical_component_class <=
[characterized_object]
[group])

5.1.9.3.1 standard_point

AIM element: cartesian_point
Source: ISO 10303-42

Reference path: mechanical_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'internal position'}
representation
representation.items [i] ->
{representation_item
representation_item.name = 'standard point'}
representation_item =>
geometric_representation_item =>
point =>
cartesian_point

5.1.9.3.2 mechanical_component to plant_item_connector

AIM element: PATH

Reference path: mechanical_component_definition <=
product_definition
characterized_product_definition = product_definition

ISO 10303-227:2005(E)

```
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition =>
product_definition_shape <-shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'ancillary'}
shape_aspect =>
plant_item_connector
```

5.1.9.3.3 mechanical_component to mechanical_family_definition (as defines)

AIM element: IDENTICAL MAPPING

5.1.10 mechanical_system_functional_characterization UoF

5.1.10.1 Arrangement_branch_connection

```
AIM element: arrangement_branch_connection
Source: ISO 10303-227
Reference path: arrangement_branch_connection <=
shape_aspect_relationship
{ shape_aspect_relationship
[shape_aspect_relationship.description = 'branch location']
[shape_aspect_relationship.relating_shape_aspect ->
shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition =>
plant_arrangement_segment_definition]
[shape_aspect_relationship.related_shape_aspect ->
shape_aspect =>
plant_arrangement_segment_termination]}}
```

5.1.10.1.1 branch_sequence_id

```
AIM element: shape_aspect_relationship.name
Source: ISO 10303-41
Reference path: arrangement_branch_connection <=
{ shape_aspect_relationship
shape_aspect_relationship.relating_shape_aspect ->
shape_aspect
shape_aspect.of_shape ->
product_definition_shape <-[
shape_aspect.of_shape
```

```

shape_aspect
shape_aspect.description = 'termination 1']
[shape_aspect.of_shape
shape_aspect
shape_aspect.description = 'termination 2']]
shape_aspect_relationship
shape_aspect_relationship.name

```

5.1.10.2 Arrangement_branch_termination

AIM element: plant_arrangement_segment_termination
Source: ISO 10303-227
Reference path: plant_arrangement_segment_termination <=
shape_aspect

5.1.10.2.1 arrangement_branch_termination to arrangement_branch_connection (as branches_to)

AIM element: PATH
Reference path: plant_arrangement_segment_termination <=
shape_aspect <-shape_aspect_relationship.related_shape_aspect
shape_aspect_relationship

5.1.10.3 Arrangement_mechanical_system_component_assignment

AIM element: product_definition_relationship
Source: ISO 10303-41
Reference path: {product_definition_relationship
[product_definition_relationship.name = 'realization']
[product_definition_relationship.relating_product_definition ->
{product_definition =>
plant_arrangement_segment_definition}
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional definition']
[product_definition_relationship.related_product_definition ->
{product_definition =>
mechanical_component_definition}
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
(application_context_element.name = 'functional occurrence')
(application_context_element.name = 'physical occurrence')]]}

5.1.10.4 Arrangement_plant_item_branch_connection

AIM element: arrangement_plant_item_branch_connection
Source: ISO 10303-227
Reference path: arrangement_plant_item_branch_connection <=
shape_aspect_relationship

ISO 10303-227:2005(E)

```
{ shape_aspect_relationship
[shape_aspect_relationship.relatng_shape_aspect ->
shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition =>
plant_arrangement_segment_definition]
[shape_aspect_relationship.related_shape_aspect ->
shape_aspect =>
plant_item_connector]}
```

5.1.10.4.1 branch_sequence_id

AIM element: shape_aspect_relationship.name

Source: ISO 10303-41

Reference path: arrangement_plant_item_branch_connection <=

```
{ shape_aspect_relationship
shape_aspect_relationship.relatng_shape_aspect ->
shape_aspect
shape_aspect.of_shape ->
product_definition_shape <-[
shape_aspect.of_shape
shape_aspect
shape_aspect.description = 'termination 1']
[shape_aspect.of_shape
shape_aspect
shape_aspect.description = 'termination 2']}]
shape_aspect_relationship
shape_aspect_relationship.name
```

5.1.10.5 Arrangement_plant_item_branch_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: plant_item_connector <=

```
shape_aspect
{ shape_aspect
[shape_aspect.description = 'arrangement plant item branch connector']
[shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
```

```

characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional occurrence']]

```

5.1.10.5.1 arrangement_plant_item_branch_connector to arrangement_plant_item_branch_connection (as is_connected_to)

AIM element: PATH

Reference path: plant_item_connector <=

```

shape_aspect <-shape_aspect_relationship.related_shape_aspect
shape_aspect_relationship =>
arrangement_plant_item_branch_connection

```

5.1.10.6 Arrangement_plant_item_connection

AIM element: arrangement_plant_item_connection

Source: ISO 10303-227

Reference path: arrangement_plant_item_connection <=

```

shape_aspect_relationship
{shape_aspect_relationship
[shape_aspect_relationship.relateing_shape_aspect ->
shape_aspect =>
plant_arrangement_segment_termination]
[shape_aspect_relationship.related_shape_aspect ->
{shape_aspect <=
plant_item_connector}
shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
(product_definition)
(product_definition =>
externally_defined_plant_item_definition)]}]

```

5.1.10.7 Arrangement_plant_item_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: plant_item_connector <=

```

shape_aspect
{shape_aspect
[shape_aspect.description = 'arrangement plant item connector']

```

ISO 10303-227:2005(E)

```
[shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional occurrence']
```

5.1.10.7.1 arrangement_plant_item_connector to arrangement_plant_item_connection (as is_connected_to)

AIM element: PATH

Reference path: plant_item_connector <=
shape_aspect <-shape_
aspect_relationship.related_shape_aspect
shape_aspect_relationship =>
arrangement_plant_item_connection

5.1.10.8 Arrangement_plant_item_termination

AIM element: plant_arrangement_segment_termination

Source: ISO 10303-227

Reference path: plant_arrangement_segment_termination <=
shape_aspect

5.1.10.8.1 arrangement_plant_item_termination to arrangement_plant_item_connection (as is_connected_to)

AIM element: PATH

Reference path: plant_arrangement_segment_termination <=
shape_aspect <-shape_aspect_relationship.relate_shape_aspect
shape_aspect_relationship =>
arrangement_plant_item_connection

5.1.10.9 Arrangement_to_arrangement_connection

AIM element: arrangement_termination_connection

Source: ISO 10303-227

Reference path: arrangement_termination_connection <=
shape_aspect_relationship

5.1.10.9.1 arrangement_to_arrangement_connection to arrangement_to_arrangement_termination (as connects)

AIM element: PATH

Reference path: arrangement_termination_connection <=
shape_aspect_relationship

```
[shape_aspect_relationship.relatng_shape_aspect ->
shape_aspect =>
(connection_node)
(plant_arrangement_segment_termination)]
[shape_aspect_relationship.related_shape_aspect ->
shape_aspect =>
plant_arrangement_segment_termination]
```

5.1.10.10 Arrangement_to_arrangement_termination

AIM element: plant_arrangement_segment_termination
Source: ISO 10303-227
Reference path: plant_arrangement_segment_termination <=
shape_aspect

5.1.10.11 Mechanical_arrangement_specification

AIM element: document
Source: ISO 10303-41
Reference path: {document
document.kind ->
document_type
document_type.product_data_type = 'mechanical specification'}

5.1.10.11.1 name

AIM element: document.name
Source: ISO 10303-41

5.1.10.11.2 owner

AIM element: (organization.name)
([person.first_name]
[person.last_name])
Source: ISO 10303-41
Reference path: document
(plant_spatial_configuration_organization_item = document
plant_spatial_configuration_organization_item <=
plant_spatial_configuration_organization_assignment.items[i]
plant_spatial_configuration_organization_assignment <=
{organization_assignment
organization_assignment.role ->
organization_role
organization_role.name = 'owner'}
organization_assignment
organization_assignment.assigned_organization ->
organization
organization.name)
(plant_spatial_configuration_person_item = document
plant_spatial_configuration_person_item <=
plant_spatial_configuration_person_assignment.items[i]
plant_spatial_configuration_person_assignment <=

ISO 10303-227:2005(E)

```
{person_assignment
person_assignment.role ->
person_role
person_role.name = 'owner'}
person_assignment
person_assignment.assigned_person ->
person
[person.first_name]
[person.last_name])
```

5.1.10.11.3 mechanical_arrangement_specification_id

AIM element: document.id

Source: ISO 10303-

41

5.1.10.11.4 service_description

AIM element: document_usage_constraint

Source: ISO 10303-41

Reference path: document <-document_usage_constraint.source
document_usage_constraint
{document_usage_constraint
document_usage_constraint.subject_element = 'service description'}

5.1.10.11.5 mechanical_arrangement_specification to mechanical_family_definition (as is_composed_of)

AIM element: PATH

Reference path: document <-document_reference.assigned_document
document_reference =>
applied_document_reference
applied_document_reference.items[i] ->
document_item
document_item = mechanical_component_class
mechanical_component_class

5.1.10.11.6 mechanical_arrangement_specification to mechanical_system_arrangement_segment (as specifies_components_for)

AIM element: PATH

Reference path: document <-
document_reference.assigned_document
document_reference =>
applied_document_reference
applied_document_reference.items[i] ->
document_item
document_item = plant_arrangement_segment_definition
plant_arrangement_segment_definition

5.1.10.12 Mechanical_system_arrangement

AIM element: plant_arrangement_definition

Source: ISO 10303-227

Reference path: plant_arrangement_definition <=
 product_definition_with_associated_documents
 {product_definition_with_associated_documents <=
 product_definition
 product_definition.frame_of_reference ->
 product_definition_context <=
 application_context_element
 application_context_element.name = 'functional definition'}

5.1.10.12.1 arrangement_number

AIM element: product_definition.description
 Source: ISO 10303-41
 Reference path: plant_arrangement_definition <=
 product_definition_with_associated_documents <=
 product_definition
 product_definition.description

5.1.10.12.2 mechanical_system arrangement to document

AIM element: PATH
 Reference path: plant_arrangement_definition <=
 product_definition_with_associated_documents
 product_definition_with_associated_documents.documentation_ids[i] ->
 document

5.1.10.12.3 mechanical_system arrangement to mechanical_system arrangement segment (as is - composed_of)

AIM element: PATH
 Reference path: plant_arrangement_definition <=
 product_definition_with_associated_documents <=
 product_definition <-product_definition_relationship.relatering_product_definition
 product_definition_relationship
 product_definition_relationship.related_product_definition ->
 product_definition =>
 plant_arrangement_segment_definition

5.1.10.12.4 mechanical_system arrangement to User_defined_attribute_value (as user_defined_parameter)

AIM element: PATH
 Reference path: plant_arrangement_definition <=
 product_definition_with_associated_documents <=
 product_definition <-
 characterized_product_definition = product_definition
 characterized_product_definition <-
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition <-
 represented_definition = property_definition

ISO 10303-227:2005(E)

```
represented_definition <-  
property_definition_representation.definition  
property_definition_representation  
property_definition_representation.used_representation ->  
{(measure_representation_item <=)  
(descriptive_representation_item <=)  
representation_item <-  
representation.items[i]  
representation  
representation.name = 'user defined parameter'}
```

5.1.10.13 Mechanical_system_arrangement_segment

AIM element: plant_arrangement_segment_definition

Source: ISO 10303-227

```
Reference path: plant_arrangement_segment_definition <=  
product_definition  
{product_definition  
product_definition.frame_of_reference ->  
product_definition_context <=  
application_context_element  
application_context_element.name = 'functional definition'}
```

5.1.10.13.1 lubrication_reference

AIM element: document_usage_constraint

Source: ISO 10303-41

```
Reference path: plant_arrangement_segment_definition  
document_item = plant_arrangement_segment_definition  
document_item <-applied_document_reference.items[i]  
applied_document_reference <=  
document_reference  
document_reference.assigned_document ->  
document <-document_usage_constraint.source  
document_usage_constraint  
{document_usage_constraint  
document_usage_constraint.subject_element = 'lubrication reference'}
```

5.1.10.13.2 design_pressure

```
AIM element: ([measure_with_unit.value_component]  
[measure_with_unit.unit_component])  
([measure_with_unit.value_component]  
[measure_with_unit.unit_component]  
[document_usage_constraint.subject_element_value])
```

Source: ISO 10303-41

```
Reference path: plant_arrangement_segment_definition <=  
product_definition  
characterized_product_definition = product_definition  
characterized_product_definition  
characterized_definition = characterized_product_definition
```

```

characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'arrangement segment characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'design pressure'}
(representation_item =>
measure_representation_item <=
measure_with_unit
[{measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
[{measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component])
([representation_item =>
measure_representation_item <=
measure_with_unit
[{measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
[{measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component]])
[representation_item
document_item = representation_item
document_item <-applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-document_usage_constraint
document_usage_constraint.subject_element_value])

```

5.1.10.13.3 design_speed

```

AIM element: ([measure_with_unit.value_component]
[measure_with_unit.unit_component])
([measure_with_unit.value_component]
[measure_with_unit.unit_component])

```

ISO 10303-227:2005(E)

```
[document_usage_constraint.subject_element_value])
Source: ISO 10303-41
Reference path: plant_arrangement_segment_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'arrangement segment characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'design speed'}
(representation_item =>
measure_representation_item <=
measure_with_unit
[{measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
[{measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component])
([representation_item =>
measure_representation_item <=
measure_with_unit
[{measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
[{measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component]])
[representation_item
document_item = representation_item
document_item <-applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-document_usage_constraint
```

document_usage_constraint.subject_element_value])

5.1.10.13.4 design_temperature

AIM element: ([measure_with_unit.value_component]
[measure_with_unit.unit_component])
([measure_with_unit.value_component]
[measure_with_unit.unit_component]
[document_usage_constraint.subject_element_value])

Source: ISO 10303-41

Reference path: plant_arrangement_segment_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'arrangement segment characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'design temperature'}
(representation_item =>
measure_representation_item <=
{measure_with_unit =>
thermodynamic_temperature_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component])
([representation_item =>
measure_representation_item <=
{measure_with_unit =>
thermodynamic_temperature_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]]
[representation_item
document_item = representation_item
document_item <-applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-document_usage_constraint
document_usage_constraint.subject_element_value])

ISO 10303-227:2005(E)

5.1.10.13.5 design_torque

AIM element: ([measure_with_unit.value_component]
[measure_with_unit.unit_component])
([measure_with_unit.value_component]
[measure_with_unit.unit_component]
[document_usage_constraint.subject_element_value])

Source: ISO 10303-41

Reference path: plant_arrangement_segment_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'arrangement segment characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'design torque'}
(representation_item =>
measure_representation_item <=
measure_with_unit
{[measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
{[measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component])
([representation_item =>
measure_representation_item <=
measure_with_unit
{[measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
{[measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component]]
[representation_item
document_item = representation_item

```

document_item <-applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-document_usage_constraint
document_usage_constraint.subject_element_value])

```

5.1.10.13.6 analysis_tracing_type

#1: If the analysis tracing type is not specified

#2a: If the analysis tracing type is vibration

#2b: If the analysis tracing type is noise

#2c: If the analysis tracing type is heat

#2d: If the analysis tracing type is shock

AIM element: #1:(analysis_tracing_representation)
 #2a; #2b;#2c;2d: ([analysis_tracing_representation]
 [document_usage_constraint.subject_element_value])

Source: ISO 10303-227

Reference path: #1: plant_arrangement_segment_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <-property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 {representation
 representation.items[i] ->
 representation_item =>
 descriptive_representation_item}
 representation =>
 (analysis_tracing_representation)
 #2a: ([analysis_tracing_representation]
 [analysis_tracing_representation
 document_item = analysis_tracing_representation
 document_item <-applied_document_reference.items[i]
 applied_document_reference <=
 document_reference
 document_reference.assigned_document ->
 document <-document_usage_constraint
 {document_usage_constraint
 document_usage_constraint.subject_element = 'vibration tracing'}
 document_usage_constraint.subject_element_value])
 #2b: ([analysis_tracing_representation]
 [analysis_tracing_representation

ISO 10303-227:2005(E)

```
document_item = analysis_tracing_representation
document_item <-applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-document_usage_constraint
{ document_usage_constraint
document_usage_constraint.subject_element = 'noise tracing'}
document_usage_constraint.subject_element_value)
#2c: ([analysis_tracing_representation]
[analysis_tracing_representation
document_item = analysis_tracing_representation
document_item <-applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-document_usage_constraint
{ document_usage_constraint
document_usage_constraint.subject_element = 'heat tracing'}
document_usage_constraint.subject_element_value)
#2d: ([analysis_tracing_representation]
[analysis_tracing_representation
document_item = analysis_tracing_representation
document_item <-applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-document_usage_constraint
{ document_usage_constraint
document_usage_constraint.subject_element = 'shock tracing'}
document_usage_constraint.subject_element_value)
```

5.1.10.13.7 mechanical_system_arrangement_segment to User_defined_attribute_value (as user_defined_parameter)

AIM element: PATH

```
Reference path: plant_arrangement_segment_definition <=
product_definition <-
characterized_product_definition = product_definition
characterized_product_definition <-
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
```



```
{(measure_representation_item <=)
(descriptive_representation_item <=)
representation_item <-
representation.items[i]
representation
representation.name = 'user defined parameter'}
```

5.1.10.13.8 mechanical_system_arrangement_segment to arrangement_branch_connection (as has_branches_defined_by)

AIM element: PATH

```
Reference path: plant_arrangement_segment_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition =>
product_definition_shape <-shape_aspect.of_shape
shape_aspect <-shape_aspect_relationship.relatng_shape_aspect
shape_aspect_relationship =>
arrangement_branch_connection
```

5.1.10.13.9 mechanical_system_arrangement_segment to arrangement_plant_item_branch_connection (as has_branches_defined_via)

AIM element: PATH

```
Reference path: plant_arrangement_segment_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition =>
product_definition_shape <-shape_aspect.of_shape
shape_aspect <-shape_aspect_relationship.relatng_shape_aspect
shape_aspect_relationship =>
arrangement_plant_item_branch_connection
```

5.1.10.13.10 mechanical_system_arrangement_segment to arrangement_mechanical_system_component_assignment (as defines_the_need_for)

AIM element: PATH

```
Reference path: plant_arrangement_segment_definition <=
product_definition <-product_definition_relationship.relatng_product_definition
product_definition_relationship
```

5.1.10.13.11 mechanical_system_arrangement_segment to mechanical_system_arrangement_segment_termination (as is_terminated_by)

AIM element: PATH

```
Reference path: plant_arrangement_segment_definition <=
```

ISO 10303-227:2005(E)

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition =>
product_definition_shape <-shape_aspect.of_shape
shape_aspect =>
plant_arrangement_segment_termination
```

5.1.10.13.12 mechanical_system_arrangement_segment to design_arrangement_performance

AIM element: PATH

```
Reference path: plant_arrangement_segment_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition =>
design_arrangement_performance
```

5.1.10.14 Mechanical_system_arrangement_segment_termination

AIM element: plant_arrangement_segment_termination

Source: ISO 10303-227

```
Reference path: plant_arrangement_segment_termination <=
shape_aspect
{[shape_aspect
shape_aspect.name = 'mechanical arrangement segment termination']
[shape_aspect <-(
shape_aspect_relationship.relatng_shape_aspect)
(shape_aspect_relationship.related_shape_aspect)
shape_aspect_relationship =>
(arrangement_branch_connection)
(arrangement_plant_item_connection)
(arrangement_termination_connection)]
[shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
{product_definition =>
plant_arrangement_segment_definition}
product_definition
product_definition.frame_of_reference ->
```

```

product_definition_context <=
application_context_element
application_context_element.name = 'functional definition']]

```

5.1.10.14.1 torque_direction

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

```

Reference path: plant_arrangement_segment_termination <=
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'torque direction'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
{(descriptive_representation_item.description = 'forward')
(descriptive_representation_item.description = 'reverse')
(descriptive_representation_item.description = 'none')
(descriptive_representation_item.description = 'stuck')}

```

5.1.10.14.2 Mechanical_system_arrangement_segment_termination to User_defined_attribute_value (as user_defined_parameter)

AIM element: PATH

```

Reference path: plant_arrangement_segment_termination <=
shape_aspect <-
represented_definition = shape_aspect
represented_definition <- property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{(measure_representation_item <=)
(descriptive_representation_item <=)
representation_item <-
representation.items[i]
representation
representation.name = 'user defined parameter'}

```

5.1.10.15 Mechanical_system_arrangement_termination

AIM element: plant_arrangement_segment_termination

ISO 10303-227:2005(E)

Source: ISO 10303-227

```
Reference path: plant_arrangement_segment_termination <=
  shape_aspect
  {[shape_aspect
  shape_aspect.name = 'mechanical arrangement termination']
  [shape_aspect
  shape_aspect.of_shape ->
  product_definition_shape <=
  property_definition
  property_definition.definition ->
  characterized_definition
  characterized_definition = characterized_product_definition
  characterized_product_definition
  characterized_product_definition = product_definition_relationship
  product_definition_relationship
  [product_definition_relationship.related_product_definition ->
  {product_definition =>
  plant_arrangement_segment_definition}
  product_definition
  product_definition.frame_of_reference ->
  product_definition_context <=
  application_context_element
  application_context_element.name = 'functional definition']
  [product_definition_relationship.relatng_product_defintion ->
  {product_definition =>
  product_definition_with_associated_documents =>
  plant_arrangement_definition}
  product_definition
  product_definition.frame_of_reference ->
  product_definition_context <=
  application_context_element
  application_context_element.name = 'functional definition']]}
```

5.1.10.15.1 location

AIM element: cartesian_point

Source: ISO 10303-42

```
Reference path: plant_arrangement_segment_termination <=
  shape_aspect
  represented_definition = shape_aspect
  represented_definition <-property_definition_representation.definition
  property_definition_representation
  property_definition_representation.used_representation ->
  {representation
  representation.name = 'plant arrangement termination position'}
  representation
  representation.items[i] ->
  representation_item =>
  geometric_representation_item =>
```

point =>
cartesian_point

5.1.10.15.2 position_on_machine

AIM element: descriptive_representation_item.description
Source: ISO 10303-45
Reference path: plant_arrangement_segment_termination <=
shape_aspect
represented_definition = shape_aspect
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'plant arrangement termination position'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'position on machine'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

5.1.10.15.3 start_or_end

AIM element: descriptive_representation_item.description
Source: ISO 10303-45
Reference path: plant_arrangement_segment_termination <=
shape_aspect
represented_definition = shape_aspect
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'plant arrangement termination position'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'start or end'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
{(descriptive_representation_item.description = 'start')
(descriptive_representation_item.description = 'end')}

5.1.10.15.4 mechanical_system_arrangement_termination to mechanical_system_arrangement (as starts_or_ends)

AIM element: PATH
Reference path: plant_arrangement_segment_termination <=
shape_aspect

ISO 10303-227:2005(E)

```
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition_relationship
product_definition_relationship
product_definition_relationship.relate_product_definition ->
{product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional definition'}
product_definition =>
product_definition_with_associated_documents =>
plant_arrangement_definition
```

5.1.10.16 Design_arrangement_performance

AIM element: design_arrangement_performance
Source: ISO 10303-227
Reference path: design_arrangement_performance <=
[characterized_object]
[property_definition]

5.1.10.16.1 description

AIM element: characterized_object.description
Source: ISO 10303-41
Rules: subtype_exclusive_characterized_object
Reference path: design_arrangement_performance <=
characterized_object
characterized_object.description

5.1.10.16.2 arrangement_case_type

AIM element: property_definition.name
Source: ISO 10303-41
Reference path: design_arrangement_performance <=
property_definition
property_definition.name

5.1.10.16.3 arrangement_data_reference

AIM element: (descriptive_representation_item.description)
([descriptive_representation_item.description]
[document_usage_constraint.subject_element_value])
Source: ISO 10303-41, ISO 10303-45
Reference path: design_arrangement_performance <=
property_definition

```

represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'design arrangement characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'arrangement data reference'}
(representation_item =>
descriptive_representation_item
descriptive_representation_item.description)
([representation_item =>
descriptive_representation_item
descriptive_representation_item.description]
[representation_item
document_item = representation_item
document_item <-applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-document_usage_constraint
document_usage_constraint.subject_element_value])

```

5.1.10.16.4 arrangement_design_id

AIM element: characterized_object.name
Source: ISO 10303-41
Rules: subtype_exclusive_characterized_object
Reference path: design_arrangement_performance <=
characterized_object
characterized_object.name

5.1.10.16.5 design_arrangement_performance to User_defined_attribute_value (as user_defined_parameter)

AIM element: PATH
Reference path: design_arrangement_performance <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-property_definition.definition
property_definition <-
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{(measure_representation_item <=)
(descriptive_representation_item <=)}

ISO 10303-227:2005(E)

```
representation_item <-  
representation.items[i]  
representation  
representation.name = 'user defined parameter'}
```

5.1.10.16.6 design_arrangement_performance to arrangement_load (as is_composed_of)

```
AIM element:  PATH  
Rules:       subtype_exclusive_characterized_object  
Reference path: design_arrangement_performance <=  
              characterized_object  
              characterized_definition = characterized_object  
              characterized_definition <-property_definition.definition  
              property_definition =>  
              arrangement_load
```

5.1.10.17 Arrangement_load

```
AIM element:  arrangement_load  
Source:       ISO 10303-227  
Reference path: arrangement_load <=  
              property_definition
```

5.1.10.17.1 constituent_loads

```
AIM element:  descriptive_representation_item.description  
Source:       ISO 10303-45  
Reference path: arrangement_load <=  
              property_definition  
              represented_definition = property_definition  
              represented_definition <-property_definition_representation.definition  
              property_definition_representation  
              property_definition_representation.used_representation ->  
              {representation  
              representation.name = 'arrangement load characteristics'}  
              representation  
              representation.items[i] ->  
              {representation_item  
              representation_item.name = 'constituent loads'}  
              representation_item =>  
              descriptive_representation_item  
              descriptive_representation_item.description
```

5.1.10.17.2 Arrangement_load to User_defined_attribute_value (as user_defined_loads)

```
AIM element:  PATH  
Reference path: arrangement_load <= property_definition  
              property_definition <-  
              represented_definition = property_definition  
              represented_definition <-  
              property_definition_representation.definition  
              property_definition_representation
```



```

property_definition_representation.used_representation ->
{ (measure_representation_item <=)
(descriptive_representation_item <=)
representation_item <-
representation.items[i]
representation
representation.name = 'user defined loads' }

```

5.1.10.17.3 Arrangement_load to plant_item (as items)

AIM element: PATH

```

Reference path: arrangement_load <=
property_definition
property_definition.definition -> characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.formation -> product_definition_formation
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item'

```

5.1.11 piping_component_characterization UoF

5.1.11.1 Base_elbow_support

AIM element: piping_support_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

```

Reference path: piping_support_definition <=
product_definition
{ piping_support_definition
classification_item = piping_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification' }
classification_assignment
classification_assignment.assigned_class ->
[group =>

```

ISO 10303-227:2005(E)

```
    piping_support_fitting_class]
    [group
    (group.name = 'base elbow support')]
    {product_definition
    product_definition.formation ->
    product_definition_formation
    product_definition_formation.of_product ->
    [product
    classification_item = product
    classification_item <-
    applied_classification_assignment.items[i]
    applied_classification_assignment <=
    {classification_assignment
    classification_assignment.role ->
    classification_role
    classification_role = 'plant item type classification'}
    classification_assignment
    classification_assignment.assigned_class ->
    (group)
    (group <-
    group_relationship.related_group
    group_relationship
    group_relationship.relating_group ->
    group)
    group.name = 'piping support']
    [product
    product.frame_of_reference[i] ->
    product_context <=
    application_context_element
    application_context_element.name = 'plant item']]
```

5.1.11.1.1 height

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: piping_support_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]

```

[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'base elbow support dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'height'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.1.2 adjustability

AIM element: group.description

Source: ISO 10303-41

Reference path: piping_support_definition

```

classification_item = piping_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'adjustability type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
{group =>
piping_support_fitting_class}
group.description
{(group.description = 'adjustable')
(group.description = 'non-adjustable')}

```

5.1.11.2 Base_line_support

AIM element: piping_support_definition

ISO 10303-227:2005(E)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: piping_support_definition <=
product_definition
{piping_support_definition
classification_item = piping_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
piping_support_fitting_class]
[group
group.name = 'base line support']
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'piping support']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]}

5.1.11.2.1 height

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: piping_support_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 [shape_aspect <-
 shape_aspect_relationship.relating_shape_aspect]
 [shape_aspect <-
 shape_aspect_relationship.related_shape_aspect]
 shape_aspect_relationship =>
 dimensional_location
 dimensional_characteristic = dimensional_location
 dimensional_characteristic <-
 dimensional_characteristic_representation.dimension
 dimensional_characteristic_representation
 dimensional_characteristic_representation.representation ->
 shape_dimension_representation <=
 shape_representation <=
 {representation
 representation.name = 'base line support dimensional shape'}
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'height'}
 representation_item =>
 measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.11.2.2 spring

AIM element: group.description

Source: ISO 10303-41

Reference path: piping_support_definition
 classification_item = piping_support_definition
 classification_item <-

ISO 10303-227:2005(E)

```
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'spring type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
{[group =>
piping_support_fitting_class]
[group
group.name = 'base line support']}
group.description
{(group.description = 'with spring')
(group.description = 'without spring')}
```

5.1.11.3 Blank

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=

```
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'pipe fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
```

```

group)
group.name= 'blank']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]

```

```

#2: (piping_component_class <=
[characterized_object]
[group])

```

5.1.11.3.1 outside_diameter

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'blank fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'outside diameter'})
#2: (piping_component_class <=
characterized_object

```

ISO 10303-227:2005(E)

```
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'blank fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum outside diameter')
(representation_item.name = 'minimum outside diameter')}})
((representation.items[i] ->
{representation_item
representation_item.name = 'maximum outside diameter'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum outside diameter'}}))
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.3.2 thickness

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape


```

[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'blank fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'thickness'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'blank fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum thickness')
(representation_item.name = 'minimum thickness'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum thickness'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum thickness'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit

```

ISO 10303-227:2005(E)

[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.11.4 Blind flange

AIM element: piping_component_definition
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <=
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'pipe fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
flange_fitting_class]
[group
group.name = 'blind flange']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <=
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'pipe fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <=
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name= 'flange']

```
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}
```

5.1.11.5 Boss

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=

```
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'pipe fitting type classification'}
{classification_assignment
classification_assignment.role ->
group_role
group_role.name = 'plant item type'}
classification_assignment
classification_assignment.assigned_class ->
{group
group.name = 'boss'}
group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group
group.name = 'olet'}]
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}
```

ISO 10303-227:2005(E)

```
product_definition)
#2: (piping_component_class <=
[characterized_object]
[group])
{[group
group.name = 'boss']
[group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group
group.name = 'olet']}]
```

5.1.11.6 Bushing

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=

```
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'pipe fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'bushing']
[product
product.frame_of_reference[i] ->
```

```

product_context<=
application_context_element
application_context_element.name = 'plant item'})
#2: (piping_component_class <=
[characterized_object]
[group])

```

5.1.11.6.1 end_1_connector

AIM element: plant_item_connector

Source: ISO 10303-227

```

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector

```

5.1.11.6.2 end_2_connector

AIM element: plant_item_connector

Source: ISO 10303-227

```

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
plant_item_connector

```

5.1.11.6.3 end_to_end_length

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

ISO 10303-227:2005(E)

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[[[shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 1']}]
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[[[shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 2']}]
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'bushing fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'end to end length'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-

```

property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'bushing fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum end to end length')
(representation_item.name = 'minimum end to end length'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum end to end length'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum end to end length'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.7 Cap

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'pipe fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
pipe_closure_fitting_class]

ISO 10303-227:2005(E)

```
[group
group.name = 'cap']
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'pipe fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'cap'}
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]
#2: (piping_component_class <=
[characterized_object]
[group])
{[group =>
pipe_closure_fitting_class]
[(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'cap']]}
```

5.1.11.7.1 height

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41


```

Rules:      subtype_exclusive_characterized_object
           subtype_mandatory_shape_representation
Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'pipe closure fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'height'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'pipe closure fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum height')

```

ISO 10303-227:2005(E)

```
(representation_item.name = 'minimum height'))
([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum height'}]
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum height'}])
representation_item =>
measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
```

5.1.11.8 Bent_pipe

AIM element: piping_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
pipe_class]
[group
group.name = 'bent pipe']}
{product_definition <-
product_definition_relationship.relatng_product_definition
{[product_definition_relationship
product_definition_relationship.name = 'bent pipe composition']
[product_definition_relationship
product_definition_relationship.related_product_definition ->
product_definition =>
piping_component_definition
classification_item = piping_component_definition
classification_item <-

```

applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
pipe_class]
[group
(group.name = 'mitre bend pipe')
(group.name = 'swept bend pipe')
(group.name = 'straight pipe')]]}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
{classification_assignment
classification_assignment.role ->
group_role
group_role.name = 'plant item type'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'pipe']}
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.11.9 Coupling

#1: The attributes are for the individual piping component.

ISO 10303-227:2005(E)

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'coupling']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']})
#2: (piping_component_class <=
[characterized_object]
[group])

5.1.11.9.1 end_1_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition

```

characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector

```

5.1.11.9.2 end_2_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
plant_item_connector

```

5.1.11.9.3 end_to_end_length

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[{{shape_aspect =>
plant_item_connector}]

```

ISO 10303-227:2005(E)

```
[shape_aspect
shape_aspect.description = 'end 1']]
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[{{[shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 2']]
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'coupling fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'end to end length'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'coupling fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum end to end length')
(representation_item.name = 'minimum end to end length')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum end to end length'}]
[representation.items[i] ->
{representation_item
```

```

representation_item.name = 'minimum end to end length'})
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.10 Cross

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'cross']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']})
#2: (piping_component_class <=

ISO 10303-227:2005(E)

[characterized_object]
[group])

5.1.11.10.1 centre_to_end_1_length

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
[shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'centre'}
shape_aspect <=
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect.of_shape
{[shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 1']}]
shape_aspect <=
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <=
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'cross fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre to end 1 length'})
#2: (piping_component_class <=


```

characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'cross fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum centre to end 1 length')
(representation_item.name = 'minimum centre to end 1 length'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum centre to end 1 length'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum centre to end 1 length'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.10.2 centre_to_end_2_length

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-

ISO 10303-227:2005(E)

```
[shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'centre'}
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect.of_shape
{[shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 2']}
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'cross fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre to end 2 length'}}
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'cross fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum centre to end 2 length')
(representation_item.name = 'minimum centre to end 2 length')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum centre to end 2 length'}}]
```

```
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum centre to end 2 length'}}]
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.10.3 centre_to_end_3_length

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <= product_definition
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
[shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'centre'}
shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect.of_shape
{[shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 3']}
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=

ISO 10303-227:2005(E)

```
shape_representation <=
{representation
representation.name = 'cross fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre to end 3 length'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'cross fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum centre to end 3 length')
(representation_item.name = 'minimum centre to end 3 length'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum centre to end 3 length'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum centre to end 3 length'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
representation
```

5.1.11.10.4 centre_to_end_4_length

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

```

Reference path: #1: (piping_component_definition <=
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition =>
  product_definition_shape <-
  [shape_aspect.of_shape
  { shape_aspect
  shape_aspect.description = 'centre'}
  shape_aspect <-
  shape_aspect_relationship.relate_shape_aspect]
  [shape_aspect.of_shape
  {[shape_aspect =>
  plant_item_connector]
  [shape_aspect
  shape_aspect.description = 'end 4']}
  shape_aspect <-
  shape_aspect_relationship.related_shape_aspect]
  shape_aspect_relationship =>
  dimensional_location
  dimensional_characteristic = dimensional_location
  dimensional_characteristic <-
  dimensional_characteristic_representation.dimension
  dimensional_characteristic_representation
  dimensional_characteristic_representation.representation ->
  shape_dimension_representation <=
  shape_representation <=
  { representation
  representation.name = 'cross fitting dimensional shape'}
  representation
  representation.items[i] ->
  { representation_item
  representation_item.name = 'centre to end 4 length'})
#2: (piping_component_class <=
  characterized_object
  characterized_definition = characterized_object
  characterized_definition <-
  property_definition.definition
  property_definition
  represented_definition = property_definition
  represented_definition <-
  property_definition_representation.definition
  property_definition_representation
  property_definition_representation.used_representation ->
  { representation

```

ISO 10303-227:2005(E)

```
representation.name = 'cross fitting class dimensions'}
representation
(representation.items[i] ->
 {representation_item
 (representation_item.name = 'maximum centre to end 4 length')
 (representation_item.name = 'minimum centre to end 4 length'}})
([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum centre to end 4 length'}}]
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum centre to end 4 length'}}])
representation_item =>
measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
```

5.1.11.10.5 end_1_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
 {shape_aspect
 shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector
```

5.1.11.10.6 end_2_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
```

```

property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 2' }
shape_aspect =>
plant_item_connector

```

5.1.11.10.7 end_3_connector

AIM element: plant_item_connector

Source: ISO 10303-227

```

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 3' }
shape_aspect =>
plant_item_connector

```

5.1.11.10.8 end_4_connector

AIM element: plant_item_connector

Source: ISO 10303-227

```

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 4' }
shape_aspect =>
plant_item_connector

```

5.1.11.11 Dummy_leg

AIM element: piping_support_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context

ISO 10303-227:2005(E)

```
product_context_discipline_type_constraint
value_for_application_context
Reference path: piping_support_definition <=
product_definition
{piping_support_definition
classification_item = piping_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
piping_support_fitting_class]
[group
group.name = 'dummy leg']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'piping support']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}
```


5.1.11.11.1 length

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: piping_support_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 [shape_aspect <-
 shape_aspect_relationship.relating_shape_aspect]
 [shape_aspect <-
 shape_aspect_relationship.related_shape_aspect]
 shape_aspect_relationship =>
 dimensional_location
 dimensional_characteristic = dimensional_location
 dimensional_characteristic <-
 dimensional_characteristic_representation.dimension
 dimensional_characteristic_representation
 dimensional_characteristic_representation.representation ->
 shape_dimension_representation <=
 shape_representation <=
 {representation
 representation.name = 'dummy leg dimensional shape'}
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'length'}
 representation_item =>
 measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.11.12 Eccentric_base_elbow_support

AIM element: piping_support_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
 product_context_discipline_type_constraint
 value_for_application_context

ISO 10303-227:2005(E)

```
Reference path: piping_support_definition <=
  product_definition
  { piping_support_definition
  classification_item = piping_support_definition
  classification_item <-
  applied_classification_assignment.items[i]
  applied_classification_assignment <=
  { classification_assignment
  classification_assignment.role ->
  classification_role
  classification_role = 'plant item type classification' }
  classification_assignment
  classification_assignment.assigned_class ->
  [group =>
  piping_support_fitting_class]
  [group
  group.name = 'eccentric base elbow support' ]}
  { product_definition
  product_definition.formation ->
  product_definition_formation
  product_definition_formation.of_product ->
  [product
  classification_item = product
  classification_item <-
  applied_classification_assignment.items[i]
  applied_classification_assignment <=
  { classification_assignment
  classification_assignment.role ->
  classification_role
  classification_role = 'plant item type classification' }
  classification_assignment
  classification_assignment.assigned_class ->
  (group)
  (group <-
  group_relationship.related_group
  group_relationship
  group_relationship.relating_group ->
  group)
  group.name = 'piping support' ]
  [product
  product.frame_of_reference[i] ->
  product_context <=
  application_context_element
  application_context_element.name = 'plant item' ] }
```

5.1.11.12.1 offset

```
AIM element: [measure_with_unit.value_component]
             [measure_with_unit.unit_component]
```

Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path piping_support_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
[{ shape_aspect.description = 'location point' }
shape_aspect <=
shape_aspect_relationship.relate_shape_aspect]
[{ shape_aspect.description = 'centreline' }
shape_aspect <=
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <=
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'eccentric base elbow support dimensional shape' }
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'offset' }
representation_item =>
measure_representation_item <=
{ measure_with_unit =>
length_measure_with_unit }
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.11.12.2 root_orientation

AIM element: axis2_placement_3d.ref_direction
Source: ISO 10303-42
Reference path: product
product_definition_formation.of_product
product_definition_formation
product_definition.formation

ISO 10303-227:2005(E)

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'root orientation'}
representation_item =>
geometric_representation_item =>
placement =>
axis2_placement_3d
axis2_placement_3d.ref_direction
```

5.1.11.13 Eccentric_reducer

AIM element: piping_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
reducer_fitting_class]
[group
group.name = 'eccentric reducer']}

```

{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'reducer']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.11.13.1 centreline_offset

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: piping_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
[shape_aspect.of_shape
{shape_aspect shape_aspect.description = 'centre'}
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect.of_shape
{shape_aspect

```

ISO 10303-227:2005(E)

```
shape_aspect.description = 'centre'}
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'reducer fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centreline offset'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.13.2 flat_side_orientation

AIM element: shape_aspect.description

Source: ISO 10303-41

```
Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.name = 'flat side'}
shape_aspect
```

5.1.11.14 Elbow

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'elbow']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}
#2: (piping_component_class <=
[characterized_object]
[group])

5.1.11.14.1 centre_to_end_1_length

#1: The attributes are for the individual piping component.
#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition

ISO 10303-227:2005(E)

```
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
[shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'centre'}
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect.of_shape
{[shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 1']}]
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'elbow fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre to end 1 length'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'elbow fitting class dimensions'}
representation
(representation.items[i] ->
```



```

{representation_item
(representation_item.name = 'maximum centre to end 1 length')
(representation_item.name = 'minimum centre to end 1 length'))
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum centre to end 1 length'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum centre to end 1 length'}}]
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.14.2 centre_to_end_2_length

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
[shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'centre'}
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect.of_shape
{[shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 2']}
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location

ISO 10303-227:2005(E)

```
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'elbow fitting dimensional shape'}
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'centre to end 2 length'}}
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{ representation
representation.name = 'elbow fitting class dimensions'}
representation
(representation.items[i] ->
{ representation_item
(representation_item.name = 'maximum centre to end 2 length')
(representation_item.name = 'minimum centre to end 2 length')}})
([representation.items[i] ->
{ representation_item
representation_item.name = 'maximum centre to end 2 length'}}]
[representation.items[i] ->
{ representation_item
representation_item.name = 'minimum centre to end 2 length'}}])
representation_item =>
measure_representation_item <=
{ measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.14.3 centreline_radius

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
[shape_aspect.of_shape
{shape_aspect shape_aspect.description = 'inner bend centre point'}
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect.of_shape
{shape_aspect shape_aspect.name = 'sweep angle centre point'}
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'elbow fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centreline radius'}
#2:(piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->

ISO 10303-227:2005(E)

```
{representation
representation.name = 'elbow fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum centreline radius')
(representation_item.name = 'minimum centreline radius'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum centreline radius'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum centreline radius'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.14.4 end_1_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector
```

5.1.11.14.5 end_2_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
```

```

property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
plant_item_connector

```

5.1.11.14.6 sweep_angle

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
{dimensional_location =>
angular_location}
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'elbow fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'sweep angle'})

ISO 10303-227:2005(E)

```
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'elbow fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum sweep angle')
(representation_item.name = 'minimum sweep angle')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum sweep angle'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum sweep angle'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
plane_angle_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.14.7 type

AIM element: group.name

Source: ISO 10303-41

Reference path: piping_component_definition

```
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'elbow fitting type classification'}
```

```

classification_assignment
classification_assignment.assigned_class ->
{group =>
elbow_fitting_class}
group
group.name

```

5.1.11.15 Expander_flange

AIM element: piping_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

```

Reference path: piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
flange_fitting_class]
[group
group.name = 'expander flange']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group

```

ISO 10303-227:2005(E)

```
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'flange']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}
```

5.1.11.16 Family_definition

AIM element: piping_component_class
Source: ISO 10303-227
Reference path: piping_component_class <=
[group]
[characterized_object]

5.1.11.16.1 family_classification_description

AIM element: group_relationship.related_group
Source: ISO 10303-41
Reference path: piping_component_class <=
group
group_relationship.related_group

5.1.11.17 Ferrule

#1: The attributes are for an individual piping component.
#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: #1: (piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role


```

classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'ferrule']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'}})
#2: (piping_component_class <=
[characterized_object]
[group])

```

5.1.11.17.1 end_1_connector

AIM element: plant_item_connector

Source: ISO 10303-227

```

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector

```

5.1.11.17.2 end_2_connector

AIM element: plant_item_connector

Source: ISO 10303-227

```

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>

```

ISO 10303-227:2005(E)

```
product_definition_shape <-  
shape_aspect.of_shape  
{ shape_aspect  
shape_aspect.description = 'end 2' }  
shape_aspect =>  
plant_item_connector
```

5.1.11.17.3 length

#1: The length is for the individual piping component.

#2: The length is for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect.relationship.relate_shape_aspect]
[shape_aspect <-
shape_aspect.relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'ferrule fitting dimensional shape' }
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'length' })
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-

```

property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'ferrule fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum length')
(representation_item.name = 'minimum length')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum length'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum length'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.18 Fitting

AIM element: (piping_component_definition)
(piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: (piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->

ISO 10303-227:2005(E)

```
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'fitting']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]
(piping_component_class <=
[characterized_object]
[group])
```

5.1.11.19 Flange

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=

```
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
```

```

group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'flange']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'}})
#2: (piping_component_class <=
[characterized_object]
[group])

```

5.1.11.19.1 end_1_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector

```

5.1.11.19.2 end_2_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 2'}

```

ISO 10303-227:2005(E)

shape_aspect =>
plant_item_connector

5.1.11.19.3 hub_through_length

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
[shape_aspect <=
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <=
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <=
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'flange fitting dimensional shape'}
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'hub through length'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <=
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <=

```

property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'flange fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum hub through length')
(representation_item.name = 'minimum hub through length')}}
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum hub through length'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum hub through length'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.19.4 hub_weld_point_diameter

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimension

ISO 10303-227:2005(E)

```
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'flange fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'hub weld point diameter'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'flange fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum hub weld point diameter')
(representation_item.name = 'minimum hub weld point diameter')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum hub weld point diameter'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum hub weld point diameter'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.19.5 hole_straddle_centrelines_orientation

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: axis2_placement_3d

Source: ISO 10303-42


```

Reference path: #1: (piping_component_definition <=
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition =>
  product_definition_shape <-
  shape_aspect.of_shape
  [shape_aspect <-
  shape_aspect_relationship.relating_shape_aspect]
  [shape_aspect <-
  shape_aspect_relationship.related_shape_aspect]
  shape_aspect_relationship =>
  dimensional_location
  dimensional_characteristic = dimensional_location
  dimensional_characteristic <-
  dimensional_characteristic_representation.dimension
  dimensional_characteristic_representation
  dimensional_characteristic_representation.representation ->
  shape_dimension_representation <=
  shape_representation <=)
#2: (piping_component_class <=
  characterized_object
  characterized_definition = characterized_object
  characterized_definition <-
  property_definition.definition
  property_definition
  represented_definition = property_definition
  represented_definition <-
  property_definition_representation.definition
  property_definition_representation
  property_definition_representation.used_representation ->)
  {representation
  representation.name = 'flange fitting dimensional shape'}
  representation
  representation.items[i] ->
  {representation_item
  representation_item.name = 'hole straddle centreline orientation'}
  representation_item =>
  geometric_representation_item =>
  placement =>
  axis2_placement_3d

```

5.1.11.20 Gasket

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

ISO 10303-227:2005(E)

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'gasket']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']})
#2: (piping_component_class <=
[characterized_object]
[group])

5.1.11.20.1 compressed_thickness

#1: The attributes are for the individual piping component.
#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

```

Reference path: #1: (piping_component_definition <=
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition =>
  product_definition_shape <-
  shape_aspect.of_shape
  [shape_aspect <-
  shape_aspect_relationship.relating_shape_aspect]
  [shape_aspect <-
  shape_aspect_relationship.related_shape_aspect]
  shape_aspect_relationship =>
  dimensional_location
  dimensional_characteristic = dimensional_location
  dimensional_characteristic <-
  dimensional_characteristic_representation.dimension
  dimensional_characteristic_representation
  dimensional_characteristic_representation.representation ->
  shape_dimension_representation <=
  shape_representation <=
  {representation
  representation.name = 'gasket fitting dimensional shape'}
  representation
  representation.items[i] ->
  {representation_item
  representation_item.name = 'thickness'})
#2: (piping_component_class <=
  characterized_object
  characterized_definition = characterized_object
  characterized_definition <-
  property_definition.definition
  property_definition
  represented_definition = property_definition
  represented_definition <-
  property_definition_representation.definition
  property_definition_representation
  property_definition_representation.used_representation ->
  {representation
  representation.name = 'gasket fitting class dimensions'}
  representation
  (representation.items[i] ->
  {representation_item
  (representation_item.name = 'maximum thickness')
  (representation_item.name = 'minimum thickness')}}
  ([representation.items[i] ->

```

ISO 10303-227:2005(E)

```
{representation_item
representation_item.name = 'maximum thickness'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum thickness'}})
representation_item =>
{qualified_representation_item
qualified_representation_item.qualifiers[i] ->
value_qualifier
value_qualifier = type_qualifier
type_qualifier
type_qualifier.name = 'compressed'}
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.20.2 uncompressed_thickness

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->

```

shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'gasket fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'thickness'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'gasket fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum thickness')
(representation_item.name = 'minimum thickness'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum thickness'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum thickness'}}])
representation_item =>
{qualified_representation_item
qualified_representation_item.qualifiers[i] ->
value_qualifier
value_qualifier = type_qualifier
type_qualifier
type_qualifier.name = 'uncompressed'}
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.21 Gusset

AIM element: reinforcing_component_definition

ISO 10303-227:2005(E)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: reinforcing_component_definition <=
product_definition
{reinforcing_component_definition
classification_item = reinforcing_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant_item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
piping_support_fitting_class]
[group
group.name = 'gusset']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'reinforcing component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]}

5.1.11.21.1 height

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
 Source: ISO 10303-41
 Rules: subtype_mandatory_shape_representation
 Reference path: reinforcing_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 [shape_aspect <-
 shape_aspect_relationship.relate_shape_aspect]
 [shape_aspect <-
 shape_aspect_relationship.related_shape_aspect]
 shape_aspect_relationship =>
 dimensional_location
 dimensional_characteristic = dimensional_location
 dimensional_characteristic <-
 dimensional_characteristic_representation.dimension
 dimensional_characteristic_representation
 dimensional_characteristic_representation.representation ->
 shape_dimension_representation <=
 shape_representation <=
 {representation
 representation.name = 'gusset dimensional shape'}
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'height'}
 representation_item =>
 measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.11.22 Hanger

AIM element: piping_support_definition
 Source: ISO 10303-227
 Rules: dependent_instantiable_product_context
 product_context_discipline_type_constraint
 value_for_application_context

ISO 10303-227:2005(E)

Reference path: piping_support_definition <=
product_definition
{ piping_support_definition
classification_item = piping_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
piping_support_fitting_class]
[group
group.name = 'hanger']}
{ product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'piping support']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]

5.1.11.22.1 end_2_connector

AIM element: plant_item_connector
Source: ISO 10303-227

Reference path: piping_support_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 { shape_aspect
 shape_aspect.description = 'end 2' }
 shape_aspect =>
 plant_item_connector

5.1.11.22.2 length

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
 Source: ISO 10303-41
 Rules: subtype_mandatory_shape_representation
 Reference path: piping_support_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 [shape_aspect <-
 shape_aspect_relationship.relating_shape_aspect]
 [shape_aspect <-
 shape_aspect_relationship.related_shape_aspect]
 shape_aspect_relationship =>
 dimensional_location
 dimensional_characteristic = dimensional_location
 dimensional_characteristic <-
 dimensional_characteristic_representation.dimension
 dimensional_characteristic_representation
 dimensional_characteristic_representation.representation ->
 shape_dimension_representation <=
 shape_representation <=
 { representation
 representation.name = 'hanger dimensional shape' }
 representation
 representation.items[i] ->
 { representation_item

ISO 10303-227:2005(E)

```
representation_item.name = 'length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.22.3 spring

AIM element: group.description

Source: ISO 10303-41

Reference path: piping_support_definition

```
classification_item = piping_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'spring type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
{group =>
piping_support_fitting_class}
group.description
{(group.description = 'with spring')}
(group.description = 'without spring')}
```

5.1.11.23 Inline_equipment

AIM element: inline_equipment

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: inline_equipment <=

```
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
```

```

group
group.name = 'equipment'}
piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'}

```

5.1.11.24 Inline_instrument

AIM element: piping_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: piping_component_definition <=

```

product_definition
{[piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'instrument']
[piping_component_definition <=
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}]

```

5.1.11.25 Insert_fitting

#1: The attributes are for the individual piping component.

ISO 10303-227:2005(E)

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'insert_fitting']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']})
#2: (piping_component_class <=
[characterized_object]
[group])

5.1.11.25.1 end_1_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition

```

characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 1' }
shape_aspect =>
plant_item_connector

```

5.1.11.25.2 end_2_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 2' }
shape_aspect =>
plant_item_connector

```

5.1.11.25.3 end_to_end_length

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[ { shape_aspect =>
plant_item_connector } ]

```

ISO 10303-227:2005(E)

```
[shape_aspect
shape_aspect.description = 'end 1']]
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[{{shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 2']]
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'insert fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'end to end length'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'insert fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum end to end length')
(representation_item.name = 'minimum end to end length')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum end to end length'}]
[representation.items[i] ->
{representation_item
```

```

representation_item.name = 'minimum end to end length'})
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.26 Inside_and_thickness

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (shape_dimension_representation)
#2: (representation)

Source: ISO 10303-43, ISO 10303-47

```

Reference path: #1: ({shape_dimension_representation <=
shape_representation <=
[representation
representation.name = 'piping component dimensions']
[representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
(represented_definition
represented_definition = property_definition
{property_definition =>
product_definition_shape}
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition =>
piping_component_definition)
(represented_definition
represented_definition = shape_aspect
shape_aspect =>
plant_item_connector)}})
#2: ({[representation
representation.name = 'piping component class size']
[representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition

```

ISO 10303-227:2005(E)

```
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
piping_component_class}}
```

5.1.11.26.1 inside_diameter

- #1: The attributes are for the individual piping component.
- #2: The attributes are for the definition of a family of piping components.

```
AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: #1: (shape_dimension_representation <=
shape_representation <=
representation
representation.items[i] ->
{representation_item
representation_item.name = 'inside diameter'})
#2: (representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum inside diameter')
(representation_item.name = 'minimum inside diameter')}))
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum inside diameter'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum inside diameter'}}])
representation =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.26.2 thickness

- #1: The attributes are for the individual piping component.
- #2: The attributes are for the definition of a family of piping components.

```
AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: #1: (shape_dimension_representation <=
shape_representation <=
```



```

representation
representation.items[i] ->
{representation_item
representation_item.name = 'thickness'})
#2: (representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum thickness')
(representation_item.name = 'minimum thickness'))}
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum thickness'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum thickness'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.27 Lap_joint_flange

```

AIM element: piping_component_definition
Source:      ISO 10303-227
Rules:      dependent_instantiable_product_context
            product_context_discipline_type_constraint
            value_for_application_context
Reference path: piping_component_definition <=
              product_definition
              {piping_component_definition
              classification_item = piping_component_definition
              classification_item <-
              applied_classification_assignment.items[i]
              applied_classification_assignment <=
              {classification_assignment
              classification_assignment.role ->
              classification_role
              classification_role = 'piping component type classification'}
              classification_assignment
              classification_assignment.assigned_class ->
              [group =>
              flange_fitting_neck_type_class]
              [group
              group.name = 'lap joint flange']}
              {product_definition
              product_definition.formation ->

```

ISO 10303-227:2005(E)

```
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'flange']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}
```

5.1.11.28 Lap_joint_stub_end

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->

```

classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'lap joint stub end']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]
#2: (piping_component_class <=
[characterized_object]
[group])

```

5.1.11.28.1 end_1_connector

```

AIM element: plant_item_connector
Source: ISO 10303-227
Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector

```

5.1.11.28.2 end_2_connector

```

AIM element: plant_item_connector
Source: ISO 10303-227
Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition

```

ISO 10303-227:2005(E)

```
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 2' }
shape_aspect =>
plant_item_connector
```

5.1.11.28.3 length

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'lap joint stub end fitting dimensional shape' }
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'length' })
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object

```

characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'lap joint stub end fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum length')
(representation_item.name = 'minimum length'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum length'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum length'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.28.4 stub_diameter

- #1: The attributes are for the individual piping component.
#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-

ISO 10303-227:2005(E)

```
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'lap joint stub end fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'stub diameter'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'lap joint stub end fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum stub diameter')
(representation_item.name = 'minimum stub diameter')})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum stub diameter'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum stub diameter'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.28.5 stub_thickness

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
 subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 [shape_aspect <-
 shape_aspect_relationship.relating_shape_aspect]
 [shape_aspect <-
 shape_aspect_relationship.related_shape_aspect]
 shape_aspect_relationship =>
 dimensional_location
 dimensional_characteristic = dimensional_location
 dimensional_characteristic <-
 dimensional_characteristic_representation.dimension
 dimensional_characteristic_representation
 dimensional_characteristic_representation.representation ->
 shape_dimension_representation <=
 shape_representation <=
 {representation
 representation.name = 'lap joint stub end fitting dimensional shape'}
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'stub thickness'})

#2: (piping_component_class <=
 characterized_object
 characterized_definition = characterized_object
 characterized_definition <-
 property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <-
 property_definition_representation.definition
 property_definition_representation

ISO 10303-227:2005(E)

```
property_definition_representation.used_representation ->
{representation
representation.name = 'lap joint stub end fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum stub thickness')
(representation_item.name = 'minimum stub thickness'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum stub thickness'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum stub thickness'}})
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.29 Lateral

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->


```

(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'lateral']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]
#2: (piping_component_class <=
[characterized_object]
[group])

```

5.1.11.29.1 branch_angle

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relying_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
{ dimensional_location =>
angular_location }
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=

```

ISO 10303-227:2005(E)

```
shape_representation <=  
{representation  
representation.name = 'lateral fitting dimensional shape'}  
representation  
representation.items[i] ->  
{representation_item  
representation_item.name = 'branch angle'})  
#2: (piping_component_class <=  
characterized_object  
characterized_definition = characterized_object  
characterized_definition <-  
property_definition.definition  
property_definition  
represented_definition = property_definition  
represented_definition <-  
property_definition_representation.definition  
property_definition_representation  
property_definition_representation.used_representation ->  
{representation  
representation.name = 'lateral fitting class dimensions'}  
representation  
(representation.items[i] ->  
{representation_item  
(representation_item.name = 'maximum branch angle')  
(representation_item.name = 'minimum branch angle'))  
([representation.items[i] ->  
{representation_item  
representation_item.name = 'maximum branch angle'}]  
[representation.items[i] ->  
{representation_item  
representation_item.name = 'minimum branch angle'}]))  
representation_item =>  
measure_representation_item <=  
{measure_with_unit =>  
plane_angle_measure_with_unit}  
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.11.29.2 centre_to_end_1_length

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

```

Reference path: #1: (piping_component_definition <=
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition =>
  product_definition_shape <-
  [shape_aspect.of_shape
  { shape_aspect
  shape_aspect.description = 'centre'}
  shape_aspect <-
  shape_aspect_relationship.relate_shape_aspect]
  [shape_aspect.of_shape
  {[shape_aspect =>
  plant_item_connector]
  [shape_aspect
  shape_aspect.description = 'end 1']}
  shape_aspect <-
  shape_aspect_relationship.related_shape_aspect]
  shape_aspect_relationship =>
  dimensional_location
  dimensional_characteristic = dimensional_location
  dimensional_characteristic <-
  dimensional_characteristic_representation.dimension
  dimensional_characteristic_representation
  dimensional_characteristic_representation.representation ->
  shape_dimension_representation <=
  shape_representation <=
  { representation
  representation.name = 'lateral fitting dimensional shape'}
  representation
  representation
  representation.items[i] ->
  { representation_item
  representation_item.name = 'centre to end 1 length'})
#2: (piping_component_class <=
  characterized_object
  characterized_definition = characterized_object
  characterized_definition <-
  property_definition.definition
  property_definition
  represented_definition = property_definition
  represented_definition <-
  property_definition_representation.definition
  property_definition_representation
  property_definition_representation.used_representation ->

```

ISO 10303-227:2005(E)

```
{representation
representation.name = 'lateral fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum centre to end 1 length')
(representation_item.name = 'minimum centre to end 1 length'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum centre to end 1 length'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum centre to end 1 length'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.29.3 centre_to_end_2_length

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <= product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
[shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'centre'}
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect.of_shape
{[shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 2']}]

```

shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'lateral fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre to end 2 length')}
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'lateral fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum centre to end 2 length')
(representation_item.name = 'minimum centre to end 2 length')})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum centre to end 2 length'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum centre to end 2 length'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

ISO 10303-227:2005(E)

5.1.11.29.4 centre_to_end_3_length

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation
Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
[shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'centre'}
shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect.of_shape
{[shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 3']}
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'lateral fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre to end 3 length'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object

```

characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'lateral fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum centre to end 3 length')
(representation_item.name = 'minimum centre to end 3 length'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum centre to end 3 length'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum centre to end 3 length'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.29.5 end_1_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector

```

ISO 10303-227:2005(E)

5.1.11.29.6 end_2_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
plant_item_connector

5.1.11.29.7 end_3_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 3'}
shape_aspect =>
plant_item_connector

5.1.11.30 Lined_piping

AIM element: piping_spool_definition

Source: ISO 10303-227

Reference path: piping_spool_definition <=
product_definition
classification_item = product_definition
classification_item <=
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
group_role


```

group_role.name = 'lining type'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name
{group.name = 'lined'}

```

5.1.11.30.1 lining_thickness_inside_pipe

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: piping_spool_definition <=
product_definition <-
characterized_product_definition = product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.name = 'pipe lining'}
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
{property_definition_representation =>
shape_definition_representation}
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items [i] ->
{representation_item
representation_item.name = 'thickness'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.11.30.2 lining_thickness_at_flange_face

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: piping_spool_definition <=
product_definition <-

ISO 10303-227:2005(E)

```
characterized_product_definition = product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.name = 'flange face lining'}
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
{property_definition_representation =>
shape_definition_representation}
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items [i] ->
{representation_item
representation_item.name = 'thickness'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.31 Lug

AIM element: piping_support_definition
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: piping_support_definition <=
product_definition
{piping_support_definition
classification_item = piping_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->

```

[group =>
  piping_support_fitting_class]
[group
  group.name = 'lug']
  {product_definition
  product_definition.formation ->
  product_definition_formation
  product_definition_formation.of_product ->
  [product
  classification_item = product
  classification_item <-
  applied_classification_assignment.items[i]
  applied_classification_assignment <=
  {classification_assignment
  classification_assignment.role ->
  classification_role
  classification_role = 'plant item type classification'}
  classification_assignment
  classification_assignment.assigned_class ->
  (group)
  (group <-
  group_relationship.related_group
  group_relationship
  group_relationship.relying_group ->
  group)
  group.name = 'piping support']
  [product
  product.frame_of_reference[i] ->
  product_context <=
  application_context_element
  application_context_element.name = 'plant item']]

```

5.1.11.31.1 length

AIM element: [measure_with_unit.value_component]

[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: piping_support_definition <=

product_definition

characterized_product_definition = product_definition

characterized_product_definition

characterized_definition = characterized_product_definition

characterized_definition <-

property_definition.definition

property_definition =>

product_definition_shape <-

shape_aspect.of_shape

[shape_aspect <-

ISO 10303-227:2005(E)

```
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'lug dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.32 Mitre_bend_pipe

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->

```

[group =>
pipe_class]
[group
group.name = 'mitre bend pipe']]
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'pipe']
227
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]
#2: (piping_component_class <=
[characterized_object]
[group])

```

5.1.11.32.1 number_of_segments

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition

ISO 10303-227:2005(E)

```
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'pipe characteristics'}
representation
{representation_item
representation_item.name = 'number of segments'}}
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'pipe class characteristics'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum number of segments')
(representation_item.name = 'minimum number of segments')}}
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum number of segments'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum number of segments'}}])
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component
{measure_with_unit.value_component ->
measure_value
measure_value = count_measure}]
[measure_with_unit.unit_component]
```

5.1.11.32.2 radius

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

```

AIM element: [measure_with_unit.value_component]
             [measure_with_unit.unit_component]
Source:      ISO 10303-41
Rules:       subtype_exclusive_characterized_object
             subtype_mandatory_shape_representation
Reference path: #1: (piping_component_definition <=
                    product_definition
                    characterized_product_definition = product_definition
                    characterized_product_definition
                    characterized_definition = characterized_product_definition
                    characterized_definition <-
                    property_definition.definition
                    property_definition =>
                    product_definition_shape <-
                    shape_aspect.of_shape
                    shape_aspect <-
                    dimensional_size.applies_to
                    dimensional_size
                    dimensional_characteristic = dimensional_size
                    dimensional_characteristic <-
                    dimensional_characteristic_representation.dimension
                    dimensional_characteristic_representation
                    dimensional_characteristic_representation.representation ->
                    shape_dimension_representation <=
                    shape_representation <=
                    {representation
                     representation.name = 'pipe dimensional shape'}
                    representation
                    representation.items[i] ->
                    {representation_item
                     representation_item.name = 'radius'})
#2: (piping_component_class <=
     characterized_object
     characterized_definition = characterized_object
     characterized_definition <-
     property_definition.definition
     property_definition
     represented_definition = property_definition
     represented_definition <-
     property_definition_representation.definition
     property_definition_representation
     property_definition_representation.used_representation ->
     {representation
      representation.name = 'pipe class dimensions'}
     representation
     (representation.items[i] ->
      {representation_item

```

ISO 10303-227:2005(E)

```
(representation_item.name = 'maximum radius')
(representation_item.name = 'minimum radius'))
([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum radius'}]
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum radius'}])
representation_item =>
measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
```

5.1.11.32.3 sweep_angle

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 [shape_aspect <-
 shape_aspect_relationship.relate_shape_aspect]
 [shape_aspect <-
 shape_aspect_relationship.related_shape_aspect]
 shape_aspect_relationship =>
 {dimensional_location =>
 angular_location}
 dimensional_location
 dimensional_characteristic = dimensional_location
 dimensional_characteristic <-
 dimensional_characteristic_representation.dimension
 dimensional_characteristic_representation
 dimensional_characteristic_representation.representation ->
 shape_dimension_representation <=


```

shape_representation <=
{representation
representation.name = 'pipe dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'sweep angle'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'pipe class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum sweep angle')
(representation_item.name = 'minimum sweep angle'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum sweep angle'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum sweep angle'}]))
representation_item =>
measure_representation_item <=
{measure_with_unit =>
plane_angle_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.33 Nipple

AIM element: piping_component_definition
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: piping_component_definition <=
product_definition
{piping_component_definition

ISO 10303-227:2005(E)

```
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
pipe_class]
[group
group.name = 'nipple']
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'pipe']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]}
```

5.1.11.33.1 end_to_end_length

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: piping_component_definition <=
product_definition

```

characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[{{shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 1']}
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[{{shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 2']}
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'nipple dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'end to end length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.34 Olet

- #1: The attributes are for the individual piping component.
- #2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)

ISO 10303-227:2005(E)

Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: #1: (piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'olet']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']})
#2: (piping_component_class <=
[characterized_object]
[group])

5.1.11.34.1 base_outside_diameter

#1: The attributes are for the individual piping component.
#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition

```

characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'olet fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'base outside diameter'}}
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'olet fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum base outside diameter')
(representation_item.name = 'minimum base outside diameter')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum base outside diameter'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum base outside diameter'}}])
representation_item =>

```

ISO 10303-227:2005(E)

```
measure_representation_item <=  
{ measure_with_unit =>  
length_measure_with_unit}  
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.11.34.2 branch_angle

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
{ dimensional_location =>
angular_location}
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'olet fitting dimensional shape'}
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'branch angle'})
#2: (piping_component_class <=
characterized_object

```

characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'lateral fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum branch angle')
(representation_item.name = 'minimum branch angle')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum branch angle'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum branch angle'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
plane_angle_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.34.3 end_1_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector

```

ISO 10303-227:2005(E)

5.1.11.34.4 end_2_connector

AIM element: plant_item_connector
Source: ISO 10303-227
Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
plant_item_connector

5.1.11.34.5 length

#1: The attributes are for the individual piping component.
#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation
Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
[shape_aspect <=
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <=
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <=
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->


```

shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'olet fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'length'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'olet fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum length')
(representation_item.name = 'minimum length'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum length'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum length'}]))
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.34.6 skirt_outside_diameter

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

ISO 10303-227:2005(E)

```
Reference path: #1: (piping_component_definition <=
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition =>
  product_definition_shape <-
  shape_aspect.of_shape
  shape_aspect <-
  dimensional_size.applies_to
  dimensional_size
  dimensional_characteristic = dimensional_size
  dimensional_characteristic <-
  dimensional_characteristic_representation.dimension
  dimensional_characteristic_representation
  dimensional_characteristic_representation.representation ->
  shape_dimension_representation <=
  shape_representation <=
  {representation
  representation.name = 'olet fitting dimensional shape'}
  representation
  representation.items[i] ->
  {representation_item
  representation_item.name = 'skirt outside diameter'})
#2: (piping_component_class <=
  characterized_object
  characterized_definition = characterized_object
  characterized_definition <-
  property_definition.definition
  property_definition
  represented_definition = property_definition
  represented_definition <-
  property_definition_representation.definition
  property_definition_representation
  property_definition_representation.used_representation ->
  {representation
  representation.name = 'olet fitting class dimensions'}
  representation
  (representation.items[i] ->
  {representation_item
  (representation_item.name = 'maximum skirt outside diameter')
  (representation_item.name = 'minimum skirt outside diameter')})
  ([representation.items[i] ->
  {representation_item
  representation_item.name = 'maximum skirt outside diameter'}]
  [representation.items[i] ->
```

```

{representation_item
representation_item.name = 'minimum skirt outside diameter'}})
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.35 Orifice_flange

AIM element: piping_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
flange_fitting_class]
[group
group.name = 'orifice flange']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->

ISO 10303-227:2005(E)

```
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'flange']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]}
```

5.1.11.35.1 jacking_screw_orientation

AIM element: shape_aspect.description

Source: ISO 10303-41

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.name = 'jacking screw'}
shape_aspect
shape_aspect.description

5.1.11.35.2 tap

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'tap'}
shape_aspect =>
plant_item_connector

5.1.11.35.3 tap_centreline_orientation

AIM element: axis2_placement_3d

Source: ISO 10303-42

Reference path: piping_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 {[shape_aspect
 shape_aspect.description = 'tap']
 [shape_aspect =>
 plant_item_connector]
 shape_aspect
 represented_definition = shape_aspect
 represented_definition <-
 property_definition_representation.definition
 {property_definition_representation =>
 shape_definition_representation}
 property_definition_representation
 property_definition_representation.used_representation ->
 {representation =>
 shape_representation}
 representation
 representation.items [i] ->
 {representation_item
 representation_item.name = 'centreline orientation'}
 representation_item =>
 geometric_representation_item
 placement =>
 axis2_placement_3d

5.1.11.36 Pad

AIM element: piping_support_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
 product_context_discipline_type_constraint
 value_for_application_context

Reference path: piping_support_definition <=
 product_definition
 {piping_support_definition
 classification_item = piping_support_definition
 classification_item <-

ISO 10303-227:2005(E)

```
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
piping_support_fitting_class]
[group
group.name = 'pad']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'piping support']}
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]}
```

5.1.11.36.1 thickness

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: piping_support_definition <=
product_definition
characterized_product_definition = product_definition

```

characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'shoe dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'thickness'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.37 Perforated_cap

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-

ISO 10303-227:2005(E)

```
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
pipe_closure_fitting_class]
[group
group.name = 'perforated cap']
[group <-
group_relationship.related_group
{group_relationship
group_relationship.name = 'class hierarchy'}
group_relationship
group_relationship.relatng_group ->
group
group.name = 'cap']] }
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
{classification_assignment
classification_assignment.role ->
group_role
group_role.name = 'plant item type'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
```



```

group)
group.name = 'perforated cap']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'}})
#2: (piping_component_class <=
[characterized_object]
[group])
{[group =>
pipe_closure_fitting_class]
[(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'perforated cap']
[group <-
group_relationship.related_group
{group_relationship
group_relationship.name = 'class hierarchy'}
group_relationship
group_relationship.relying_group ->
group
group.name = 'cap']}]

```

5.1.11.37.1 end_2_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
plant_item_connector

```

ISO 10303-227:2005(E)

5.1.11.37.2 hole_diameter

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation
Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'pipe closure fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'hole diameter'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'pipe closure fitting class dimensions'}

```

representation
(representation.items[i] ->
 {representation_item
 (representation_item.name = 'maximum hole diameter')
 (representation_item.name = 'minimum hole diameter'}})
([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum hole diameter'}}]
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum hole diameter'}}])
representation_item =>
measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

```

5.1.11.38 Orifice_plate

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=

```

product_definition
 {product_definition
 product_definition.formation ->
 product_definition_formation
 product_definition_formation.of_product ->
 [product
 classification_item = product
 classification_item <-
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role
 classification_role = 'piping component type classification'}
 classification_assignment
 classification_assignment.assigned_class ->
 (group)
 (group <-
 group_relationship.related_group

```

ISO 10303-227:2005(E)

```
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'orifice plate']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']})
#2: (piping_component_class <=
[characterized_object]
[group])
```

5.1.11.38.1 beta_ratio

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'beta ratio'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
ratio_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.11.38.2 bore_diameter

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

```

Rules:      subtype_exclusive_characterized_object
            subtype_mandatory_shape_representation
Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'orifice plate fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'bore diameter'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'orifice plate fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum bore diameter')
(representation_item.name = 'minimum bore diameter')})
([representation.items[i] ->
{representation_item

```

ISO 10303-227:2005(E)

```
representation_item.name = 'maximum bore diameter'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum bore diameter'}})]
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.38.3 outside_diameter

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'orifice plate fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'outside diameter'})
#2: (piping_component_class <=
characterized_object

```

characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'orifice plate fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum outside diameter')
(representation_item.name = 'minimum outside diameter')}})
((representation.items[i] ->
{representation_item
representation_item.name = 'maximum outside diameter'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum outside diameter'}}))
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.38.4 thickness

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape

ISO 10303-227:2005(E)

```
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'orifice plate fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'thickness'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'orifice plate fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum thickness')
(representation_item.name = 'minimum thickness'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum thickness'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum thickness'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
```



```
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.38.5 end_1_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: #1: (piping_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 1' }
shape_aspect =>
plant_item_connector)
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 1' }
shape_aspect =>
plant_item_connector)
```

5.1.11.38.6 end_2_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: #1: (piping_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 2' }
```

ISO 10303-227:2005(E)

```
shape_aspect =>
plant_item_connector)
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
plant_item_connector)
```

5.1.11.39 Outside_and_thickness

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (shape_dimension_representation)

#2: (representation)

Source: ISO 10303-43, ISO 10303-47

Reference path: #1: ({shape_dimension_representation <=

```
shape_representation <=
[representation
representation.name = 'piping component dimensions']
[representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
(represented_definition
represented_definition = property_definition
{property_definition =>
product_definition_shape}
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition =>
piping_component_definition)
(represented_definition
represented_definition = shape_aspect
shape_aspect =>
plant_item_connector)}})
#2: ({[representation
representation.name = 'piping component class size']
[representation <-
```

```

property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
piping_component_class}})

```

5.1.11.39.1 outside_diameter

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

```

AIM element: [measure_with_unit.value_component]
             [measure_with_unit.unit_component]
Source:      ISO 10303-41
Rules:       subtype_mandatory_shape_representation
Reference path: #1: (shape_dimension_representation <=
                   shape_representation <=
                   representation
                   representation.items[i] ->
                   {representation_item
                    representation_item.name = 'outside diameter'})
              #2: (representation
                   (representation.items[i] ->
                    {representation_item
                     (representation_item.name = 'maximum outside diameter')
                     (representation_item.name = 'minimum outside diameter')})
                   ([representation.items[i] ->
                    {representation_item
                     representation_item.name = 'maximum outside diameter'}}]
                   [representation.items[i] ->
                    {representation_item
                     representation_item.name = 'minimum outside diameter'}}])
                   representation_item =>
                   measure_representation_item <=
                   {measure_with_unit =>
                    length_measure_with_unit}
                   measure_with_unit
                   [measure_with_unit.value_component]
                   [measure_with_unit.unit_component]

```

5.1.11.39.2 thickness

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

ISO 10303-227:2005(E)

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: #1: (shape_dimension_representation <=
shape_representation <=
representation
representation.items[i] ->
{representation_item
representation_item.name = 'thickness'})
#2: (representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum thickness')
(representation_item.name = 'minimum thickness')})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum thickness'}])
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum thickness'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.11.40 Paddle_blank

#1: The attributes are for the individual piping component.
#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->

```

classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
blank_fitting_class]
[group
group.name = 'paddle blank']]
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'blank']}
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]
#2: (piping_component_class <=
[characterized_object]
[group])

```

5.1.11.40.1 paddle_length

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

ISO 10303-227:2005(E)

```
Reference path: #1: (piping_component_definition <=
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition =>
  product_definition_shape <-
  shape_aspect.of_shape
  [shape_aspect <-
  shape_aspect_relationship.relating_shape_aspect]
  [shape_aspect <-
  shape_aspect_relationship.related_shape_aspect]
  shape_aspect_relationship =>
  dimensional_location
  dimensional_characteristic = dimensional_location
  dimensional_characteristic <-
  dimensional_characteristic_representation.dimension
  dimensional_characteristic_representation
  dimensional_characteristic_representation.representation ->
  shape_dimension_representation <=
  shape_representation <=
  {representation
  representation.name = 'blank fitting dimensional shape'}
  representation
  representation.items[i] ->
  {representation_item
  representation_item.name = 'paddle length'})
#2: (piping_component_class <=
  characterized_object
  characterized_definition = characterized_object
  characterized_definition <-
  property_definition.definition
  property_definition
  represented_definition = property_definition
  represented_definition <-
  property_definition_representation.definition
  property_definition_representation
  property_definition_representation.used_representation ->
  {representation
  representation.name = 'blank fitting class dimensions'}
  representation
  (representation.items[i] ->
  {representation_item
  (representation_item.name = 'maximum paddle length')
  (representation_item.name = 'minimum paddle length')})
  ([representation.items[i] ->
```

```

{representation_item
representation_item.name = 'maximum paddle length'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum paddle length'}})
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.40.2 paddle_width

- #1: The attributes are for the individual piping component.
#2: The attributes are for the definition of a family of piping components.

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation
Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'blank fitting dimensional shape'}
representation
representation.items[i] ->

```

ISO 10303-227:2005(E)

```
{representation_item
representation_item.name = 'paddle width'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'blank fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum paddle width')
(representation_item.name = 'minimum paddle width'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum paddle width'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum paddle width'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.41 Paddle_spacer

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-


```

applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
spacer_fitting_class]
[group
group.name = 'paddle spacer']]
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'spacer']}
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]
#2: (piping_component_class <=
[characterized_object]
[group])

```

5.1.11.41.1 inside_diameter

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

ISO 10303-227:2005(E)

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'spacer fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'inside diameter'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'spacer fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum inside diameter')
(representation_item.name = 'minimum inside diameter'}})
([representation.items[i] ->

```

{representation_item
representation_item.name = 'maximum inside diameter'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum inside diameter'}})
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.41.2 paddle_length

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'spacer fitting dimensional shape'}
representation
representation.items[i] ->

ISO 10303-227:2005(E)

```
{representation_item
representation_item.name = 'paddle length'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'spacer fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum paddle length')
(representation_item.name = 'minimum paddle length')})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum paddle length'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum paddle length'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.41.3 paddle_width

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: Iso 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-

```

property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimensional
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'spacer fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'paddle width'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'spacer fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum paddle width')
(representation_item.name = 'minimum paddle width')})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum paddle width'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum paddle width'}])
representation_item =>

```

ISO 10303-227:2005(E)

```
measure_representation_item <=  
{ measure_with_unit =>  
length_measure_with_unit}  
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.11.42 Perforated_plate

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{ piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
pipe_closure_fitting_class]
[group
group.name = 'perforated plate']
[group <-
group_relationship.related_group
{ group_relationship
group_relationship.name = 'class hierarchy'}
group_relationship
group_relationship.relating_group ->
group
group.name = 'plate']}]
{ product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-

```

applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'perforated plate']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]
#2: (piping_component_class <=
[characterized_object]
[group])
{[group =>
pipe_closure_fitting_class]
[(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'perforated plate']
[group <-
group_relationship.related_group
{group_relationship
group_relationship.name = 'class hierarchy'}
group_relationship
group_relationship.relating_group ->
group
group.name = 'plate']]

```

5.1.11.42.1 end_2_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition

ISO 10303-227:2005(E)

```
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 2' }
shape_aspect =>
plant_item_connector
```

5.1.11.42.2 hole_diameter

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'pipe closure fitting dimensional shape' }
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'hole diameter' })
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object


```

characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'pipe closure fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum hole diameter')
(representation_item.name = 'minimum hole diameter')}}
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum hole diameter'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum hole diameter'}]))
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.43 Pipe

- #1: The attributes are for the individual piping component.
#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: (piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-

ISO 10303-227:2005(E)

```
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'pipe'}}
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'}})
(piping_component_class <=
[characterized_object]
[group])
```

5.1.11.43.1 end_1_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: #1: (piping_component_definition <=

```
product_definition
characterized_product_definition
characterized_definition = characterized_product_definition)
#2: (piping_component_class <=
[characterized_object]
[group]
characterized_definition = characterized_object)
characterized_definition <-
property_definition.definition
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
```

```

shape_aspect =>
plant_item_connector

```

5.1.11.43.2 end_2_connector

```

AIM element:  plant_item_connector
Source:      ISO 10303-227
Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition
characterized_definition = characterized_product_definition)
#2: (piping_component_class <=
[characterized_object]
[group]
characterized_definition = characterized_object)
characterized_definition <-
property_definition.definition
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
plant_item_connector

```

5.1.11.43.3 additional_length

#1: The attributes are for the individual piping component.
#2: The attributes are for the definition of a family of piping components.

```

AIM element:  [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source:      ISO 10303-41
Rules:      subtype_exclusive_characterized_object
subtype_mandatory_shape_representation
Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-

```

ISO 10303-227:2005(E)

```
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'pipe dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'additional length'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'spacer fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum additional length')
(representation_item.name = 'minimum additional length'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum additional length'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum additional length'}})
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
```

```

measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.44 Pipe_closure

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->]
[product
product.frame_of_reference[i] ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'pipe closure']
product_context<=
application_context_element
application_context_element.name = 'plant item']})
#2: (piping_component_class <=
[characterized_object]
[group])-
{(group)
(group <-

ISO 10303-227:2005(E)

```
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'pipe closure'}
```

5.1.11.44.1 end_1_connector

```
AIM element: plant_item_connector
Source:      ISO 10303-227
Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector
```

5.1.11.44.2 shape_type

```
AIM element: group.description
Source:      ISO 10303-41
Reference path: piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'pipe closure fitting type classification'}
classification_assignment
classification_assignment.assigned_class ->
{group =>
pipe_closure_fitting_class}
group
group.description
{(group.description = 'square')}
(group.description = 'round')}
```

5.1.11.45 Piping_component

- #1: The attributes are for the individual piping component.
- #2: The attributes are for the definition of a family of piping components.

AIM element: #1 (piping_component_definition)
 #2 (piping_component_class)
 Source: ISO 10303-227
 Rules: dependent_instantiable_product_context
 product_context_discipline_type_constraint
 value_for_application_context
 Reference path: (piping_component_definition <=
 product_definition
 {product_definition
 product_definition.formation ->
 product_definition_formation
 product_definition_formation.of_product ->
 product
 product.frame_of_reference[i] ->
 product_context <=
 application_context_element
 application_context_element.name = 'plant item'})
 (piping_component_class <=
 [characterized_object]
 [group])

5.1.11.45.1 side_connector

AIM element: plant_item_connector
 Source: ISO 10303-227
 Reference path: piping_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 {shape_aspect
 shape_aspect.description = 'side'}
 shape_aspect =>
 plant_item_connector

5.1.11.45.2 standard_point

AIM element: cartesian_point
 Source: ISO 10303-42
 Reference path: piping_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-

ISO 10303-227:2005(E)

```
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{ representation
representation.name = 'internal position'}
representation
representation.items [i] ->
{ representation_item
representation_item.name = 'standard point'}
representation_item =>
geometric_representation_item =>
point =>
cartesian_point
```

5.1.11.45.3 pmi_record

AIM element: document.id

Source: ISO 10303-41

```
Reference path: piping_component_definition <=
product_definition
document_item = product_definition
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
{ document
document.kind ->
document_type
document_type.product_data_type = 'pmi record'}
document
document.id
```

5.1.11.45.4 mill_sheet_number

AIM element: document.id

Source: ISO 10303-41

```
Reference path: piping_component_definition <=
product_definition
document_item = product_definition
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
{ document
```



```

document.kind ->
document_type
document_type.product_data_type = 'mill sheet'}
document
document.id

```

5.1.11.45.5 piping_component to family_definition

AIM element: IDENTICAL MAPPING

5.1.11.46 Piping_size_description

#1: The attributes are for the definition of a family of piping components.

#2: The attributes are for the individual piping component.

AIM element: #1: (shape_dimension_representation)

#2: (representation)

Source: ISO 10303-43, ISO 10303-47

```

Reference path: {(shape_dimension_representation <=
shape_representation <=
representation)
(representation)
document_item = representation
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document
document.kind ->
document_type
document_type.product_data_type = 'dimensional standard'}
#1: ((shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'piping component dimensions'})
({representation
representation.name = 'piping component size'})
representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
(represented_definition
represented_definition = property_definition
{property_definition =>
product_definition_shape}
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition

```

ISO 10303-227:2005(E)

```
characterized_product_definition
characterized_product_definition = product_definition
product_definition =>
  piping_component_definition)(represented_definition
represented_definition = shape_aspect
shape_aspect =>
  plant_item_connector))
#2: ({[representation
representation.name = 'piping component class size']
[representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
  piping_component_class]])
```

5.1.11.46.1 dimensional_standard

#1: The attributes are for the definition of a family of piping components.

#2: The attributes are for the individual piping component.

AIM element: document

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: #1: (shape_dimension_representation <=
shape_representation <=
representation)
#2: (representation)
document_item = representation
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document
{ document.kind ->
document_type
document_type.product_data_type = 'dimensional standard'}

5.1.11.46.2 ovality_allowance

#1: The attributes are for the definition of a family of piping components.

#2: The attributes are for the individual piping component.

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
 Source: ISO 10303-41
 Rules: subtype_mandatory_shape_representation
 Reference path: #1: (shape_dimension_representation <=
 shape_representation <=
 representation)
 #2: (representation)
 representation.items[i] ->
 {representation_item
 (representation_item.name = 'ovality upper limit')
 (representation_item.name = 'ovality lower limit')}
 representation_item =>
 measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.11.47 Piping_spool

AIM element: piping_spool_definition
 Source: ISO 10303-227
 Rules: dependent_instantiable_product_context
 product_context_discipline_type_constraint
 value_for_application_context
 Reference path: piping_spool_definition <=
 product_definition
 {product_definition
 product_definition.formation ->
 product_definition_formation
 product_definition_formation.of_product ->
 product
 product.frame_of_reference[i] ->
 product_context<=
 application_context_element
 application_context_element.name = 'plant item'}

5.1.11.47.1 tag_number

AIM element: product.id
 Source: ISO 10303-41
 Reference path: piping_spool_definition <=
 product_definition
 product_definition.formation ->
 product_definition_formation
 product_definition_formation.of_product ->
 product
 product.id

ISO 10303-227:2005(E)

5.1.11.47.2 piping_type

AIM element: group.name
Source: ISO 10303-41
Reference path: piping_spool_definition <=
product_definition
classification_item = product_definition
classification_item <=
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
group_role
group_role.name = 'piping type'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name

5.1.11.47.3 temporary_flag

AIM element: application_context.application
Source: ISO 10303-41
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: piping_spool_definition <=
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.frame_of_reference ->
application_context
application_context.application
{(application_context.application = 'temporary piece')
(application_context.application = 'permanent piece')}

5.1.11.48 Piping_support

AIM element: product
Source: ISO 10303-41
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: {[product
classification_item = product
classification_item <=

```

applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group
group.name = 'piping support']
[group
group_relationship.related_group
group_relationship
{group_relationship.name = 'usage classification'}
group_relationship.relying_group ->
group
group.name = 'support component']]
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.11.48.1 orientation

AIM element: axis2_placement_3d.ref_direction

Source: ISO 10303-42

Reference path: product

```

product_definition_formation.of_product
product_definition_formation
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect.description = 'location point'}
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->

```

ISO 10303-227:2005(E)

```
{representation_item
representation_item.name = 'support orientation'}
representation_item =>
geometric_representation_item =>
placement =>
axis2_placement_3d
axis2_placement_3d.ref_direction
```

5.1.11.48.2 location_point

AIM element: placement.location

Source: ISO 10303-42

Reference path: product

```
product_definition_formation.of_product
product_definition_formation
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'location point'}
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'support location'}
representation_item =>
geometric_representation_item =>
placement
placement.location
```

5.1.11.48.3 end_1_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: product

```
product_definition_formation.of_product
product_definition_formation
product_definition.formation
```

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector

```

5.1.11.49 Plate

- #1: The attributes are for the individual piping component.
#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
pipe_closure_fitting_class]
[group
group.name = 'plate']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-

ISO 10303-227:2005(E)

```
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
{classification_assignment
classification_assignment.role ->
group_role
group_role.name = 'plant item type'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'plate'}}
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'}})
#2: (piping_component_class <=
[characterized_object]
[group])
{[group =>
pipe_closure_fitting_class]
[(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'plate']]}
```

5.1.11.49.1 thickness

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition


```

characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_shape]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'pipe closure fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'thickness'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'pipe closure fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum thickness')
(representation_item.name = 'minimum thickness')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum thickness'}}
[representation.items[i] ->

```

ISO 10303-227:2005(E)

```
{representation_item
representation_item.name = 'minimum thickness'}}]
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.50 Plug

#1: The attributes are for the individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
pipe_closure_fitting_class]
[group
group.name = 'plug']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role

```

classification_role = 'piping component type classification'}
{classification_assignment
classification_assignment.role ->
group_role
group_role.name = 'plant item type'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'plug'}
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]
#2: (piping_component_class <=
[characterized_object]
[group])
{[group =>
pipe_closure_fitting_class]
[(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'plug']]

```

5.1.11.51 Pressure_class

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: representation

Source: ISO 10303-43

Reference path: #1: ([representation
representation.name = 'piping component size']
[representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
(represented_definition
represented_definition = property_definition
property_definition
property_definition.definition ->

ISO 10303-227:2005(E)

```
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition =>
  piping_component_definition)
(represented_definition
represented_definition = shape_aspect
shape_aspect =>
  plant_item_connector))})
#2: ({representation
representation.name = 'piping component class size'
[representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
  piping_component_class])})
```

5.1.11.51.1 nominal_size

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: representation

```
#1: ({representation
representation.name = 'piping component size'}
representation.items[i] ->
{representation_item
representation_item.name = 'nominal size'})
#2: ({representation
representation.name = 'piping component class size'}
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum nominal size')
(representation_item.name = 'minimum nominal size')})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum nominal size'}]
[representation.items[i] ->
```

```

{representation_item
representation_item.name = 'minimum nominal size'}}
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component])

```

5.1.11.51.2 pressure_rating

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: representation

```

#1: ({representation
representation.name = 'piping component size'}
representation.items[i] ->
{representation_item
representation_item.name = 'pressure rating'})
#2: ({representation
representation.name = 'piping component class size'}
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum pressure rating')
(representation_item.name = 'minimum pressure rating')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum pressure rating'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum pressure rating'}}])
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
[measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component]

```

5.1.11.52 Reducer

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

ISO 10303-227:2005(E)

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: #1: (piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'reducer']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']})
#2: (piping_component_class <=
[characterized_object]
[group])

5.1.11.52.1 end_1_connector

AIM element: plant_item_connector
Source: ISO 10303-227
Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition

```

characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 1' }
shape_aspect =>
plant_item_connector

```

5.1.11.52.2 end_2_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 2' }
shape_aspect =>
plant_item_connector

```

5.1.11.52.3 end_to_end_length

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[{{shape_aspect =>

```

ISO 10303-227:2005(E)

```
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 1']]
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[{{shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 2']]
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'reducer fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'end to end length'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'reducer fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum end to end length')
(representation_item.name = 'minimum end to end length'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum end to end length'}}]
[representation.items[i] ->
```



```

{representation_item
representation_item.name = 'minimum end to end length'}}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.53 Reducing flange

```

AIM element: piping_component_definition
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
flange_fitting_class]
[group
group.name = 'reducing flange']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship

```

ISO 10303-227:2005(E)

```
group_relationship.relater_group ->
group)
group.name = 'flange']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}]
```

5.1.11.54 Reinforcing_component

AIM element: product
Source: ISO 10303-41
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group
group.name = 'reinforcing component']
[group
group_relationship.related_group
group_relationship
{group_relationship.name = 'usage classification'}
group_relationship.relater_group ->
group
group.name = 'support component']}]
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]}

5.1.11.54.1 orientation

AIM element: axis2_placement_3d.ref_direction
Source: ISO 10303-42
Reference path: product
product_definition_formation.of_product
product_definition_formation
product_definition.formation

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'reinforcing orientation'}
representation_item =>
geometric_representation_item =>
placement =>
axis2_placement_3d
axis2_placement_3d.ref_direction

```

5.1.11.54.2 location_point

AIM element: placement.location

Source: ISO 10303-42

Reference path: product

```

product_definition_formation.of_product
product_definition_formation
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation

```

ISO 10303-227:2005(E)

```
representation.items[i] ->
{representation_item
representation_item.name = 'reinforcing location'}
representation_item =>
geometric_representation_item =>
placement
placement.location
```

5.1.11.54.3 end_1_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: product

```
product_definition_formation.of_product
product_definition_formation
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector
```

5.1.11.55 Reinforcing_plate

AIM element: reinforcing_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: reinforcing_component_definition <=

```
product_definition
{reinforcing_component_definition
classification_item = reinforcing_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
```

```

[group =>
  piping_support_fitting_class]
[group
  group.name = 'reinforcing plate']]
{product_definition
  product_definition.formation ->
  product_definition_formation
  product_definition_formation.of_product ->
  [product
    classification_item = product
    classification_item <-
    applied_classification_assignment.items[i]
    applied_classification_assignment <=
    {classification_assignment
      classification_assignment.role ->
      classification_role
      classification_role = 'plant item type classification'}
    classification_assignment
    classification_assignment.assigned_class ->
    (group)
    (group <-
      group_relationship.related_group
      group_relationship
      group_relationship.relating_group ->
      group)
    group.name = 'reinforcing component']
  [product
    product.frame_of_reference[i] ->
    product_context <=
    application_context_element
    application_context_element.name = 'plant item']]

```

5.1.11.55.1 thickness

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: reinforcing_component_definition <=

```

  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition =>
  product_definition_shape <-
  shape_aspect.of_shape
  [shape_aspect <-

```

ISO 10303-227:2005(E)

```
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'reinforcing plate dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'thickness'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.56 Reinforcing_ring

AIM element: reinforcing_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: reinforcing_component_definition <=
product_definition
{reinforcing_component_definition
classification_item = reinforcing_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
piping_support_fitting_class]
[group

```

group.name = 'reinforcing ring']}]
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relate_group ->
group)
group.name = 'reinforcing component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]

```

5.1.11.56.1 thickness

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: reinforcing_component_definition <=

```

product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]

```

ISO 10303-227:2005(E)

```
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'reinforcing ring dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'thickness'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.56.2 outside_diameter

```
AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: reinforcing_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
```



```

dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'reinforcing ring dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'outside diameter'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.57 Ring_spacer

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=

```

product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
spacer_fitting_class]
[group
group.name = 'ring spacer']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->

```

ISO 10303-227:2005(E)

```
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'spacer']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]
#2: (piping_component_class <=
[characterized_object]
[group])
```

5.1.11.57.1 inside_diameter

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-
dimensional_size.applies_to

```

dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimensional_size
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'spacer fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'inside diameter'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'spacer fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum inside diameter')
(representation_item.name = 'minimum inside diameter')})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum inside diameter'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum inside diameter'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.58 Schedule

#1: The attributes are for an individual piping component.

ISO 10303-227:2005(E)

#2: The attributes are for the definition of a family of piping components.

AIM element: representation

Source: ISO 10303-43

```
Reference path: {representation
  document_item = representation
  document_item <-
  applied_document_reference.items[i]
  applied_document_reference <=
  document_reference
  document_reference.assigned_document ->
  document <-
  document_usage_constraint.source
  document_usage_constraint
  (document_usage_constraint.subject_element = 'pipe schedule')
  (document_usage_constraint.subject_element = 'connector schedule')}
#1: ({[representation
  representation.name = 'piping component size']
  [representation <-
  property_definition_representation.used_representation
  property_definition_representation
  property_definition_representation.definition ->
  (represented_definition
  represented_definition = property_definition
  property_definition
  property_definition.definition ->
  characterized_definition
  characterized_definition = characterized_product_definition
  characterized_product_definition
  characterized_product_definition = product_definition
  product_definition =>
  piping_component_definition)
  (represented_definition
  represented_definition = shape_aspect
  shape_aspect =>
  plant_item_connector)}})
#2: ({[representation
  representation.name = 'piping component class size']
  [representation <-
  property_definition_representation.used_representation
  property_definition_representation
  property_definition_representation.definition ->
  represented_definition
  represented_definition = property_definition
  property_definition
  property_definition.definition ->
  characterized_definition
  characterized_definition = characterized_object
```

```
characterized_object =>
  piping_component_class}}
```

5.1.11.58.1 nominal_size

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: representation

```
#1: ({representation
representation.name = 'piping component size'}
representation.items[i] ->
{representation_item
representation_item.name = 'nominal size'})
#2: ({representation
representation.name = 'piping component class size'}
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum nominal size')
(representation_item.name = 'minimum nominal size')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum nominal size'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum nominal size'}])
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.58.2 pipe_schedule

AIM element: document_usage_constraint.subject_element_value

Source: ISO 10303-41

Reference path: representation

```
document_item = representation
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-
document_usage_constraint.source
document_usage_constraint
document_usage_constraint.subject_element_value
```

ISO 10303-227:2005(E)

5.1.11.59 Shoe

AIM element: piping_support_definition
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: piping_support_definition <=
product_definition
{piping_support_definition
classification_item = piping_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
piping_support_fitting_class]
[group
group.name = 'shoe']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'piping support']
[product
product.frame_of_reference[i] ->

```

product_context <=
application_context_element
application_context_element.name = 'plant item']}]

```

5.1.11.59.1 height

```

AIM element: [measure_with_unit.value_component]
             [measure_with_unit.unit_component]
Source:      ISO 10303-41
Rules:      subtype_mandatory_shape_representation
Reference path: piping_support_definition <=
              product_definition
              characterized_product_definition = product_definition
              characterized_product_definition
              characterized_definition = characterized_product_definition
              characterized_definition <-
              property_definition.definition
              property_definition =>
              product_definition_shape <-
              shape_aspect.of_shape
              [shape_aspect <-
              shape_aspect_relationship.relater_shape_aspect]
              [shape_aspect <-
              shape_aspect_relationship.related_shape_aspect]
              shape_aspect_relationship =>
              dimensional_location
              dimensional_characteristic = dimensional_location
              dimensional_characteristic <-
              dimensional_characteristic_representation.dimension
              dimensional_characteristic_representation
              dimensional_characteristic_representation.representation ->
              shape_dimension_representation <=
              shape_representation <=
              {representation
              representation.name = 'shoe dimensional shape'}
              representation
              representation.items[i] ->
              {representation_item
              representation_item.name = 'height'}
              representation_item =>
              measure_representation_item <=
              {measure_with_unit =>
              length_measure_with_unit}
              measure_with_unit
              [measure_with_unit.value_component]
              [measure_with_unit.unit_component]

```

5.1.11.60 Slip_on_flange

#1: The attributes are for an individual piping component.

ISO 10303-227:2005(E)

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
flange_fitting_neck_type_class]
[group
group.name = 'slip on flange']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'flange']
[product


```

product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'})
#2: (piping_component_class <=
[characterized_object]
[group])

```

5.1.11.60.1 stand_off

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[{ shape_aspect
shape_aspect.name = 'flange face' }
shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[{ shape_aspect
shape_aspect.name = 'pipe end' }
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'slip on flange fitting dimensional shape' }
representation
representation.items[i] ->

ISO 10303-227:2005(E)

```
{representation_item
representation_item.name = 'stand off'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'slip on flange fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum stand off')
(representation_item.name = 'minimum stand off')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum stand off'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum stand off'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.61 Slip_on_jacket_flange

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition

```

classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
flange_fitting_neck_type_class]
[group
group.name = 'slip on jacket flange']
[group <-
group_relationship.related_group
{group_relationship
group_relationship.name = 'class hierarchy'}
group_relationship
group_relationship.relating_group ->
group
group.name = 'slip on flange'}}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'slip on jacket flange']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'}})

```

ISO 10303-227:2005(E)

```
#2: (piping_component_class <=  
[characterized_object]  
[group])  
{[group =>  
flange_fitting_neck_type_class]  
[group  
group.name = 'slip on jacket flange']  
(group)  
(group <=  
group_relationship.related_group  
group_relationship  
group_relationship.relating_group ->  
group)  
group.name = 'slip on jacket flange'}
```

5.1.11.61.1 end_3_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector

5.1.11.62 Socket_weld_flange

AIM element: piping_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <=
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->

```

classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
flange_fitting_neck_type_class]
[group
group.name = 'socket weld flange']]
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'flange']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.11.63 Spacer

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition

ISO 10303-227:2005(E)

```
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'spacer']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'}})
#2: (piping_component_class <=
[characterized_object]
[group])
```

5.1.11.63.1 outside_diameter

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>

```

product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'spacer fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'outside diameter'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'spacer fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum outside diameter')
(representation_item.name = 'minimum outside diameter')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum outside diameter'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum outside diameter'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit

```

ISO 10303-227:2005(E)

[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.11.63.2 thickness

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'spacer fitting dimensional shape' }
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'thickness' })
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition


```

represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'spacer fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum thickness')
(representation_item.name = 'minimum thickness')}}
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum thickness'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum thickness'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.64 Specialty_item

AIM element: piping_component_definition
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'}

5.1.11.65 Spectacle_blind

#1: The attributes are for an individual piping component.
#2: The attributes are for the definition of a family of piping components.

ISO 10303-227:2005(E)

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
blank_fitting_class]
[group
group.name = 'spectacle blind']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'blank']
[product
product.frame_of_reference[i] ->
product_context<=

```

application_context_element
application_context_element.name = 'plant item'})
#2: (piping_component_class <=
[characterized_object]
[group])

```

5.1.11.65.1 arm_width

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation
Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'blank fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'arm width'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-

```

ISO 10303-227:2005(E)

```
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'blank fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum arm width')
(representation_item.name = 'minimum arm width')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum arm width'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum arm width'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.65.2 centre_to_centre

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
[shape_aspect.of_shape
{shape_aspect

```

shape_aspect.description = 'centre'}
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'centre'}
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'blank fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre to centre'}}
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'blank fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum centre to centre')
(representation_item.name = 'minimum centre to centre')}}
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum centre to centre'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum centre to centre'}}])
representation_item =>

```

ISO 10303-227:2005(E)

```
measure_representation_item <=  
{ measure_with_unit =>  
length_measure_with_unit}  
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.11.65.3 inside_ring_diameter

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'blank fitting dimensional shape'}
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'inside ring diameter'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition

```

represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'blank fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum inside ring diameter')
(representation_item.name = 'minimum inside ring diameter')}}
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum inside ring diameter'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum inside ring diameter'}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.66 Stay

AIM element: reinforcing_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: reinforcing_component_definition <=

```

product_definition
{reinforcing_component_definition
classification_item = reinforcing_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
piping_support_fitting_class]
[group

```

ISO 10303-227:2005(E)

```
group.name = 'stay']}]
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'reinforcing component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]}
```

5.1.11.66.1 height

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: reinforcing_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
```



```

shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'stay dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'height'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.67 Stopper

```

AIM element: piping_support_definition
Source:      ISO 10303-227
Rules:      dependent_instantiable_product_context
            product_context_discipline_type_constraint
            value_for_application_context
Reference path: piping_support_definition <=
            product_definition
            {piping_support_definition
            classification_item = piping_support_definition
            classification_item <-
            applied_classification_assignment.items[i]
            applied_classification_assignment <=
            {classification_assignment
            classification_assignment.role ->
            classification_role
            classification_role = 'plant item type classification'}
            classification_assignment
            classification_assignment.assigned_class ->
            [group =>
            piping_support_fitting_class]
            [group
            group.name = 'stopper']}
            {product_definition
            product_definition.formation ->

```

ISO 10303-227:2005(E)

```
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'piping support']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]
```

5.1.11.67.1 length

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: Iso 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: piping_support_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
```

```

dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'stopper dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.68 Straight_pipe

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
pipe_class]
[group
group.name = 'straight pipe']}
{product_definition

ISO 10303-227:2005(E)

```
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'pipe']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]
#2: (piping_component_class <=
[characterized_object]
[group])
```

5.1.11.68.1 cold_spring

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: Iso 10303-41

Reference path: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
{property_definition =>
product_definition_shape}
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
{property_definition_representation =>

```

shape_definition_representation}
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'pipe fabrication dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'cold spring'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component])

```

5.1.11.68.2 end_to_end_length

#1: The attributes are for an individual piping component.

#1a: The length is given as a numeric value.

#1b: The length is as required.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1a: ([measure_with_unit.value_component]
[measure_with_unit.unit_component])

#1b: (descriptive_representation_item.description)

#2: ([measure_with_unit.value_component]
[measure_with_unit.unit_component])

Source: ISO 10303-41, ISO 10303-45

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[{{shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 1']}
shape_aspect <-

ISO 10303-227:2005(E)

```
shape_aspect_relationship.relatng_shape_aspect]
[{{shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 2'}}
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
#1a: (shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimensional
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'pipe dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'end to end length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component])
#1b: (shape_aspect_relationship
shape_definition = shape_aspect_relationship
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'end to end length'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
```

```

{descriptive_representation_item.description = 'as required'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'pipe class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum end to end length')
(representation_item.name = 'minimum end to end length')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum end to end length'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum end to end length'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component])

```

5.1.11.68.3 end_to_end_cut_length

- #1: The end_to_end_cut_length is a single value.
#2: The end_to_end_cut_length is a range of values.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: Iso 10303-41

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>

ISO 10303-227:2005(E)

```
product_definition_shape}
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
{property_definition_representation =>
shape_definition_representation}
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'pipe fabrication dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'end to end cut length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component])
#2: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'pipe fabrication dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum end to end length')
(representation_item.name = 'minimum end to end length')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum end to end length'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum end to end length'}])
```



```

representation_item =>
measure_representation_item <=
{ measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component])

```

5.1.11.68.4 longitudinal_welding_seam_orientation

```

AIM element: direction
Source: ISO 10303-42
Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation
Reference path: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'pipe dimensional shape' }
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'longitudinal welding seam orientation' })

```

5.1.11.69 Swept_bend_pipe

```

AIM element: piping_component_definition
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint

```

ISO 10303-227:2005(E)

```
value_for_application_context
Reference path: piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
pipe_class]
[group
group.name = 'swept bend pipe']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'pipe']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}]}
```

5.1.11.69.1 wall_thinning_allowance

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: piping_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 [shape_aspect <-
 shape_aspect_relationship.relating_shape_aspect]
 [shape_aspect <-
 shape_aspect_relationship.related_shape_aspect]
 shape_aspect_relationship =>
 dimensional_location
 dimensional_characteristic = dimensional_location
 dimensional_characteristic <-
 dimensional_characteristic_representation.dimension
 dimensional_characteristic_representation
 dimensional_characteristic_representation.representation ->
 shape_dimension_representation <=
 shape_representation <=
 {representation
 representation.name = 'swept bend pipe dimensional shape'}
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'wall thinning allowance'}
 representation_item =>
 measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.11.69.2 centreline_radius

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: piping_component_definition <=
 product_definition

ISO 10303-227:2005(E)

```
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'pipe bend' }
shape_aspect <-
[shape_aspect_relationship.relying_shape_aspect
{ shape_aspect_relationship
shape_aspect_relationship.name = 'pipe bend sweep angle centre point' }
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
{ shape_aspect
shape_aspect.description = 'sweep angle centre point' }
shape_aspect <-
shape_aspect_relationship.relying_shape_aspect]
[shape_aspect_relationship.relying_shape_aspect
shape_aspect_relationship
{ shape_aspect_relationship
shape_aspect_relationship.name = 'pipe bend sweep angle centreline' }
shape_aspect_relationship.related_shape_aspect ->
{ shape_aspect
shape_aspect.description = 'pipe centreline' }
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'pipe bend dimensional shape' }
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'centreline radius' }
representation_item =>
measure_representation_item <=
{ measure_with_unit =>
length_measure_with_unit }
```

```

measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.69.3 sweep_angle

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

```

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'pipe bend'}
shape_aspect <-
[shape_aspect_relationship.relating_shape_aspect
{shape_aspect_relationship
shape_aspect_relationship.name = 'pipe bend start'}
shape_aspect_relationship
shape_aspect_relationship.related_shape_aspect ->
{shape_aspect
shape_aspect.description = 'pipe bend start'}
shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect_relationship.relating_shape_aspect
shape_aspect_relationship
{shape_aspect_relationship
shape_aspect_relationship.name = 'pipe bend end'}
shape_aspect_relationship.related_shape_aspect ->
{shape_aspect
shape_aspect.description = 'pipe bend end'}
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=

```

ISO 10303-227:2005(E)

```
{representation
representation.name = 'pipe bend dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centreline radius'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.70 Tee

- #1: The attributes are for an individual piping component.
- #2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'tee']

```
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]
#2: (piping_component_class <=
[characterized_object]
[group])
```

5.1.11.70.1 centre_to_end_1_length

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
[shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'centre'}
shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect.of_shape
{[shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 1']}
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=

ISO 10303-227:2005(E)

```
{representation
representation.name = 'tee fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre to end 1 length'}}
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'tee fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum centre to end 1 length')
(representation_item.name = 'minimum centre to end 1 length')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum centre to end 1 length'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum centre to end 1 length'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.70.2 centre_to_end_2_length

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation


```

Reference path: #1: (piping_component_definition <=
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition =>
  product_definition_shape <-
  [shape_aspect.of_shape
  { shape_aspect
  shape_aspect.description = 'centre'}
  shape_aspect <-
  shape_aspect_relationship.relatng_shape_aspect]
  [shape_aspect.of_shape
  {[shape_aspect =>
  plant_item_connector]
  [shape_aspect
  shape_aspect.description = 'end 2']}
  shape_aspect <-
  shape_aspect_relationship.related_shape_aspect]
  shape_aspect_relationship =>
  dimensional_location
  dimensional_characteristic = dimensional_location
  dimensional_characteristic <-
  dimensional_characteristic_representation.dimension
  dimensional_characteristic_representation
  dimensional_characteristic_representation.representation ->
  shape_dimension_representation <=
  shape_representation <=
  { representation
  representation.name = 'tee fitting dimensional shape'}
  representation
  representation.items[i] ->
  { representation_item
  representation_item.name = 'centre to end 2 length'})
#2: (piping_component_class <=
  characterized_object
  characterized_definition = characterized_object
  characterized_definition <-
  property_definition.definition
  property_definition
  represented_definition = property_definition
  represented_definition <-
  property_definition_representation.definition
  property_definition_representation
  property_definition_representation.used_representation ->
  { representation

```

ISO 10303-227:2005(E)

```
representation.name = 'tee fitting class dimensions'}
representation
(representation.items[i] ->
 {representation_item
 (representation_item.name = 'maximum centre to end 2 length')
 (representation_item.name = 'minimum centre to end 2 length'}})
([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum centre to end 2 length'}}]
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum centre to end 2 length'}}])
representation_item =>
measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
```

5.1.11.70.3 centre_to_end_3_length

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
[shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'centre'}
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect.of_shape
{[shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 3']}]

```

shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'tee fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre to end 3 length')}
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'tee fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum centre to end 3 length')
(representation_item.name = 'minimum centre to end 3 length')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum centre to end 3 length'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum centre to end 3 length'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

ISO 10303-227:2005(E)

5.1.11.70.4 end_1_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector

5.1.11.70.5 end_2_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
plant_item_connector

5.1.11.70.6 end_3_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=

```

shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 3'}
shape_aspect =>
plant_item_connector

```

5.1.11.71 Threaded_flange

```

AIM element: piping_component_definition
Source:      ISO 10303-227
Rules:      dependent_instantiable_product_context
            product_context_discipline_type_constraint
            value_for_application_context
Reference path: piping_component_definition <=
              product_definition
                {piping_component_definition
                 classification_item = piping_component_definition
                 classification_item <-
                 applied_classification_assignment.items[i]
                 applied_classification_assignment <=
                 {classification_assignment
                  classification_assignment.role ->
                  classification_role
                  classification_role = 'piping component type classification'}
                 classification_assignment
                 classification_assignment.assigned_class ->
                 [group =>
                  flange_fitting_neck_type_class]
                 [group
                  group.name = 'threaded flange']}
                {product_definition
                 product_definition.formation ->
                 product_definition_formation
                 product_definition_formation.of_product ->
                 [product
                  classification_item = product
                  classification_item <-
                  applied_classification_assignment.items[i]
                  applied_classification_assignment <=
                  {classification_assignment
                   classification_assignment.role ->
                   classification_role
                   classification_role = 'piping component type classification'}
                  classification_assignment
                  classification_assignment.assigned_class ->
                  (group)
                  (group <-
                   group_relationship.related_group
                   group_relationship

```

ISO 10303-227:2005(E)

```
group_relationship.relatng_group ->
group)
group.name = 'flange']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}]
```

5.1.11.72 Union

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)

#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=

```
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'union']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']})
```

#2: (piping_component_class <=
 [characterized_object]
 [group])

5.1.11.72.1 end_1_connector

AIM element: plant_item_connector
 Source: ISO 10303-227
 Reference path: piping_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <=
 property_definition.definition
 property_definition =>
 product_definition_shape <=
 shape_aspect.of_shape
 { shape_aspect
 shape_aspect.description = 'end 1'}
 shape_aspect =>
 plant_item_connector

5.1.11.72.2 end_2_connector

AIM element: plant_item_connector
 Source: ISO 10303-227
 Reference path: piping_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <=
 property_definition.definition
 property_definition =>
 product_definition_shape <=
 shape_aspect.of_shape
 { shape_aspect
 shape_aspect.description = 'end 2'}
 shape_aspect =>
 plant_item_connector

5.1.11.72.3 end_to_end_length

#1: The attributes are for an individual piping component.
 #2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
 Source: ISO 10303-41

ISO 10303-227:2005(E)

Rules: subtype_exclusive_characterized_object
 subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 [{{shape_aspect =>
 plant_item_connector]
 [shape_aspect
 shape_aspect.description = 'end 1']}]
 shape_aspect <-
 shape_aspect_relationship.relatng_shape_aspect]
 [{{shape_aspect =>
 plant_item_connector]
 [shape_aspect
 shape_aspect.description = 'end 2']}]
 shape_aspect <-
 shape_aspect_relationship.related_shape_aspect]
 shape_aspect_relationship =>
 dimensional_location
 dimensional_characteristic = dimensional_location
 dimensional_characteristic <-
 dimensional_characteristic_representation.dimension
 dimensional_characteristic_representation
 dimensional_characteristic_representation.representation ->
 shape_dimension_representation <=
 shape_representation <=
 {representation
 representation.name = 'union fitting dimensional shape'}
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'end to end length'}})

#2: (piping_component_class <=
 characterized_object
 characterized_definition = characterized_object
 characterized_definition <-
 property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <-
 property_definition_representation.definition


```

property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'union fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum end to end length')
(representation_item.name = 'minimum end to end length'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum end to end length'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum end to end length'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.72.4 major_outside_diameter

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-
dimensional_size.applies_to
dimensional_size
dimensional_characteristic = dimensional_size
dimensional_characteristic <-
dimensional_characteristic_representation.dimension

ISO 10303-227:2005(E)

```
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'union fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'major outside diameter'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'union fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum major outside diameter')
(representation_item.name = 'minimum major outside diameter'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum major outside diameter'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum major outside diameter'}})
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.72.5 minor_outside_diameter

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
 subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 shape_aspect <-
 dimensional_size.applies_to
 dimensional_size
 dimensional_characteristic = dimensional_size
 dimensional_characteristic <-
 dimensional_characteristic_representation.dimension
 dimensional_characteristic_representation
 dimensional_characteristic_representation.representation ->
 shape_dimension_representation <=
 shape_representation <=
 {representation
 representation.name = 'union fitting dimensional shape'}
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'minor outside diameter'})

#2: (piping_component_class <=
 characterized_object
 characterized_definition = characterized_object
 characterized_definition <-
 property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <-
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 {representation
 representation.name = 'union fitting class dimensions'}
 representation
 (representation.items[i] ->
 {representation_item
 (representation_item.name = 'maximum minor outside diameter')
 (representation_item.name = 'minimum minor outside diameter')}}
 ([representation.items[i] ->

ISO 10303-227:2005(E)

```
{representation_item
representation_item.name = 'maximum minor outside diameter'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum minor outside diameter'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.73 Valve

AIM element: piping_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'valve']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}]}

5.1.11.73.1 actuator_type

AIM element: descriptive_representation_item.description
 Source: ISO 10303-45
 Reference path: piping_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <=
 property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <=
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'actuator type'}
 representation_item =>
 descriptive_representation_item
 descriptive_representation_item.description

5.1.11.73.2 operation_mode

AIM element: descriptive_representation_item.description
 Source: ISO 10303-45
 Reference path: piping_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <=
 property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <=
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'operation mode'}
 representation_item =>
 descriptive_representation_item
 descriptive_representation_item.description

ISO 10303-227:2005(E)

5.1.11.73.3 end_to_end_length

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[{{shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 1']}]
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[{{shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 2']}]
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'valve dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'end to end length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.11.73.4 valve_stem_orientation

AIM element: axis2_placement_3d.ref_direction

Source: ISO 10303-42

Reference path: (piping_component_definition <=
 product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <=
 property_definition.definition
 {property_definition =>
 product_definition_shape}
 property_definition
 represented_definition = property_definition
 represented_definition <=
 property_definition_representation.definition
 {property_definition_representation =>
 shape_definition_representation}
 property_definition_representation
 property_definition_representation.used_representation ->
 representation
 representation.items [i] ->
 {representation_item
 representation_item.name = 'valve stem orientation'}
 representation_item =>
 geometric_representation_item =>
 placement =>
 axis2_placement_3d
 axis2_placement_3d.ref_direction

5.1.11.74 Weld_neck_flange

AIM element: piping_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
 product_context_discipline_type_constraint
 value_for_application_context

Reference path: piping_component_definition <=
 product_definition
 {piping_component_definition
 classification_item = piping_component_definition
 classification_item <=
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role
 classification_role = 'piping component type classification'}
 classification_assignment
 classification_assignment.assigned_class ->

ISO 10303-227:2005(E)

```
[group =>
flange_fitting_neck_type_class]
[group
group.name = 'weld neck flange']
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'flange']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]}
```

5.1.11.75 Weld_neck_jacket_flange

AIM element: piping_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: piping_component_definition <=
product_definition
{piping_component_definition
classification_item = piping_component_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role


```

classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
flange_fitting_neck_type_class]
[group
group.name = 'weld neck jacket flange']
[group <-
group_relationship.related_group
{group_relationship
group_relationship.name = 'class hierarchy'}
group_relationship
group_relationship.relating_group ->
group
group.name = 'weld neck flange']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'weld neck jacket flange']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.11.75.1 end_3_connector

AIM element: plant_item_connector
 Source: ISO 10303-227
 Reference path: piping_component_definition <=
 product_definition

ISO 10303-227:2005(E)

```
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{ shape_aspect
shape_aspect.description = 'end 1' }
shape_aspect =>
plant_item_connector
```

5.1.11.76 Y_type_lateral

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: #1: (piping_component_definition)
#2: (piping_component_class)

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: #1: (piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role = 'piping component type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'Y type lateral']
[product

```

product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'})
#2: (piping_component_class <=
[characterized_object]
[group])

```

5.1.11.76.1 angle

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
{dimensional_location =>
angular_location}
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'y type lateral fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'angle'})

ISO 10303-227:2005(E)

```
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'y type lateral fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum angle')
(representation_item.name = 'minimum angle'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum angle'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum angle'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
plane_angle_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.76.2 centre_to_end_1_length

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition

```

property_definition =>
product_definition_shape <-
[shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'centre'}
shape_aspect <-
shape_aspect_relationship.relatng_shape_shape]
[shape_aspect.of_shape
{[shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 1']}]
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'y type lateral fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre to end 1 length'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'y type lateral fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum centre to end 1 length')
(representation_item.name = 'minimum centre to end 1 length')}})
([representation.items[i] ->

```

ISO 10303-227:2005(E)

```
{representation_item
representation_item.name = 'maximum centre to end 1 length'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum centre to end 1 length'}})
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.11.76.3 centre_to_end_2_length

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
[shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'centre'}
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect.of_shape
{[shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 2']}]
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension

```

dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'y type lateral fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre to end 2 length'})
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'y type lateral fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum centre to end 2 length')
(representation_item.name = 'minimum centre to end 2 length')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum centre to end 2 length'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum centre to end 2 length'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.76.4 centre_to_end_3_length

#1: The attributes are for an individual piping component.

#2: The attributes are for the definition of a family of piping components.

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

ISO 10303-227:2005(E)

Source: ISO 10303-41

Rules: subtype_exclusive_characterized_object
subtype_mandatory_shape_representation

Reference path: #1: (piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
[shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'centre'}
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect.of_shape
{[shape_aspect =>
plant_item_connector]
[shape_aspect
shape_aspect.description = 'end 3']}]
shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'y type lateral fitting dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre to end 3 length'}}
#2: (piping_component_class <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition


```

property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'y type lateral fitting class dimensions'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'maximum centre to end 3 length')
(representation_item.name = 'minimum centre to end 3 length'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum centre to end 3 length'}}
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum centre to end 3 length'}}]
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.11.76.5 end_1_connector

```

AIM element: plant_item_connector
Source:      ISO 10303-227
Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector

```

5.1.11.76.6 end_2_connector

```

AIM element: plant_item_connector
Source:      ISO 10303-227
Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition

```

ISO 10303-227:2005(E)

```
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
plant_item_connector
```

5.1.11.76.7 end_3_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 3'}
shape_aspect =>
plant_item_connector

5.1.12 piping_inspection UoF

5.1.12.1 Connection_inspection_record

AIM element: material_property

Source: ISO 10303-45

Reference path: {material_property <=
property_definition
property_definition.description = 'connection inspection record'}

5.1.12.1.1 inspection_record_number

AIM element: identification_assignment.assigned_id

Source: ISO 10303-41

Reference path: material_property <=
{property_definition
property_definition.description = 'connection inspection record'}
property_definition
identified_item = property_definition
identified_item <-
applied_identification_assignment.items[i]

```

applied_identification_assignment <=
identification_assignment
{identification_assignment.role ->
identification_role
identification_role.name = 'record number'}
identification_assignment.assigned_id

```

5.1.12.1.2 inspected_property_name

AIM element: property_definition.name
Source: ISO 10303-41
Reference path: {material_property <=
property_definition
property_definition.name}

5.1.12.1.3 connection_type

AIM element: group.name
Source: ISO 10303-41
Reference path: material_property
classification_item = material_property
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
classification_assignment
{classification_assignment.role ->
classification_role
classification_role.name = 'connection type'}
classification_assignment.assigned_class ->
group
group.name

5.1.12.1.4 inspection_type

AIM element: group.name
Source: ISO 10303-41
Reference path: material_property
classification_item = material_property
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
classification_assignment
{classification_assignment.role ->
classification_role
classification_role.name = 'inspection type'}
classification_assignment.assigned_class ->
group
group.name

5.1.12.1.5 weld_id

AIM element: identification_assignment.assigned_id

ISO 10303-227:2005(E)

Source: ISO 10303-41
Reference path: material_property
identification_item = material_property
identification_item <-
applied_identification_assignment.items[i]
applied_identification_assignment <=
identification_assignment
{identification_assignment.role ->
identification_role
identification_role.name = 'weld id'}
identification_assignment.assigned_id

5.1.12.1.6 connecting_portion_id

AIM element: identification_assignment.assigned_id
Source: ISO 10303-41
Reference path: material_property
identification_item = document
identification_item <-
applied_identification_assignment.items[i]
applied_identification_assignment <=
identification_assignment
{identification_assignment.role ->
identification_role
identification_role.name = 'connecting portion id'}
identification_assignment.assigned_id

5.1.12.1.7 inspected_property_tolerance

AIM element: qualified_representation_item
Source: ISO 10303-45
Reference path: material_property <=
property_definition <-
property_definition_representation.definition
property_definition_representation
{property_definition_representation =>
material_property_representation}
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'inspected property tolerance'}
representation_item =>
qualified_representation_item

5.1.12.1.8 inspected_property_measured_value

AIM element: ([measure_with_unit.value_component]
[measure_with_unit.unit_component])
(descriptive_representation_item.description)
Source: ISO 10303-41

Reference path: material_property <=
 property_definition <=
 property_definition_representation.definition
 property_definition_representation
 {property_definition_representation =>
 material_property_representation}
 property_definition_representation.used_representation ->
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'inspected property measured value'}
 representation_item =>
 (measure_representation_item
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component])
 (descriptive_representation_item
 descriptive_representation_item.description)

5.1.12.1.9 connection_inspection_record to document

AIM element: PATH

Reference path: material_property
 document_item = material_property
 document_item <=
 applied_document_reference.items[i]
 applied_document_reference <=
 document_reference
 document_reference.assigned_document ->
 document

5.1.12.1.10 connection_inspection_record to inspection_condition

AIM element: PATH

Reference path: material_property <=
 property_definition <=
 {property_definition.description = 'connection inspection record'}
 property_definition_representation.definition
 property_definition_representation =>
 material_property_representation

 material_property_representation.dependent_environment ->
 data_environment
 {data_environment.description = 'inspection condition'}

5.1.12.2 Inspection_condition

AIM element: data_environment

Source: ISO 10303-45

Reference path: {data_environment.description = 'inspection condition'}

ISO 10303-227:2005(E)

5.1.12.2.1 condition_name

AIM element: data_environment.name

Source: ISO 10303-45

Reference path: data_environment
data_environment.name

5.1.12.2.2 condition_value

AIM element: ([measure_representation_item.value_component]
[measure_representation_item.unit_component])
(descriptive_representation_item.description)

Source: ISO 10303-41

Reference path: data_environment
data_environment.elements ->
property_definition_representation
{property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object}
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'inspection condition value'}
representation_item =>
(measure_representation_item <=
measure_with_unit
[measure_representation_item.value_component]
[measure_representation_item.unit_component])
(descriptive_representation_item
descriptive_representation_item.description)

5.1.12.3 Piping_component_inspection_record

AIM element: material_property

Source: ISO 10303-45

Reference path: {material_property <=
property_definition
property_definition.description = 'piping component inspection record'}

5.1.12.3.1 inspection_record_number

AIM element: identification_assignment.assigned_id

Source: ISO 10303-41

Reference path: material_property <=
{property_definition
property_definition.description = 'piping component inspection record'}
property_definition

```

identified_item = property_definition
identified_item <-
applied_identification_assignment.items[i]
applied_identification_assignment <=
identification_assignment
{identification_assignment.role ->
identification_role
identification_role.name = 'record number'}
identification_assignment.assigned_id

```

5.1.12.3.2 inspected_property_name

AIM element: property_definition.name
Source: ISO 10303-41
Reference path: material_property <=
property_definition
property_definition.name

5.1.12.3.3 inspected_property_tolerance

AIM element: qualified_representation_item
Source: ISO 10303-45
Reference path: material_property <=
property_definition <-
property_definition_representation.definition
property_definition_representation
{property_definition_representation =>
material_property_representation}
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'inspected property tolerance'}
representation_item =>
qualified_representation_item

5.1.12.3.4 inspected_property_measured_value

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: material_property <=
property_definition <-
property_definition_representation.definition
property_definition_representation
{property_definition_representation =>
material_property_representation}
property_definition_representation.used_representation ->
representation
representation.items[i] ->

ISO 10303-227:2005(E)

```
{representation_item
representation_item.name = 'inspected property measured value'}
representation_item =>
measure_representation_item
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.12.3.5 piping_component_inspection_record to inspection_condition

AIM element: PATH

```
Reference path: material_property <=
property_definition <-
{property_definition.description = 'piping component inspection record'}
property_definition_representation.definition
property_definition_representation =>
material_property_representation
material_property_representation.dependent_environment ->
data_environment
{data_environment.description = 'inspection condition'}
```

5.1.12.3.6 piping_component_inspection_record to piping_component

NOTE For the purpose of this mapping, only the subset of the mapping of the Piping_component specified in the reference path is applicable.

AIM element: PATH

```
Reference path: material_property <=
property_definition
{property_definition.description = 'piping component inspection record'}
property_definition.definition ->
characterized_definition =
(shape_definition =
shape_aspect
{shape_aspect =>
plant_item_connector}
shape_aspect.of_shape ->
product_definition_shape =>
property_definition
property_definition.definition ->
characterized_definition =
characterized_product_definition)
(characterized_product_definition)
characterized_product_definition =
product_definition =>
piping_component_definition
```

5.1.12.3.7 piping_component_inspection_record to plant_item_connector

AIM element: PATH

```
Reference path: material_property <=
property_definition
```



```

{property_definition.description = 'piping component inspection record'}
property_definition.definition ->
characterized_definition =
shape_definition =
shape_aspect =>
plant_item_connector

```

5.1.12.3.8 piping_component_inspection_record to document

AIM element: PATH

```

Reference path: material_property
document_item = material_property
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document

```

5.1.12.4 Piping_spool_inspection_record

AIM element: material_property

Source: ISO 10303-45

```

Reference path: {material_property <=
property_definition
property_definition.description = 'piping spool inspection record'}

```

5.1.12.4.1 inspection_record_number

AIM element: identification_assignment.assigned_id

Source: ISO 10303-41

```

Reference path: material_property <=
{property_definition
property_definition.description = 'piping spool inspection record'}
property_definition
identified_item = property_definition
identified_item <-
applied_identification_assignment.items[i]
applied_identification_assignment <=
identification_assignment
{identification_assignment.role ->
identification_role
identification_role.name = 'record number'}
identification_assignment.assigned_id

```

5.1.12.4.2 inspected_property_name

AIM element: property_definition.name

Source: ISO 10303-41

```

Reference path: material_property <=
property_definition
property_definition.name

```

ISO 10303-227:2005(E)

5.1.12.4.3 inspected_property_tolerance

AIM element: qualified_representation_item

Source: ISO 10303-45

Reference path: material_property <=
property_definition <=
property_definition_representation.definition
property_definition_representation
{property_definition_representation =>
material_property_representation}
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'inspected property tolerance'}
representation_item =>
qualified_representation_item

5.1.12.4.4 inspected_property_measured_value

AIM element: [measure_with_unit.value_component]

[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: material_property <=
property_definition <=
property_definition_representation.definition
property_definition_representation
{property_definition_representation =>
material_property_representation}
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'inspected property measured value'}
representation_item =>
measure_representation_item
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.12.4.5 piping_spool_inspection_record to piping_spool

AIM element: PATH

Reference path: material_property =>
property_definition
{property_definition.description = 'piping spool inspection record'}
property_definition.definition ->
characterized_definition =
characterized_product_definition =
product_definition =>
piping_spool_definition

5.1.12.4.6 piping_spool_inspection_record to document

AIM element: PATH

```
Reference path: material_property
                document_item = material_property
                document_item <-
                applied_document_reference.items[i]
                applied_document_reference <=
                document_reference
                document_reference.assigned_document ->
                document
```

5.1.12.4.7 piping_spool_inspection_record to inspection_condition

AIM element: PATH

```
Reference path: material_property <=
                property_definition <-
                {property_definition.description = 'piping spool inspection record'}
                property_definition_representation.definition
                property_definition_representation =>
                material_property_representation
                material_property_representation.dependent_environment ->
                data_environment
                {data_environment.description = 'inspection condition'}
```

5.1.12.5 Shape_inspection_record

AIM element: property_definition

Source: ISO 10303-41

```
Reference path: property_definition
                {property_definition
                property_definition.description = 'shape inspection record'}
```

5.1.12.5.1 inspection_record_number

AIM element: identification_assignment.assigned_id

Source: ISO 10303-41

```
Reference path: property_definition
                {property_definition
                property_definition.description = 'shape inspection record'}
                identified_item = property_definition
                identified_item <-
                applied_identification_assignment.items[i]
                applied_identification_assignment <=
                identification_assignment
                {identification_assignment.role ->
                identification_role
                identification_role.name = 'record number'}
                identification_assignment.assigned_id
```

5.1.12.5.2 shape_inspection_property_name

AIM element: property_definition.name

ISO 10303-227:2005(E)

Source: ISO 10303-41
Reference path: material_property <=
property_definition
property_definition.name

5.1.12.5.3 shape_inspection_property_sequence_number

AIM element: descriptive_representation_item.description
Source: ISO 10303-45
Reference path: property_definition <-
property_definition_representation.definition
property_definition_representation
{ property_definition_representation =>
material_property_representation}
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'inspected property sequence number'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

5.1.12.5.4 inspected_property_tolerance

AIM element: qualified_representation_item
Source: ISO 10303-45
Reference path: property_definition <-
property_definition_representation.definition
property_definition_representation
{ property_definition_representation =>
material_property_representation}
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'inspected property tolerance'}
representation_item =>
qualified_representation_item

5.1.12.5.5 inspected_property_design_value

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: property_definition <-
property_definition_representation.definition
property_definition_representation
{ property_definition_representation =>
material_property_representation}
property_definition_representation.used_representation ->

```

representation
representation.items[i] ->
{representation_item
representation_item.name = 'inspected property design value'}
representation_item =>
measure_representation_item
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.12.5.6 inspected_property_measured_value

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: property_definition <-
property_definition_representation.definition
property_definition_representation
{property_definition_representation =>
material_property_representation}
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'inspected property measured value'}
representation_item =>
measure_representation_item
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.12.5.7 shape_inspection_record to document

AIM element: PATH

Reference path: property_definition
document_item = property_definition
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document

5.1.12.5.8 shape_inspection_record to inspection_condition

AIM element: PATH

Reference path: property_definition <-
{property_definition
property_definition.description = 'piping spool inspection record'}
property_definition_representation.definition
property_definition_representation =>
material_property_representation
material_property_representation.dependent_environment ->

ISO 10303-227:2005(E)

```
data_environment
{data_environment.description = 'inspection condition'}
```

5.1.12.5.9 shape_inspection_record to piping_spool

AIM element: PATH

```
Reference path: property_definition
{property_definition.description = 'shape inspection record'}
property_definition.definition ->
characterized_definition =
characterized_product_definition =
product_definition =>
piping_spool_definition
```

5.1.12.5.10 shape_inspection_record to plant_item_connector

AIM element: PATH

```
Reference path: property_definition
{property_definition.description = 'shape inspection record'}
property_definition.definition ->
characterized_definition =
shape_definition =
shape_aspect =>
plant_item_connector
```

5.1.13 piping_system_functional_characterization UoF

5.1.13.1 Line_branch_connection

AIM element: line_branch_connection

Source: ISO 10303-227

```
Reference path: line_branch_connection <=
shape_aspect_relationship
{shape_aspect_relationship
[shape_aspect_relationship.description = 'branch location']
[shape_aspect_relationship.relating_shape_aspect ->
shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition =>
plant_line_segment_definition]
[shape_aspect_relationship.related_shape_aspect ->
shape_aspect =>
plant_line_segment_termination]}
```

5.1.13.1.1 branch_sequence_id

AIM element: shape_aspect_relationship.name
 Source: ISO 10303-41
 Reference path: line_branch_connection <=
 {shape_aspect_relationship
 shape_aspect_relationship.relating_shape_aspect ->
 shape_aspect
 shape_aspect.of_shape ->
 product_definition_shape <-
 [shape_aspect.of_shape
 shape_aspect
 shape_aspect.description = 'termination 1']
 [shape_aspect.of_shape
 shape_aspect
 shape_aspect.description = 'termination 2']}
 shape_aspect_relationship
 shape_aspect_relationship.name

5.1.13.1.2 line_branch_connection to changed_line_branch_connection

AIM element: IDENTICAL MAPPING

5.1.13.2 Line_branch_termination

AIM element: plant_line_segment_termination
 Source: ISO 10303-227
 Reference path: plant_line_segment_termination <=
 shape_aspect

5.1.13.2.1 line_branch_termination to line_branch_connection

AIM element: PATH
 Reference path: plant_line_segment_termination <=
 shape_aspect <-
 shape_aspect_relationship.related_shape_aspect
 shape_aspect_relationship

5.1.13.3 Line_piping_system_component_assignment

AIM element: product_definition_relationship
 Source: ISO 10303-41
 Reference path: {product_definition_relationship
 [product_definition_relationship.name = 'realization']
 [product_definition_relationship.relating_product_definition ->
 {product_definition =>
 plant_line_segment_definition}
 product_definition
 product_definition.frame_of_reference ->
 product_definition_context <=
 application_context_element
 application_context_element.name = 'functional definition']
 [product_definition_relationship.related_product_definition ->

ISO 10303-227:2005(E)

```
{product_definition =>
  piping_component_definition}
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
  application_context_element
(application_context_element.name = 'functional occurrence')
(application_context_element.name = 'physical occurrence')]]}
```

5.1.13.3.1 line_piping_system_component_assignment to changed_line_assignment

AIM element: IDENTICAL MAPPING

5.1.13.4 Line_plant_item_branch_connection

AIM element: line_plant_item_branch_connection

Source: ISO 10303-227

Reference path: line_plant_item_branch_connection <=

```
  shape_aspect_relationship
  {shape_aspect_relationship
  [shape_aspect_relationship.relatng_shape_aspect ->
  shape_aspect
  shape_aspect.of_shape ->
  product_definition_shape <=
  property_definition
  property_definition.definition ->
  characterized_definition
  characterized_definition = characterized_product_definition
  characterized_product_definition
  characterized_product_definition = product_definition
  product_definition =>
  plant_line_segment_definition]
  [shape_aspect_relationship.related_shape_aspect ->
  shape_aspect =>
  plant_item_connector]}
```

5.1.13.4.1 branch_sequence_id

AIM element: shape_aspect_relationship.name

Source: ISO 10303-41

Reference path: line_plant_item_branch_connection <=

```
  {shape_aspect_relationship
  shape_aspect_relationship.relatng_shape_aspect ->
  shape_aspect
  shape_aspect.of_shape ->
  product_definition_shape <-
  [shape_aspect.of_shape
  shape_aspect
  shape_aspect.description = 'termination 1']
  [shape_aspect.of_shape
  shape_aspect
```



```

shape_aspect.description = 'termination 2']}]
shape_aspect_relationship
shape_aspect_relationship.name

```

5.1.13.4.2 line_plant_item_branch_connection to changed_line_plant_item_branch_connection

AIM element: IDENTICAL MAPPING

5.1.13.5 Line_plant_item_branch_connector

AIM element: plant_item_connector

Source: ISO 10303-227

```

Reference path: plant_item_connector <=
  shape_aspect
  { shape_aspect
  [shape_aspect.description = 'line plant item branch connector']
  [shape_aspect.of_shape ->
  product_definition_shape <=
  property_definition
  property_definition.definition ->
  characterized_definition
  characterized_definition = characterized_product_definition
  characterized_product_definition
  characterized_product_definition = product_definition
  product_definition
  product_definition.frame_of_reference ->
  product_definition_context <=
  application_context_element
  application_context_element.name = 'functional occurrence']]

```

5.1.13.5.1 line_plant_item_branch_connector to line_plant_item_branch_connection

AIM element: PATH

```

Reference path: plant_item_connector <=
  shape_aspect <-
  shape_aspect_relationship.related_shape_aspect
  shape_aspect_relationship =>
  line_plant_item_branch_connection

```

5.1.13.6 Line_plant_item_connection

AIM element: line_plant_item_connection

Source: ISO 10303-227

```

Reference path: line_plant_item_connection <=
  shape_aspect_relationship
  { shape_aspect_relationship
  [shape_aspect_relationship.relate_shape_aspect ->
  shape_aspect =>
  plant_line_segment_termination]
  [shape_aspect_relationship.related_shape_aspect ->
  { shape_aspect <=
  plant_item_connector}

```

ISO 10303-227:2005(E)

```
shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
(product_definition)
(product_definition =>
externally_defined_plant_item_definition)]]
```

5.1.13.6.1 line_plant_item_connection to changed_line_plant_item_connection

AIM element: IDENTICAL MAPPING

5.1.13.7 Line_plant_item_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: {plant_item_connector <=

```
{shape_aspect
shape_aspect.description = 'line plant item connector'}
shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional occurrence'}
```

5.1.13.7.1 line_plant_item_connector to line_plant_item_connection

AIM element: PATH

Reference path: plant_item_connector <=

```
shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect
shape_aspect_relationship =>
line_plant_item_connection
```

5.1.13.8 Line_plant_item_termination

AIM element: plant_line_segment_termination

Source: ISO 10303-227

Reference path: plant_line_segment_termination <=
shape_aspect

5.1.13.8.1 line_plant_item_termination to line_plant_item_connection

AIM element: PATH

Reference path: plant_line_segment_termination <=
shape_aspect <-
shape_aspect_relationship.related_shape_aspect
shape_aspect_relationship =>
line_plant_item_connection

5.1.13.9 Line_to_line_connection

AIM element: line_termination_connection

Source: ISO 10303-227

Reference path: line_termination_connection <=
shape_aspect_relationship

5.1.13.9.1 line_to_line_connection to changed_line_to_line_connection

AIM element: IDENTICAL MAPPING

5.1.13.9.2 line_to_line_connection to line_to_line_termination

AIM element: PATH

Reference path: line_termination_connection <=
shape_aspect_relationship
[shape_aspect_relationship.relate_shape_aspect ->
shape_aspect =>
(connection_node)
(plant_line_segment_termination)]
[shape_aspect_relationship.related_shape_aspect ->
shape_aspect =>
plant_line_segment_termination]

5.1.13.10 Line_to_line_termination

AIM element: plant_line_segment_termination

Source: ISO 10303-227

Reference path: plant_line_segment_termination <=
shape_aspect

5.1.13.11 Piping_specification

AIM element: document

Source: ISO 10303-41

Reference path: {document
document.kind ->
document_type
document_type.product_data_type = 'piping specification'}

5.1.13.11.1 name

AIM element: document.name

ISO 10303-227:2005(E)

Source: ISO 10303-41

5.1.13.11.2 owner

AIM element: (organization.name)
([person.first_name]
[person.last_name])

Source: ISO 10303-41

Reference path: document

```
(plant_spatial_configuration_organization_item = document
plant_spatial_configuration_organization_item <-
plant_spatial_configuration_organization_assignment.items[i]
plant_spatial_configuration_organization_assignment <=
{organization_assignment
organization_assignment.role ->
organization_role
organization_role.name = 'owner'}
organization_assignment
organization_assignment.assigned_organization ->
organization
organization.name)
(plant_spatial_configuration_person_item = document
plant_spatial_configuration_person_item <-
plant_spatial_configuration_person_assignment.items[i]
plant_spatial_configuration_person_assignment <=
{person_assignment
person_assignment.role ->
person_role
person_role.name = 'owner'}
person_assignment
person_assignment.assigned_person ->
person
[person.first_name]
[person.last_name])
```

5.1.13.11.3 piping_specification_id

AIM element: document.id

Source: ISO 10303-41

5.1.13.11.4 service_description

AIM element: document_usage_constraint

Source: ISO 10303-41

Reference path: document <-

```
document_usage_constraint.source
document_usage_constraint
{document_usage_constraint
document_usage_constraint.subject_element = 'service description'}
```

5.1.13.11.5 piping_specification to changed_piping_specification

AIM element: IDENTICAL MAPPING

5.1.13.11.6 piping_specification to family_definition

AIM element: PATH

Reference path: document <-
 document_reference.assigned_document
 document_reference =>
 applied_document_reference
 applied_document_reference.items[i] ->
 document_item
 document_item = piping_component_class
 piping_component_class

5.1.13.11.7 piping_specification to piping_system_line_segment

AIM element: PATH

Reference path: document <-
 document_reference.assigned_document
 document_reference =>
 applied_document_reference
 applied_document_reference.items[i] ->
 document_item
 document_item = plant_line_segment_definition
 plant_line_segment_definition

5.1.13.12 Piping_system_line

AIM element: plant_line_definition

Source: ISO 10303-227

Reference path: plant_line_definition <=
 product_definition_with_associated_documents
 {product_definition_with_associated_documents <=
 product_definition
 product_definition.frame_of_reference ->
 product_definition_context <=
 application_context_element
 application_context_element.name = 'functional definition'}

5.1.13.12.1 line_number

AIM element: product_definition.description

Source: ISO 10303-41

Reference path: plant_line_definition <=
 product_definition_with_associated_documents <=
 product_definition
 product_definition.description

5.1.13.12.2 P_and_i_reference

AIM element: document

Source: ISO 10303-41

ISO 10303-227:2005(E)

Reference path: plant_line_definition <=
product_definition_with_associated_documents
product_definition_with_associated_documents.documentation_ids[i] ->
document

5.1.13.12.3 piping_system_line to changed_piping_system_line

AIM element: IDENTICAL MAPPING

5.1.13.12.4 piping_system_line to piping_system_line_segment

AIM element: PATH

Reference path: plant_line_definition <=
product_definition_with_associated_documents <=
product_definition <-
product_definition_relationship.relatering_product_definition
product_definition_relationship
product_definition_relationship.related_product_definition ->
product_definition =>
plant_line_segment_definition

5.1.13.13 Piping_system_line_segment

AIM element: plant_line_segment_definition

Source: ISO 10303-227

Reference path: plant_line_segment_definition <=
product_definition
{product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional definition'}

5.1.13.13.1 coating_reference

AIM element: document_usage_constraint

Source: ISO 10303-

41

Reference path: plant_line_segment_definition
document_item = plant_line_segment_definition
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-
document_usage_constraint.source
document_usage_constraint
{document_usage_constraint
document_usage_constraint.subject_element = 'coating reference'}

5.1.13.13.2 corrosion_allowance

AIM element: ([measure_with_unit.value_component]
 [measure_with_unit.unit_component])
 ([measure_with_unit.value_component]
 [measure_with_unit.unit_component]
 [document_usage_constraint.subject_element_value])

Source: ISO 10303-41

Reference path: plant_line_segment_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <-
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 {representation
 representation.name = 'line segment characteristics'}
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'corrosion allowance'}
 (representation_item =>
 measure_representation_item <=
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component])
 ([representation_item =>
 measure_representation_item <=
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]]
 [representation_item
 document_item = representation_item
 document_item <-
 applied_document_reference.items[i]
 applied_document_reference <=
 document_reference
 document_reference.assigned_document ->
 document <-
 document_usage_constraint
 document_usage_constraint.subject_element_value])

ISO 10303-227:2005(E)

5.1.13.13.3 design_pressure

AIM element: ([measure_with_unit.value_component]
[measure_with_unit.unit_component])
([measure_with_unit.value_component]
[measure_with_unit.unit_component]
[document_usage_constraint.subject_element_value])

Source: ISO 10303-41

Reference path: plant_line_segment_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <=
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'line segment characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'design pressure'}
(representation_item =>
measure_representation_item <=
measure_with_unit
{[measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
{[measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component])
([representation_item =>
measure_representation_item <=
measure_with_unit
{[measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
{[measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component])


```

[representation_item
document_item = representation_item
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-
document_usage_constraint
document_usage_constraint.subject_element_value])

```

5.1.13.13.4 design_temperature

AIM element: ([measure_with_unit.value_component]
[measure_with_unit.unit_component])
([measure_with_unit.value_component]
[measure_with_unit.unit_component]
[document_usage_constraint.subject_element_value])

Source: ISO 10303-41

```

Reference path: plant_line_segment_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'line segment characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'design temperature'}
(representation_item =>
measure_representation_item <=
{measure_with_unit =>
thermodynamic_temperature_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component])
([representation_item =>
measure_representation_item <=
{measure_with_unit =>
thermodynamic_temperature_measure_with_unit}

```

ISO 10303-227:2005(E)

```
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]]
[representation_item
document_item = representation_item
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-
document_usage_constraint
document_usage_constraint.subject_element_value])
```

5.1.13.13.5 elevation

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

```
Reference path: plant_line_segment_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'line segment characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'elevation'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.13.13.6 heat_tracing_type

AIM element: (heat_tracing_representation)
 ([heat_tracing_representation]
 [document_usage_constraint.subject_element_value])

Source: ISO 10303-227

Reference path: plant_line_segment_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <-
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 {representation
 representation.items[i] ->
 representation_item =>
 descriptive_representation_item}
 representation =>
 (heat_tracing_representation)
 ([heat_tracing_representation]
 [heat_tracing_representation
 document_item = heat_tracing_representation
 document_item <-
 applied_document_reference.items[i]
 applied_document_reference <=
 document_reference
 document_reference.assigned_document ->
 document <-
 document_usage_constraint
 {document_usage_constraint
 document_usage_constraint.subject_element = 'heat tracing'}
 document_usage_constraint.subject_element_value])

5.1.13.13.7 line_size

AIM element: shape_dimension_representation

Source: ISO 10303-47

Rules: subtype_mandatory_shape_representation

Reference path: plant_line_segment_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-

ISO 10303-227:2005(E)

```
property_definition.definition
{property_definition =>
product_definition_shape}
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
{property_definition_representation =>
shape_definition_representation}
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.items[i] ->
representation_item
representation_item.name = 'line size'}
representation =>
shape_representation =>
shape_dimension_representation
```

5.1.13.13.8 piping_system_line_segment to changed_piping_system_line_segment

AIM element: IDENTICAL MAPPING

5.1.13.13.9 piping_system_line_segment to line_branch_connection

AIM element: PATH

```
Reference path: plant_line_segment_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-
shape_aspect_relationship.relate_shape_aspect
shape_aspect_relationship =>
line_branch_connection
```

5.1.13.13.10 piping_system_line_segment to line_plant_item_branch_connection

AIM element: PATH

```
Reference path: plant_line_segment_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
```

```

property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect <-
shape_aspect_relationship.relating_shape_aspect
shape_aspect_relationship =>
line_plant_item_branch_connection

```

5.1.13.13.11 piping_system_line_segment to line_piping_system_component_assignment

AIM element: PATH

```

Reference path: plant_line_segment_definition <=
product_definition <-
product_definition_relationship.relating_product_definition
product_definition_relationship

```

5.1.13.13.12 piping_system_line_segment to piping_system_line_segment_termination

AIM element: PATH

```

Reference path: plant_line_segment_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect =>
plant_line_segment_termination

```

5.1.13.13.13 piping_system_line_segment to segment_insulation

AIM element: PATH

```

Reference path: plant_line_segment_definition <=
product_definition <-
product_definition_relationship.relating_product_definition
product_definition_relationship
{product_definition_relationship
product_definition_relationship.name = 'segment insulation'}

```

5.1.13.13.14 piping_system_line_segment to stream_design_case

AIM element: PATH

```

Reference path: plant_line_segment_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition

```

ISO 10303-227:2005(E)

```
property_definition =>
stream_design_case
```

5.1.13.14 Piping_system_line_segment_termination

AIM element: plant_line_segment_termination

Source: ISO 10303-227

```
Reference path: plant_line_segment_termination <=
shape_aspect
{[shape_aspect
shape_aspect.name = 'piping line segment termination']
[shape_aspect <-
(shape_aspect_relationship.relate_shape_aspect)
(shape_aspect_relationship.related_shape_aspect)
shape_aspect_relationship =>
(line_branch_connection)
(line_plant_item_connection)
(line_termination_connection)]
[shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
{product_definition =>
plant_line_segment_definition}
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional definition']]
```

5.1.13.14.1 flow_direction

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

```
Reference path: plant_line_segment_termination <=
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
```

```

property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'flow direction'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
{(descriptive_representation_item.description = 'both')
(descriptive_representation_item.description = 'in')
(descriptive_representation_item.description = 'not specified')
(descriptive_representation_item.description = 'out')}

```

5.1.13.14.2 piping_system_line_segment_termination to changed_piping_system_line_segment_termination

AIM element: IDENTICAL MAPPING

5.1.13.15 Piping_system_line_termination

AIM element: plant_line_segment_termination

Source: ISO 10303-227

```

Reference path: plant_line_segment_termination <=
shape_aspect
{[shape_aspect
shape_aspect.name = 'piping line termination']
[shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition_relationship
product_definition_relationship
[product_definition_relationship.related_product_definition ->
{product_definition =>
plant_line_segment_definition}
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional definition']
[product_definition_relationship.relating_product_definition ->
{product_definition =>
product_definition_with_associated_documents =>
plant_line_definition}
product_definition

```

ISO 10303-227:2005(E)

```
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional definition']}]}
```

5.1.13.15.1 location

```
AIM element: cartesian_point
Source: ISO 10303-42
Reference path: plant_line_segment_termination <=
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'plant line termination position'}
representation
representation.items[i] ->
representation_item =>
geometric_representation_item =>
point =>
cartesian_point
```

5.1.13.15.2 position_on_pipe

```
AIM element: descriptive_representation_item.description
Source: ISO 10303-45
Reference path: plant_line_segment_termination <=
shape_aspect
represented_definition = shape_aspect
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'plant line termination position'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'position on pipe'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
```

5.1.13.15.3 start_or_end

```
AIM element: descriptive_representation_item.description
Source: ISO 10303-45
```


Reference path: plant_line_segment_termination <=
 shape_aspect
 represented_definition = shape_aspect
 represented_definition <=
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 {representation
 representation.name = 'plant line termination position'}
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'start or end'}
 representation_item =>
 descriptive_representation_item
 descriptive_representation_item.description
 {(descriptive_representation_item.description = 'start')
 (descriptive_representation_item.description = 'end')}

5.1.13.15.4 piping_system_line_termination_to_piping_system_line

AIM element: PATH

Reference path: plant_line_segment_termination <=
 shape_aspect
 shape_aspect.of_shape ->
 product_definition_shape <=
 property_definition
 property_definition.definition ->
 characterized_definition
 characterized_definition = characterized_product_definition
 characterized_product_definition
 characterized_product_definition = product_definition_relationship
 product_definition_relationship
 product_definition_relationship.relating_product_definition ->
 {product_definition
 product_definition.frame_of_reference ->
 product_definition_context <=
 application_context_element
 application_context_element.name = 'functional definition'}
 product_definition =>
 product_definition_with_associated_documents =>
 plant_line_definition

5.1.13.16 Segment_insulation

AIM element: product_definition_relationship

Source: ISO 10303-41

Reference path: {product_definition_relationship
 [product_definition_relationship.name = 'segment insulation']
 [product_definition_relationship.relating_product_definition ->

ISO 10303-227:2005(E)

```
product_definition =>  
plant_line_segment_definition}}
```

5.1.13.16.1 boundaries

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

```
Reference path: product_definition_relationship  
characterized_product_definition = product_definition_relationship  
characterized_product_definition  
characterized_definition = characterized_product_definition  
characterized_definition <-  
property_definition.definition  
{property_definition =>  
product_definition_shape}  
property_definition  
represented_definition = property_definition  
represented_definition <-  
property_definition_representation.definition  
{property_definition_representation =>  
shape_definition_representation}  
property_definition_representation  
property_definition_representation.used_representation ->  
{representation  
representation.name = 'segment insulation characteristics'}  
representation  
representation.items[i] ->  
{representation_item  
representation_item.name = 'segment insulation boundary'}  
representation_item <=  
descriptive_representation_item  
descriptive_representation_item.description
```

5.1.13.16.2 description

AIM element: product_definition_relationship.description

Source: ISO 10303-41

5.1.13.16.3 thickness

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

```
Reference path: product_definition_relationship  
characterized_product_definition = product_definition_relationship  
characterized_product_definition  
characterized_definition = characterized_product_definition  
characterized_definition <-  
property_definition.definition  
{property_definition =>  
product_definition_shape}
```

```

property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
{property_definition_representation =>
shape_definition_representation}
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'segment insulation characteristics'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'thickness')
(representation_item.name = 'maximum thickness')
(representation_item.name = 'minimum thickness'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum thickness'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum thickness'}}])
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.13.16.4 type

AIM element: product.name
Source: ISO 10303-41
Reference path: product_definition_relationship
product_definition_relationship.related_product_definition ->
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.name

5.1.13.17 Stream_design_case

AIM element: stream_design_case
Source: ISO 10303-227
Reference path: stream_design_case <=
[characterized_object]
[property_definition]

ISO 10303-227:2005(E)

5.1.13.17.1 description

AIM element: characterized_object.description
Source: ISO 10303-41
Rules: subtype_exclusive_characterized_object
Reference path: stream_design_case <=
 characterized_object
 characterized_object.description

5.1.13.17.2 flow_rate

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: stream_design_case <=
 property_definition
 represented_definition = property_definition
 represented_definition <=
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 {representation
 representation.name = 'stream flow characteristics'}
 representation
 (representation.items[i] ->
 {representation_item
 (representation_item.name = 'flow rate')
 (representation_item.name = 'maximum flow rate')
 (representation_item.name = 'minimum flow rate')}})
 ([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum flow rate'}]
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum flow rate'}}])
 representation_item =>
 measure_representation_item <=
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.13.17.3 pressure

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: stream_design_case <=
 property_definition
 represented_definition = property_definition
 represented_definition <=
 property_definition_representation.definition

```

property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'stream flow characteristics'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'pressure')
(representation_item.name = 'maximum pressure')
(representation_item.name = 'minimum pressure')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum pressure'}}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum pressure'}}])
representation_item =>
measure_representation_item <=
measure_with_unit
[{measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
[{measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component]

```

5.1.13.17.4 stream_case_type

AIM element: property_definition.name
Source: ISO 10303-41
Reference path: stream_design_case <=
property_definition
property_definition.name

5.1.13.17.5 stream_data_reference

AIM element: (descriptive_representation_item.description)
([descriptive_representation_item.description]
[document_usage_constraint.subject_element_value])
Source: ISO 10303-41, ISO 10303-45
Reference path: stream_design_case <=
property_definition
represented_definition = property_definition
represented_definition <=
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation

ISO 10303-227:2005(E)

```
representation.name = 'stream flow characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'stream data reference'}
(representation_item =>
descriptive_representation_item
descriptive_representation_item.description)
([representation_item =>
descriptive_representation_item
descriptive_representation_item.description]
[representation_item
document_item = representation_item
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-
document_usage_constraint
document_usage_constraint.subject_element_value])
```

5.1.13.17.6 stream_design_id

AIM element: characterized_object.name
Source: ISO 10303-41
Rules: subtype_exclusive_characterized_object
Reference path: stream_design_case <=
characterized_object
characterized_object.name

5.1.13.17.7 velocity

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: stream_design_case <=
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'stream flow characteristics'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'velocity')
(representation_item.name = 'maximum velocity')

```

(representation_item.name = 'minimum velocity'))
([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum velocity'}}
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum velocity'}}])
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.13.17.8 stream_design_case to service_operating_case

AIM element: PATH

Reference path: stream_design_case <=
 property_definition <-
 property_definition_relationship.relating_property_definition
 property_definition_relationship

5.1.13.17.9 stream_design_case to stream_phase

AIM element: PATH

Rules: subtype_exclusive_characterized_object

Reference path: stream_design_case <=
 characterized_object
 characterized_definition = characterized_object
 characterized_definition <-
 property_definition.definition
 property_definition =>
 stream_phase

5.1.13.18 Stream_phase

AIM element: stream_phase

Source: ISO 10303-227

Reference path: stream_phase <=
 property_definition

5.1.13.18.1 constituent_mole_fraction

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: stream_phase <=
 property_definition
 represented_definition = property_definition
 represented_definition <-
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->

ISO 10303-227:2005(E)

```
{representation
representation.name = 'stream phase characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'constituent mole fraction'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
ratio_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.13.18.2 constituents

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: stream_phase <=

```
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'stream phase characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'constituents'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
```

5.1.13.18.3 phase_density

AIM element: [measure_with_unit.value_component]

[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: stream_phase <=

```
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'stream phase characteristics'}
representation
```



```

representation.items[i] ->
{representation_item
representation_item.name = 'phase density'}
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.13.18.4 phase_fraction

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: stream_phase <=

```

property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'stream phase characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'phase fraction'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
ratio_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.13.18.5 specific_gravity

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: stream_phase <=

```

property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'stream phase characteristics'}
representation

```

ISO 10303-227:2005(E)

```
representation.items[i] ->
{representation_item
representation_item.name = 'specific gravity'}
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.13.18.6 surface_tension

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: stream_phase <=

```
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'stream phase characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'surface tension'}
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.13.18.7 temperature

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: stream_phase <=

```
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'stream phase characteristics'}
representation
(representation.items[i] ->
{representation_item
```

```

(representation_item.name = 'temperature')
(representation_item.name = 'maximum temperature')
(representation_item.name = 'minimum temperature'))
([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum temperature'}]
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum temperature'}])
representation_item =>
measure_representation_item <=
 {measure_with_unit =>
 thermodynamic_temperature_measure_with_unit}
measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

```

5.1.13.18.8 viscosity

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: stream_phase <=
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'stream phase characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'viscosity'}
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.14 plant_characterization UoF

5.1.14.1 Arrangement_less_mechanical_system

AIM element: arrangement_less_mechanical_system

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

ISO 10303-227:2005(E)

Reference path: arrangement_less_mechanical_system <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant system'}

5.1.14.1.1 arrangement_less_mechanical_system to mechanical_system_component (as is_composed_of)

AIM element: PATH

Reference path: arrangement_less_mechanical_system <=
product_definition <-product_definition_relationship.relating_product_definition
{product_definition_relationship =>
product_definition_usage =>
assembly_component_usage}
product_definition_relationship
product_definition_relationship.related_product_definition ->
product_definition =>
mechanical_component_definition

5.1.14.1.2 arrangement_less_mechanical_system to design_arrangement_performance (as transports_mechanical_power_for)

AIM element: PATH

Reference path: arrangement_less_mechanical_system <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition =>
design_arrangement_performance

5.1.14.2 Cableway_system

AIM element: cableway_system

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: cableway_system <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation

```

product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant system'}

```

5.1.14.3 Ducting_system

AIM element: ducting_system

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: ducting_system <=

```

product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant system'}

```

5.1.14.3.1 type

AIM element: group.name

Source: ISO 10303-41

Reference path: ducting_system

```

classification_item = ducting_system
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'ducting system type classification'}
classification_assignment
classification_assignment.assigned_class ->
{group =>
system_class}
group
group.name

```

5.1.14.3.2 ducting_system to stream_design_case

AIM element: PATH

Reference path: ducting_system <=

```

product_definition

```

ISO 10303-227:2005(E)

```
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
stream_design_case
```

5.1.14.4 Electrical_system

AIM element: electrical_system

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: electrical_system <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant system'}

5.1.14.4.1 system_voltage_designation

AIM element: representation

Source: ISO 10303-43

Reference path: electrical_system <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation
[representation.name = 'system voltage designation']
[representation.items[i] ->
representation_item =>
measure_representation_item <=

```
measure_with_unit =>
electric_current_measure_with_unit}}
```

5.1.14.4.2 type

```
AIM element:  group.name
Source:      ISO 10303-41
Reference path: electrical_system
              classification_item = electrical_system
              classification_item <-
              applied_classification_assignment.items[i]
              applied_classification_assignment <=
              { classification_assignment
                classification_assignment.role ->
                classification_role
                classification_role.name = 'electrical system type classification' }
              classification_assignment
              classification_assignment.assigned_class ->
              { group =>
                system_class }
              group
              group.name
```

5.1.14.5 External_classification

```
AIM element:  externally_defined_class
Source:      ISO 10303-227
Reference path: externally_defined_class <=
              [group]
              [externally_defined_item]
```

5.1.14.5.1 description

```
AIM element:  group.description
Source:      ISO 10303-41
Reference path: externally_defined_class <=
              group
              group.description
```

5.1.14.5.2 name

```
AIM element:  group.name
Source:      ISO 10303-41
Reference path: externally_defined_class <=
              group
              group.name
```

5.1.14.5.3 source

```
AIM element:  external_source.source_id
Source:      ISO 10303-41
Reference path: externally_defined_class <=
              externally_defined_item
```

ISO 10303-227:2005(E)

```
externally_defined_item.source ->  
(external_source)  
(external_source =>  
known_source)  
external_source.source_id
```

5.1.14.6 Functional_plant

```
AIM element: product_definition  
Source: ISO 10303-41  
Reference path: {product_definition  
[product_definition.formation ->  
product_definition_formation  
product_definition_formation.of_product ->  
product =>  
plant]  
[product_definition.frame_of_reference ->  
[product_definition_context <=  
application_context_element  
application_context_element.name = 'functional occurrence']  
[product_definition_context  
product_definition_context.life_cycle_stage = 'functional design']]}
```

5.1.14.6.1 functional_plant to functional_plant_satisfaction

```
AIM element: PATH  
Reference path: product_definition <-  
product_definition_relationship.relating_product_definition  
product_definition_relationship  
{product_definition_relationship  
product_definition_relationship.name = 'plant satisfaction'}
```

5.1.14.6.2 functional_plant to plant_system

```
AIM element: PATH  
Reference path: product_definition <-  
product_definition_relationship.relating_product_definition  
product_definition_relationship  
product_definition_relationship.related_product_definition ->  
product_definition =>  
(electrical_system)  
(ducting_system)  
(instrumentation_and_control_system)  
(piping_system)  
(structural_system)  
(cableway_system)
```

5.1.14.7 Functional_plant_satisfaction

```
AIM element: product_definition_relationship  
Source: ISO 10303-41
```


Reference path: {product_definition_relationship
product_definition_relationship.name = 'plant satisfaction'}

5.1.14.8 Hvac_system

AIM element: hvac_system

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: hvac_system <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant system'}

5.1.14.9 Instrumentation_and_control_system

AIM element: instrumentation_and_control_system

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: instrumentation_and_control_system <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant system'}

5.1.14.9.1 type

AIM element: group.name

Source: ISO 10303-41

Reference path: instrumentation_and_control_system
classification_item = instrumentation_and_control_system
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment

ISO 10303-227:2005(E)

```
classification_assignment.role ->
classification_role
classification_role.name = 'instrumentation and control system type classification'}
classification_assignment
classification_assignment.assigned_class ->
{group =>
system_class}
group
group.name
```

5.1.14.10 Line_less_piping_system

```
AIM element: line_less_piping_system
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: line_less_piping_system <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant system'}
```

5.1.14.10.1 line_less_piping_system to piping_system_component

```
AIM element: PATH
Reference path: line_less_piping_system <=
product_definition <-
product_definition_relationship.relating_product_definition
{product_definition_relationship =>
product_definition_usage =>
assembly_component_usage}
product_definition_relationship
product_definition_relationship.related_product_definition ->
product_definition =>
piping_component_definition
```

5.1.14.10.2 line_less_piping_system to stream_design_case

```
AIM element: PATH
Reference path: line_less_piping_system <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
```

```

characterized_definition <-
property_definition.definition
property_definition =>
stream_design_case

```

5.1.14.11 Location_in_plant

```

AIM element: (axis2_placement_2d)
              (axis2_placement_3d)
Source:      ISO 10303-42
Reference path: {(axis2_placement_2d <=)
                 (axis2_placement_3d <=)
                 placement <=
                 geometric_representation_item <=
                 representation_item <-
                 representation.items[i]
                 {representation =>
                 shape_representation}
                 representation <-
                 property_definition_representation.used_representation
                 {property_definition_representation =>
                 shape_definition_representation}
                 property_definition_representation
                 property_definition_representation.definition ->
                 represented_definition
                 represented_definition = property_definition
                 {property_definition =>
                 product_definition_shape}
                 property_definition
                 property_definition.definition ->
                 characterized_definition
                 characterized_definition = characterized_product_definition
                 characterized_product_definition
                 characterized_product_definition = product_definition
                 {product_definition
                 product_definition.frame_of_reference ->
                 product_definition_context <=
                 application_context_element
                 application_context_element.name = 'physical occurrence'}
                 product_definition
                 product_definition.formation ->
                 product_definition_formation
                 product_definition_formation.of_product ->
                 product =>
                 plant}

```

5.1.14.12 Location_in_ship

```

AIM element: (axis2_placement_2d)
              (axis2_placement_3d)

```

ISO 10303-227:2005(E)

Source: ISO 10303-42

```
Reference path: {(axis2_placement_2d <=>
(axis2_placement_3d <=>
placement <=
geometric_representation_item <=
representation_item <-
representation.items[i]
{representation =>
shape_representation}
representation <-
property_definition_representation.used_representation
{property_definition_representation =>
shape_definition_representation}
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
{property_definition =>
product_definition_shape}
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
{product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'physical occurrence'}
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
[product
product.frame_of_reference[i] ->
product_context
product_context.discipline_type = 'shipbuilding']
[product
classification_item = product
classification_item <-applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant type classification'}
classification_assignment
```

```

classification_assignment.assigned_class ->
group
group.name = 'ship']}]

```

5.1.14.12.1 deck_number

AIM element: [measure_with_unit.value_component]

Source: ISO 10303-41

```

Reference path: {(axis2_placement_2d <=)
(axis2_placement_3d <=)
placement <=
geometric_representation_item <=
representation_item <-
representation.items[i]
representation
representation.items[i] ->
{representation_item
representation_item.name = 'deck number'}
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]}

```

5.1.14.12.2 frame_number

AIM element: [measure_with_unit.value_component]

Source: ISO 10303-41

```

Reference path: {(axis2_placement_2d <=)
(axis2_placement_3d <=)
placement <=
geometric_representation_item <=
representation_item <-
representation.items[i]
representation
representation.items[i] ->
{representation_item
representation_item.name = 'frame number'}
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]}

```

5.1.14.12.3 fore_midship_aft

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

```

Reference path: {(axis2_placement_2d <=)
(axis2_placement_3d <=)
placement <=
geometric_representation_item <=
representation_item <-

```

ISO 10303-227:2005(E)

```
representation.items[i]
representation
representation.items[i] ->
{representation_item
representation_item.name = 'fore midship aft'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
{(descriptive_representation_item.description = 'fore')
(descriptive_representation_item.description = 'midship')
(descriptive_representation_item.description = 'aft')}
```

5.1.14.12.4 port_or_starboard

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: {(axis2_placement_2d <=)
(axis2_placement_3d <=)
placement <=
geometric_representation_item <=
representation_item <-
representation.items[i]
representation
representation.items[i] ->
{representation_item
representation_item.name = 'port or starboard'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
{(descriptive_representation_item.description = 'port')
(descriptive_representation_item.description = 'starboard')}

5.1.14.13 Manufacturing_line

AIM element: plant

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: plant <=
product
{product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'manufacturing line'}

5.1.14.14 Mechanical_system

AIM element: mechanical_system

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: mechanical_system <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant system'}

5.1.14.14.1 code

AIM element: document_usage_constraint.subject_element_value
Source: ISO 10303-41
Reference path: mechanical_system
document_item = mechanical_system
document_item <-applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-document_usage_constraint.source
document_usage_constraint
document_usage_constraint.subject_element_value
{document_usage_constraint.subject_element = 'mechanical system code'}

5.1.14.14.2 description

AIM element: product_definition_formation.description
Source: ISO 10303-41
Reference path: mechanical_system <=
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.description

5.1.14.14.3 system_type

AIM element: group.name
Source: ISO 10303-41
Reference path: mechanical_system <=
product_definition
classification_item = product_definition
classification_item <-applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->

ISO 10303-227:2005(E)

```
group_role
group_role.name = 'system type'
classification_assignment
classification_assignment.assigned_class ->
group
group.name
```

5.1.14.14.4 mechanical_system to mechanical_system_arrangement (as is_made_up_of)

AIM element: PATH

```
Reference path: mechanical_system <=
product_definition <-product_definition_relationship.relatng_product_definition
product_definition_relationship
product_definition_relationship.related_product_definition ->
product_definition =>
product_definition_with_associated_documents =>
plant_arrangement_definition
```

5.1.14.15 Piping_system

AIM element: piping_system

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

```
Reference path: piping_system <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant system'}
```

5.1.14.15.1 code

AIM element: document_usage_constraint.subject_element_value

Source: ISO 10303-41

```
Reference path: piping_system
document_item = piping_system
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-
document_usage_constraint.source
document_usage_constraint
```



```
document_usage_constraint.subject_element_value
{ document_usage_constraint.subject_element = 'piping system code' }
```

5.1.14.15.2 description

```
AIM element: product_definition_formation.description
Source:      ISO 10303-41
Reference path: piping_system <=
              product_definition
              product_definition.formation ->
              product_definition_formation
              product_definition_formation.description
```

5.1.14.15.3 piping_system to piping_system_line

```
AIM element:  PATH
Reference path: piping_system <=
              product_definition <-
              product_definition_relationship.relating_product_definition
              product_definition_relationship
              product_definition_relationship.related_product_definition ->
              product_definition =>
              product_definition_with_associated_documents =>
              plant_line_definition
```

5.1.14.16 Planned_physical_plant

```
AIM element:  product_definition
Source:      ISO 10303-41
Reference path: {product_definition
                [product_definition.formation ->
                product_definition_formation
                product_definition_formation.of_product ->
                product =>
                plant]
                [product_definition.frame_of_reference ->
                [product_definition_context <=
                application_context_element
                application_context_element.name = 'physical occurrence']
                [product_definition_context
                product_definition_context.life_cycle_stage = 'physical design']]}
```

5.1.14.16.1 planned_physical_plant to changed_planned_physical_plant

```
AIM element:  IDENTICAL MAPPING
```

5.1.14.16.2 planned_physical_plant to functional_plant_satisfaction

```
AIM element:  PATH
Reference path: product_definition <-
              product_definition_relationship.related_product_definition
              product_definition_relationship
```

ISO 10303-227:2005(E)

```
{product_definition_relationship  
product_definition_relationship.name = 'plant satisfaction'}
```

5.1.14.16.3 planned_physical_plant to location_in_plant

AIM element: PATH

Rules: subtype_mandatory_shape_representation

Reference path: product_definition

```
characterized_product_definition = product_definition  
characterized_product_definition  
characterized_definition = characterized_product_definition  
characterized_definition <-  
property_definition.definition  
{property_definition =>  
product_definition_shape}  
property_definition  
represented_definition = property_definition  
represented_definition <-  
property_definition_representation.definition  
{property_definition_representation =>  
shape_definition_representation}  
property_definition_representation  
property_definition_representation.used_representation ->  
{representation =>  
shape_representation}  
representation  
representation.items[i] ->  
representation_item =>  
geometric_representation_item =>  
placement =>  
(axis2_placement_2d)  
(axis2_placement_3d)
```

5.1.14.16.4 planned_physical_plant to sited_plant

AIM element: PATH

Reference path: product_definition

```
characterized_product_definition = product_definition  
characterized_product_definition  
characterized_definition = characterized_product_definition  
characterized_definition <-  
property_definition.definition  
property_definition =>  
sited_plant
```

5.1.14.17 Plant

AIM element: plant

Source: ISO 10303-227

Reference path: plant <=
product

```

{product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
product_definition.frame_of_reference ->
product_definition_context
(product_definition_context.life_cycle_stage = 'physical design')
(product_definition_context.life_cycle_stage = 'functional design')}

```

5.1.14.17.1 definition_coordinate_system

#1: If the Plant is a process plant

#2: If the Plant is a ship

AIM element: representation_context.context_identifier

Source: ISO 10303-43

Reference path: plant <=

```

product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.items[i] ->
[representation_item
representation_item.name = 'plant placement reference']
[representation_item =>
geometric_representation_item =>
placement =>
#1((axis2_placment_2d
axis2_placement_2d.ref_direction ->
direction <=
geometric_representation_item <=
representation_item
(representation_item
representation_item.name = 'plant north')

```

ISO 10303-227:2005(E)

```
(axis2_placement_2d))
((axis2_placement_3d
axis2_placement_3d.axis ->
direction <=
geometric_representation_item <=
representation_item
(representation_item.name = 'plant north'))
(axis2_placement_3d
axis2_placement_3d.ref_direction ->
direction <=
geometric_representation_item <=
representation_item
(representation_item.name = 'plant north'))
(axis2_placement_3d)])}
representation
representation.context_of_items ->
{representation_context =>
geometric_representation_context}
representation_context
representation_context.context_identifier)
#2 (axis2_placement_3d)]}
representation
representation.context_of_items ->
{representation_context =>
geometric_representation_context}
representation_context
representation_context.context_identifier)
```

5.1.14.17.2 description

AIM element: product.description
Source: ISO 10303-41
Reference path: plant <=
product
product.description

5.1.14.17.3 name

AIM element: product.name
Source: ISO 10303-41
Reference path: plant <=
product
product.name

5.1.14.17.4 operator

AIM element: (organization)
(person_and_organization)
Source: ISO 10303-41
Reference path: plant
(plant_spatial_configuration_organization_item = plant

```

plant_spatial_configuration_organization_item <-
plant_spatial_configuration_organization_assignment.items[i]
plant_spatial_configuration_organization_assignment <=
{organization_assignment
organization_assignment.role ->
organization_role
organization_role.name = 'plant operator'}
organization_assignment
organization_assignment.assigned_organization ->
organization)
(plant_spatial_configuration_person_and_organization_item = plant
plant_spatial_configuration_person_and_organization_item <-
plant_spatial_configuration_person_and_organization_assignment.items[i]
plant_spatial_configuration_person_and_organization_assignment <=
{person_and_organization_assignment
person_and_organization_assignment.role ->
person_and_organization_role
person_and_organization_role.name = 'plant operator'}
person_and_organization_assignment
person_and_organization_assignment.assigned_person_and_organization ->
person_and_organization)

```

5.1.14.17.5 owners

AIM element: (person)
 (organization)
 (person_and_organization)

Source: ISO 10303-41

Reference path: plant

```

(plant_spatial_configuration_person_item = plant
plant_spatial_configuration_person_item <-
plant_spatial_configuration_person_assignment.items[i]
plant_spatial_configuration_person_assignment <=
{person_assignment
person_assignment.role ->
person_role
person_role.name = 'plant owner'}
person_assignment
person_assignment.assigned_person ->
person)
(plant_spatial_configuration_organization_item = plant
plant_spatial_configuration_organization_item <-
plant_spatial_configuration_organization_assignment.items[i]
plant_spatial_configuration_organization_assignment <=
{organization_assignment
organization_assignment.role ->
organization_role
organization_role.name = 'plant owner'}
organization_assignment

```

ISO 10303-227:2005(E)

```
organization_assignment.assigned_organization ->
organization)
(plant_spatial_configuration_person_and_organization_item = plant
plant_spatial_configuration_person_and_organization_item <-
plant_spatial_configuration_person_and_organization_assignment.items[i]
plant_spatial_configuration_person_and_organization_assignment <=
{person_and_organization_assignment
person_and_organization_assignment.role ->
person_and_organization_role
person_and_organization_role.name = 'plant owner'}
person_and_organization_assignment
person_and_organization_assignment.assigned_person_and_organization ->
person_and_organization)
```

5.1.14.17.6 plant_id

AIM element: product.id
Source: ISO 10303-41
Reference path: plant <=
product
product.id

5.1.14.17.7 plant_type

AIM element: group.name
Source: ISO 10303-41
Reference path: product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name

5.1.14.17.8 plant to changed_plant

AIM element: IDENTICAL MAPPING

5.1.14.17.9 plant to external_classification

AIM element: PATH
Reference path: plant <=
product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]

```

applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant type classification'}
classification_assignment
classification_assignment.assigned_class ->
group =>
externally_defined_class

```

5.1.14.17.10 plant to functional_plant

AIM element: PATH

Rules: application_context_requires_ap_definition
dependent_instantiable_application_context
dependent_instantiable_product_definition_context
product_definition_context_name_constraint

Reference path: plant <=
product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
{product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional occurrence'}

5.1.14.17.11 plant to planned_physical_plant

AIM element: PATH

Rules: application_context_requires_ap_definition
dependent_instantiable_application_context
dependent_instantiable_product_definition_context
product_definition_context_name_constraint
product_definition_usage_constraint

Reference path: plant <=
product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
{product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'physical occurrence'}

ISO 10303-227:2005(E)

5.1.14.17.12 plant to plant_process_capability

AIM element: PATH

Reference path: plant <=
product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
process_capability

5.1.14.17.13 plant to sub_plant_relationship (contains)

AIM element: PATH

Reference path: plant <=
product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition <-
product_definition_relationship.relying_product_definition
product_definition_relationship
{product_definition_relationship
product_definition_relationship.name = 'sub plant'}

5.1.14.17.14 plant to sub_plant_relationship (used in)

AIM element: PATH

Reference path: plant <=
product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition <-
product_definition_relationship.related_product_definition
product_definition_relationship
{product_definition_relationship
product_definition_relationship.name = 'sub plant'}

5.1.14.18 Plant_process_capability

AIM element: process_capability

Source: Iso 10303-227

Reference path: process_capability <=
property_definition

5.1.14.18.1 production_capacity

AIM element: representation

Source: ISO 10303-43

```
Reference path: process_capability <=
  property_definition
  represented_definition = property_definition
  represented_definition <-
  property_definition_representation.definition
  property_definition_representation
  property_definition_representation.used_representation ->
  representation
  {representation
  representation.name = 'production capacity'}
```

5.1.14.18.2 production_type

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

```
Reference path: process_capability <=
  property_definition
  represented_definition = property_definition
  represented_definition <-
  property_definition_representation.definition
  property_definition_representation
  property_definition_representation.used_representation ->
  {representation
  representation.name = 'production capacity'}
  representation
  representation.items[i] ->
  {representation_item
  representation_item.name = 'production type'}
  representation_item =>
  descriptive_representation_item
  descriptive_representation_item.description
```

5.1.14.18.3 plant_process_capability_to_changed_plant_process_capability

AIM element: IDENTICAL MAPPING

5.1.14.19 Plant_system

```
AIM element: (electrical_system)
             (ducting_system)
             (instrumentation_and_control_system)
             (piping_system)
             (structural_system)
             (cableway_system)
             (hvac_system)
```

Source: ISO 10303-227

```
Rules: dependent_instantiable_product_context
       product_context_discipline_type_constraint
```

ISO 10303-227:2005(E)

value_for_application_context
Reference path: (electrical_system <=)
(ducting_system <=)
(instrumentation_and_control_system <=)
(mechanical_system <=)
(piping_system <=)
(structural_system <=)
(cableway_system <=)
(hvac_system <=)
product_definition
{ product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant system'}

5.1.14.19.1 approval_state

AIM element: approval_status.name
Source: ISO 10303-41
Reference path: (approval_item = electrical_system)
(approval_item = ducting_system)
(approval_item = instrumentation_and_control_system)
(approval_item = piping_system)
(approval_item = structural_system)
(approval_item = cableway_system)
(approval_item = hvac_system)
approval_item <-
applied_approval_assignment.items[i]
applied_approval_assignment
approval_assignment.assigned_approval ->
approval
approval.status ->
approval_status
approval_status.name

5.1.14.19.2 name

AIM element: product_definition.description
Source: ISO 10303-41
Reference path: (electrical_system <=)
(ducting_system <=)
(instrumentation_and_control_system <=)
(piping_system <=)
(structural_system <=)
(cableway_system <=)

(hvac_system <=)
 product_definition
 product_definition.description

5.1.14.19.3 plant_system_id

AIM element: product_definition.id
 Source: ISO 10303-41
 Reference path: (electrical_system <=)
 (ducting_system <=)
 (instrumentation_and_control_system <=)
 (piping_system <=)
 (structural_system <=)
 (cableway_system <=)
 (hvac_system <=)
 product_definition
 product_definition.id

5.1.14.19.4 service_description

AIM element: property_definition.name
 Source: ISO 10303-41
 Reference path: (electrical_system <=)
 (ducting_system <=)
 (instrumentation_and_control_system <=)
 (piping_system <=)
 (structural_system <=)
 (cableway_system <=)
 (hvac_system <=)
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition
 property_definition.name

5.1.14.19.5 plant_system to changed_plant_system

AIM element: IDENTICAL MAPPING

5.1.14.19.6 plant_system to external_classification

AIM element: PATH
 Reference path: (electrical_system
 classification_item = electrical_system)
 (ducting_system
 classification_item = ducting_system)
 (instrumentation_and_control_system
 classification_item = instrumentation_and_control_system)
 (piping_system

ISO 10303-227:2005(E)

```
classification_item = piping_system)
(structural_system
classification_item = structural_system)
(cableway_system
classification_item = cableway_system)
(hvac_system
classification_item = hvac_system)
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant system type classification'}
classification_assignment
classification_assignment.assigned_class ->
group =>
externally_defined_class
```

5.1.14.19.7 plant_system to plant_item

AIM element: PATH

Reference path: (electrical_system <=)
(ducting_system <=)
(instrumentation_and_control_system <=)
(piping_system <=)
(structural_system <=)
(cableway_system <=)
(hvac_system <=)
product_definition <-
product_definition_relationship.relating_product_definition
product_definition_relationship
product_definition_relationship.related_product_definition ->
(product_definition)
(product_definition =>
externally_defined_plant_item_definition)
(product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product)

5.1.14.19.8 plant_system to plant_system_assembly (sub-system)

AIM element: PATH

Reference path: (electrical_system <=)
(ducting_system <=)
(instrumentation_and_control_system <=)
(piping_system <=)

(structural_system <=)
 (cableway_system <=)
 (hvac_system <=)
 product_definition <-
 product_definition_relationship.related_product_definition
 product_definition_relationship
 product_definition_relationship.relating_product_definition ->
 product_definition
 (electrical_system)
 (ducting_system)
 (instrumentation_and_control_system)
 (piping_system)
 (structural_system)
 (cableway_system)

5.1.14.19.9 plant_system to plant_system_assembly (super-system)

AIM element: PATH

Reference path: (electrical_system <=)
 (ducting_system <=)
 (instrumentation_and_control_system <=)
 (piping_system <=)
 (structural_system <=)
 (cableway_system <=)
 (hvac_system <=)
 product_definition <-
 product_definition_relationship.relating_product_definition
 product_definition_relationship
 product_definition_relationship.related_product_definition ->
 product_definition
 (electrical_system)
 (ducting_system)
 (instrumentation_and_control_system)
 (piping_system)
 (structural_system)
 (cableway_system)

5.1.14.20 Plant_system_assembly

AIM element: (electrical_system)
 (ducting_system)
 (instrumentation_and_control_system)
 (piping_system)
 (structural_system)
 (cableway_system)
 (hvac_system)

Source: ISO 10303-227

Reference path: (electrical_system <=)
 (ducting_system <=)
 (instrumentation_and_control_system <=)

ISO 10303-227:2005(E)

```
(piping_system <=)
(structural_system <=)
(cableway_system <=)
(hvac_system <=)
product_definition
```

5.1.14.21 Ship

```
AIM element: plant
Source:      ISO 10303-227
Reference path: plant <=
product
{[product
product.frame_of_reference[i] ->
product_context
product_context.discipline_type = 'shipbuilding']
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'ship']]}
```

5.1.14.21.1 orientation

```
AIM element: descriptive_representation_item.description
Source:      ISO 10303-45
Reference path: plant <=
product
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
{property_definition =>
product_definition_shape}
property_definition
represented_definition = property_definition
```

```

represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
[representation.name = 'global axis representation']
[representation.context_of_items ->
{representation_context
representation_context.context_type = 'global co-ordinate space'}
representation_context =>
geometric_representation_context]}
representation
representation.items [i] ->
{representation_item
representation_item.name = 'orientation'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
{(descriptive_representation_item.description = 'forward pointing')
(descriptive_representation_item.description = 'aft pointing')}

```

5.1.14.21.2 single_hull_or_class

AIM element: application_context_element.name
Source: ISO 10303-41
Reference path: plant <=
product
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
product_definition.frame_of_reference ->
product_definition_context =>
application_context_element
application_context_element.name
{(application_context_element.name = 'design for single hull')
(application_context_element.name = 'design for multiple hulls')}

5.1.14.21.3 after_perpendicular_offset

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: plant <=
product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition

ISO 10303-227:2005(E)

```
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
[representation.name = 'global axis representation']
[representation.context_of_items ->
{representation_context
representation_context.context_type = 'global co-ordinate space'}
representation_context =>
geometric_representation_context]}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'after perpendicular offset'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.14.21.4 length_between_perpendiculars

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: plant <=
product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition_formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
[representation.name = 'global axis representation']}


```

[representation.context_of_items ->
 {representation_context
 representation_context.context_type = 'global co-ordinate space'}
 representation_context =>
 geometric_representation_context}]
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'length between perpendiculars '}
 representation_item =>
 measure_representation_item <=
 {measure_with_unit =>
 length_measure_with_unit}
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

```

5.1.14.22 Structural_system

AIM element: structural_system

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: structural_system <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant system'}

5.1.14.22.1 type

AIM element: group.name

Source: ISO 10303-41

Reference path: structural_system
classification_item = structural_system
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'structural system type classification'}
classification_assignment

ISO 10303-227:2005(E)

```
classification_assignment.assigned_class ->
{group =>
system_class}
group
group.name
```

5.1.14.23 Sub_plant_relationship

AIM element: product_definition_relationship
Source: ISO 10303-41
Reference path: {product_definition_relationship
product_definition_relationship.name = 'sub plant'}

5.1.14.23.1 location_and_orientation

AIM element: (axis2_placement_2d)
(axis2_placement_3d)
Source: ISO 10303-42
Rules: subtype_mandatory_shape_representation
Reference path: product_definition_relationship
characterized_product_definition = product_definition_relationship
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
{property_definition =>
product_definition_shape}
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation =>
shape_representation}
representation
representation.items[i] ->
representation_item =>
geometric_representation_item =>
placement =>
(axis2_placement_2d)
(axis2_placement_3d)

5.1.14.23.2 sub_plant_relationship to changed_sub_plant_relationship

AIM element: IDENTICAL MAPPING

5.1.14.24 Train

AIM element: plant
Source: ISO 10303-227
Rules: dependent_instantiable_product_context

product_context_discipline_type_constraint
value_for_application_context

Reference path: plant <=
product
{product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'train'}

5.1.14.25 Unit

AIM element: plant
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: plant <=
product
{product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'unit'}

5.1.15 plant_csg_shape_representation UoF

5.1.15.1 Block

AIM element: block
Source: ISO 10303-42

5.1.15.2 Circular_ellipsoid

AIM element: ellipsoid
Source: ISO 10303-42

5.1.15.3 Cone

AIM element: right_circular_cone
Source: ISO 10303-42

5.1.15.4 Csg_element

AIM element: (csg_primitive)
(boolean_result)
faceted_brep
(plant_design_csg_primitive)
Source: ISO 10303-42, ISO 10303-227

5.1.15.5 Cylinder

AIM element: right_circular_cylinder

ISO 10303-227:2005(E)

Source: ISO 10303-42

5.1.15.6 Eccentric_cone

AIM element: eccentric_cone

Source: ISO 10303-42

5.1.15.7 Eccentric_cylinder

AIM element: eccentric_cone

Source: ISO 10303-42

Reference path: {eccentric_cone
eccentric_cone.ratio = 1 }

5.1.15.8 Eccentric_pyramid

AIM element: rectangular_pyramid

Source: ISO 10303-42

5.1.15.9 Extrusion

AIM element: extruded_area_solid

Source: ISO 10303-42

Reference path: {extruded_area_solid <=
swept_area_solid
swept_area_solid.swept_area ->
curve_bounded_surface
[curve_bounded_surface.basis_surface ->
surface =>
elementary_surface =>
plane]
[curve_bounded_surface.boundaries[i] ->
surface_boundary
surface_boundary = boundary_curve
boundary_curve <=
composite_curve_on_surface <=
composite_curve
composite_curve.segments[i] ->
composite_curve_segment
composite_curve_segment.parent_curve ->
surface_curve
surface_curve.curve_3d ->
curve =>
bounded_curve =>
trimmed_curve
trimmed_curve.basis_curve ->
curve =>
(line)
(conic)]}

5.1.15.10 Faceted_brep

AIM element: faceted_brep

Source: ISO 10303-42

5.1.15.11 Hemisphere

AIM element: plant_design_csg_primitive

Source: ISO 10303-227

Reference path: plant_design_csg_primitive <=
 [{solid_model <=
 geometric_representation_item <=
 representation_item
 representation_item.name = 'hemisphere'}
 solid_model]
 [{shape_representation <=
 representation
 representation.name = 'hemisphere'}
 shape_representation]

5.1.15.12 Pyramid

AIM element: rectangular_pyramid

Source: ISO 10303-42

5.1.15.13 Reducing_torus

AIM element: cyclide_segment_solid

Source: ISO 10303-42

5.1.15.14 Solid_of_revolution

AIM element: revolved_area_solid

Source: ISO 10303-42

Reference path: {revolved_area_solid <=
 swept_area_solid
 swept_area_solid.swept_area ->
 curve_bounded_surface
 curve_bounded_surface.boundaries[i] ->
 surface_boundary
 surface_boundary = boundary_curve
 boundary_curve <=
 composite_curve_on_surface <=
 composite_curve
 composite_curve.segments[i] ->
 composite_curve_segment
 composite_curve_segment.parent_curve ->
 surface_curve
 surface_curve.curve_3d ->
 curve =>
 bounded_curve =>
 trimmed_curve
 trimmed_curve.basis_curve ->
 curve =>

ISO 10303-227:2005(E)

(line)
(conic)}

5.1.15.15 Sphere

AIM element: sphere
Source: ISO 10303-42

5.1.15.16 Square_to_round

AIM element: plant_design_csg_primitive
Source: ISO 10303-42
Reference path: plant_design_csg_primitive <=
[
 {solid_model <=
 geometric_representation_item <=
 representation_item
 representation_item.name = 'rectangle to ellipse'}
 solid_model]
 {shape_representation <=
 representation
 representation.name = 'rectangle to ellipse'}
 shape_representation]

5.1.15.17 Torus

AIM element: torus
Source: ISO 10303-42

5.1.15.18 Trimmed_block

AIM element: plant_design_csg_primitive
Source: ISO 10303-227
Reference path: plant_design_csg_primitive <=
[
 {solid_model <=
 geometric_representation_item <=
 representation_item
 representation_item.name = 'trimmed block'}
 solid_model]
 {shape_representation <=
 representation
 representation.name = 'trimmed block'}
 shape_representation]

5.1.15.19 Trimmed_cone

AIM element: eccentric_cone
Source: ISO 10303-42
Reference path: {eccentric_cone
 eccentric_cone.semi_axis_1 = eccentric_cone.semi_axis_2}

5.1.15.20 Trimmed_cylinder

AIM element: eccentric_cone
Source: ISO 10303-42

5.1.15.21 Trimmed_pyramid

AIM element: plant_design_csg_primitive
 Source: ISO 10303-227
 Reference path: plant_design_csg_primitive <=
 [
 {solid_model <=
 geometric_representation_item <=
 representation_item
 representation_item.name = 'trimmed pyramid'}
 solid_model]
 [
 {shape_representation <=
 representation
 representation.name = 'trimmed pyramid'}
 shape_representation]

5.1.15.22 Trimmed_sphere

AIM element: plant_design_csg_primitive
 Source: ISO 10303-227
 Reference path: plant_design_csg_primitive <=
 [
 {solid_model <=
 geometric_representation_item <=
 representation_item
 representation_item.name = 'trimmed sphere'}
 solid_model]
 [
 {shape_representation <=
 representation
 representation.name = 'trimmed sphere'}
 shape_representation]

5.1.15.23 Trimmed_torus

AIM element: cyclide_segment_solid
 Source: ISO 10303-42

5.1.16 plant_item_characterization UoF**5.1.16.1 Analysis_data_point**

AIM element: shape_aspect
 Source: ISO 10303-41
 Reference path: {shape_aspect
 shape_aspect.description = 'analysis data point'}

5.1.16.1.1 id

AIM element: identification_assignment.assigned_id
 Source: ISO 10303-41
 Reference path: identification_item = shape_aspect
 identification_item <=
 applied_identification_assignment.items[i]
 applied_identification_assignment <=
 identification_assignment

ISO 10303-227:2005(E)

```
{identification_assignment.role ->
identification_role
identification_role.name = 'analysis data point id'}
identification_assignment.assigned_id
```

5.1.16.1.2 name

AIM element: shape_aspect.name

Source: ISO 10303-41

5.1.16.1.3 location

AIM element: (axis2_placement_2d)

(axis2_placement_3d)

Source: ISO 10303-42

Reference path: shape_aspect

```
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'analysis data point location'}
representation_item =>
geometric_representation_item =>
placement =>
(axis2_placement_2d)
(axis2_placement_3d)
```

5.1.16.1.4 Value

AIM element: [measure_with_unit.value_component]

[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: shape_aspect

```
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
```



```

property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'analysis data point value'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.16.2 Bolt

AIM element: bolt_and_nut_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: bolt_and_nut_component_definition <=

```

product_definition
{bolt_and_nut_component_definition
classification_item = piping_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
bolt_and_nut_component_class]
[group
group.name = 'bolt']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment

```

ISO 10303-227:2005(E)

```
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'bolt and nut component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]}
```

5.1.16.3 Clamp

AIM element: product
Source: ISO 10303-41
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
classification_assignment
classification_assignment.assigned_class ->
[group
group.name = 'clamp']
[group
group_relationship.related_group
group_relationship
{group_relationship.name = 'usage classification'}
group_relationship.relating_group ->
group
group.name = 'connection component']]
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]}

5.1.16.4 Bolt_and_nut_component

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group
group.name = 'bolt and nut component']
[group
group_relationship.related_group
group_relationship
{group_relationship.name = 'usage classification'}
group_relationship.relating_group ->
group
group.name = 'connection component']]
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]}

5.1.16.4.1 nominal_size

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->

ISO 10303-227:2005(E)

```
representation
{representation.name = 'connection component size'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'nominal size'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.16.4.2 quantity

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
{product_definition =>
bolt_and_nut_component_definition}
product_definition <-
product_definition_relationship.related_product_definition
product_definition_relationship =>
{product_definition_relationship.relatng_product_definition ->
product_definition =>
bolt_and_nut_set_definition}
product_definition_usage =>
assembly_component_usage =>
quantified_assembly_component_usage
quantified_assembly_component_usage.quantity ->
measure_with_unit
{measure_with_unit =>
count_measure_with_unit}
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.16.5 Bolt_and_nut_set

AIM element: bolt_and_nut_set_definition

Source: ISO 10303-227

Reference path: bolt_and_nut_set_definition <=
product_definition

5.1.16.5.1 set_id

AIM element: product_definition.id
 Source: ISO 10303-41
 Reference path: bolt_and_nut_set_definition <=
 product_definition
 product_definition.id

5.1.16.5.2 quantity_used

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]
 Source: ISO 10303-41
 Reference path: bolt_and_nut_set_definition <=
 product_definition <-
 product_definition_relationship.related_product_definition
 product_definition_relationship =>
 {product_definition_relationship.relating_product_definition ->
 product_definition =>
 connection_material_definition}
 product_definition_usage =>
 assembly_component_usage =>
 quantified_assembly_component_usage
 quantified_assembly_component_usage.quantity ->
 measure_with_unit
 {measure_with_unit =>
 count_measure_with_unit}
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.16.5.3 bolt_and_nut_set to connection_material

AIM element: PATH
 Reference path bolt_and_nut_set_definition <=
 product_definition <-
 product_definition_relationship.related_product_definition
 product_definition_relationship
 {product_definition_relationship =>
 product_definition_usage =>
 (assembly_component_usage)
 (assembly_component_usage =>
 quantified_assembly_component_usage)}
 product_definition_relationship.relating_product_definition ->
 product_definition =>
 connection_material_definition

5.1.16.5.4 bolt_and_nut_set to bolt_and_nut_component

AIM element: PATH
 Reference path: bolt_and_nut_set_definition <=
 product_definition <-
 product_definition_relationship.relating_product_definition

ISO 10303-227:2005(E)

```
product_definition_relationship
{product_definition_relationship =>
product_definition_usage =>
(assembly_component_usage)
(assembly_component_usage =>
quantified_assembly_component_usage)}
product_definition_relationship.related_product_definition ->
product_definition =>
bolt_and_nut_component_definition
```

5.1.16.6 Clamp_set

AIM element: clamp_set_definition
Source: ISO 10303-227
Reference path: clamp_set_definition <=
product_definition

5.1.16.6.1 set_id

AIM element: product_definition.id
Source: ISO 10303-41
Reference path: clamp_set_definition <=
product_definition
product_definition.id

5.1.16.6.2 quantity

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: clamp_set_definition <=
product_definition <-
product_definition_relationship.related_product_definition
product_definition_relationship =>
{product_definition_relationship.relateing_product_definition ->
product_definition =>
connection_material_definition}
product_definition_usage =>
assembly_component_usage =>
quantified_assembly_component_usage
quantified_assembly_component_usage.quantity ->
measure_with_unit
{measure_with_unit =>
count_measure_with_unit}
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.16.6.3 clamp_set to connection_material

AIM element: PATH
Reference path: clamp_set_definition <=
product_definition <-

```

product_definition_relationship.related_product_definition
product_definition_relationship
{product_definition_relationship =>
product_definition_usage =>
(assembly_component_usage)
(assembly_component_usage =>
quantified_assembly_component_usage)}
product_definition_relationship.relying_product_definition ->
product_definition =>
connection_material_definition

```

5.1.16.6.4 clamp_set to clamp

AIM element: PATH

```

Reference path: clamp_set_definition <=
product_definition <-
product_definition_relationship.relying_product_definition
product_definition_relationship
{product_definition_relationship =>
product_definition_usage =>
(assembly_component_usage)
(assembly_component_usage =>
quantified_assembly_component_usage)}
product_definition_relationship.related_product_definition ->
product_definition =>
clamp_component_definition

```

5.1.16.6.5 clamp_set to bolt_and_nut_component

AIM element: PATH

```

Reference path: clamp_set_definition <=
product_definition <-
product_definition_relationship.relying_product_definition
product_definition_relationship
{product_definition_relationship =>
product_definition_usage =>
(assembly_component_usage)
(assembly_component_usage =>
quantified_assembly_component_usage)}
product_definition_relationship.related_product_definition ->
product_definition =>
bolt_and_nut_component_definition

```

5.1.16.7 Cable_support

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

ISO 10303-227:2005(E)

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group
group.name = 'cable support']
[group <-
group_relationship.related_group
{group_relationship
group_relationship.name = 'usage classification'}
group_relationship
group_relationship.relating_group ->
group
group.name = 'support component']]
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]}

5.1.16.8 Catalogue_definition

AIM element: catalogue
Source: ISO 10303-227
Reference path: catalogue <=
(external_source)
(external_source =>
known_source)
[document]

5.1.16.8.1 catalogue_id

AIM element: document.id
Source: ISO 10303-41
Reference path: catalogue <=
document
document.id

5.1.16.8.2 catalogue_name

AIM element: document.name
Source: ISO 10303-41

Reference path: catalogue <=
 document
 document.name

5.1.16.8.3 catalogue_version

AIM element: document.description
 Source: ISO 10303-41
 Reference path: catalogue <=
 document
 document.description

5.1.16.8.4 catalogue_definition to catalogue_connector

AIM element: PATH
 Rules: subtype_mandatory_pre_defined_item
 Reference path: catalogue <=
 (external_source)
 (external_source =>
 known_source) <-
 externally_defined_item.source
 externally_defined_item =>
 catalogue_connector

5.1.16.8.5 catalogue_definition to catalogue_item

AIM element: PATH
 Rules: subtype_mandatory_pre_defined_item
 Reference path: catalogue <=
 (external_source)
 (external_source =>
 known_source) <-
 externally_defined_item.source
 externally_defined_item =>
 externally_defined_plant_item_definition =>
 catalogue_item

5.1.16.9 Catalogue_item

AIM element: catalogue_item
 Source: ISO 10303-227
 Reference path: catalogue_item <=
 externally_defined_plant_item_definition <=
 [product_definition
 {product_definition
 product_definition.frame_of_reference ->
 product_definition_context <=
 application_context_element
 application_context_element.name = 'physical definition'}}]
 [externally_defined_item
 {externally_defined_item
 externally_defined_item.source ->

ISO 10303-227:2005(E)

```
(external_source)  
(external_source =>  
known_source) =>  
catalogue}]
```

5.1.16.9.1 item_name

AIM element: product.name
Source: ISO 10303-41
Reference path: catalogue_item <=
externally_defined_plant_item_definition <=
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.name

5.1.16.9.2 item_version

AIM element: product_definition_formation.id
Source: ISO 10303-41
Reference path: catalogue_item <=
externally_defined_plant_item_definition <=
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.id

5.1.16.9.3 model_number

AIM element: product.id
Source: ISO 10303-41
Reference path: catalogue_item <=
externally_defined_plant_item_definition <=
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.id

5.1.16.9.4 catalogue_item to catalogue_item_substitute (has as substitute)

AIM element: PATH
Reference path: catalogue_item <=
externally_defined_plant_item_definition <=
product_definition <-
product_definition_relationship.related_product_definition
product_definition_relationship <-
product_definition_substitute.context_relationship
product_definition_substitute

5.1.16.9.5 catalogue_item to catalogue_item_substitute (is substitute)

AIM element: PATH

Reference path: catalogue_item <=
 externally_defined_plant_item_definition <=
 product_definition <-
 product_definition_substitute.substitute_definition
 product_definition_substitute

5.1.16.9.6 catalogue_item to plant_item_definition (is defined by)

AIM element: PATH

Reference path: catalogue_item <=
 externally_defined_plant_item_definition

5.1.16.10 Catalogue_item_substitute

AIM element: product_definition_substitute

Source: ISO 10303-41

5.1.16.11 Connected_collection

AIM element: assembly_component_usage

Source: ISO 10303-44

Reference path: {assembly_component_usage <=
 product_definition_usage <=
 product_definition_relationship
 (product_definition_relationship.name = 'connected collection')
 (product_definition_relationship.name = 'connected hierarchical collection')}

5.1.16.11.1 connected_collection to plant_item_connection

AIM element: PATH

Reference path: assembly_component_usage <=
 product_definition_usage <=
 product_definition_relationship
 product_definition_relationship.relate_product_definition ->
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 shape_aspect =>
 plant_item_connection

5.1.16.12 Connection_component

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context

ISO 10303-227:2005(E)

```
product_context_discipline_type_constraint
value_for_application_context
Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'connection component'}
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}]}
```

5.1.16.13 Connection_material

AIM element: connection_material_definition
Source: ISO 10303-227
Reference path connection_material_definition <=
product_definition

5.1.16.13.1 material_name

AIM element: material_designation.name
Source: ISO 10303-45
Reference path: connection_material_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect =>
plant_item_connection <=
shape_aspect_relationship
shape_aspect_relationship
shape_definition = shape_aspect_relationship
shape_definition
characterized_definition = shape_definition
characterized_definition <-

```

material_designation.definitions[i]
material_designation
material_designation.name

```

5.1.16.14 Design_project

```

AIM element: design_project
Source:      ISO 10303-227
Reference path: design_project <=
              organization

```

5.1.16.14.1 description

```

AIM element: organization.description
Source:      ISO 10303-41
Reference path: design_project <=
              organization
              organization.description

```

5.1.16.14.2 name

```

AIM element: organization.name
Source:      ISO 10303-41
Reference path: design_project <=
              organization
              organization.name

```

5.1.16.14.3 owner

```

AIM element: organization.name
Source:      ISO 10303-41
Reference path: design_project
              plant_spatial_configuration_organization_item = design_project
              plant_spatial_configuration_organization_item <-
              plant_spatial_configuration_organization_assignment.items[i]
              plant_spatial_configuration_organization_assignment <=
              { organization_assignment
                organization_assignment.role ->
                organization_role
                organization_role.name = 'project owner' }
              organization_assignment
              organization_assignment.assigned_organization ->
              organization
              organization.name

```

5.1.16.14.4 design_project to project_design_assignment

```

AIM element: PATH
Reference path: design_project <=
              organization <-
              organization_assignment.assigned_organization
              organization_assignment =>
              design_project_assignment

```

ISO 10303-227:2005(E)

5.1.16.15 Document

AIM element: document
Source: ISO 10303-41
Reference path

5.1.16.15.1 document_id

AIM element: document.id
Source: ISO 10303-41
Reference path: document
document.id

5.1.16.15.2 version_id

AIM element: identification_assignment.assigned_id
Source: ISO 10303-41
Reference path: document
identification_item = document
identification_item <-
applied_identification_assignment.items[i]
applied_identification_assignment <=
identification_assignment
{ identification_assignment.role ->
identification_role
identification_role.name = 'document version id'}
identification_assignment.assigned_id

5.1.16.15.3 document_type

AIM element: document_type.product_data_type
Source: ISO 10303-41
Reference path: document
document.kind ->
document_type
document_type.product_data_type

5.1.16.15.4 internal_document_reference

AIM element: [document_usage_constraint.subject_element]
[document_usage_constraint.subject_element_value]
Source: ISO 10303-41
Reference path: document <-
document_usage_constraint.source
document_usage_constraint
[document_usage_constraint.subject_element]
[document_usage_constraint.subject_element_value]

5.1.16.15.5 document to changed_document

AIM element: IDENTICAL MAPPING

5.1.16.15.6 document to plant_item

#1: The whole document is associated with the plant_item

#2: Part of the document is associated with the plant_item

AIM element: PATH

Reference path: document

```
#1: (document <-
document_usage_constraint.source
document_usage_constraint <-
document_usage_constraint_assignment.assigned_document_usage
document_usage_constraint_assignment =>
applied_document_usage_constraint_assignment
applied_document_usage_constraint_assignment.items[i] ->
document_item =
(product_definition)
(externally_defined_plant_item_definition)
(product))
#2: (document <-
document_reference.assigned_document
document_reference =>
applied_document_reference
applied_document_reference.items[i] ->
document_item =
(product_definition)
(externally_defined_plant_item_definition)
(product))
```

5.1.16.15.7 document to plant_item_connector

#1: The whole document is associated with the plant_item_connector

#2: Part of the document is associated with the plant_item_connector

AIM element: PATH

Reference path: document

```
#1: (document <-
document_usage_constraint.source
document_usage_constraint <-
document_usage_constraint_assignment.assigned_document_usage
document_usage_constraint_assignment =>
applied_document_usage_constraint_assignment
applied_document_usage_constraint_assignment.items[i] ->
document_item =
plant_item_connector)
#2: (document <-
document_reference.assigned_document
document_reference =>
applied_document_reference
applied_document_reference.items[i] ->
document_item =
plant_item_connector)
```

ISO 10303-227:2005(E)

5.1.16.16 Ducting_component

AIM element: product
Source: ISO 10303-41
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'ducting component'}
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}]}

5.1.16.17 Electrical_component

AIM element: product
Source: ISO 10303-41
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'electrical component'}
[product
product.frame_of_reference[i] ->
product_context<=


```

application_context_element
application_context_element.name = 'plant item']]

```

5.1.16.18 Equipment

```

AIM element: product
Source: ISO 10303-41
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'equipment'}
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.16.18.1 characteristics

```

AIM element: ([representation_item.name]
[(descriptive_representation_item.description)
([measure_with_unit.value_component]
[measure_with_unit.unit_component]))
([representation_item.name]
[(descriptive_representation_item.description)
([measure_with_unit.value_component]
[measure_with_unit.unit_component])]
[document_usage_constraint.subject_element_value])
Source: ISO 10303-41, ISO 10303-43, ISO 10303-45
Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition

```

ISO 10303-227:2005(E)

```
characterized_definition <-  
property_definition.definition  
{property_definition  
property_definition.name = 'general characteristics'}  
property_definition  
represented_definition = property_definition  
represented_definition <-  
property_definition_representation.definition  
property_definition_representation  
property_definition_representation.used_representation ->  
representation  
representation.items[i] ->  
[representation_item  
representation_item.name]  
[representation_item =>  
(descriptive_representation_item  
descriptive_representation_item.description)  
(measure_representation_item <=  
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component])]  
[(representation_item)  
(representation_item  
document_item = representation_item  
document_item <-  
applied_document_reference.items[i]  
applied_document_reference <=  
document_reference  
document_reference.assigned_document ->  
document <-  
document_usage_constraint.source  
document_usage_constraint  
document_usage_constraint.subject_element_value)]
```

5.1.16.18.2 equipment_type

AIM element: group.name

Source: ISO 10303-41

Reference path: product

```
classification_item = product  
classification_item <-  
applied_classification_assignment.items[i]  
applied_classification_assignment <=  
{classification_assignment  
classification_assignment.role ->  
classification_role  
classification_role.name = 'plant item type classification'}  
classification_assignment
```

```

classification_assignment.assigned_class ->
{group <-
group_relationship.related_group
group_relationship
{group_relationship
group_relationship.name = 'type hierarchy'}
group_relationship.relying_group ->
group
group.name = 'equipement'}
group
group.name

```

5.1.16.18.3 heat_tracing_type

AIM element: (heat_tracing_representation)
 ([heat_tracing_representation]
 [document_usage_constraint.subject_element_value])

Source: ISO 10303-227

Reference path: product <-
 product_definition_formation.of_product
 product_definition_formation <-
 product_definition.formation
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <-
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 representation =>
 (heat_tracing_representation)
 ([heat_tracing_representation]
 [heat_tracing_representation]
 document_item = heat_tracing_representation
 document_item <-
 applied_document_reference.items[i]
 applied_document_reference <=
 document_reference
 document_reference.assigned_document ->
 document <-
 document_usage_constraint.source
 document_usage_constraint
 {document_usage_constraint

ISO 10303-227:2005(E)

```
document_usage_constraining.subject_element = 'heat tracing'}  
document_usage_constraint.subject_element_value])
```

5.1.16.18.4 insulation_specification

AIM element: document_usage_constraint.subject_element_value

Source: ISO 10303-41

Reference path: product

```
document_item = product  
document_item <-  
applied_document_reference.items[i]  
applied_document_reference <=  
document_reference  
document_reference.assigned_document ->  
document <-  
document_usage_constraint.source  
document_usage_constraint  
document_usage_constraint.subject_element_value
```

5.1.16.18.5 rated_temperature

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: product <-

```
product_definition_formation.of_product  
product_definition_formation <-  
product_definition.formation  
product_definition  
characterized_product_definition = product_definition  
characterized_product_definition  
characterized_definition = characterized_product_definition  
characterized_definition <-  
property_definition.definition  
property_definition <-  
represented_definition = property_definition  
represented_definition <-  
property_definition_representation.definition  
property_definition_representation  
property_definition_representation.used_representation ->  
representation  
{representation.name = 'equipment characteristics'}  
(representation.items[i] ->  
{representation_item  
(representation_item.name = 'rated temperature')  
(representation_item.name = 'maximum rated temperature')  
(representation_item.name = 'minimum rated temperature'}})  
([representation.items[i] ->  
{representation_item  
representation_item.name = 'maximum rated temperature'}}]
```

```
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum rated temperature'}}]
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.16.18.6 shock_qualification_status

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: product <-

```
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'equipment characteristics'}
representation.items[i] ->
{representation_item
representation_item.name = 'shock qualification status'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
```

5.1.16.18.7 vibration_amplitude

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: product <-

```
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
```

ISO 10303-227:2005(E)

```
property_definition.definition
property_definition <-
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'equipment characteristics'}
(representation.items[i] ->
{representation_item
(representation_item.name = 'vibration amplitude')
(representation_item.name = 'maximum vibration amplitude')
(representation_item.name = 'minimum vibration amplitude')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum vibration amplitude'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum vibration amplitude'}])
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.16.18.8 vibration_frequency

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation.name = 'equipment characteristics'}

```

(representation.items[i] ->
 {representation_item
 (representation_item.name = 'vibration frequency')
 (representation_item.name = 'maximum vibration frequency')
 (representation_item.name = 'minimum vibration frequency'}})
([representation.items[i] ->
 {representation_item
 representation_item.name = 'maximum vibration frequency'}]
 [representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum vibration frequency'}})
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.16.18.9 equipment to equipment_trim_piping

AIM element: PATH

```

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition <-
product_definition_relationship.relatng_product_definition
product_definition_relationship
{product_definition_relationship
product_definition_relationship.name = 'trim piping'}

```

5.1.16.18.10 equipment to supplied_equipment

AIM element: IDENTICAL MAPPING

5.1.16.19 Equipment_breaching

```

AIM element: product
Source: ISO 10303-41
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

```

```

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment

```

ISO 10303-227:2005(E)

```
classification_assignment.assigned_class ->
[group
group.name = 'equipment breaching']
[group <-
group_relationship.related_group
{group_relationship
group_relationship.name = 'usage classification'}
group_relationship
group_relationship.relating_group ->
group
group.name = 'ducting component']]
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}]
```

5.1.16.20 Equipment_trim_piping

AIM element: product_definition_relationship

Source: ISO 10303-41

Reference path: {product_definition_relationship
[product_definition_relationship.relating_product_definition ->
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'equipment']
[product_definition_relationship.related_product_definition ->
product_definition =>
piping_component_definition]
[product_definition_relationship.name = 'trim piping']]}

5.1.16.21 Externally_defined_document

AIM element: externally_defined_document

Source: ISO 10303-227

Reference path: externally_defined_document <=
 [document]
 [externally_defined_item]

5.1.16.21.1 source_id

AIM element: external_source.source_id
 Source: ISO 10303-41
 Reference path: externally_defined_document <=
 externally_defined_item
 externally_defined_item.source ->
 external_source
 external_source.source_id

5.1.16.21.2 source_description

AIM element: description_attribute.attribute_value
 Source: ISO 10303-41
 Reference path: externally_defined_document <=
 externally_defined_item
 externally_defined_item.source ->
 external_source
 description_attribute_select = external_source
 description_attribute_select <-
 description_attribute.described_item
 description_attribute
 description_attribute.attribute_value

5.1.16.22 Externally_defined_user_defined_attribute_value

AIM element: externally_defined_representation_item
 Source: ISO 10303-227
 Reference path: externally_defined_representation <=
 [representation_item]
 [externally_defined_item]

5.1.16.22.1 source

AIM element: external_source.id
 Source: ISO 10303-41
 Reference path: externally_defined_representation_item <=
 externally_defined_item
 externally_defined_item.source ->
 external_source
 external_source.id

5.1.16.23 Functional_design_view

AIM element: (product_definition)
 (externally_defined_plant_item_definition)
 Source: ISO 10303-41, ISO 10303-227
 Rules: dependent_instantiable_product_context
 product_context_discipline_type_constraint

ISO 10303-227:2005(E)

value_for_application_context
Reference path: (product_definition)
(externally_defined_plant_item_definition <=
[externally_defined_item]
[product_definition])
{product_definition
[product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']
[product_definition.frame_of_reference ->
[product_definition_context <=
application_context_element
(application_context_element.name = 'functional definition')
(application_context_element.name = 'functional occurrence')]
[product_definition_context
product_definition_context.life_cycle_stage = 'functional design']]}

5.1.16.23.1 tag_number

AIM element: product_definition.id
Source: ISO 10303-41
Reference path: (product_definition)
(externally_defined_plant_item_definition <=
product_definition)
{product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional occurrence'}
product_definition.id

5.1.16.23.2 functional_design_view_to_functional_plant_item_satisfaction

AIM element: PATH
Reference path: (product_definition <-)
(externally_defined_plant_item_definition <=
product_definition <-)
product_definition_relationship.relatng_product_definition
product_definition_relationship
{product_definition_relationship
product_definition_relationship.name = 'plant item satisfaction'}

5.1.16.24 Functional_plant_item_satisfaction

AIM element: product_definition_relationship
Source: ISO 10303-41

Reference path: {product_definition_relationship
product_definition_relationship.name = 'plant item satisfaction'}

5.1.16.25 bolt_with_head

AIM element: bolt_and_nut_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: bolt_and_nut_component_definition <=
product_definition
{bolt_and_nut_component_definition
classification_item = piping_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
bolt_and_nut_component_class]
[group
group.description = 'head bolt']
[group <-
group_relationship.related_group
group_relationship
{group_relationship.name = 'class hierarchy'}
group_relationship.relating_group ->
group
{[group.name = 'bolt']
[group =>
bolt_and_nut_component_class]}}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}

ISO 10303-227:2005(E)

```
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->
group)
group.name = 'bolt and nut component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]}
```

5.1.16.25.1 length

```
AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: bolt_and_nut_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'hexagon head bolt dimensional shape'}
representation
representation.items[i] ->
{representation_item
```

```

representation_item.name = 'length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.16.25.2 type_of_head

```

AIM element:  group.name
Source:      ISO 10303-41
Rules:      subtype_mandatory_shape_representation
Reference path: bolt_and_nut_component_definition <=
product_definition =>
piping_support_definition
classification_item = piping_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
bolt_and_nut_component_class]
[group
group.description = 'head bolt']
group
group.name

```

5.1.16.26 Hierarchically_organized_collection

```

AIM element:  assembly_component_usage
Source:      ISO 10303-44
Reference path: {assembly_component_usage <=
product_definition_usage <=
product_definition_relationship
(product_definition_relationship.name = 'hierarchical collection')
(product_definition_relationship.name = 'connected hierarchical collection')}}

```

5.1.16.27 Hull_applicability

```

AIM element:  serial_numbered_effectivity
Source:      ISO 10303-41

```

5.1.16.27.1 start_hull

```

AIM element:  serial_numbered_effectivity.effectivity_start_id

```

ISO 10303-227:2005(E)

Source: ISOI 10303-41

Reference path: serial_numbered_effectivity
serial_numbered_effectivity.effectivity_start_id

5.1.16.27.2 end_hull

AIM element: serial_numbered_effectivity.effectivity_end_id

Source: ISO 10303-41

Reference path: serial_numbered_effectivity
serial_numbered_effectivity.effectivity_end_id

5.1.16.27.3 hull_applicability to plant_item

AIM element: PATH

Reference path: serial_numbered_effectivity <=
effectivity <-
effectivity_assignment.assigned_effectivity
effectivity_assignment =>
applied_effectivity_assignment
applied_effectivity_assignment.items [i] ->
effectivity_item
(effectivity_item = product_definition)
(effectivity_item = product)
{(product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product)
(product)
product.frame_of_reference[i] ->
[product_context
product_context.discipline_type = 'process plant']
[product_context <=
application_context_element
application_context_element.name = 'plant item']}
(product_definition)
(product)

5.1.16.27.4 hull_applicability to ship

AIM element: PATH

Reference path: serial_numbered_effectivity <=
effectivity <-
effectivity_assignment.assigned_effectivity
effectivity_assignment <-
effectivity_context_assignment.assigned_effectivity_context
applied_effectivity_context_assignment
applied_effectivity_context_assignment.items [i] ->
effectivity_context_item
effectivity_context_item = product_definition

```

product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
{[product
product.frame_of_reference[i] ->
product_context
product_context.discipline_type = 'shipbuilding']
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'ship']}]

```

5.1.16.28 Installed_physical_design_view

AIM element: (product_definition)
(externally_defined_plant_item_definition)

Source: ISO 10303-41, ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: (product_definition)
(externally_defined_plant_item_definition <=
[externally_defined_item]
[product_definition])
{product_definition
[product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']
[product_definition.description = 'installed']
[product_definition.frame_of_reference ->
[product_definition_context <=
application_context_element
application_context_element.name = 'physical occurrence']

ISO 10303-227:2005(E)

```
[product_definition_context  
product_definition_context.life_cycle_stage = 'physical design']}]}
```

5.1.16.28.1 serial_number

AIM element: product_definition.id
Source: ISO 10303-41
Reference path: (product_definition)
(externally_defined_plant_item_definition <=
product_definition)
product_definition.id

5.1.16.28.2 installed_physical_design_view to physical_design_view

AIM element: PATH
Reference path: (product_definition)
(externally_defined_plant_item_definition <=
product_definition)
product_definition <-
product_definition_relationship.related_product_definition
product_definition_relationship
{ product_definition_relationship
product_definition_relationship.name = 'installation'}
product_definition_relationship.relying_product_definition ->
(product_definition)
(externally_defined_plant_item_definition <=
product_definition)

5.1.16.29 Instrument

AIM element: product
Source: ISO 10303-41
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group
group.name = 'instrument']
[group <-
group_relationship.related_group
{group_relationship


```

group_relationship.name = 'usage classification'}
group_relationship
group_relationship.relying_group ->
group
group.name = 'instrumentation and control component']]
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']
[product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition <-
product_definition_relationship.related_product_definition
{product_definition_relationship
product_definition_relationship.name = 'control loop element'}
product_definition_relationship
product_definition_relationship.relying_product_definition ->
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'control loop']]

```

5.1.16.29.1 control_loop_id

AIM element: product.id
Source: ISO 10303-41
Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-

ISO 10303-227:2005(E)

```
product_definition.formation
product_definition <-
product_definition_relationship.related_product_definition
{product_definition_relationship
product_definition_relationship.name = 'control loop element'}
product_definition_relationship
product_definition_relationship.relatng_product_definition ->
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.id
```

5.1.16.29.2 instrument_type

AIM element: group.name

Source: ISO 10303-41

Reference path: product

```
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'instrument type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name
```

5.1.16.29.3 sensor_type

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: product <-

```
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
```

```

property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'sensor type'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

```

5.1.16.29.4 signal_type

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'signal type'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

5.1.16.29.5 stream_interaction_type

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition

ISO 10303-227:2005(E)

```
characterized_definition <-  
property_definition.definition  
property_definition  
represented_definition = property_definition  
represented_definition <-  
property_definition_representation.definition  
property_definition_representation  
property_definition_representation.used_representation ->  
representation  
representation.items[i] ->  
{representation_item  
representation_item.name = 'stream interaction type'}  
representation_item =>  
descriptive_representation_item  
descriptive_representation_item.description
```

5.1.16.30 Instrumentation_and_control_component

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'instrumentation and control component'}
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}]}

5.1.16.31 Insulation

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'insulation']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element

5.1.16.32 Material_specification_selection

AIM element: [material_property]
[document]

Source: ISO 10303-41, ISO 10303-45

Reference path: {document
document.kind ->
document_type
document_type.product_data_type = 'material specification'}

5.1.16.32.1 description

AIM element: property_definition.description

Source: ISO 10303-41

Reference path: material_property <=
property_definition
property_definition.description

5.1.16.32.2 material_specification_id

AIM element: document.id

Source: ISO 10303-41

5.1.16.32.3 required_or_optional

AIM element: group.name

Source: ISO 10303-41

Reference path: document <-
document_reference.assigned_document
document_reference =>
applied_document_reference
classification_item = applied_document_reference
classification_item <-
applied_classification_assignment.items[i]

ISO 10303-227:2005(E)

```
applied_classification_assignment <=  
classification_assignment  
classification_assignment.assigned__classification>  
group  
{(group.name = 'required')  
(group.name = 'optional')}
```

5.1.16.32.4 selection_id

AIM element: document_usage_constraint.subject_element
Source: ISO 10303-41
Reference path: document <-
document_usage_constraint.source
document_usage_constraint
document_usage_constraint.subject_element

5.1.16.32.5 type

AIM element: document_usage_constraint.subject_element_value
Source: ISO 10303-41
Reference path: document <-
document_usage_constraint.source
document_usage_constraint
document_usage_constraint.subject_element_value

5.1.16.32.6 material_specification_selection to material_specification_subset_reference

AIM element: PATH
Reference path: document <-
document_relationship.relying_document
document_relationship
{ document_relationship
document_relationship.description = 'subset'}

5.1.16.33 Material_specification_subset_reference

AIM element: document_relationship
Source: ISO 10303-41
Reference path: { document_relationship
document_relationship.description = 'subset'}

5.1.16.33.1 subset_id

AIM element: document_relationship.name
Source: ISO 10303-41

5.1.16.34 External_schema_context

AIM element: externally_defined_representation_item
Source: ISO 10303-227
Reference path: externally_defined_representation_item <=
[representation_item]
[externally_defined_item]

5.1.16.34.1 target_schema_name

AIM element: external_source.source_id

Source: ISO 10303-41

Reference path: externally_defined_representation_item <=
 [representation_item]
 [externally_defined_item]
 externally_defined_item.source ->
 external_source
 {description_attribute_select = external_source
 description_attribute_select <-description_attribute.described_item
 description_attribute
 description_attribute.attribute_value = 'target schema name' }
 external_source.source_id
 {-> source_item
 source_item = identifier }

5.1.16.34.2 target_entity_name

AIM element: external_source.source_item

Source: ISO 10303-41

Reference path: externally_defined_representation_item <=
 [representation_item]
 [externally_defined_item]
 externally_defined_item.source ->
 external_source
 {description_attribute_select = external_source
 description_attribute_select <-description_attribute.described_item
 description_attribute
 description_attribute.attribute_value = 'target schema name' }
 external_source_relationship.relying_source <-
 external_source_relationship
 {external_source_relationship.name = 'composition' }
 external_source_relationship.related_source ->
 external_source
 {description_attribute_select = external_source
 description_attribute_select <-description_attribute.described_item
 description_attribute
 description_attribute.attribute_value = 'target entity name' }
 external_source.source_id
 {-> source_item
 source_item = identifier }

5.1.16.34.3 External_schema_context to planned_physical_plant_item (as)

AIM element: PATH

Reference path: externally_defined_representation_item <=
 [representation_item]
 [externally_defined_item]
 externally_defined_item =>
 externally_defined_plant_item_definition

ISO 10303-227:2005(E)

```
(externally_defined_plant_item_definition <=  
[product_definition]  
[externally_defined_item])
```

5.1.16.35 Mechanical_system_component

AIM element: mechanical_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: mechanical_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'}

5.1.16.35.1 alignment_allowance

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: mechanical_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'system fabrication'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'alignment allowance')
(representation_item.name = 'maximum alignment allowance')
(representation_item.name = 'minimum alignment allowance'}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum alignment allowance'}}]


```
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum alignment allowance'}}]
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.16.35.2 alignment_orientation

AIM element: axis2_placement_3d.ref_direction

Source: ISO 10303-42

Reference path: mechanical_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'alignment orientation'}
representation_item =>
geometric_representation_item =>
{placement
axis2_placement_3d
axis2_placement_3d.ref_direction
```

5.1.16.35.3 analysis_tracing_type

#1: If the analysis tracing type is not specified

#2a: If the analysis tracing type is vibration

#2b: If the analysis tracing type is noise

#2c: If the analysis tracing type is heat

#2d: If the analysis tracing type is shock

AIM element: #1:(analysis_tracing_representation)
#2a; #2b; #2c; #2d: ([analysis_tracing_representation]
[document_usage_constraint.subject_element_value])

Source: ISO 10303-227

Reference path: mechanical_component_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
```

ISO 10303-227:2005(E)

```
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.items[i] ->
representation_item =>
descriptive_representation_item}
representation =>
(analysis_tracing_representation)
#2a: ([analysis_tracing_representation]
[analysis_tracing_representation
document_item = analysis_tracing_representation
document_item <-applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-document_usage_constraint.source
document_usage_constraint
({document_usage_constraint
document_usage_constraint.subject_element = 'vibration tracing'}
document_usage_constraint.subject_element_value)))
#2b: ([analysis_tracing_representation]
[analysis_tracing_representation
document_item = analysis_tracing_representation
document_item <-applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-document_usage_constraint.source
document_usage_constraint
({document_usage_constraint
document_usage_constraint.subject_element = 'noise tracing'}
document_usage_constraint.subject_element_value)))
#2c: ([analysis_tracing_representation]
[analysis_tracing_representation
document_item = analysis_tracing_representation
document_item <-applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-document_usage_constraint.source
document_usage_constraint
({document_usage_constraint
document_usage_constraint.subject_element = 'heat tracing'}
```

```

document_usage_constraint.subject_element_value)))
#2d: ([analysis_tracing_representation]
[analysis_tracing_representation
document_item = analysis_tracing_representation
document_item <-applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-document_usage_constraint.source
document_usage_constraint
({ document_usage_constraint
document_usage_constraint.subject_element = 'shock tracing'
document_usage_constraint.subject_element_value}))

```

5.1.16.35.4 distributed_torque

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

```

Reference path: mechanical_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'system characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'distributed torque'}
representation_item =>
measure_representation_item <=
measure_with_unit
[{measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
[{measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component]

```

ISO 10303-227:2005(E)

5.1.16.35.5 drawing_sheet_number

AIM element: document.id
Source: ISO 10303-41
Reference path: mechanical_component_definition <=
product_definition
document_item = product_definition
document_item <-applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
{ document
document.kind ->
document_type
document_type.product_data_type = 'drawing sheet'}
document
document.id

5.1.16.35.6 filling_fluid

AIM element: descriptive_representation_item.description
Source: ISO 10303-45
Reference path: mechanical_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{ representation
representation.name = 'system fabrication'}
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'filling fluid'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

5.1.16.35.7 lubrication_name

AIM element: descriptive_representation_item.description
Source: ISO 10303-45
Reference path: mechanical_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition

```

characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'system lubrication'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'lubrication'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

```

5.1.16.35.8 operating_pressure

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

```

Reference path: mechanical_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'system characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'operating pressure'}
representation_item =>
measure_representation_item <=
measure_with_unit
[{measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
[{measure_with_unit.unit_component ->
unit
unit = derived_unit}

```

ISO 10303-227:2005(E)

measure_with_unit.unit_component]

5.1.16.35.9 operating_speed

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: mechanical_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'system characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'operating speed'}
representation_item =>
measure_representation_item <=
measure_with_unit
[{measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
[{measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component]

5.1.16.35.10 operating_temperature

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: mechanical_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition

```

property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'system characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'operating temperature'}
(representation_item =>
measure_representation_item <=
{measure_with_unit =>
thermodynamic_temperature_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component])

```

5.1.16.35.11 vibration_frequency

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

```

Reference path: mechanical_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'system characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'vibration frequency'}
representation_item =>
measure_representation_item <=
measure_with_unit
[{measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
[{measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component]

```

ISO 10303-227:2005(E)

5.1.16.35.12 vibration_amplitude

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: mechanical_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'system characteristics'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'vibration amplitude'}
representation_item =>
measure_representation_item <=
measure_with_unit
[{measure_with_unit.value_component ->
measure_value
measure_value = ratio_measure}
measure_with_unit.value_component]
[{measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component]

5.1.16.35.13 mechanical_system_component to user_defined_attribute_value (as user_defined_parameter)

AIM element: PATH

Reference path: mechanical_component_definition <=
product_definition <-
characterized_product_definition = product_definition
characterized_product_definition <-
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition <-
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation


```

property_definition_representation.used_representation ->
{ (measure_representation_item <=)
(descriptive_representation_item <=)
representation_item <-
representation.items[i]
representation
representation.name = 'user defined parameter'}

```

5.1.16.35.14 mechanical_system_component to arrangement_mechanical_system_component - assignment (as satisfies)

AIM element: PATH

```

Reference path: mechanical_component_definition <=
product_definition <-product_definition_relationship.related_product_definition
{product_definition_relationship
product_definition_relationship.name = 'realization'}
product_definition_relationship

```

5.1.16.35.15 mechanical_system_component to component_size_description (as has_a_size - described_by)

AIM element: PATH

Rules: subtype_mandatory_shape_representation

```

Reference path: mechanical_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-property_definition.definition
{property_definition =>
product_definition_shape}
property_definition
represented_definition = property_definition
represented_definition <-property_definition_representation.definition
{property_definition_representation =>
shape_definition_representation}
property_definition_representation
property_definition_representation.used_representation ->
representation =>
shape_representation =>
shape_dimension_representation

```

5.1.16.36 Nozzle

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

```

Reference path: {[product
classification_item = product

```

ISO 10303-227:2005(E)

```
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'nozzle']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}]
```

5.1.16.36.1 end_1_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: product <-

```
product_definition_formation.of_product <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 1'}
shape_aspect =>
plant_item_connector
```

5.1.16.36.2 end_2_connector

AIM element: plant_item_connector

Source: ISO 10303-227

Reference path: product <-

```
product_definition_formation.of_product <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
```

```

property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
{shape_aspect
shape_aspect.description = 'end 2'}
shape_aspect =>
plant_item_connector

```

5.1.16.37 Nut

```

AIM element: bolt_and_nut_component_definition
Source: ISO 10303-227
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context
Reference path: bolt_and_nut_component_definition <=
product_definition
{bolt_and_nut_component_definition
classification_item = piping_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
classification_assignment
classification_assignment.assigned_class ->
[group =>
bolt_and_nut_component_class]
[group
group.name = 'nut']}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relating_group ->

```

ISO 10303-227:2005(E)

```
group)
group.name = 'bolt and nut component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]
```

5.1.16.38 Offline_instrument

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group
group.name = 'offline instrument']
[group <-
group_relationship.related_group
{group_relationship
group_relationship.name = 'usage classification'}
group_relationship
group_relationship.relating_group ->
group
group.name = 'instrument']]
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}]}

5.1.16.39 Physical_design_view

AIM element: (product_definition)
(externally_defined_plant_item_definition)

Source: ISO 10303-41, ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: (product_definition)
 (externally_defined_plant_item_definition <=
 [externally_defined_item]
 [product_definition])
 {product_definition
 [product_definition.formation ->
 product_definition_formation
 product_definition_formation.of_product ->
 product
 product.frame_of_reference[i] ->
 product_context<=
 application_context_element
 application_context_element.name = 'plant item']
 [product_definition.frame_of_reference ->
 [product_definition_context <=
 application_context_element
 (application_context_element.name = 'physical definition')
 (application_context_element.name = 'physical occurrence')]
 [product_definition_context
 product_definition_context.life_cycle_stage = 'physical design']]}

5.1.16.39.1 physical_design_view to functional_plant_item_satisfaction

AIM element: PATH

Reference path: (product_definition <-)
 (externally_defined_plant_item_definition <=
 product_definition <-)
 product_definition_relationship.related_product_definition
 product_definition_relationship
 {product_definition_relationship
 product_definition_relationship.name = 'plant item satisfaction'}

5.1.16.40 Piping_assembly

AIM element: product_definition

Source: ISO 10303-41

Reference path: {product_definition
 product_definition.frame_of_reference ->
 product_definition_context <=
 application_context_element
 application_context_element.name = 'fabrication assembly'}

5.1.16.40.1 piping_assembly_number

AIM element: product_definition.id

Source: ISO 10303-41

5.1.16.40.2 piping_assembly to piping_assembly_assignment

AIM element: PATH

Reference path: product_definition <-
 product_definition_relationship.relatng_product_definition

ISO 10303-227:2005(E)

product_definition_relationship =>
product_definition_usage

5.1.16.41 Piping_assembly_assignment

AIM element: product_definition_usage

Source: ISO 10303-44

Reference path: {product_definition_usage <=
product_definition_relationship
[product_definition_relationship.relating_product_definition ->
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'fabrication assembly']
[product_definition_relationship.related_product_definition ->
{(product_definition)
(product_definition =>
externally_defined_plant_item_definition)}
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
(application_context_element.name = 'functional occurrence')
(application_context_element.name = 'physical occurrence')}]}

5.1.16.42 Piping_system_component

AIM element: piping_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'}

5.1.16.42.1 coating_reference

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: piping_component_definition <=
product_definition

```

characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'system coating and lining'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'coating'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

```

5.1.16.42.2 corrosion_allowance

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation
representation.name = 'system coating and lining'}
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'corrosion allowance')
(representation_item.name = 'maximum corrosion allowance')
(representation_item.name = 'minimum corrosion allowance'}})
([representation.items[i] ->
{representation_item

ISO 10303-227:2005(E)

```
representation_item.name = 'maximum corrosion allowance'}}
[representation.items[i] ->
 {representation_item
 representation_item.name = 'minimum corrosion allowance'}})
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.16.42.3 heat_tracing_type

AIM element: (heat_tracing_representation)
([heat_tracing_representation]
[document_usage_constraint.subject_element_value])

Source: ISO 10303-227

Reference path: piping_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation =>
(heat_tracing_representation)
([heat_tracing_representation]
[heat_tracing_representation
document_item = heat_tracing_representation
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document <-
document_usage_constraint.source
document_usage_constraint
{document_usage_constraint
document_usage_constraint.subject_element = 'heat tracing'}
document_usage_constraint.subject_element_value])

5.1.16.42.4 lining

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: piping_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <=
 property_definition.definition
 property_definition
 represented_definition = property_definition
 represented_definition <=
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 {representation
 representation.name = 'system coating and lining'}
 representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'lining'}
 representation_item =>
 descriptive_representation_item
 descriptive_representation_item.description

5.1.16.42.5 piping_system_component to equipment_trim_piping

AIM element: PATH

Reference path: piping_component_definition <=
 product_definition <=
 product_definition_relationship.related_product_definition
 {product_definition_relationship
 product_definition_relationship.name = 'trim piping'}
 product_definition_relationship

5.1.16.42.6 piping_system_component to line_piping_system_component_assignment

AIM element: PATH

Reference path: piping_component_definition <=
 product_definition <=
 product_definition_relationship.related_product_definition
 {product_definition_relationship
 product_definition_relationship.name = 'realization'}
 product_definition_relationship

5.1.16.42.7 piping_system_component to piping_size_description

AIM element: PATH

Rules: subtype_mandatory_shape_representation

Reference path: piping_component_definition <=
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition

ISO 10303-227:2005(E)

```
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
{property_definition =>
product_definition_shape}
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
{property_definition_representation =>
shape_definition_representation}
property_definition_representation
property_definition_representation.used_representation ->
representation =>
shape_representation =>
shape_dimension_representation
```

5.1.16.43 Plain_washer

AIM element: bolt_and_nut_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: bolt_and_nut_component_definition <=
product_definition
{bolt_and_nut_component_definition
classification_item = piping_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
bolt_and_nut_component_class]
[group
group.name = 'plain washer']
[group <-
group_relationship.related_group
group_relationship
{group_relationship.name = 'class hierarchy'}
group_relationship.relating_group ->
group
{[group.name = 'washer']
[group =>

```

bolt_and_nut_component_class]])}
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relate_group ->
group)
group.name = 'bolt and nut component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.16.43.1 thickness

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: bolt_and_nut_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]

ISO 10303-227:2005(E)

```
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'plain washer dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'thickness'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.16.43.2 outside_diameter

```
AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: bolt_and_nut_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relate_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
```

```

dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'plain washer dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'outside diameter'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.16.44 Planned_physical_plant_item

- #1: If the item is a local definition
- #2: If the item is an external definition

```

AIM element: #1: (product_definition)
              #2: (externally_defined_plant_item_definition)
Source:      ISO 10303-41, ISO 10303-227
Rules:      dependent_instantiable_product_context
            product_context_discipline_type_constraint
            value_for_application_context
Reference path: #1: (product_definition)
                #2: (externally_defined_plant_item_definition <=
                    [product_definition]
                    [externally_defined_item])
                {product_definition
                 [product_definition.formation ->
                 product_definition_formation
                 product_definition_formation.of_product ->
                 product
                 product.frame_of_reference[i] ->
                 product_context<=
                 application_context_element
                 application_context_element.name = 'plant item']
                 [product_definition.frame_of_reference ->
                 product_definition_context <=
                 application_context_element
                 (application_context_element.name = 'functional occurrence')
                 (application_context_element.name = 'physical occurrence')]}

```

5.1.16.44.1 stock_code

AIM element: identification_assignment.assigned_id

ISO 10303-227:2005(E)

Source: ISO 10303-41

Reference path: (product_definition)
(externally_defined_plant_item_definition <=
[product_definition]
[externally_defined_item])
product_definition
identified_item = product_definition
identification_assignment.items[i] ->
{identification_assignment
identification_assignment.role ->
identification_role
identification_role.name = 'stock code'}
identification_assignment
identification_assignment.assigned_id

5.1.16.44.2 global_unambiguous_identifier

AIM element: identification_assignment.assigned_id

Source: ISO 10303-41

Reference path: (product_definition)
(externally_defined_plant_item_definition <=
[product_definition]
[externally_defined_item])
product_definition
identified_item = product_definition
identified_item <-
applied_identification_assignment.items[i]
{identification_assignment
identification_assignment.role ->
identification_role
identification_role.name = 'globally unambiguous identifier'}
identification_assignment
identification_assignment.assigned_id

5.1.16.44.3 planned_physical_plant_item to external_schema_context (as has_constrained_reference_of)

AIM element: PATH

Reference path: (product_definition)
(externally_defined_plant_item_definition <=
[product_definition]
[externally_defined_item])
externally_defined_item =>
externally_defined_representation_item
(externally_defined_representation_item <=
[externally_defined_item]
[representation_item])

5.1.16.44.4 planned_physical_plant_item to plant_item_connector_occurrence

AIM element: PATH

Reference path: (product_definition)
 (externally_defined_plant_item_definition <=
 product_definition)
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <-
 property_definition.definition
 property_definition =>
 product_definition_shape <-
 shape_aspect.of_shape
 shape_aspect =>
 plant_item_connector

5.1.16.44.5 planned_physical_plant_item to piping_assembly_assignment

AIM element: PATH

Reference path: (product_definition <-)
 (externally_defined_plant_item_definition <=
 product_definition <-)
 product_definition_relationship.related_product_definition
 product_definition_relationship =>
 product_definition_usage

5.1.16.44.6 planned_physical_plant_item to support_usage (supported by)

AIM element: PATH

Reference path: (product_definition <-)
 (externally_defined_plant_item_definition <=
 product_definition <-)
 product_definition_relationship.related_product_definition
 {product_definition_relationship
 (product_definition_relationship.name = 'support usage')
 (product_definition_relationship.name = 'support usage connection')}}
 product_definition_relationship

5.1.16.44.7 planned_physical_plant_item to support_usage (supports)

AIM element: PATH

Reference path: (product_definition <-)
 (externally_defined_plant_item_definition <=
 product_definition <-)
 product_definition_relationship.relying_product_definition
 {product_definition_relationship
 (product_definition_relationship.name = 'support usage')
 (product_definition_relationship.name = 'support usage connection')}}
 product_definition_relationship

ISO 10303-227:2005(E)

5.1.16.45 Plant_item

AIM element: (product_definition)
(externally_defined_plant_item_definition)
(product)

Source: ISO 10303-41, ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: (product_definition)
(externally_defined_plant_item_definition <=
[product_definition]
[externally_defined_item])
(product)
{(product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product)
(product)
product.frame_of_reference[i] ->
[product_context
product_context.discipline_type = 'process plant']
[product_context <=
application_context_element
application_context_element.name = 'plant item']}
{(product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition)
(product_definition)
product_definition.frame_of_reference ->
product_definition_context
(product_definition_context.life_cycle_stage = 'physical design')
(product_definition_context.life_cycle_stage = 'functional design')}

5.1.16.45.1 description

AIM element: product.description

Source: ISO 10303-41

Reference path: (product_definition)
(externally_defined_plant_item_definition <=
product_definition)
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.description

5.1.16.45.2 name

AIM element: product.name
 Source: ISO 10303-41
 Reference path: (product_definition)
 (externally_defined_plant_item_definition <=
 product_definition)
 product_definition.formation ->
 product_definition_formation
 product_definition_formation.of_product ->
 product
 product.name

5.1.16.45.3 plant_item_id

AIM element: product.id
 Source: ISO 10303-41
 Reference path: (product_definition)
 (externally_defined_plant_item_definition <=
 product_definition)
 product_definition.formation ->
 product_definition_formation
 product_definition_formation.of_product ->
 product
 product.id

5.1.16.45.4 status

AIM element: group.name
 Source: ISO 10303-41
 Reference path: (product_definition)
 (externally_defined_plant_item_definition <=
 product_definition)
 classification_item = product_definition
 classification_item <-
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role
 classification_role.name = 'plant item status'}
 classification_assignment
 classification_assignment.assigned_class ->
 group
 group.name

5.1.16.45.5 type

AIM element: group.name
 Source: ISO 10303-41
 Reference path: (product_definition)
 (externally_defined_plant_item_definition <=

ISO 10303-227:2005(E)

```
product_definition)
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product_classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name
```

5.1.16.45.6 plant_item to changed_plant_item

AIM element: IDENTICAL MAPPING

5.1.16.45.7 plant_item to external_classification

AIM element: PATH

```
Reference path: (product_definition)
(externally_defined_plant_item_definition <=
product_definition)
classification_item = product_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group =>
externally_defined_class
```

5.1.16.45.8 plant_item to insulation

AIM element: PATH

```
Reference path: (product_definition <-)
(externally_defined_plant_item_definition <=
product_definition <-)
(product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition <-)
```

```

product_definition_relationship.relateing_product_definition
{product_definition_relationship
product_definition_relationship.name = 'item insulation'}
product_definition_relationship
product_definition_relationship.related_product_definition ->
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
{product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'insulation'}

```

5.1.16.45.9 plant_item to plant_item_collection (element)

AIM element: PATH

Reference path: (product_definition <-)
 (externally_defined_plant_item_definition <=
 product_definition <-)
 (product <-
 product_definition_formation.of_product
 product_definition_formation <-
 product_definition.formation
 product_definition <-)
 product_definition_relationship.related_product_definition
 product_definition_relationship

5.1.16.45.10 plant_item to plant_item_collection (group)

AIM element: PATH

Reference path: (product_definition <-)
 (externally_defined_plant_item_definition <=
 product_definition <-)
 (product <-
 product_definition_formation.of_product
 product_definition_formation <-
 product_definition.formation
 product_definition <-)

ISO 10303-227:2005(E)

product_definition_relationship.relativing_product_definition
product_definition_relationship

5.1.16.45.11 plant_item to plant_item_design_view

AIM element: (IDENTICAL MAPPING)
(PATH)

Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
(product_definition)
(product_definition =>
externally_defined_plant_item_definition)

5.1.16.45.12 plant_item to plant_item_shape

AIM element: PATH

Reference path: (product_definition)
(externally_defined_plant_item_definition <=
product_definition)
(product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition)
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape

5.1.16.45.13 plant_item to plant_item_weight

AIM element: PATH

Reference path: (product_definition)
(externally_defined_plant_item_definition <=
product_definition)
(product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition)
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition

```

represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation =>
plant_item_weight_representation

```

5.1.16.45.14 plant_item to reference_geometry

AIM element: PATH

```

Reference path: (product_definition)
(externally_defined_plant_item_definition <=
product_definition)
(product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition)
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect =>
derived_shape_aspect =>
reference_geometry

```

5.1.16.45.15 plant_item to required_material_description

#1: The quantity is not known or not yet specified.

#2: The quantity is known.

AIM element: PATH

```

Reference path: (product_definition <-)
(externally_defined_plant_item_definition <=
product_definition <-)
(product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition <-)
product_definition_relationship.relatng_product_definition
{product_definition_relationship =>
#1: (product_definition_usage)
#2: (product_definition_usage =>
make_from_usage_option)}
product_definition_relationship

```

ISO 10303-227:2005(E)

product_definition_relationship.related_product_definition ->
product_definition

5.1.16.45.16 plant_item to spare_plant_item_usage (as primary)

AIM element: PATH

Reference path: (product_definition <-)
(externally_defined_plant_item_definition <=
product_definition <-)
(product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition <-)
product_definition_relationship.relying_product_definition
product_definition_relationship
{product_definition_relationship
product_definition_relationship.name = 'spare plant item usage'}

5.1.16.45.17 plant_item to spare_plant_item_usage (as spare)

AIM element: PATH

Reference path: (product_definition <-)
(externally_defined_plant_item_definition <=
product_definition <-)
(product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition <-)
product_definition_relationship.related_product_definition
product_definition_relationship
{product_definition_relationship
product_definition_relationship.name = 'spare plant item usage'}

5.1.16.45.18 plant_item to analysis_data_point

AIM element: PATH

Reference path: (product_definition)
(externally_defined_plant_item_definition <=
product_definition)
(product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition)
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition

```

property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect
{shape_aspect.description = 'analysis data point'}

```

5.1.16.46 Plant_item_collection

AIM element: product_definition_relationship
Source: ISO 10303-41
Reference path: {product_definition_relationship
[product_definition_relationship.relateing_product_definition ->]
[product_definition_relationship.related_product_definition ->]
(product_definition)
(product_definition =>
externally_defined_plant_item_definition)}

5.1.16.46.1 location_and_orientation

AIM element: (axis2_placement_2d)
(axis2_placement_3d)
Source: ISO 10303-42
Reference path: product_definition_relationship
characterized_product_definition = product_definition_relationship
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
representation_item =>
geometric_representation_item =>
placement =>
(axis2_placement_2d)
(axis2_placement_3d)

5.1.16.46.2 usage_type

AIM element: product_definition_relationship.name
Source: ISO 10303-41

5.1.16.46.3 plant_item_collection to changed_plant_item_collection

AIM element: IDENTICAL MAPPING

ISO 10303-227:2005(E)

5.1.16.47 Plant_item_definition

AIM element: (product_definition)
(externally_defined_plant_item_definition)

Source: ISO 10303-41, ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: (product_definition)
(externally_defined_plant_item_definition <=
[product_definition]
[externally_defined_item])
{product_definition
[product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']
[product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
(application_context_element.name = 'functional definition')
(application_context_element.name = 'physical definition')]}

5.1.16.47.1 plant_item_definition to catalogue_item (is defined as)

#1: Instances of the definition use the same catalogue item.
#2: Instances of the definition use different catalogue items.

AIM element: PATH

Reference path: (product_definition <-)
(externally_defined_plant_item_definition <=
product_definition <-)
#1: (product_definition_relationship.related_product_definition
{product_definition_relationship
product_definition_relationship.name = 'catalogue usage'}
product_definition_relationship
product_definition_relationship.relating_product_definition ->)
product_definition =>
externally_defined_plant_item_definition =>
catalogue_item
#2: (product_definition_relationship.relating_product_definition
{product_definition_relationship
product_definition_relationship.name = 'definition usage'}
product_definition_relationship
product_definition_relationship.related_product_definition ->
{product_definition


```

product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
(application_context_element.name = 'physical occurrence')
(application_context_element.name = 'functional occurrence')
(product_definition <-)
({product_definition =>
externally_defined_plant_item_definition}
product_definition <-)
product_definition_relationship.related_product_definition
{product_definition_relationship
product_definition_relationship.name = 'catalogue usage'}
product_definition_relationship
product_definition_relationship.relatng_product_definition ->)
product_definition =>
externally_defined_plant_item_definition =>
catalogue_item

```

5.1.16.47.2 plant_item_definition to connector_definition

AIM element: PATH

```

Reference path: (product_definition)
(externally_defined_plant_item_definition <=
product_definition)
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect =>
plant_item_connector

```

5.1.16.47.3 plant_item_definition to planned_physical_plant_item

#1: The definition is physical.

#2: The definition is functional.

AIM element: PATH

```

Rules:
application_context_requires_ap_definition
dependent_instantiable_application_context
dependent_instantiable_product_definition_context
product_definition_context_name_constraint
product_definition_usage_constraint

```

```

Reference path: #1: ((product_definition <-)
(externally_defined_plant_item_definition <=
product_definition <-)
{product_definition

```

ISO 10303-227:2005(E)

```
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'physical definition'}
product_definition_relationship.relatng_product_definition
{product_definition_relationship
product_definition_relationship.name = 'definition usage'}
product_definition_relationship
product_definition_relationship.related_product_definition ->
{product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'physical occurrence'}
(product_definition)
(product_definition =>
externally_defined_plant_item_definition))
#2: ((product_definition <-)
(externally_defined_plant_item_definition <=
product_definition <-)
{product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional definition'}
product_definition_relationship.relatng_product_definition
{product_definition_relationship
product_definition_relationship.name = 'definition usage'}
product_definition_relationship
product_definition_relationship.related_product_definition ->
{product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'functional occurrence'}
(product_definition)
(product_definition =>
externally_defined_plant_item_definition))
```

5.1.16.48 Plant_item_design_view

AIM element: (product_definition)
(externally_defined_plant_item_definition)

Source: ISO 10303-41, ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: (product_definition)
(externally_defined_plant_item_definition <=

```

[externally_defined_item]
[product_definition])
{product_definition
[product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']
[product_definition.frame_of_reference ->
[product_definition_context <=
application_context_element
(application_context_element.name = 'functional definition')
(application_context_element.name = 'functional occurrence')
(application_context_element.name = 'physical definition')
(application_context_element.name = 'physical occurrence')]]}

```

5.1.16.48.1 name

AIM element: product_definition_context.life_cycle_stage

Source: ISO 10303-41

Reference path: product_defintion
product_definition.frame_of_reference ->
product_definition_context
product_definition_context.life_cycle_stage

5.1.16.49 Plant_item_instance

AIM element: (product_definition)
(externally_defined_plant_item_definition)

Source: ISO 10303-41, ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: (product_defintion)
(externally_defined_plant_item_definition <=
[product_definition]
[externally_defined_item])
{product_definition
[product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']
[product_definition.frame_of_reference ->

ISO 10303-227:2005(E)

```
product_definition_context <=  
application_context_element  
(application_context_element.name = 'functional occurrence')  
(application_context_element.name = 'physical occurrence')]]}
```

5.1.16.49.1 plant_item_instance to plant_item_interference (first item)

AIM element: PATH

```
Reference path: (product_definition <-)  
(externally_defined_plant_item_definition <=  
product_definition <-)  
product_definition_relationship.relatng_product_definition  
product_definition_relationship =>  
plant_item_interference
```

5.1.16.49.2 plant_item_instance to plant_item_interference(second item)

AIM element: PATH

```
Reference path: (product_definition <-)  
(externally_defined_plant_item_definition <=  
product_definition <-)  
product_definition_relationship.related_product_definition  
product_definition_relationship =>  
plant_item_interference
```

5.1.16.49.3 plant_item_instance to plant_item_location

#1: The plant item is placed relative to another plant item.

#2a: The plant item is placed in a building, plant, or site.

#2b: The plant item is defined in the coordinate space of a building, plant, or site.

AIM element: PATH

Rules: subtype_mandatory_shape_representation

```
Reference path: (product_definition)  
(externally_defined_plant_item_definition <=  
product_definition)  
characterized_product_definition = product_definition  
characterized_product_definition  
characterized_definition = characterized_product_definition  
characterized_definition <-  
property_definition.definition  
{property_definition =>  
product_definition_shape}  
property_definition  
represented_definition = property_definition  
represented_definition <-  
property_definition_representation.definition  
{property_definition_representation =>  
shape_definition_representation}  
property_definition_representation  
property_definition_representation.used_representation ->
```

```

{representation =>
shape_representation}
#1: (representation <-
representation_map.mapped_representation
representation_map <-
mapped_item.mapping_source
mapped_item
{mapped_item <=
representation_item
representation_item.name = 'relative item location'})
#2a: (representation
representation.items[i] ->
{representation_item
representation_item.name = 'placed shape'}
representation_item =>
mapped_item
mapped_item.mapping_target ->
representation_item =>
geometric_representation_item =>
placement =>
(axis2_placement_2d)
(axis2_placement_3d))
#2b: (representation
representation.items[i] ->
representation_item =>
geometric_representation_item =>
placement =>
(axis2_placement_2d)
(axis2_placement_3d))

```

5.1.16.49.4 plant_item_instance to project_design_assignment

AIM element: PATH

Reference path: (product_definition)
 (externally_defined_plant_item_definition <=
 product_definition)
 design_project_item = product_definition
 design_project_item <-
 design_project_assignment.items[i]
 design_project_assignment

5.1.16.49.5 plant_item_instance to relative_item_location

AIM element: PATH

Reference path: (product_definition)
 (externally_defined_plant_item_definition <=
 product_definition)
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition

ISO 10303-227:2005(E)

```
characterized_definition <-
property_definition.definition
{property_definition =>
product_definition_shape}
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item =>
geometric_representation_item =>
placement =>
(axis2_placement_2d)
(axis2_placement_3d)}
representation_item <-
mapped_item.mapping_target
mapped_item
{mapped_item <=
representation_item
representation_item.name = 'relative item location'}
```

5.1.16.50 Plant_item_location

- #1: The plant item is placed relative to another plant item.
- #2: The plant item is placed in a building, plant, or site.

AIM element: #1: (mapped_item)
#2: ((axis2_placement_2d)
(axis2_placement_3d))

Source: ISO 10303-43, ISO 10303-42

5.1.16.50.1 location_and_orientation

- #1: The plant item is placed relative to another plant item.
- #2: The plant item is placed in a building, plant, or site.

AIM element: [(axis2_placement_2d)
(axis2_placement_3d)]
[cartesian_point]

Source: ISO 10303-42

Reference path: #1: (mapped_item
mapped_item.mapping_target ->
representation_item =>
geometric_representation_item =>
[placement =>
(axis2_placement_2d)
(axis2_placement_3d)]

```
[placement
placement.location ->
cartesian_point])
#2: ((axis2_placement_2d)
(axis2_placement_3d])
[(axis2_placement_2d <=)
(axis2_placement_3d <=)
placement
placement.location ->
cartesian_point])
```

5.1.16.50.2 location_id

#1: The plant item is placed relative to another plant item.
#2: The plant item is placed in a building, plant, or site.

AIM element: representation_item.name

Source: ISO 10303-43

Reference path: #1: (mapped_item
mapped_item.mapping_target ->
{representation_item =>
geometric_representation_item =>
placement =>
(axis2_placement_2d
(axis2_placement_3d)})
#2: ((axis2_placement_2d <=)
(axis2_placement_3d <=)
placement <=
geometric_representation_item <=)
representation_item
representation_item.name

5.1.16.50.3 plant_item_location to changed_plant_item_location

#1: The plant item is placed relative to another plant item.
#2: The plant item is placed in a building, plant, or site.

AIM element: #1: (PATH)
#2: (IDENTICAL MAPPING)

Reference path: #1: mapped_item
mapped_item.mapping_target ->
representation_item =>
geometric_representation_item =>
placement =>
(axis2_placement_2d
{axis2_placement_2d
change_item = axis2_placement_2d})
(axis2_placement_3d
{axis2_placement_3d
change_item = axis2_placement_3d})

ISO 10303-227:2005(E)

5.1.16.51 Plant_item_weight

AIM element: plant_item_weight_representation

Source: ISO 10303-227

Reference path: plant_item_weight_representation <=
property_definition_representation
{property_definition_representation
property_definition_representation.used_representation ->
representation
representation.name = 'item weight'}

5.1.16.51.1 centre_of_gravity

AIM element: geometric_representation_item

Source: ISO 10303-42

Reference path: plant_item_weight_representation <=
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'centre of gravity'}
representation_item =>
geometric_representation_item

5.1.16.51.2 weight_state

AIM element: type_qualifier.name

Source: ISO 10303-45

Reference path: plant_item_weight_representation <=
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
({[representation_item
representation_item.name = 'weight value']
[representation_item =>
measure_representation_item]}
representation_item =>
qualified_representation_item
qualified_representation_item.qualifiers[i] ->
value_qualifier
value_qualifier = type_qualifier
type_qualifier
{(type_qualifier.name = 'empty')
(type_qualifier.name = 'full')
(type_qualifier.name = 'operating')
(type_qualifier.name = 'shipping')
(type_qualifier.name = 'test')})
({[representation_item
(representation_item.name = 'maximum weight value')


```
(representation_item.name = 'minimum weight value')]
[representation_item =>
measure_representation_item]}
representation_item =>
qualified_representation_item
qualified_representation_item.qualifiers[i] ->
value_qualifier
value_qualifier = type_qualifier
type_qualifier
type_qualifier.name = 'operating'}})
```

5.1.16.51.3 weight_value

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: plant_item_weight_representation <=
property_definition_representation
property_definition_representation.used_representation ->
representation
(representation.items[i] ->
{representation_item
(representation_item.name = 'weight value')
(representation_item.name = 'maximum weight value')
(representation_item.name = 'minimum weight value')}})
([representation.items[i] ->
{representation_item
representation_item.name = 'maximum weight value'}]
[representation.items[i] ->
{representation_item
representation_item.name = 'minimum weight value'}}]
{representation_item =>
qualified_representation_item}
representation_item =>
measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[{measure_with_unit.unit_component ->
unit
unit = derived_unit}
measure_with_unit.unit_component]

5.1.16.52 Plant_volume

AIM element: (plant_item_route)
(reserved_space)
(system_space)
(product_definition_shape)
(shape_aspect)

Source: ISO 10303-227

ISO 10303-227:2005(E)

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: ((plant_item_route <=
product_definition_shape)
(product_definition_shape)
{product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'})
(reserved_space <=
shape_aspect)
(shape_aspect)
{shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item'})
(system_space <=
product_definition_shape
{product_definition_shape <=
property_definition
property_definition.definition ->

```

characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant system'})

```

5.1.16.52.1 type

```

AIM element: (property_definition.name)
              (shape_aspect.name)
Source:      ISO 10303-41
Reference path: ((plant_item_route <=
                 product_definition_shape <=)
                 (system_space <=
                 product_definition_shape <=)
                 (product_definition_shape <=)
                 property_definition
                 property_definition.name)
                 ((reserved_space <=
                 shape_aspect)
                 (shape_aspect)
                 shape_aspect.name)

```

5.1.16.52.2 plant_volume to plant_arrangement_segment_definition (as is_composed_of)

```

AIM element: PATH
Rules:       product_definition_usage_constraint
Reference path: (plant_item_route <=
                 product_definition_shape <=
                 property_definition
                 property_definition.definition ->
                 characterized_definition
                 characterized_definition = characterized_product_definition
                 characterized_product_definition
                 characterized_product_definition = product_definition
                 product_definition <-
                 product_definition_relationship.related_product_definition
                 product_definition_relationship
                 product_definition_relationship.relating_product_definition
                 product_definition =>
                 plant_arrangement_segment_definition)

```

ISO 10303-227:2005(E)

(reserved_space <=
shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition_relationship.related_product_definition
product_definition_relationship
product_definition_relationship.relying_product_definition
product_definition =>
plant_arrangement_segment_definition)
(system_space <=
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition_relationship.related_product_definition
product_definition_relationship
product_definition_relationship.relying_product_definition
product_definition =>
plant_arrangement_segment_definition)
(product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition_relationship.related_product_definition
product_definition_relationship
product_definition_relationship.relying_product_definition
product_definition =>
plant_arrangement_segment_definition)
(shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->

```

characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition_relationship.related_product_definition
product_definition_relationship
product_definition_relationship.relatng_product_definition
product_definition =>
plant_arrangement_segment_definition)

```

5.1.16.53 Process_ducting

AIM element: piping_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: piping_component_definition <=
product_definition
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group
group.name = 'process ducting']
[group <-
group_relationship.related_group
{group_relationship
group_relationship.name = 'usage classification'}
group_relationship
group_relationship.relatng_group ->
group
group.name = 'ducting component']]
[product
product.frame_of_reference[i] ->
product_context<=

ISO 10303-227:2005(E)

```
application_context_element  
application_context_element.name = 'plant item']}]}
```

5.1.16.53.1 gauge

```
AIM element: [measure_with_unit.value_component]  
             [measure_with_unit.unit_component]  
Source:      ISO 10303-41  
Rules:       subtype_mandatory_shape_representation  
Reference path: piping_component_definition <=  
               product_definition  
               characterized_product_definition = product_definition  
               characterized_product_definition  
               characterized_definition = characterized_product_definition  
               characterized_definition <-  
               property_definition.definition  
               property_definition =>  
               product_definition_shape <-  
               shape_aspect.of_shape  
               [shape_aspect <-  
               shape_aspect_relationship.relater_shape_aspect]  
               [shape_aspect <-  
               shape_aspect_relationship.related_shape_aspect]  
               shape_aspect_relationship =>  
               dimensional_location  
               dimensional_characteristic = dimensional_location  
               dimensional_characteristic <-  
               dimensional_characteristic_representation.dimension  
               dimensional_characteristic_representation  
               dimensional_characteristic_representation.representation ->  
               shape_dimension_representation <=  
               shape_representation <=  
               {representation  
               representation.name = 'process ducting dimensional shape'}  
               representation  
               representation.items[i] ->  
               {representation_item  
               representation_item.name = 'gauge'}  
               representation_item =>  
               measure_representation_item <=  
               {measure_with_unit =>  
               length_measure_with_unit}  
               measure_with_unit  
               [measure_with_unit.value_component]  
               [measure_with_unit.unit_component]
```

5.1.16.54 Project_design_assignment

```
AIM element: design_project_assignment  
Source:      ISO 10303-227
```

Reference path: design_project_assignment <=
 organization_assignment
 {organization_assignment
 organization_assignment.assigned_organization ->
 organization =>
 design_project}

5.1.16.55 Relative_item_location

AIM element: mapped_item
 Source: ISO 10303-43
 Reference path: {[mapped_item <=
 representation_item
 representation_item.name = 'relative item location']
 [mapped_item
 mapped_item.mapping_target ->
 [representation_item =>
 geometric_representation_item =>
 placement =>
 (axis2_placement_2d)
 (axis2_placement_3d)]
 [representation_item <=
 representation.items[i]
 representation <=
 property_definition_representation.used_representation
 property_definition_representation
 property_definition_representation.definition ->
 represented_definition
 represented_definition = property_definition
 property_definition
 property_definition.definition ->
 characterized_definition
 characterized_definition = characterized_product_definition
 characterized_product_definition
 characterized_product_definition = product_definition
 product_definition
 product_definition.frame_of_reference ->
 product_definition_context <=
 application_context_element
 (application_context_element.name = 'functional occurrence')
 (application_context_element.name = 'physical occurrence')]]]}

5.1.16.56 Required_material_description

AIM element: product_definition
 Source: ISO 10303-41
 Reference path: {product_definition
 product_definition.frame_of_reference ->
 {product_definition_context
 product_definition_context.life_cycle_stage = 'requirement definition'}}

ISO 10303-227:2005(E)

```
product_definition_context =>
application_context_element
application_context_element.name = 'material'}
```

5.1.16.56.1 description

AIM element: property_definition.description

Source: ISO 10303-41

Reference path: product_definition

```
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
{property_definition =>
material_property}
property_definition <-
property_definition_relationship.relateing_property_definition
{property_definition_relationship
property_definition_relationship.name = 'requirement allocation'}
property_definition_relationship
property_definition_relationship.related_property_definition ->
{property_definition =>
material_property =>
required_material_property}
property_definition
property_definition.description
```

5.1.16.56.2 material_requirement_id

AIM element: product.id

Source: ISO 10303-41

Reference path: product_definition

```
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.id
```

5.1.16.56.3 required_material_description to changed_required_material_description

AIM element: IDENTICAL MAPPING

5.1.16.56.4 required_material_description to material_specification_selection

AIM element: PATH

Reference path: product_definition

```
[characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
```



```

property_definition =>
material_property]
[document_item = product_definition
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document]

```

5.1.16.57 Reserved_space

AIM element: reserved_space

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: reserved_space <=

```

shape_aspect
{shape_aspect
shape_aspect.of_shape ->
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
[product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
(application_context_element.name = 'functional occurrence')
(application_context_element.name = 'physical occurrence')]
[product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.16.58 Route

AIM element: plant_item_route

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

ISO 10303-227:2005(E)

Reference path: plant_item_route <=
product_definition_shape
{product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
[product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
application_context_element.name = 'physical occurrence']
[product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}}

5.1.16.58.1 route to piping_system_line_segment

AIM element: PATH

Rules: product_definition_usage_constraint

Reference path: plant_item_route <=
product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition <=
product_definition_relationship.related_product_definition
product_definition_relationship
product_definition_relationship.relying_product_definition
product_definition =>
plant_line_segment_definition

5.1.16.59 Spare_plant_item_usage

AIM element: product_definition_relationship

Source: ISO 10303-41

Reference path: {product_definition_relationship
product_definition_relationship.name = 'spare plant item usage'}

5.1.16.60 Spring_washer

AIM element: bolt_and_nut_component_definition
 Source: ISO 10303-227
 Rules: dependent_instantiable_product_context
 product_context_discipline_type_constraint
 value_for_application_context
 Reference path: bolt_and_nut_component_definition <=
 product_definition
 {bolt_and_nut_component_definition
 classification_item = piping_support_definition
 classification_item <-
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role
 classification_role.name = 'plant item type classification'}
 classification_assignment
 classification_assignment.assigned_class ->
 [group =>
 bolt_and_nut_component_class]
 [group
 group.name = 'spring washer']
 [group <-
 group_relationship.related_group
 group_relationship
 {group_relationship.name = 'class hierarchy'}
 group_relationship.relating_group ->
 group
 {[group.name = 'washer']
 [group =>
 bolt_and_nut_component_class]}}
 {product_definition
 product_definition.formation ->
 product_definition_formation
 product_definition_formation.of_product ->
 [product
 classification_item = product
 classification_item <-
 applied_classification_assignment.items[i]
 applied_classification_assignment <=
 {classification_assignment
 classification_assignment.role ->
 classification_role
 classification_role.name = 'plant item type classification'}
 classification_assignment
 classification_assignment.assigned_class ->}

ISO 10303-227:2005(E)

```
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relatng_group ->
group)
group.name = 'bolt and nut component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']}]
```

5.1.16.60.1 thickness

```
AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: bolt_and_nut_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'spring washer dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'thickness'}
representation_item =>
```

```

measure_representation_item <=
{ measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.16.60.2 outside_diameter

```

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: bolt_and_nut_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relating_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{ representation
representation.name = 'spring washer dimensional shape'}
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'outside diameter'}
representation_item =>
measure_representation_item <=
{ measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

ISO 10303-227:2005(E)

5.1.16.61 Structural_component

AIM element: product
Source: ISO 10303-41
Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'structural component'}
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}]}

5.1.16.61.1 exact_section

AIM element: shape_aspect
Source: ISO 10303-41
Reference path: product <-
product_definition_formation.of_product
product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
shape_aspect

5.1.16.61.2 size_designator

AIM element: descriptive_representation_item.description
Source: ISO 10303-45
Reference path: product <-
product_definition_formation.of_product

```

product_definition_formation <-
product_definition.formation
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{ representation
document_item = representation
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document}
representation
representation.items[i] ->
{ representation_item
representation_item.name = 'size designator'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

```

5.1.16.62 Stud_bolt

AIM element: bolt_and_nut_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: bolt_and_nut_component_definition <=
product_definition
{ bolt_and_nut_component_definition
classification_item = piping_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment

ISO 10303-227:2005(E)

```
classification_assignment.assigned_class ->
[group =>
bolt_and_nut_component_class]
[group
group.name = 'stud bolt']
[group <-
group_relationship.related_group
group_relationship
{group_relationship.name = 'class hierarchy'}
group_relationship.relying_group ->
group
{[group.name = 'bolt']
[group =>
bolt_and_nut_component_class]}]
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'bolt and nut component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]}
```

5.1.16.62.1 length

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation


```

Reference path: bolt_and_nut_component_definition <=
  product_definition
  characterized_product_definition = product_definition
  characterized_product_definition
  characterized_definition = characterized_product_definition
  characterized_definition <-
  property_definition.definition
  property_definition =>
  product_definition_shape <-
  shape_aspect.of_shape
  [shape_aspect <-
  shape_aspect_relationship.relating_shape_aspect]
  [shape_aspect <-
  shape_aspect_relationship.related_shape_aspect]
  shape_aspect_relationship =>
  dimensional_location
  dimensional_characteristic = dimensional_location
  dimensional_characteristic <-
  dimensional_characteristic_representation.dimension
  dimensional_characteristic_representation
  dimensional_characteristic_representation.representation ->
  shape_dimension_representation <=
  shape_representation <=
  {representation
  representation.name = 'stud bolt dimensional shape'}
  representation
  representation.items[i] ->
  {representation_item
  representation_item.name = 'length'}
  representation_item =>
  measure_representation_item <=
  {measure_with_unit =>
  length_measure_with_unit}
  measure_with_unit
  [measure_with_unit.value_component]
  [measure_with_unit.unit_component]

```

5.1.16.63 Supplied_equipment

AIM element: product

Source: ISO 10303-41

```

Reference path: {[product <-
  product_definition_formation.of_product
  product_definition_formation =>
  product_definition_formation_with_specified_source
  product_definition_formation_with_specified_source.make_or_buy = 'BUY']
  [product
  classification_item = product
  classification_item <-

```

ISO 10303-227:2005(E)

```
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'equipment']}]
```

5.1.16.63.1 delivery_date

AIM element: (date_assignment.role)
(date_and_time_assignment.role)

Source: ISO 10303-41

Reference path: product
(dated_item = product
dated_item <-
applied_date_assignment.items[i]
applied_date_assignment <=
date_assignment
date_assignment.role)
(date_and_time_item = product
date_and_time_item <-
applied_date_and_time_assignment.items[i]
applied_date_and_time_assignment <=
date_and_time_assignment
date_and_time_assignment.role)

5.1.16.63.2 purchase_order_number

AIM element: action_directive.name

Source: ISO 10303-41

Reference path: product
purchase_item = product
purchase_item <-
purchase_assignment.items[i]
purchase_assignment <=
action_assignment
action_assignment.assigned_action ->
action =>
executed_action =>
directed_action
directed_action.directive ->
action_directive
action_directive.name

5.1.16.63.3 requisition_number

#1: Prior to purchase order being issue.

#2: A purchase order exists.

AIM element: versioned_action_request.id

Source: ISO 10303-41

Reference path: product

```
#1: (action_request_item = product
action_request_item <-
applied_action_request_assignment.items[i]
applied_action_request_assignment <=
action_request_assignment
action_request_assignment.assigned_action_request ->)
#2: (purchase_item = product
purchase_item <-
purchase_assignment.items[i]
purchase_assignment <=
action_assignment
action_assignment.assigned_action ->
action =>
executed_action =>
directed_action
directed_action.directive ->
action_directive
action_directive.requests[i] ->)
versioned_action_request
versioned_action_request.id
```

5.1.16.64 Supplier

AIM element: organization

Source: ISO 10303-41

5.1.16.64.1 supplier_id

AIM element: organization.id

Source: ISO 10303-41

5.1.16.64.2 vendor_name

AIM element: organization.name

Source: ISO 10303-41

5.1.16.64.3 supplier to catalogue_definition

AIM element: PATH

```
Reference path: organization <-
organization_assignment.assigned_organization
{organization_assignment
organization_assignment.role ->
organization_role
organization_role.name = 'publisher'}
organization_assignment =>
plant_spatial_configuration_organization_assignment
plant_spatial_configuration_organization_assignment.items[i] ->
```

ISO 10303-227:2005(E)

```
plant_spatial_configuration_organization_item
plant_spatial_configuration_organization_item = catalogue
catalogue
```

5.1.16.64.4 supplier to supplied_equipment

AIM element: PATH

```
Reference path: organization <-
organization_assignment.assigned_organization
{organization_assignment
organization_assignment.role ->
organization_role
organization_role.name = 'supplier'}
organization_assignment =>
plant_spatial_configuration_organization_assignment
plant_spatial_configuration_organization_assignment.items[i] ->
plant_spatial_configuration_organization_item
plant_spatial_configuration_organization_item = product_definition_formation
{product_definition_formation =>
product_definition_formation_with_specified_source}
product_definition_formation
product_definition_formation.of_product ->
product
{product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'equipment'}
```

5.1.16.65 Support_component

AIM element: product

Source: ISO 10303-41

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

```
Reference path: {[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
```

```

classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
group
group.name = 'support component']
[product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant item']}]

```

5.1.16.66 Support_constraints

AIM element: support_constraint_representation
Source: ISO 10303-227
Reference path: support_constraint_representation <=
representation

5.1.16.66.1 gap

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: support_constraint_representation <=
representation
representation.items[i] ->
{representation_item
(representation_item.name = 'negative x')
(representation_item.name = 'positive x')
(representation_item.name = 'negative y')
(representation_item.name = 'positive y')
(representation_item.name = 'negative z')
(representation_item.name = 'positive z')
(representation_item.name = 'negative x rotation')
(representation_item.name = 'positive x rotation')
(representation_item.name = 'negative y rotation')
(representation_item.name = 'positive y rotation')
(representation_item.name = 'negative z rotation')
(representation_item.name = 'positive z rotation')}]
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

ISO 10303-227:2005(E)

5.1.16.66.2 k

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: support_constraint_representation <=
representation
representation.items[i] ->
representation_item =>
measure_representation_item <=
{measure_with_unit =>
ratio_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.16.66.3 restrained

AIM element: descriptive_representation_item.description

Source: ISO 10303-45

Reference path: support_constraint_representation <=
representation
representation.items[i] ->
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

5.1.16.66.4 support_constraints to support_usage (negative x-direction)

AIM element: PATH

Reference path: support_constraint_representation <=
{representation
representation.items[i] ->
representation_item
representation_item.name = 'negative x'}
representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition_relationship
{product_definition_relationship
(product_definition_relationship.name = 'support usage')
(product_definition_relationship.name = 'support usage connection')}}
product_definition_relationship

5.1.16.66.5 support_constraints to support_usage (positive x-direction)

AIM element: PATH

```

Reference path: support_constraint_representation <=
  {representation
  representation.items[i] ->
  representation_item
  representation_item.name = 'positive x'}
representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition_relationship
{product_definition_relationship
(product_definition_relationship.name = 'support usage')
(product_definition_relationship.name = 'support usage connection')}
product_definition_relationship

```

5.1.16.66.6 support_constraints to support_usage (negative y-direction)

AIM element: PATH

```

Reference path: support_constraint_representation <=
  {representation
  representation.items[i] ->
  representation_item
  representation_item.name = 'negative y'}
representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition_relationship
{product_definition_relationship
(product_definition_relationship.name = 'support usage')
(product_definition_relationship.name = 'support usage connection')}
product_definition_relationship

```

ISO 10303-227:2005(E)

5.1.16.66.7 support_constraints to support_usage (positive y-direction)

AIM element: PATH

```
Reference path: support_constraint_representation <=  
  {representation  
  representation.items[i] ->  
  representation_item  
  representation_item.name = 'positive y'}  
  representation <-  
  property_definition_representation.used_representation  
  property_definition_representation  
  property_definition_representation.definition ->  
  represented_definition  
  represented_definition = property_definition  
  property_definition  
  property_definition.definition ->  
  characterized_definition  
  characterized_definition = characterized_product_definition  
  characterized_product_definition  
  characterized_product_definition = product_definition_relationship  
  {product_definition_relationship  
  (product_definition_relationship.name = 'support usage')  
  (product_definition_relationship.name = 'support usage connection')}}  
  product_definition_relationship
```

5.1.16.66.8 support_constraints to support_usage (negative z-direction)

AIM element: PATH

```
Reference path: support_constraint_representation <=  
  {representation  
  representation.items[i] ->  
  representation_item  
  representation_item.name = 'negative z'}  
  representation <-  
  property_definition_representation.used_representation  
  property_definition_representation  
  property_definition_representation.definition ->  
  represented_definition  
  represented_definition = property_definition  
  property_definition  
  property_definition.definition ->  
  characterized_definition  
  characterized_definition = characterized_product_definition  
  characterized_product_definition  
  characterized_product_definition = product_definition_relationship  
  {product_definition_relationship  
  (product_definition_relationship.name = 'support usage')  
  (product_definition_relationship.name = 'support usage connection')}}  
  product_definition_relationship
```


5.1.16.66.9 support_constraints to support_usage (positive z-direction)

AIM element: PATH

```

Reference path: support_constraint_representation <=
  {representation
  representation.items[i] ->
  representation_item
  representation_item.name = 'positive z'}
representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition_relationship
{product_definition_relationship
(product_definition_relationship.name = 'support usage')
(product_definition_relationship.name = 'support usage connection')}
product_definition_relationship

```

5.1.16.66.10 support_constraints to support_usage (negative rotation x-axis)

AIM element: PATH

```

Reference path: support_constraint_representation <=
  {representation
  representation.items[i] ->
  representation_item
  representation_item.name = 'negative x rotation'}
representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition_relationship
{product_definition_relationship
(product_definition_relationship.name = 'support usage')
(product_definition_relationship.name = 'support usage connection')}
product_definition_relationship

```

ISO 10303-227:2005(E)

5.1.16.66.11 support_constraints to support_usage (positive rotation x-axis)

AIM element: PATH

```
Reference path: support_constraint_representation <=  
  {representation  
  representation.items[i] ->  
  representation_item  
  representation_item.name = 'positive x rotation'}  
  representation <-  
  property_definition_representation.used_representation  
  property_definition_representation  
  property_definition_representation.definition ->  
  represented_definition  
  represented_definition = property_definition  
  property_definition  
  property_definition.definition ->  
  characterized_definition  
  characterized_definition = characterized_product_definition  
  characterized_product_definition  
  characterized_product_definition = product_definition_relationship  
  {product_definition_relationship  
  (product_definition_relationship.name = 'support usage')  
  (product_definition_relationship.name = 'support usage connection')}}  
  product_definition_relationship
```

5.1.16.66.12 support_constraints to support_usage (negative rotation y-axis)

AIM element: PATH

```
Reference path: support_constraint_representation <=  
  {representation  
  representation.items[i] ->  
  representation_item  
  representation_item.name = 'negative y rotation'}  
  representation <-  
  property_definition_representation.used_representation  
  property_definition_representation  
  property_definition_representation.definition ->  
  represented_definition  
  represented_definition = property_definition  
  property_definition  
  property_definition.definition ->  
  characterized_definition  
  characterized_definition = characterized_product_definition  
  characterized_product_definition  
  characterized_product_definition = product_definition_relationship  
  {product_definition_relationship  
  (product_definition_relationship.name = 'support usage')  
  (product_definition_relationship.name = 'support usage connection')}}  
  product_definition_relationship
```

5.1.16.66.13 support_constraints to support_usage (positive rotation y-axis)

AIM element: PATH

```

Reference path: support_constraint_representation <=
  {representation
  representation.items[i] ->
  representation_item
  representation_item.name = 'positive y rotation'}
representation <-
  property_definition_representation.used_representation
  property_definition_representation
  property_definition_representation.definition ->
  represented_definition
  represented_definition = property_definition
  property_definition
  property_definition.definition ->
  characterized_definition
  characterized_definition = characterized_product_definition
  characterized_product_definition
  characterized_product_definition = product_definition_relationship
  {product_definition_relationship
  (product_definition_relationship.name = 'support usage')
  (product_definition_relationship.name = 'support usage connection')}
  product_definition_relationship

```

5.1.16.66.14 support_constraints to support_usage (negative rotation z-axis)

AIM element: PATH

```

Reference path: {representation
  representation.items[i] ->
  representation_item
  representation_item.name = 'negative z rotation'}
representation <-
  property_definition_representation.used_representation
  property_definition_representation
  property_definition_representation.definition ->
  represented_definition
  represented_definition = property_definition
  property_definition
  property_definition.definition ->
  characterized_definition
  characterized_definition = characterized_product_definition
  characterized_product_definition
  characterized_product_definition = product_definition_relationship
  {product_definition_relationship
  (product_definition_relationship.name = 'support usage')
  (product_definition_relationship.name = 'support usage connection')}
  product_definition_relationship

```

ISO 10303-227:2005(E)

5.1.16.66.15 support_constraints to support_usage (positive rotation z-axis)

AIM element: PATH

```
Reference path: support_constraint_representation <=  
  {representation  
  representation.items[i] ->  
  representation_item  
  representation_item.name = 'positive z rotation'}  
representation <-  
  property_definition_representation.used_representation  
  property_definition_representation  
  property_definition_representation.definition ->  
  represented_definition  
  represented_definition = property_definition  
  property_definition  
  property_definition.definition ->  
  characterized_definition  
  characterized_definition = characterized_product_definition  
  characterized_product_definition  
  characterized_product_definition = product_definition_relationship  
  {product_definition_relationship  
  (product_definition_relationship.name = 'support usage')  
  (product_definition_relationship.name = 'support usage connection')}  
  product_definition_relationship
```

5.1.16.67 Support_usage

AIM element: product_definition_relationship

Source: ISO 10303-41

```
Reference path: {product_definition_relationship  
  product_definition_relationship.name = 'support usage'}
```

5.1.16.67.1 detail_sheet_reference

AIM element: document

Source: ISO 10303-41

```
Reference path: product_definition_relationship  
  document_item = product_definition_relationship  
  document_item <-  
  applied_document_reference.items[i]  
  applied_document_reference <=  
  document_reference  
  document_reference.assigned_document ->  
  {document  
  document.kind ->  
  document_type  
  document_type.product_data_type = 'drawing'}  
  document
```

5.1.16.67.2 function

AIM element: product_definition_relationship.description

Source: ISO 10303-41

5.1.16.68 Support_usage_connection

AIM element: product_definition_relationship

Source: ISO 10303-41

Reference path: {product_definition_relationship
product_definition_relationship.name = 'support usage connection'}

5.1.16.68.1 support_usage_connection to plant_item_connection_occurrence

AIM element: PATH

Rules: application_context_requires_ap_definition
dependent_instantiable_application_context
dependent_instantiable_product_definition_context
product_definition_context_name_constraint
product_definition_usage_constraint

Reference path: product_definition_relationship
[product_definition_relationship.relateing_product_definition ->]
[product_definition_relationship.related_product_definition ->]
{product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
(application_context_element.name = 'functional occurrence')
(application_context_element.name = 'physical occurrence')}
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <=
property_definition.definition
property_definition =>
product_definition_shape <=
shape_aspect.of_shape
shape_aspect =>
plant_item_connection

5.1.16.69 System_space

AIM element: system_space

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: system_space <=
product_definition_shape
{product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition

ISO 10303-227:2005(E)

```
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
[product_definition =>
(electrical_system)
(ducting_system)
(instrumentation_and_control_system)
(piping_system)
(structural_system)
(cableway_system)]
[product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product
product.frame_of_reference[i] ->
product_context<=
application_context_element
application_context_element.name = 'plant system']]
```

5.1.16.70 Toothed_lock_washer

AIM element: bolt_and_nut_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: bolt_and_nut_component_definition <=
product_definition
{ bolt_and_nut_component_definition
classification_item = piping_support_definition
classification_item <=
applied_classification_assignment.items[i]
applied_classification_assignment <=
{ classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
[group =>
bolt_and_nut_component_class]
[group
group.name = 'toothed lock washer']
[group <=
group_relationship.related_group
group_relationship
{ group_relationship.name = 'class hierarchy'}
group_relationship.relying_group ->

```

group
{ [group.name = 'washer']
[group =>
bolt_and_nut_component_class]] }
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'bolt and nut component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']] }

```

5.1.16.70.1 thickness

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: bolt_and_nut_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-

ISO 10303-227:2005(E)

```
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'toothed lock washer dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'thickness'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]
```

5.1.16.70.2 outside_diameter

```
AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: bolt_and_nut_component_definition <=
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relatng_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
```



```

dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'toothed lock washer dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'outside diameter'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.16.71 Trunnion

```

AIM element: piping_support_definition
Source:      ISO 10303-227
Rules:      dependent_instantiable_product_context
            product_context_discipline_type_constraint
            value_for_application_context
Reference path: piping_support_definition <=
            product_definition
            {piping_support_definition
            classification_item = piping_support_definition
            classification_item <-
            applied_classification_assignment.items[i]
            applied_classification_assignment <=
            {classification_assignment
            classification_assignment.role ->
            classification_role
            classification_role.name = 'plant item type classification'}
            classification_assignment
            classification_assignment.assigned_class ->
            [group =>
            piping_support_fitting_class]
            [group
            group.name = 'trunnion']}
            {product_definition
            product_definition.formation ->
            product_definition_formation
            product_definition_formation.of_product ->
            [product

```

ISO 10303-227:2005(E)

```
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'piping support']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]}
```

5.1.16.71.1 length

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]

Source: ISO 10303-41

Rules: subtype_mandatory_shape_representation

Reference path: piping_support_definition <=

```
product_definition
characterized_product_definition = product_definition
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition =>
product_definition_shape <-
shape_aspect.of_shape
[shape_aspect <-
shape_aspect_relationship.relying_shape_aspect]
[shape_aspect <-
shape_aspect_relationship.related_shape_aspect]
shape_aspect_relationship =>
dimensional_location
dimensional_characteristic = dimensional_location
dimensional_characteristic <-
dimensional_characteristic_representation.dimension
dimensional_characteristic_representation
```

```

dimensional_characteristic_representation.representation ->
shape_dimension_representation <=
shape_representation <=
{representation
representation.name = 'trunnion dimensional shape'}
representation
representation.items[i] ->
{representation_item
representation_item.name = 'length'}
representation_item =>
measure_representation_item <=
{measure_with_unit =>
length_measure_with_unit}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.16.72 User_defined_attribute_value

#1: The value is given by a measure and unit

#2: The value is given by text

AIM element: #1: (measure_representation_item)
#2: (descriptive_representation_item)

Source: ISO 10303-45

Reference path: {#1: (measure_representation_item <=)
#2: (descriptive_representation_item <=)
representation_item <-
representation.items[i]
representation
representation.name = 'user defined attributes'}

5.1.16.72.1 name

AIM element: representation_item.name

Source: ISO 10303-43

Reference path: (measure_representation_item <=)
(descriptive_representation_item <=)
representation_item
representation_item.name

5.1.16.72.2 value

AIM element: ([measure_with_unit.value_component]
[measure_with_unit.unit_component])
(descriptive_representation_item.description)

Source: ISO 10303-41

Reference path: (measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component])

ISO 10303-227:2005(E)

(descriptive_representation_item
descriptive_representation_item.description)

5.1.16.72.3 user_defined_attribute_value to plant_item

AIM element: PATH

Reference path: (measure_representation_item <=)
(descriptive_representation_item <=)
representation_item <-
representation.items[i]
representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
(product_definition)
(product_definition =>
externally_defined_plant_item_definition)
(product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product)

5.1.16.73 Washer

AIM element: bolt_and_nut_component_definition

Source: ISO 10303-227

Rules: dependent_instantiable_product_context
product_context_discipline_type_constraint
value_for_application_context

Reference path: bolt_and_nut_component_definition <=
product_definition
{bolt_and_nut_component_definition
classification_item = piping_support_definition
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment

```

classification_assignment.assigned_class ->
[group =>
bolt_and_nut_component_class]
[group
group.name = 'washer']]
{product_definition
product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
[product
classification_item = product
classification_item <-
applied_classification_assignment.items[i]
applied_classification_assignment <=
{classification_assignment
classification_assignment.role ->
classification_role
classification_role.name = 'plant item type classification'}
classification_assignment
classification_assignment.assigned_class ->
(group)
(group <-
group_relationship.related_group
group_relationship
group_relationship.relying_group ->
group)
group.name = 'bolt and nut component']
[product
product.frame_of_reference[i] ->
product_context <=
application_context_element
application_context_element.name = 'plant item']]

```

5.1.17 shape UoF

5.1.17.1 Detail_shape

AIM element: representation.name
Source: ISO 10303-43
Reference path: {representation.name = 'detail'}

5.1.17.2 Envelope_shape

AIM element: representation.name
Source: ISO 10303-43
Reference path: {representation.name = 'envelope'}

5.1.17.3 Hybrid_shape_representation

AIM element: hybrid_shape_representation
Source: ISO 10303-227

ISO 10303-227:2005(E)

Reference path: hybrid_shape_representation <=
shape_representation

5.1.17.4 Interfering_shape_element

AIM element: interfering_shape_element
Source: ISO 10303-227
Reference path: interfering_shape_element <=
[shape_aspect_relationship]
[shape_aspect]

5.1.17.4.1 interference_colour

AIM element: descriptive_colour
Source: ISO 10303-227
Reference path: interfering_shape_element <=
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'interference colour'}
representation_item =>
descriptive_representation_item =>
{descriptive_colour <=
colour}
descriptive_colour

5.1.17.5 Outline_shape

AIM element: representation.name
Source: ISO 10303-43
Reference path: {representation.name = 'outline'}

5.1.17.6 Plant_csg_shape_representation

AIM element: plant_csg_shape_representation
Source: ISO 10303-227
Reference path: plant_csg_shape_representation <=
shape_representation

5.1.17.7 Plant_item_centreline

AIM element: centre_of_symmetry
 Source: ISO 10303-47

5.1.17.8 Plant_item_interference

AIM element: plant_item_interference
 Source: ISO 10303-227
 Reference path: plant_item_interference <=
 product_definition_relationship

5.1.17.8.1 type

AIM element: product_definition_relationship.description
 Source: ISO 10303-41
 Reference path: plant_item_interference <=
 product_definition_relationship
 product_definition_relationship.description

5.1.17.8.2 plant_item_interference to interfering_shape_element

AIM element: PATH
 Reference path: plant_item_interference <=
 product_definition_relationship
 product_definition_relationship.relate_product_definition ->
 product_definition
 characterized_product_definition = product_definition
 characterized_product_definition
 characterized_definition = characterized_product_definition
 characterized_definition <=
 property_definition.definition
 property_definition =>
 product_definition_shape <=
 shape_aspect.of_shape
 shape_aspect =>
 interfering_shape_element

5.1.17.8.3 plant_item_interference to plant_item_interference_status

AIM element: PATH
 Reference path: plant_item_interference <=
 product_definition_relationship
 (plant_spatial_configuration_organization_item = product_definition_relationship
 plant_spatial_configuration_organization_item <=
 plant_spatial_configuration_organization_assignment.items[i]
 plant_spatial_configuration_organization_assignment)
 (plant_spatial_configuration_person_item = product_definition_relationship
 plant_spatial_configuration_person_item <=
 plant_spatial_configuration_person_assignment.items[i]
 plant_spatial_configuration_person_assignment)
 (characterized_product_definition = product_definition_relationship
 characterized_product_definition

ISO 10303-227:2005(E)

```
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation)
```

5.1.17.8.4 plant_item_interference_to_shape_interference_zone_usage

AIM element: PATH

Rules: subtype_mandatory_shape_representation

Reference path: plant_item_interference <=
product_definition_relationship
characterized_product_definition = product_definition_relationship
characterized_product_definition
characterized_definition = characterized_product_definition
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
{representation =>
shape_representation}
representation
representation.items[i] ->
representation_item =>
mapped_item

5.1.17.9 Plant_item_interference_status

AIM element: representation

Source: ISO 10303-43

Reference path: {representation
representation.name = 'plant item interference status'}

5.1.17.9.1 assessor

AIM element: (organization.name)
([person.first_name]
[person.last_name])

Source: ISO 10303-41

Reference path: (representation
plant_spatial_configuration_organization_item = representation
plant_spatial_configuration_organization_item <-


```

plant_spatial_configuration_organization_assignment.items [i]
plant_spatial_configuration_organization_assignment <=
organization_assignment
organization_assignment.assigned_organization ->
organization
organization.name)
(representation
plant_spatial_configuration_person_item = representation
plant_spatial_configuration_person_item <-
plant_spatial_configuration_person_assignment.items [i]
plant_spatial_configuration_person_assignment <=
person_assignment
person_assignment.assigned_person ->
person
[person.first_name]
[person.last_name])

```

5.1.17.9.2 status

AIM element: descriptive_representation_item.description
Source: ISO 10303-45
Reference path: representation
representation.items[i] ->
{representation_item
representation_item.name = 'interference status'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description

5.1.17.10 Plant_item_shape

AIM element: product_definition_shape
Source: ISO 10303-41
Reference path: {product_definition_shape <=
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
product_definition.frame_of_reference ->
product_definition_context <=
application_context_element
(application_context_element.name = 'physical definition')
(application_context_element.name = 'physical occurrence')}

5.1.17.10.1 clash_detection_class

AIM element: property_definition.description
Source: ISO 10303-41

ISO 10303-227:2005(E)

Reference path: product_definition_shape <=
property_definition
property_definition.description
{(property_definition.description = 'hard')
(property_definition.description = 'ignore')
(property_definition.description = 'soft')}

5.1.17.10.2 origin

AIM element: (axis2_placement_2d)
(axis2_placement_3d)
Source: ISO 10303-42
Reference path: product_definition_shape <=
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'plant item orientation'}
representation_item =>
geometric_representation_item =>
{placement
placement.location ->
cartesian_point <=
point <=
geometric_representation_item <=
representation_item
representation_item.name = 'plant item location'}
placement =>
(axis2_placement_2d)
(axis2_placement_3d)

5.1.17.10.3 plant_item_shape to changed_plant_item_shape

AIM element: IDENTICAL MAPPING

5.1.17.10.4 plant_item_shape to shape_representation

AIM element: PATH
Reference path: product_definition_shape <=
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
{property_definition_representation =>
shape_definition_representation}

```

property_definition_representation.used_representation ->
representation =>
shape_representation =>
(plant_csg_shape_representation)
(hybrid_shape_representation)

```

5.1.17.11 Reference_geometry

AIM element: reference_geometry
Source: ISO 10303-227
Reference path: reference_geometry <=
derived_shape_aspect

5.1.17.11.1 name

AIM element: shape_aspect.name
Source: ISO 10303-41
Reference path: reference_geometry <=
derived_shape_aspect <=
shape_aspect
shape_aspect.name

5.1.17.11.2 reference_geometry to changed_reference_geometry

AIM element: IDENTICAL MAPPING

5.1.17.11.3 reference_geometry to shape_representation_element

AIM element: PATH
Reference path: reference_geometry <=
derived_shape_aspect <=
shape_aspect
shape_definition = shape_aspect
shape_definition
characterized_definition = shape_definition
characterized_definition <=
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <=
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
representation_item

5.1.17.12 Shape_interference_zone_usage

AIM element: mapped_item
Source: ISO 10303-43

ISO 10303-227:2005(E)

5.1.17.13 Shape_parameter

AIM element: measure_representation_item
Source: ISO 10303-45
Reference path: {measure_representation_item <=
representation_item <=
representation.items[i]
representation =>
shape_representation =>
hybrid_shape_representation}

5.1.17.13.1 name

AIM element: representation_item.name
Source: ISO 10303-43
Reference path: measure_representation_item <=
representation_item
representation_item.name

5.1.17.13.2 value

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: measure_representation_item <=
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

5.1.17.14 Shape_representation

AIM element: (hybrid_shape_representation)
(plant_csg_shape_representation)
Source: ISO 10303-227
Reference path: (hybrid_shape_representation <=)
(plant_csg_shape_representation <=)
shape_representation
{shape_representation <=
representation
(representation.name = 'detail')
(representation.name = 'envelope')
(representation.name = 'outline')}

5.1.17.14.1 minimum_point_spacing

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: (hybrid_shape_representation <=)
(plant_csg_shape_representation <=)
shape_representation <=
representation
representation.context_of_items ->

```

representation_context =>
global_uncertainty_assigned_context
global_uncertainty_assigned_context.uncertainty [i] ->
{uncertainty_measure_with_unit
uncertainty_measure_with_unit.name = 'minimum point spacing'}
uncertainty_measure_with_unit =>
{measure_with_unit
[measure_with_unit.unit_component ->
unit
unit = named_unit
named_unit =>
([length_unit]
[si_unit])
([length_unit]
[conversion_based_unit])
([length_unit]
[expression_conversion_based_unit])
([length_unit]
[context_dependent_unit])]}
[measure_with_unit.value_component ->
measure_value = positive_length_measure]}
measure_with_unit
[measure_with_unit.value_component]
[measure_with_unit.unit_component]

```

5.1.17.14.2 shape_representation to shape_representation_element_usage

AIM element: PATH

Rules: subtype_mandatory_shape_representation

Reference path: property_definition_representation

```

property_definition_representation.used_representation ->
{representation =>
shape_representation =>
(plant_csg_shape_representation)
(hybrid_shape_representation)}
representation
representation.items[i] ->
representation_item

```

5.1.17.15 Shape_representation_element

AIM element: representation_item

Source: ISO 10303-43

5.1.17.15.1 shape_representation_element to shape_interference_zone_usage

AIM element: PATH

Reference path: representation_item <-

```

representation_map.mapping_origin
representation_map <-

```

ISO 10303-227:2005(E)

mapped_item.mapping_source
mapped_item

5.1.17.15.2 shape_representation_element to shape_representation_element_usage

AIM element: IDENTICAL MAPPING
Rules: subtype_mandatory_shape_representation

5.1.17.16 Shape_representation_element_usage

AIM element: representation_item
Source: ISO 10303-43

5.1.17.16.1 element_colour

AIM element: descriptive_colour
Source: ISO 10303-227
Rules: subtype_mandatory_shape_representation
Reference path: representation_item <-
representation_item_relationship.related_representation_item
{representation_item_relationship
representation_item_relationship.name = 'element color association'}
representation_item_relationship
representation_item_relationship.relying_representation_item ->
{representation_item
representation_item.name = 'element colour'}
representation_item =>
descriptive_representation_item =>
{descriptive_colour <=
colour}
descriptive_colour

5.1.17.16.2 layer

AIM element: presentation_layer_assignment
Source: ISO 10303-46
Rules: subtype_mandatory_shape_representation
Reference path: representation_item
layered_item = representation_item
layered_item <-
presentation_layer_assignment.assigned_items[i]
presentation_layer_assignment

5.1.17.16.3 shape_representation_element_usage to interfering_shape_element

AIM element: PATH
Rules: subtype_mandatory_shape_representation
Reference path: representation_item <-
item_identified_representation_usage.identified_item
item_identified_representation_usage
item_identified_representation_usage.definition ->
represented_definition
represented_definition = shape_aspect

```

shape_aspect =>
interfering_shape_element

```

5.1.18 site_characterization UoF

5.1.18.1 Breakline

AIM element: polyline
Source: ISO 10303-42

5.1.18.1.1 breakline to survey_point

AIM element: PATH
Reference path: polyline
 polyline.points[i] ->
 cartesian_point
 { cartesian_point <=
 point <=
 geometric_representation_item <=
 representation_item
 representation_item.name = 'survey point' }

5.1.18.2 Building

AIM element: site_building
Source: ISO 10303-227
Reference path: site_building <=
 property_definition

5.1.18.2.1 building_id

AIM element: representation
Source: ISO 10303-43
Reference path: site_building <=
 property_definition
 represented_definition = property_definition
 represented_definition <=
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 representation
 { representation
 [representation.name = 'building number']
 [representation.items[i] ->
 representation_item =>
 descriptive_representation_item] }

5.1.18.2.2 location_and_orientation

AIM element: [(axis2_placement_2d)
 (axis2_placement_3d)]
 [cartesian_point]
Source: ISO 10303-42

ISO 10303-227:2005(E)

Reference path: site_building <=
property_definition
represented_definition = property_definition
represented_definition <=
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'building orientation'}
representation_item =>
geometric_representation_item =>
[placement =>
(axis2_placement_2d)
(axis2_placement_3d)]
[placement
placement.location ->
cartesian_point
{cartesian_point <=
point <=
geometric_representation_item <=
representation_item
representation_item.name = 'building location'}]

5.1.18.2.3 name

AIM element: property_definition.name
Source: ISO 10303-41
Reference path: site_building <=
property_definition
property_definition.name

5.1.18.2.4 shape

AIM element: shape_representation
Source: ISO 10303-41
Rules: subtype_mandatory_shape_representation
Reference path: site_building <=
{property_definition =>
product_definition_shape}
property_definition
represented_definition = property_definition
represented_definition <=
property_definition_representation.definition
{property_definition_representation =>
shape_definition_representation}
property_definition_representation
property_definition_representation.used_representation ->

representation =>
 shape_representation

5.1.18.2.5 building to location_in_building

AIM element: PATH

Reference path: site_building <=
 property_definition
 represented_definition = property_definition
 represented_definition <=
 property_definition_representation.definition
 property_definition_representation
 property_definition_representation.used_representation ->
 representation
 representation.items[i] ->
 representation_item =>
 geometric_representation_item =>
 placement =>
 (axis2_placement_2d)
 (axis2_placement_3d)

5.1.18.2.6 building to reference_geometry

AIM element: PATH

Reference path: site_building <=
 property_definition =>
 product_definition_shape <=
 shape_aspect.of_shape
 shape_aspect =>
 derived_shape_aspect =>
 reference_geometry

5.1.18.3 Facet_trigon

AIM element: poly_loop

Source: ISO 10303-42

5.1.18.3.1 facet_trigon to survey_point

AIM element: PATH

Reference path: poly_loop
 poly_loop.polygon[i] ->
 cartesian_point
 { cartesian_point <=
 point <=
 geometric_representation_item <=
 representation_item
 representation_item.name = 'survey point' }

5.1.18.4 Faceted_surface_representation

AIM element: site_representation

Source: ISO 10303-227

ISO 10303-227:2005(E)

Rules: subtype_mandatory_shape_representation
Reference path: site_representation <=
shape_representation
{ shape_representation <=
representation
representation.items[i] ->
representation_item =>
topological_representation_item =>
connected_face_set }

5.1.18.4.1 faceted_surface_representation to facet_trigon

AIM element: PATH
Rules: subtype_mandatory_shape_representation
Reference path: site_representation <=
shape_representation <=
representation
representation.items[i] ->
representation_item =>
topological_representation_item =>
connected_face_set
connected_face_set.cfs_faces[i] ->
{ face =>
face_surface }
face
face.bounds[i] ->
face_bound
face_bound.bound ->
loop =>
poly_loop

5.1.18.5 Gis_position

AIM element: representation
Source: ISO 10303-43
Reference path: { representation
representation.name = 'gis position' }

5.1.18.5.1 height

AIM element: [measure_with_unit.value_component]
[measure_with_unit.unit_component]
Source: ISO 10303-41
Reference path: representation
representation.items[i] ->
{ representation_item
representation_item.name = 'height' }
representation_item =>
measure_representation_item <=
measure_with_unit

[measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.18.5.2 scale

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: Iso 10303-41

Reference path: representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'scale'}
 representation_item =>
 measure_representation_item <=
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.18.5.3 system

AIM element: representation_context.context_type

Source: ISO 10303-43

Reference path: representation
 representation.context_of_items ->
 representation_context
 representation_context.context_type

5.1.18.5.4 x_axis_delta_x

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'x-axis delta x'}
 representation_item =>
 measure_representation_item <=
 measure_with_unit
 [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

5.1.18.5.5 x_axis_delta_y

AIM element: [measure_with_unit.value_component]
 [measure_with_unit.unit_component]

Source: ISO 10303-41

Reference path: representation
 representation.items[i] ->
 {representation_item
 representation_item.name = 'x-axis delta y'}
 representation_item =>

ISO 10303-227:2005(E)

```
measure_representation_item <=  
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.18.5.6 x_coordinate

```
AIM element: [measure_with_unit.value_component]  
[measure_with_unit.unit_component]  
Source: ISO 10303-41  
Reference path: representation  
representation.items[i] ->  
{representation_item  
representation_item.name = 'x coordinate'}  
representation_item =>  
measure_representation_item <=  
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.18.5.7 y_coordinate

```
AIM element: [measure_with_unit.value_component]  
[measure_with_unit.unit_component]  
Source: ISO 10303-41  
Reference path: representation  
representation.items[i] ->  
{representation_item  
representation_item.name = 'y coordinate'}  
representation_item =>  
measure_representation_item <=  
measure_with_unit  
[measure_with_unit.value_component]  
[measure_with_unit.unit_component]
```

5.1.18.5.8 zone

```
AIM element: descriptive_representation_item.description  
Source: ISO 10303-45  
Reference path: representation  
representation.items[i] ->  
{representation_item  
representation_item.name = 'zone'}  
representation_item =>  
descriptive_representation_item  
descriptive_representation_item.description
```

5.1.18.6 Location_in_building

```
AIM element: (axis2_placement_2d)  
(axis2_placement_3d)  
Source: ISO 10303-42
```

Reference path: {(axis2_placement_2d <=)
 (axis2_placement_3d <=)
 placement <=
 geometric_representation_item <=
 representation_item <=
 representation.items[i]
 representation <=
 property_definition_representation.used_representation
 property_definition_representation
 property_definition_representation.definition ->
 represented_definition
 represented_definition = property_definition
 property_definition =>
 site_building }

5.1.18.7 Location_in_site

AIM element: (axis2_placement_2d)
 (axis2_placement_3d)

Source: ISO 10303-42

Reference path: {(axis2_placement_2d <=)
 (axis2_placement_3d <=)
 placement <=
 geometric_representation_item <=
 representation_item <=
 representation.items[i]
 representation <=
 property_definition_representation.used_representation
 {property_definition_representation =>
 shape_definition_representation}
 property_definition_representation
 property_definition_representation.definition ->
 represented_definition
 represented_definition = property_definition
 {property_definition =>
 product_definition_shape}
 property_definition
 property_definition.definition ->
 characterized_definition
 characterized_definition = characterized_object
 characterized_object =>
 site }

5.1.18.8 Point_and_line_representation

AIM element: site_representation

Source: ISO 10303-227

Reference path: site_representation <=
 shape_representation
 {shape_representation <=

ISO 10303-227:2005(E)

```
representation
representation.items[i] ->
representation_item =>
geometric_representation_item =>
geometric_set =>
geometric_curve_set}
```

5.1.18.8.1 point_and_line_representation to survey_point

```
AIM element:  PATH
Rules:       subtype_mandatory_shape_representation
Reference path: site_representation <=
              shape_representation <=
              representation
              representation.items[i] ->
              representation_item =>
              geometric_representation_item =>
              {geometric_set =>
              geometric_curve_set}
              geometric_set
              geometric_set.elements[i] ->
              geometric_set_select
              geometric_set_select = point
              point =>
              cartesian_point
              {cartesian_point <=
              point <=
              geometric_representation_item <=
              representation_item
              representation_item.name = 'survey point'}
```

5.1.18.9 Site

```
AIM element:  site
Source:       Iso 10303-227
Reference path: site <=
              [characterized_object]
              [property_definition]
```

5.1.18.9.1 address

```
AIM element:  representation
Source:       ISO 10303-43
Rules:       subtype_exclusive_characterized_object
Reference path: site <=
              characterized_object
              characterized_definition = characterized_object
              characterized_definition <-
              property_definition.definition
              property_definition
              represented_definition = property_definition
```

```

represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation
representation.name = 'site address'}

```

5.1.18.9.2 coordinates

```

AIM element: representation
Source:      ISO 10303-43
Rules:      subtype_exclusive_characterized_object
Reference path: site <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation
representation.name = 'site coordinates'}

```

5.1.18.9.3 elevation

```

AIM element: representation
Source:      ISO 10303-43
Rules:      subtype_exclusive_characterized_object
Reference path: site <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation
representation.name = 'site elevation'}

```

5.1.18.9.4 environmental_references

```

AIM element: document.id

```

ISO 10303-227:2005(E)

Source: ISO 10303-41
Reference path: site
document_item = site
document_item <-
applied_document_reference.items[i]
applied_document_reference <=
document_reference
document_reference.assigned_document ->
document
document.id

5.1.18.9.5 locality

AIM element: representation
Source: ISO 10303-43
Rules: subtype_exclusive_characterized_object
Reference path: site <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
{representation
representation.name = 'site locality'}

5.1.18.9.6 name

AIM element: characterized_object.description
Source: ISO 10303-41
Rules: subtype_exclusive_characterized_object
Reference path: site <=
characterized_object
characterized_object.description

5.1.18.9.7 orientation

AIM element: (axis2_placement_2d)
(axis2_placement_3d)
Source: ISO 10303-42
Rules: subtype_exclusive_characterized_object
Reference path: site <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition


```

property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'site orientation'}
representation_item =>
geometric_representation_item =>
{placement
placement.location ->
cartesian_point <=
point <=
geometric_representation_item <=
representation_item
representation_item.name = 'site location'}
placement =>
(axis2_placement_2d)
(axis2_placement_3d)

```

5.1.18.9.8 owners

AIM element: (person)
(organization)
(person_and_organization)

Source: ISO 10303-41

Reference path: site

```

(plant_spatial_configuration_person_item = site
plant_spatial_configuration_person_item <-
plant_spatial_configuration_person_assignment.items[i]
plant_spatial_configuration_person_assignment <=
{person_assignment
person_assignment.role ->
person_role
person_role.name = 'owner'}
person_assignment
person_assignment.assigned_person ->
person)
(plant_spatial_configuration_organization_item = site
plant_spatial_configuration_organization_item <-
plant_spatial_configuration_organization_assignment.items[i]
plant_spatial_configuration_organization_assignment <=
{organization_assignment
organization_assignment.role ->
organization_role
organization_role.name = 'owner'}

```

ISO 10303-227:2005(E)

```
organization_assignment
organization_assignment.assigned_organization ->
organization)
(plant_spatial_configuration_person_and_organization_item = site
plant_spatial_configuration_person_and_organization_item <-
plant_spatial_configuration_person_and_organization_assignment.items[i]
plant_spatial_configuration_person_and_organization_assignment <=
{person_and_organization_assignment
person_and_organization_assignment.role ->
person_and_organization_role
person_and_organization_role.name = 'owner'}
person_and_organization_assignment
person_and_organization_assignment.assigned_person_and_organization ->
person_and_organization)
```

5.1.18.9.9 site_id

AIM element: characterized_object.name
Source: ISO 10303-41
Rules: subtype_exclusive_characterized_object
Reference path: site <=
characterized_object
characterized_object.name

5.1.18.9.10 site to building

AIM element: PATH
Rules: subtype_exclusive_characterized_object
Reference path: site <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition =>
site_building

5.1.18.9.11 site to changed_site

AIM element: IDENTICAL MAPPING

5.1.18.9.12 site to location_in_site

AIM element: PATH
Rules: subtype_exclusive_characterized_object
Reference path: site <=
characterized_object
characterized_definition = characterized_object
characterized_definition <-
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-

```

property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
representation_item =>
geometric_representation_item =>
placement =>
(axis2_placement_2d)
(axis2_placement_3d)

```

5.1.18.9.13 site to site_feature

```

AIM element:  PATH
Rules:       subtype_exclusive_characterized_object
Reference path: site <=
              characterized_object
              characterized_definition = characterized_object
              characterized_definition <-
              property_definition.definition
              property_definition =>
              site_feature

```

5.1.18.9.14 site to site_shape_representation

```

AIM element:  PATH
Rules:       subtype_exclusive_characterized_object
              subtype_mandatory_shape_representation
Reference path: site <=
              characterized_object
              characterized_definition = characterized_object
              characterized_definition <-
              property_definition.definition
              {property_definition =>
              product_definition_shape}
              property_definition
              property_definition.used_representation ->
              representation =>
              shape_representation =>
              site_representation

```

5.1.18.9.15 site to sited_plant

```

AIM element:  PATH
Reference path: site <=
              property_definition <-
              property_definition_relationship.relatng_property_definition
              {property_definition_relationship
              property_definition_relationship.name = 'plant on site'}
              property_definition_relationship
              property_definition_relationship.related_property_definition ->

```

ISO 10303-227:2005(E)

property_definition =>
sited_plant

5.1.18.10 Site_feature

AIM element: site_feature
Source: ISO 10303-227
Reference path: site_feature <=
property_definition

5.1.18.10.1 location_and_orientation

AIM element: [(axis2_placement_2d)
(axis2_placement_3d)]
[cartesian_point]
Source: ISO 10303-42
Reference path: site_feature <=
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'feature orientation'}
representation_item =>
geometric_representation_item =>
[placement =>
(axis2_placement_2d)
(axis2_placement_3d)]
[placement
placement.location ->
cartesian_point
{cartesian_point <=
point <=
geometric_representation_item <=
representation_item
representation_item.name = 'feature location'}]

5.1.18.10.2 man_made_or_natural

AIM element: descriptive_representation_item.description
Source: ISO 10303-45
Reference path: site_feature <=
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation

```

property_definition_representation.used_representation ->
representation
representation.items[i] ->
{representation_item
representation_item.name = 'origin type'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
{(descriptive_representation_item.description = 'man made')
(descriptive_representation_item.description = 'natural')}

```

5.1.18.10.3 shape

```

AIM element:  shape_representation
Source:      ISO 10303-41
Rules:      subtype_mandatory_shape_representation
Reference path: site_feature <=
             {property_definition =>
             product_definition_shape}
             property_definition
             represented_definition = property_definition
             represented_definition <-
             property_definition_representation.definition
             {property_definition_representation =>
             shape_definition_representation}
             property_definition_representation
             property_definition_representation.used_representation ->
             representation =>
             shape_representation

```

5.1.18.10.4 site_feature_id

```

AIM element:  property_definition.name
Source:      ISO 10303-41
Reference path: site_feature <=
             property_definition
             property_definition.name

```

5.1.18.10.5 type

```

AIM element:  descriptive_representation_item.description
Source:      ISO 103034-45
Reference path: site_feature <=
             property_definition
             represented_definition = property_definition
             represented_definition <-
             property_definition_representation.definition
             property_definition_representation
             property_definition_representation.used_representation ->
             representation
             representation.items[i] ->

```

ISO 10303-227:2005(E)

```
{representation_item
representation_item.name = 'site feature type'}
representation_item =>
descriptive_representation_item
descriptive_representation_item.description
```

5.1.18.10.6 site_feature to changed_site_feature

AIM element: IDENTICAL MAPPING

5.1.18.11 Site_shape_representation

AIM element: site_representation

Source: ISO 10303-227

Reference path: site_representation <=
shape_representation

5.1.18.11.1 site_shape_representation to breakline

AIM element: PATH

Rules: subtype_mandatory_shape_representation

Reference path: site_representation <=
shape_representation <=
representation
representation.items[i] ->
representation_item =>
geometric_representation_item =>
{geometric_set =>
geometric_curve_set}
geometric_set
geometric_set.elements[i] ->
geometric_set_select
geometric_set_select = curve
curve =>
bounded_curve =>
polyline

5.1.18.11.2 site_shape_representation to gis_position

AIM element: PATH

Rules: subtype_mandatory_shape_representation

Reference path: site_representation <=
shape_representation <=
representation <-
representation_map.mapped_representation
representation_map <-
mapped_item.mapping_source
mapped_item <=
representation_item <-
representation.items[i]
representation

```
{representation
representation.name = 'gis position'}
```

5.1.18.12 Sited_plant

AIM element: sited_plant

Source: ISO 10303-227

Reference path: sited_plant <=

```
property_definition
{property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_product_definition
characterized_product_definition
characterized_product_definition = product_definition
product_definition
[product_definition.formation ->
product_definition_formation
product_definition_formation.of_product ->
product =>
plant]
[product_definition.frame_of_reference ->
[product_definition_context <=
application_context_element
application_context_element.name = 'physical occurrence']
[product_definition_context
product_definition_context.life_cycle_stage = 'physical design']]}
```

5.1.18.12.1 plant_site_location

AIM element: cartesian_point

Source: ISO 10303-42

Rules: subtype_exclusive_characterized_object

Reference path: sited_plant <=

```
property_definition
property_definition.definition
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation <-
representation_map.mapped_representation
representation_map <-
mapped_item.mapping_source
{mapped_item <=
representation_item <-
representation.items[i]
representation <-
```

ISO 10303-227:2005(E)

```
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
site}
mapped_item
mapped_item.mapping_target ->
{representation_item
representation_item.name = 'plant orientation'}
representation_item =>
geometric_representation_item =>
{placement =>
(axis2_placement_2d)
(axis2_placement_3d)}
placement
placement.location ->
cartesian_point
{cartesian_point <=
point <=
geometric_representation_item <=
representation_item
representation_item.name = 'plant location'}
```

5.1.18.12.2 plant_site_orientation

AIM element: (axis2_placement_2d)
(axis2_placement_3d)

Source: ISO 10303-42

Rules: subtype_exclusive_characterized_object

Reference path: sited_plant <=

```
property_definition
represented_definition = property_definition
represented_definition <-
property_definition_representation.definition
property_definition_representation
property_definition_representation.used_representation ->
representation <-
representation_map.mapped_representation
representation_map <-
mapped_item.mapping_source
{mapped_item <=
representation_item <-
representation.items[i]
```



```

representation <-
property_definition_representation.used_representation
property_definition_representation
property_definition_representation.definition ->
represented_definition
represented_definition = property_definition
property_definition
property_definition.definition ->
characterized_definition
characterized_definition = characterized_object
characterized_object =>
site}
mapped_item
mapped_item.mapping_target ->
{representation_item
representation_item.name = 'plant orientation'}
representation_item =>
geometric_representation_item =>
placement =>
(axis2_placement_2d)
(axis2_placement_3d)

```

5.1.18.12.3 sited_plant to changed_sited_plant

AIM element: IDENTICAL MAPPING

5.1.18.13 Survey_point

AIM element: cartesian_point

Source: ISO 10303-42

Reference path: {cartesian_point <=
point <=
geometric_representation_item <=
representation_item
representation_item.name = 'survey point'}

5.1.19 Global rules referenced in the mapping specification

```

application_context_requires_ap_definition
approval_requires_approval_date_time
approval_requires_approval_person_organization
change_action_requires_date
change_item_requires_creation_date
change_item_requires_id
change_life_cycle_stage_usage_requires_approval
change_life_cycle_stage_usage_requires_stage
dependent_instantiable_application_context
dependent_instantiable_product_context
dependent_instantiable_product_definition_context
product_context_discipline_type_constraint
product_definition_context_name_constraint

```

ISO 10303-227:2005(E)

product_definition_usage_constraint
subtype_exclusive_characterized_object
subtype_mandatory_externally_defined_item
subtype_mandatory_pre_defined_item
subtype_mandatory_shape_representation
value_for_application_context
version2_p41_object_role_selection
version2_p41_uninstantiable_basic_attributes

5.2 AIM EXPRESS short listing

This clause specifies the EXPRESS schema that uses elements from the integrated resources and contains the types, entity specializations, rules, and functions that are specific to this part of ISO 10303. This clause also specifies modifications to the text for constructs that are imported from the integrated resources. The definitions and EXPRESS provided in the integrated resources for constructs used in the AIM may include select list items and subtypes that are not imported into the AIM. Requirements stated in the integrated resources that refer to select list items and subtypes apply exclusively to those items that are imported into the AIM.

EXPRESS specification:

*)

```
SCHEMA plant_spatial_configuration;
```

```
USE FROM aic_topologically_bounded_surface; -- ISO 10303-511
```

```
USE FROM action_schema -- ISO 10303-41
```

```
(action_directive,
 action_method_relationship,
 action_relationship,
 action_request_solution,
 action_request_status,
 action_status,
 directed_action,
 versioned_action_request);
```

```
USE FROM application_context_schema -- ISO 10303-41
```

```
(application_context,
 application_protocol_definition,
 product_context,
 product_definition_context);
```

```
USE FROM approval_schema -- ISO 10303-41
```

```
(approval,
 approval_date_time,
 approval_person_organization);
```

```
USE FROM basic_attribute_schema -- ISO 10303-41
```

```
(description_attribute,
 id_attribute,
 name_attribute,
 role_association);
```

```
USE FROM date_time_schema -- ISO 10303-41
```

```
(calendar_date,
 date_and_time);
```

```
USE FROM document_schema -- ISO 10303-41
```

```
(document,
 document_relationship,
 document_usage_constraint);
```

ISO 10303-227:2005(E)

```
USE FROM draughting_element_schema -- ISO 10303-101
(draughting_callout,
 draughting_callout_relationship);

USE FROM drawing_definition_schema -- ISO 10303-101
(drawing_revision,
 drawing_revision_sequence,
 drawing_sheet_revision,
 drawing_sheet_revision_usage);

USE FROM effectivity_schema (serial_numbered_effectivity);

USE FROM external_reference_schema -- ISO 10303-41
(external_source,
 external_source_relationship,
 externally_defined_item,
 externally_defined_item_relationship,
 pre_defined_item);

USE FROM geometric_model_schema -- ISO 10303-42
(block,
 boolean_operator,
 boolean_operand,
 boolean_result,
 brep_with_voids,
 csg_solid,
 cyclide_segment_solid,
 eccentric_cone,
 ellipsoid,
 extruded_area_solid,
 extruded_face_solid,
 faceted_brep,
 geometric_curve_set,
 geometric_set,
 geometric_set_replica,
 manifold_solid_brep,
 rectangular_pyramid,
 revolved_area_solid,
 revolved_face_solid,
 right_angular_wedge,
 right_circular_cone,
 right_circular_cylinder,
 shell_based_wireframe_model,
 solid_model,
 sphere,
 swept_face_solid,
 swept_area_solid,
 torus);

USE FROM geometry_schema -- ISO 10303-42
(axis2_placement_2d,
 axis2_placement_3d,
 b_spline_curve,
```

b_spline_curve_with_knots,
b_spline_surface,
b_spline_surface_with_knots,
bezier_curve,
bezier_surface,
boundary_curve,
bounded_pcurve,
bounded_surface_curve,
cartesian_point,
circle,
composite_curve,
composite_curve_on_surface,
composite_curve_segment,
conical_surface,
curve_bounded_surface,
curve_replica,
cylindrical_surface,
degenerate_pcurve,
degenerate_toroidal_surface,
direction,
ellipse,
evaluated_degenerate_pcurve,
geometric_representation_context,
geometric_representation_item,
hyperbola,
intersection_curve,
line,
offset_curve_2d,
offset_curve_3d,
offset_surface,
outer_boundary_curve,
parabola,
pcurve,
plane,
point,
point_on_curve,
point_on_surface,
point_replica,
polyline,
quasi_uniform_curve,
quasi_uniform_surface,
rational_b_spline_curve,
rational_b_spline_surface,
reparametrised_composite_curve_segment,
rectangular_composite_surface,
rectangular_trimmed_surface,
seam_curve,
spherical_surface,
surface_curve,
surface_of_linear_extrusion,
surface_of_revolution,
surface_patch,
surface_replica,
toroidal_surface,

ISO 10303-227:2005(E)

```
trimmed_curve,  
uniform_curve,  
uniform_surface);
```

```
USE FROM group_schema -- ISO 10303-41  
(group,  
group_relationship);
```

```
USE FROM management_resources_schema -- ISO 10303-41  
(action_assignment,  
action_request_assignment,  
approval_assignment,  
classification_assignment,  
date_and_time_assignment,  
date_assignment,  
document_reference,  
document_usage_constraint_assignment,  
effectivity_assignment,  
effectivity_context_assignment,  
group_assignment,  
identification_assignment,  
name_assignment,  
organization_assignment,  
person_and_organization_assignment,  
person_assignment);
```

```
USE FROM material_property_definition_schema -- ISO 10303-45  
(characterized_material_property,  
material_designation,  
material_designation_characterization,  
material_property,  
product_material_composition_relationship,  
property_definition_relationship);
```

```
USE FROM material_property_representation_schema -- ISO 10303-45  
(material_property_representation);
```

```
USE FROM measure_schema -- ISO 10303-41  
(amount_of_substance_measure,  
amount_of_substance_measure_with_unit,  
amount_of_substance_unit,  
area_measure,  
celsius_temperature_measure,  
celsius_temperature_measure_with_unit,  
celsius_temperature_measure_unit,  
context_dependent_measure,  
context_dependent_unit,  
conversion_based_unit,  
count_measure,  
derived_unit,  
electric_current_measure,  
electric_current_measure_with_unit,  
electric_current_unit,  
global_unit_assigned_context,
```

```

length_measure,
length_measure_with_unit,
length_unit,
luminous_intensity_measure,
luminous_intensity_measure_with_unit,
luminous_intensity_unit,
mass_measure,
mass_measure_with_unit,
mass_unit,
named_unit,
numeric_measure,
parameter_value,
plane_angle_measure_with_unit,
plane_angle_unit,
positive_length_measure,
positive_plane_angle_measure,
positive_ratio_measure,
ratio_measure,
ratio_measure_with_unit,
ratio_unit,
si_unit,
solid_angle_measure,
solid_angle_measure_with_unit,
solid_angle_unit,
thermodynamic_temperature_measure,
thermodynamic_temperature_measure_with_unit,
thermodynamic_temperature_unit,
time_measure,
time_measure_with_unit,
time_unit,
volume_measure);

```

```

USE FROM person_organization_schema -- ISO 10303-41
(organization,
organizational_project);

```

```

USE FROM presentation_appearance_schema -- ISO 10303-46
(box_height,
box_rotate_angle,
box_slant_angle,
box_width,
context_dependent_invisibility,
curve_style,
curve_style_font,
curve_style_wide,
externally_defined_curve_font,
externally_defined_hatch_style,
externally_defined_tile_style,
fill_area_style,
fill_area_style_colour,
fill_area_style_hatching,
fill_area_style_tile_symbol_with_style,
fill_area_style_tiles,
marker_type,

```

ISO 10303-227:2005(E)

```
pre_defined_curve_font,  
presentation_style_by_context,  
point_style,  
styled_item,  
symbol_colour,  
symbol_style,  
text_style,  
text_style_for_defined_font,  
text_style_with_box_characteristics,  
text_style_with_mirror);
```

USE FROM presentation_definition_schema -- ISO 10303-46

```
(annotation_curve_occurrence,  
annotation_fill_area,  
annotation_fill_area_occurrence,  
annotation_occurrence_relationship,  
annotation_point_occurrence,  
annotation_symbol,  
annotation_symbol_occurrence,  
annotation_text,  
annotation_text_occurrence,  
annotation_text_with_extent,  
defined_symbol,  
externally_defined_symbol,  
symbol_representation,  
symbol_representation_map,  
symbol_representation_relationship,  
symbol_target,  
text_alignment,  
text_literal,  
text_literal_with_associated_curves,  
text_literal_with_blanking_box,  
text_literal_with_delineation,  
text_literal_with_extent,  
text_string_representation);
```

USE FROM presentation_organization_schema -- ISO 10303-46

```
(area_dependent_annotation_representation,  
camera_image,  
camera_model_d2,  
camera_model_d2_shape_clipping,  
camera_usage,  
graphical_transformation,  
presentation_area,  
presentation_layer_assignment,  
presentation_layer_usage,  
presentation_representation,  
presentation_representation_relationship,  
presentation_size,  
presentation_view,  
presented_item,  
presented_item_representation,  
product_data_representation_view,  
view_dependent_annotation_representation);
```



```
USE FROM presentation_resource_schema -- ISO 10303-46
(colour,
 colour_rgb,
 externally_defined_text_font,
 font_select,
 planar_box,
 planar_extent,
 pre_defined_colour,
 pre_defined_text_font,
 presentation_scaled_placement);

USE FROM product_definition_schema -- ISO 10303-41
(product,
 product_definition,
 product_definition_formation,
 product_definition_formation_relationship,
 product_definition_formation_with_specified_source,
 product_definition_relationship,
 product_definition_substitute,
 product_definition_with_associated_documents);

USE FROM product_property_definition_schema -- ISO 10303-41
(characterized_object,
 product_definition_shape,
 property_definition,
 shape_aspect,
 shape_aspect_relationship);

USE FROM product_property_representation_schema -- ISO 10303-41
(item_identified_representation_usage,
 property_definition_representation,
 shape_definition_representation,
 shape_representation);

USE FROM product_structure_schema -- ISO 10303-44
(assembly_component_usage,
 make_from_usage_option,
 product_definition_usage);

USE FROM qualified_measure_schema -- ISO 10303-45
(descriptive_representation_item,
 measure_representation_item,
 qualified_representation_item,
 precision_qualifier,
 type_qualifier);

USE FROM representation_schema -- ISO 10303-43
(mapped_item,
 parametric_representation_context,
 representation,
 representation_context,
 representation_item,
 representation_item_relationship,
```

ISO 10303-227:2005(E)

```
global_uncertainty_assigned_context);
```

```
USE FROM shape_aspect_definition_schema -- ISO 10303-41
(centre_of_symmetry,
 derived_shape_aspect,
 shape_aspect_deriving_relationship,
 symmetric_shape_aspect);
```

```
USE FROM shape_dimension_schema -- ISO 10303-47
(angular_location,
 dimensional_characteristic_representation,
 dimensional_location,
 dimensional_size,
 shape_dimension_representation);
```

```
USE FROM topology_schema -- ISO 10303-42
(connected_face_set,
 edge,
 edge_curve,
 edge_loop,
 face,
 face_bound,
 face_outer_bound,
 face_surface,
 loop,
 oriented_closed_shell,
 oriented_edge,
 oriented_open_shell,
 path,
 poly_loop,
 topological_representation_item,
 vertex_point,
 vertex_shell,
 wire_shell);
```

(*

NOTE The schemas referenced above can be found in the following parts of ISO 10303:

action_schema	ISO 10303-41
aic_topologically_bounded_surface	ISO 10303-511
application_context_schema	ISO 10303-41
approval_schema	ISO 10303-41
date_time_schema	ISO 10303-41
document_schema	ISO 10303-41
external_reference_schema	ISO 10303-41
geometric_model_schema	ISO 10303-42
geometry_schema	ISO 10303-42
group_schema	ISO 10303-41
management_resources_schema	ISO 10303-41
material_property_definition_schema	ISO 10303-45
measure_schema	ISO 10303-41
person_organization_schema	ISO 10303-41

presentation_organization_schema	ISO 10303-46
presentation_resource_schema	ISO 10303-46
product_definition_schema	ISO 10303-41
product_property_definition_schema	ISO 10303-41
product_property_representation_schema	ISO 10303-41
product_structure_schema	ISO 10303-44
qualified_measure_schema	ISO 10303-45
representation_schema	ISO 10303-43
shape_aspect_definition_schema	ISO 10303-47
shape_dimension_schema	ISO 10303-47
topology_schema	ISO 10303-42
drawing_definition_schema	ISO 10303-101

5.2.1 Fundamental concepts and assumptions

5.2.1.1 property_definition, representation and representation_item

For a given item, non-shape properties are handled through a combination of **property_definition**, **representation**, and **representation_item**. All non-shape properties are grouped together and evaluated by a function for consistency. The **property_definition** serves as an aggregator of property values for a particular object. The **representation** collects individual elements of representation, usually in the form of name, value pairs that are applicable to a particular **property_definition**. The **representation_item** specifies a specific characteristic and its value. Shape properties are dealt with as a subtype and evaluated separately using **shape_definition**.

5.2.1.2 identifiers and types

Any identifier is used to differentiate between instances of an entity with respect to a scope of use or implementation of the identifier. If used in data exchange, the value of the identifier shall be unique within the exchange file and, additionally, may be unique between the partners in the exchange.

EXAMPLE 1 **Representation_context.context_identifier** may be any user-defined identifier that is used to differentiate contexts. REPCXT1, for example, may identify a **representation_context**.

Any type is used to specify the intent of the instance.

EXAMPLE 2 **Representation_context.context_type** may be 'parametric' if the geometry of a part is represented parametrically.

5.2.1.3 units

Units for a particular dimension specified in this part of ISO 10303 must be either globally specified or individually specified for each dimensional value. Different kinds of dimensions (for example, length versus weight), however, may be either specified globally or locally.

5.2.1.4 connector and connection

Connectors are **shape_aspects** of the plant items that they belong to because they cannot exist independently. Connections are, therefore, a **shape_aspect_relationship**. Connections are also a **shape_aspect** of the assembly that contains the connection, so connections are also **shape_aspects**.

ISO 10303-227:2005(E)

5.2.2 Plant spatial configuration type definitions

5.2.2.1 action_request_item

An **action_request_item** identifies the **product** that is assigned to an **action_request**, indicating a request for purchase.

EXPRESS specification:

```
*)
TYPE action_request_item = SELECT
  (product);
END_TYPE;
(*
```

5.2.2.2 approval_item

An **approval_item** identifies a **change_action**, **electrical_system**, **ducting_system**, **instrumentation_and_control_system**, **piping_system**, **structural_system**, **cableway_system**, **hvac_system**, or **versioned_action_request** that is assigned an approval status.

EXPRESS specification:

```
*)
TYPE approval_item = SELECT
  (change_action,
   electrical_system,
   ducting_system,
   instrumentation_and_control_system,
   piping_system,
   structural_system,
   cableway_system,
   hvac_system,
   versioned_action_request);
END_TYPE;
(*
```

5.2.2.3 associated_item

An **associated_item** identifies a **document**, **ducting_system**, **hvac_section_termination**, **organizational_project**, **mechanical_system**, **piping_system**, **plant_item_connection**, **plant_item_connector**, **plant_arrangement_definition**, **plant_arrangement_segment_definition**, **plant_arrangement_segment_termination**, **plant_line_definition**, **plant_line_segment_definition**, **plant_line_segment_termination**, **product**, **product_definition**, **representation**, or **shape_dimension_representation** that is depicted on a schematic.

EXPRESS specification:

```
*)
TYPE associated_item = SELECT
  (document,
   ducting_system,
```

```

    hvac_section_termination,
    organizational_project,
    piping_system,
    plant_item_connection,
    plant_item_connector,
    plant_line_definition,
    plant_line_segment_definition,
    plant_line_segment_termination,
    product,
    product_definition,
    representation,
    shape_dimension_representation,
    plant_arrangement_definition,
    plant_arrangement_segment_definition,
    mechanical_system,
    plant_arrangement_segment_termination);
END_TYPE;
(*

```

5.2.2.4 change_item

A **change_item** identifies the **assembly_component_usage**, **axis_placement_2d**, **axis_placement_3d**, **document**, **ducting_system**, **electrical_system**, **externally_defined_plant_item_definition**, **instrumentation_and_control_system**, **line_branch_connection**, **line_plant_item_branch_connection**, **line_plant_item_connection**, **line_termination_connection**, **mechanical_system**, **piping_system**, **plant**, **plant_item_connection**, **plant_item_connector**, **plant_line_definition**, **plant_line_segment_definition**, **plant_line_segment_termination**, **process_capability**, **product**, **product_definition**, **product_definition_relationship**, **product_definition_shape**, **property_definition**, **reference_geometry**, **site**, **site_feature**, **sited_plant**, or **structural_system** that can be modified, for which there is a request to modify, or that is the result of a change.

EXPRESS specification:

```

*)
TYPE change_item = SELECT
    (assembly_component_usage,
     axis2_placement_2d,
     axis2_placement_3d,
     document,
     ducting_system,
     electrical_system,
     externally_defined_plant_item_definition,
     hvac_connector,
     instrumentation_and_control_system,
     line_branch_connection,
     line_plant_item_branch_connection,
     line_plant_item_connection,
     line_termination_connection,
     mechanical_system,
     piping_system,
     plant,
     plant_item_connection,
     plant_item_connector,

```

ISO 10303-227:2005(E)

```
plant_line_definition,  
plant_line_segment_definition,  
plant_line_segment_termination,  
process_capability,  
product,  
product_definition,  
product_definition_relationship,  
product_definition_shape,  
property_definition,  
reference_geometry,  
representation,  
shape_aspect,  
shape_aspect_relationship,  
site,  
site_feature,  
sited_plant,  
structural_system);
```

END_TYPE;

(*

5.2.2.5 change_life_cycle_item

A **change_life_cycle_item** identifies the **directed_action** that is classified.

EXPRESS specification:

```
*)  
TYPE change_life_cycle_item = SELECT  
    (directed_action);  
END_TYPE;  
(*
```

5.2.2.6 classification_item

A **classification_item** identifies the **cableway_system**, **ducting_system**, **electrical_system**, **hvac_-component_definition**, **hvac_connector**, **instrumentation_and_control_system**, **mechanical_system**, **mechanical_component_definition**, **pipng_component_definition**, **pipng_system**, **plant_item_-connection**, **plant_item_connector**, **applied_document_reference**, **product**, **product_definition**, or **structural_system** that is classified.

EXPRESS specification:

```
*)  
TYPE classification_item = SELECT  
    (cableway_system,  
    drawing_revision,  
    ducting_system,  
    electrical_system,  
    hvac_component_definition,  
    hvac_connector,  
    instrumentation_and_control_system,  
    material_property,  
    pipng_component_definition,
```

```

    piping_system,
    plant_item_connection,
    plant_item_connector,
    applied_document_reference,
    product,
    product_definition,
    structural_system,
    mechanical_system,
    mechanical_component_definition);
END_TYPE;
( *
```

5.2.2.7 design_project_item

A **design_project_item** identifies the **product_definition** that is assigned to a **design_project**.

EXPRESS specification:

```

*)
TYPE design_project_item = SELECT
    (product_definition);
END_TYPE;
( *
```

5.2.2.8 date_and_time_item

A **date_and_time_item** identifies the **product** that a **date_and_time** is assigned to.

EXPRESS specification:

```

*)
TYPE date_and_time_item = SELECT
    (change_action,
     change_item,
     change_life_cycle_stage_assignment,
     product);
END_TYPE;
( *
```

5.2.2.9 dated_item

A **dated_item** identifies the **action_directive**, **change_action**, **change_item**, or **product** that a date is assigned to.

EXPRESS specification:

```

*)
TYPE dated_item = SELECT
    (action_directive,
     change_action,
     change_item,
     product);
END_TYPE;
```

ISO 10303-227:2005(E)

(*

5.2.2.10 document_item

A **document_item** identifies the **analysis_tracing_representation**, **externally_defined_plant_item_definition**, **heat_tracing_representation**, **material_property**, **mechanical_component_class**, **mechanical_system**, **piping_component_class**, **piping_system**, **plant_arrangement_segment_definition**, **plant_item_connector**, **plant_line_segment_definition**, **product**, **product_definition**, **product_definition_relationship**, **property_definition**, **representation**, **representation_item**, or **site** that is associated with a **document**.

EXPRESS specification:

```
*)
TYPE document_item = SELECT
  (externally_defined_plant_item_definition,
   heat_tracing_representation,
   material_property,
   piping_component_class,
   piping_system,
   plant_item_connector,
   plant_line_segment_definition,
   product,
   product_definition,
   product_definition_relationship,
   property_definition,
   representation,
   representation_item,
   site,
   mechanical_system,
   analysis_tracing_representation,
   plant_arrangement_segment_definition,
   mechanical_component_class);
END_TYPE;
(*
```

5.2.2.11 effectivity_item

An **effectivity_item** identifies a **product**, or **product_definition** that is assigned an effectivity.

EXPRESS specification:

```
*)
TYPE effectivity_item = SELECT
  (product,
   product_definition);
END_TYPE;
(*
```

5.2.2.12 effectivity_context_item

An **effectivity_context_item** identifies a **product_definition** that is assigned to designate an effectivity context.

EXPRESS specification:

```

*)
TYPE effectivity_context_item = SELECT
  (product_definition);
END_TYPE;
( *

```

5.2.2.13 identified_item

An **identified_item** identifies the **document**, **material_property**, **product_definition**, or **shape_aspect** to which an identifier is assigned.

EXPRESS specification:

```

*)
TYPE identified_item = SELECT
  (document,
   product_definition,
   property_definition,
   shape_aspect);
END_TYPE;
( *

```

5.2.2.14 plant_spatial_configuration_organization_item

A **plant_spatial_configuration_organization_item** identifies the **catalogue**, **change_action**, **design_project**, **document**, **plant**, **product_definition_formation**, **product_definition_relationship**, or **site** that is associated with an **organization**.

EXPRESS specification:

```

*)
TYPE plant_spatial_configuration_organization_item = SELECT
  (catalogue,
   change_action,
   design_project,
   document,
   plant,
   product_definition_formation,
   product_definition_relationship,
   representation,
   site);
END_TYPE;
( *

```

5.2.2.15 plant_spatial_configuration_person_item

A **plant_spatial_configuration_person_item** identifies the **document**, **plant**, **product_definition_relationship**, or **site** that is associated with a **person**.

ISO 10303-227:2005(E)

EXPRESS specification:

```
*)
TYPE plant_spatial_configuration_person_item = SELECT
  (document,
   plant,
   product_definition_relationship,
   representation,
   site);
END_TYPE;
(*
```

5.2.2.16 plant_spatial_configuration_person_and_organization_item

A **plant_spatial_configuration_person_and_organization_item** identifies the **change_item**, **plant**, or **site** that is associated with a **person_and_organization**.

EXPRESS specification:

```
*)
TYPE plant_spatial_configuration_person_and_organization_item = SELECT
  (change_item,
   plant,
   site);
END_TYPE;
(*
```

5.2.2.17 presented_item_select

A **presented_item_select** identifies a **product_definition** that is represented by a schematic.

EXPRESS specification:

```
*)
TYPE presented_item_select = SELECT
  (product_definition);
END_TYPE;
(*
```

5.2.2.18 purchase_item

A **purchase_item** identifies a **product** that is purchased.

EXPRESS specification:

```
*)
TYPE purchase_item = SELECT
  (product);
END_TYPE;
(*
```

5.2.3 Plant spatial configuration entities

5.2.3.1 Plant spatial configuration entity definitions

5.2.3.1.1 analysis_tracing_representation

An **analysis_tracing_representation** is a type of **representation** that represents the means utilized to impart a change in the vibration, noise, temperature or shock through an external mechanism (such as dampers, insulation, heating coils, or supports).

EXPRESS specification:

```
*)
ENTITY analysis_tracing_representation
  SUBTYPE OF (representation);
END_ENTITY;
(*
```

5.2.3.1.2 applied_action_request_assignment

An **applied_action_request_assignment** assigns an **action_request** to a set of one or more **products**.

```
*)
ENTITY applied_action_request_assignment
  SUBTYPE OF (action_request_assignment);
  items : SET [1:?] OF action_request_item;
END_ENTITY;
(*
```

Attribute definitions:

items: the set of **products** that an **action_request** is assigned to.

5.2.3.1.3 applied_approval_assignment

An **applied_approval_assignment** assigns an **approval** to a set of one or more **change_actions**.

EXPRESS specification:

```
*)
ENTITY applied_approval_assignment
  SUBTYPE OF (approval_assignment);
  items : SET [1:?] OF approval_item;
END_ENTITY;
(*
```

Attribute definitions:

items: the set of instances of **change_action**, **piping_system**, or **versioned_action_request** to which an **approval** is assigned.

ISO 10303-227:2005(E)

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **applied_approval_assignment** entity:

1. **change_life_cycle_stage_usage_requires_approval** (see 5.2.4.7).

5.2.3.1.4 **applied_classification_assignment**

An **applied_classification_assignment** assigns a classification to a **cableway_system**, **ducting_system**, **electrical_system**, **hvac_component_definition**, **hvac_connector**, **instrumentation_and_control_system**, **mechanical_system**, **mechanical_component_definition**, **piping_component_definition**, **piping_system**, **plant_item_connection**, **plant_item_connector**, **applied_document_reference**, **product**, **product_definition**, or **structural_system**.

EXPRESS specification:

```
*)
ENTITY applied_classification_assignment
  SUBTYPE OF (classification_assignment);
  items : SET [1:?] OF classification_item;
WHERE
  WR1: (NOT (SIZEOF (QUERY (item <* SELF.items |
    NOT ('PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTION' IN
    TYPEOF(item)))) = 0)) OR
    (SIZEOF (TYPEOF (SELF.assigned_class) *
    ['PLANT_SPATIAL_CONFIGURATION.CONNECTION_FUNCTIONAL_CLASS',
    'PLANT_SPATIAL_CONFIGURATION.CONNECTION_MOTION_CLASS'])
    >= 1);
  WR2: (NOT (SIZEOF (QUERY (item <* SELF.items |
    NOT ('PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTOR' IN
    TYPEOF(item)))) = 0)) OR
    (SIZEOF (TYPEOF (SELF.assigned_class) *
    ['PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS',
    'PLANT_SPATIAL_CONFIGURATION.ELECTRICAL_CONNECTOR_CLASS',
    'PLANT_SPATIAL_CONFIGURATION.MECHANICAL_CONNECTOR_CLASS',
    'PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
    'PLANT_SPATIAL_CONFIGURATION.EXTERNALLY_DEFINED_CLASS',
    'PLANT_SPATIAL_CONFIGURATION.' +
    'STRUCTURAL_LOAD_CONNECTOR_CLASS']) >= 1);
END_ENTITY;
(*
```

Attribute definitions:

items: the set of **cableway_system**, **ducting_system**, **electrical_system**, **hvac_component_definition**, **hvac_connector**, **instrumentation_and_control_system**, **mechanical_system**, **mechanical_component_definition**, **piping_component_definition**, **piping_system**, **plant_item_connection**, **plant_item_connector**, **applied_document_reference**, **product**, **product_definition**, or **structural_system** instances that are assigned to a group.

Formal propositions:

WR1: A **plant_item_connection** shall be assigned either a **connection_functional_class**, a **connection_motion_class**, or a combination of these.

WR2: A **plant_item_connector** shall be assigned either a **connector_end_type_class**, **electrical_connector_class**, **mechanical_connector_class**, **pipng_connector_class**, **structural_load_connector_class**, or a combination of these.

5.2.3.1.5 applied_date_and_time_assignment

An **applied_date_and_time_assignment** assigns a **date_and_time** to a set of one or more **products**.

EXPRESS specification:

```
*)
ENTITY applied_date_and_time_assignment
  SUBTYPE OF (date_and_time_assignment);
  items : SET [1:?] OF date_and_time_item;
END_ENTITY;
(*
```

Attribute definitions:

items: the set of **products** that a **date_and_time** is assigned to.

5.2.3.1.6 applied_date_assignment

An **applied_date_assignment** assigns a **date** to a set of one or more **action_directives**, **change_actions**, **change_items**, and **products**.

EXPRESS specification:

```
*)
ENTITY applied_date_assignment
  SUBTYPE OF (date_assignment);
  items : SET [1:?] OF dated_item;
END_ENTITY;
(*
```

Attribute definitions:

items: the set of **action_directives**, **change_actions**, **change_items**, and **products** that a **date** is assigned to.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **applied_date_assignment** entity:

2. **change_action_requires_date** (see 5.2.4.4);
3. **change_item_requires_creation_date** (see 5.2.4.5).

ISO 10303-227:2005(E)

5.2.3.1.7 applied_document_reference

An **applied_document_reference** assigns a **document** to a set of one or more instances of **analysis_tracing_representation**, **heat_tracing_representation**, **mechanical_component_class**, **mechanical_system**, **plant_arrangement_segment_definition**, **piping_component_class**, **piping_system**, **plant_item_connector**, **plant_line_segment_definition**, **product**, **product_definition**, **product_definition_relationship**, **property_definition**, **representation**, **representation_item**, **site**, **externally_defined_plant_item_definition**, or **material_property**.

EXPRESS specification:

```
*)
ENTITY applied_document_reference
  SUBTYPE OF (document_reference);
  items : SET [1:?] OF document_item;
END_ENTITY;
(*
```

Attribute definitions:

items: the set of instances of **analysis_tracing_representation**, **heat_tracing_representation**, **mechanical_component_class**, **mechanical_system**, **plant_arrangement_segment_definition**, **piping_component_class**, **piping_system**, **plant_item_connector**, **plant_line_segment_definition**, **product**, **product_definition**, **product_definition_relationship**, **property_definition**, **representation**, **representation_item**, **site**, **externally_defined_plant_item_definition**, or **material_property** that is associated with a **document**.

5.2.3.1.8 applied_document_usage_constraint_assignment

An **applied_document_usage_constraint_assignment** assigns a **document_usage_constraint** to a set of one or more instances of **analysis_tracing_representation**, **heat_tracing_representation**, **mechanical_component_class**, **mechanical_system**, **plant_arrangement_segment_definition**, **piping_component_class**, **piping_system**, **plant_item_connector**, **plant_line_segment_definition**, **product**, **product_definition**, **product_definition_relationship**, **property_definition**, **representation**, **representation_item**, **site**, **externally_defined_plant_item_definition**, or **material_property**.

EXPRESS specification:

```
*)
ENTITY applied_document_usage_constraint_assignment
  SUBTYPE OF (document_usage_constraint_assignment);
  items : SET [1:?] OF document_item;
END_ENTITY;
(*
```

Attribute definitions:

items: the set of instances of **analysis_tracing_representation**, **heat_tracing_representation**, **mechanical_component_class**, **mechanical_system**, **plant_arrangement_segment_definition**, **piping_component_class**, **piping_system**, **plant_item_connector**, **plant_line_segment_definition**, **product**, **product_definition**, **product_definition_relationship**, **property_definition**, **representation**,

representation_item, **site**, **externally_defined_plant_item_definition**, or **material_property** that is associated with a **document_usage_constraint**.

5.2.3.1.9 applied_effectivity_assignment

An **applied_effectivity_assignment** assigns an **effectivity** to a set of one or more **product** or **product_definitions**.

EXPRESS specification:

```
*)
ENTITY applied_effectivity_assignment
  SUBTYPE OF (effectivity_assignment);
  items : SET [1:?] OF effectivity_item;
END_ENTITY;
(*
```

Attribute definitions:

items: the set of instances of **product** or **product_definition** to which an effectivity is assigned.

5.2.3.1.10 applied_effectivity_context_assignment

An **applied_effectivity_context_assignment** assigns an **effectivity_context** to designate a set of one or more **product_definitions** as the context for an effectivity.

EXPRESS specification:

```
*)
ENTITY applied_effectivity_context_assignment
  SUBTYPE OF (effectivity_context_assignment);
  items : SET [1:?] OF effectivity_context_item;
END_ENTITY;
(*
```

Attribute definitions:

items: the set of instances of **product_definition** to which an effectivity_context is assigned.

5.2.3.1.11 applied_identification_assignment

An **applied_identification_assignment** assigns an identifier to a set of one or more instances of **document**, **material_property**, **product_definition**, or **shape_aspect**.

EXPRESS specification:

```
*)
ENTITY applied_identification_assignment
  SUBTYPE OF (identification_assignment);
  items : SET [1:?] OF identified_item;
WHERE
```

ISO 10303-227:2005(E)

```
WR1: applied_identification_correlation (SELF);  
END_ENTITY;  
(*
```

Attribute definitions:

items: the set of instances of **product_definition**, **material_property**, or **document** that an identifier is assigned to.

Formal propositions:

WR1: The **applied_identification_correlation** function that correlates roles of identifiers to elements of product data shall be satisfied.

5.2.3.1.12 arrangement_branch_connection

An **arrangement_branch_connection** is a type of **shape_aspect_relationship** that identifies the connection between an arrangement and a branch.

EXPRESS specification:

```
*)  
ENTITY arrangement_branch_connection  
  SUBTYPE OF(shape_aspect_relationship);  
WHERE  
  WR1: SELF.description = 'branch location';  
  WR2: 'PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_SEGMENT_DEFINITION' IN  
    TYPEOF(SELF.relying_shape_aspect.of_shape.definition);  
  WR3: 'PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_SEGMENT_TERMINATION' IN  
    TYPEOF(SELF.related_shape_aspect);  
END_ENTITY;  
(*
```

Formal propositions:

WR1: The value of **arrangement_branch_connection.description** shall be 'branch location'.

WR2: The **product_definition** that the **relying_shape_aspect** of a **arrangement_branch_connection** is related to shall be a **plant_arrangement_segment_definition**.

WR3: The **related_shape_aspect** of a **arrangement_branch_connection** shall be a **plant_arrangement_segment_termination**.

5.2.3.1.13 arrangement_less_mechanical_system

An **arrangement_less_mechanical_system** is a type of **product_definition** that identifies a mechanical system that is not part of an arrangement.

EXPRESS specification:

```
*)  
ENTITY arrangement_less_mechanical_system  
  SUBTYPE OF(product_definition);  
END_ENTITY;
```


(*)

5.2.3.1.14 arrangement_load

An **arrangement_load** is a subtype of **property_definition** that defines the power performance characteristics under a specific circumstance.

EXPRESS specification:

```

*)
ENTITY arrangement_load
  SUBTYPE OF(property_definition);
WHERE
  WR1 : 'PLANT_SPATIAL_CONFIGURATION.DESIGN_ARRANGEMENT_PERFORMANCE' IN
        TYPEOF(SELF.definition);
  WR2 : SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
        (pdr.used_representation.name = 'arrangement load characteristics'))
        = 1;
  WR3 : SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
        (pdr.used_representation.name = 'arrangement load characteristics')) |
        NOT (SIZEOF(spc.used_representation.items) >= 1))) = 0;
  WR4 : SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
        (pdr.used_representation.name = 'arrangement load characteristics')) |
        NOT (SIZEOF(QUERY (it <* spc.used_representation.items |
        ('PLANT_SPATIAL_CONFIGURATION.DESCRPTIVE_REPRESENTATION_ITEM' IN
        TYPEOF(it)) AND (it.name = 'constituent loads')) = 1))) = 0;
END_ENTITY;
(*)

```

Formal propositions:

WR1: A **load_case** shall define a property of a design_arrangement_performance.

WR2: A **load_case** shall have exactly one **representation** with the name of 'arrangement load characteristics'.

WR3: The representation of the **load_case** with the name of 'arrangement load characteristics' shall have at least one **representation_item**.

WR4: The representation of the **load_case** with the name of 'arrangement load characteristics' shall have exactly one **representation_item** that is of type **descriptive_representation_item** with a name of 'constituent loads'.

5.2.3.1.15 arrangement_plant_item_branch_connection

An **arrangement_plant_item_branch_connection** is a type of **shape_aspect_relationship** that identifies the connection between an arrangement and a plant item connector that branches from the arrangement.

EXPRESS specification:

ISO 10303-227:2005(E)

```
*)  
ENTITY arrangement_plant_item_branch_connection  
SUBTYPE OF(shape_aspect_relationship);  
END_ENTITY;  
(*
```

5.2.3.1.16 arrangement_plant_item_connection

An **arrangement_plant_item_connection** is a type of **shape_aspect_relationship** that identifies the connection between an arrangement segment and a plant item connector.

EXPRESS specification:

```
*)  
ENTITY arrangement_plant_item_connection  
SUBTYPE OF(shape_aspect_relationship);  
WHERE  
  WR1 : 'PLANT_SPATIAL_CONFIGURATION.' +  
        'PLANT_ARRANGEMENT_SEGMENT_TERMINATION' IN  
        TYPEOF(SELF.relying_shape_aspect);  
  WR2 : 'PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTOR' IN  
        TYPEOF(SELF.related_shape_aspect);  
  WR3 : SELF\shape_aspect_relationship.  
        related_shape_aspect.of_shape\property_definition.  
        definition\product_definition.frame_of_reference\  
        application_context_element.name = 'physical occurrence';  
END_ENTITY;  
(*
```

Formal propositions:

WR1: The **relying_shape_aspect** of an **arrangement_plant_item_connection** shall be a **plant_arrangement_segment_termination**.

WR2: The **related_shape_aspect** of an **arrangement_plant_item_connection** shall be a **plant_item_connector**.

WR3: The **product_definition** that the **related_shape_aspect** of an **arrangement_plant_item_connection** is related to shall have a context with the name 'physical occurrence'.

5.2.3.1.17 arrangement_termination_connection

An **arrangement_termination_connection** is a type of **shape_aspect_relationship** that identifies a connection between two arrangement segment terminations, or between an arrangement segment termination and a connection node.

EXPRESS specification:

```
*)  
ENTITY arrangement_termination_connection  
SUBTYPE OF(shape_aspect_relationship);  
WHERE  
  WR1 : SIZEOF(TYPEOF(SELF.relying_shape_aspect) *  
            ['PLANT_SPATIAL_CONFIGURATION.CONNECTION_NODE',
```

```

    'PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_SEGMENT_TERMINATION'
])
    >= 1;
    WR2 :
    'PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_SEGMENT_TERMINATION' IN
    TYPEOF(SELF.related_shape_aspect);
    END_ENTITY;
    (*

```

Formal propositions:

WR1: The **relating_shape_aspect** of an **arrangement_termination_connection** shall be a **connection_node** or a **plant_arrangement_segment_termination**.

WR2: The **related_shape_aspect** of an **arrangement_termination_connection** shall be a **plant_arrangement_segment_termination**.

5.2.3.1.18 blank_fitting_class

A **blank_fitting_class** is a type of **group** that classifies the items that are assigned to it as blank fittings.

EXPRESS specification:

```

*)
ENTITY blank_fitting_class
    SUBTYPE OF (group);
WHERE
    WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
        'ASSIGNED_CLASS') |
        'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
        TYPEOF (ca)) |
        NOT (SIZEOF (QUERY (it <* aca.items |
            NOT ('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN
            TYPEOF (it)))) = 0))) = 0;
    WR2: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
        'ASSIGNED_CLASS') |
        'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
        TYPEOF (ca)) |
        NOT (SIZEOF (QUERY (pcd <* QUERY (it <* aca.items |
            'PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN
            TYPEOF (it)) |
            NOT (SIZEOF (QUERY (aca1 <* USEDIN (pcd.formation.of_product,
                'PLANT_SPATIAL_CONFIGURATION.' +
                'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
                class_in_tree (aca1.assigned_class, 'blank')))) = 1)))) = 0
        ))) = 0;
    END_ENTITY;
    (*

```

ISO 10303-227:2005(E)

Formal propositions:

WR1: A **blank_fitting_class** shall classify items of type **pipng_component_definition**.

WR2: A **blank_fitting_class** shall classify items of type **pipng_component_definition** that are a definition of a **product** that is classified as a 'blank'.

5.2.3.1.19 bolt_and_nut_component_class

A **bolt_and_nut_component_class** is a type of **group** that classifies the items that are assigned to it as bolts, nuts, or washers.

EXPRESS specification:

```
*)
ENTITY bolt_and_nut_component_class
  SUBTYPE OF (group);
WHERE
  WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (it <* aca.items |
    NOT ('PLANT_SPATIAL_CONFIGURATION.BOLT_AND_NUT_COMPONENT_DEFINITION'
    IN TYPEOF (it)))) = 0))) = 0;
  WR2: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (pcd <* QUERY (it <* aca.items |
    'PLANT_SPATIAL_CONFIGURATION.BOLT_AND_NUT_COMPONENT_DEFINITION' IN
    TYPEOF (it)) |
    NOT (SIZEOF (QUERY (aca1 <* USEDIN (pcd.formation.of_product,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
    class_in_tree (aca1.assigned_class,
    'bolt and nut component')) = 1)))) = 0
    ))) = 0;
END_ENTITY;
(*
```

Formal propositions:

WR1: A **bolt_and_nut_component_class** shall classify items of type **bolt_and_nut_component_definition**.

WR2: A **bolt_and_nut_component_class** shall classify items of type **pipng_component_definition** that are a definition of a **product** that is classified as a 'bolt and nut component'.

5.2.3.1.20 bolt_and_nut_component_definition

A **bolt_and_nut_component_definition** is a type of **product_definition** that defines a bolt and nut component.

EXPRESS specification

```
*)
ENTITY bolt_and_nut_component_definition
  SUBTYPE OF (product_definition);
END_ENTITY;
(*
```

5.2.3.1.21 bolt_and_nut_set_definition

A **bolt_and_nut_set_definition** is a type of **product_definition** that defines a bolt and nut set.

EXPRESS specification

```
*)
ENTITY bolt_and_nut_set_definition
  SUBTYPE OF (product_definition);
END_ENTITY;
(*
```

5.2.3.1.22 cableway_component_class

A **cableway_component_class** is a type of **group** that classifies the items that are assigned to it as cableway components. The name of the **cableway_component_class** further classifies the assigned items.

EXPRESS specification:

```
*)
ENTITY cableway_component_class
  SUBTYPE OF (group);
WHERE
  WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'CLASSIFICATION_ASSIGNMENT.ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (it <* aca.items |
    NOT ('PLANT_SPATIAL_CONFIGURATION.CABLEWAY_COMPONENT_DEFINITION' IN
    TYPEOF (it)))) = 0))) = 0;
  WR2: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (pcd <* QUERY (it <* aca.items |
    'PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN
    TYPEOF (it)) |
    NOT (SIZEOF (QUERY (aca1 <* USEDIN (pcd.formation.of_product,
```

ISO 10303-227:2005(E)

```
'PLANT_SPATIAL_CONFIGURATION.' +
'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
class_in_tree (aca1.assigned_class, 'cableway component')) = 1)))
= 0))) = 0;
END_ENTITY;
(*
```

Formal propositions:

WR1: A **cableway_component_class** shall classify items of type **cableway_component_definition**.

WR2: A **cableway_component_class** shall classify items of type **cableway_component_definition** that are a definition of a **product** that is classified as a 'cableway component'.

5.2.3.1.23 cableway_component_definition

A **cableway_component_definition** is a type of **product_definition** that defines a cableway component.

EXPRESS specification

```
*)
ENTITY cableway_component_definition
  SUBTYPE OF (product_definition);
END_ENTITY;
(*
```

5.2.3.1.24 cableway_connector_class

A **cableway_connector_class** is a type of **group** that classifies the items that are assigned to it as being cableway connectors.

EXPRESS specification:

```
*)
ENTITY cableway_connector_class
  SUBTYPE OF (group);
END_ENTITY;
(*
```

5.2.3.1.25 cableway_system

A **cableway_system** is a type of **product_definition** that identifies a system ... *(to be completed when corresponding clause 4.2 definition is available).*

EXPRESS specification:

```
*)
ENTITY cableway_system
  SUBTYPE OF (product_definition);
WHERE
  WR1: SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
  'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
  ('PLANT_SPATIAL_CONFIGURATION.PLANT' IN TYPEOF
```

```

        (pdr.relatng_product_definition.formation.of_product)) AND
        (pdr.relatng_product_definition.frame_of_reference.name =
        'functional occurrence')) = 1;
END_ENTITY;
(*

```

Formal propositions:

WR1: The **cableway_system** shall be related to exactly one **product_definition** that is the definition of a plant and has a context of 'functional occurrence'.

5.2.3.1.26 catalogue

A **catalogue** is a type of **document** defined as an **external_source** that records items whose characteristics are standardized.

NOTE Whether the catalogue is a paper-based or digitally-based catalogue is indicated by the value of the attribute `document_type.product_data_type`. `document_type` is referenced the attribute kind inherited from `document`, a supertype of `catalogue`.

EXPRESS specification:

```

*)
ENTITY catalogue
  SUBTYPE OF (document, external_source);
END_ENTITY;
(*

```

5.2.3.1.27 catalogue_connector

A **catalogue_connector** is a type of **shape_aspect** that is externally defined and identifies a connector whose characteristics are standardised in a library or catalogue.

EXPRESS specification:

```

*)
ENTITY catalogue_connector
  SUBTYPE OF (shape_aspect, externally_defined_item);
WHERE
  WR1: 'PLANT_SPATIAL_CONFIGURATION.CHARACTERIZED_OBJECT' IN
      TYPEOF (SELF.of_shape);
  WR2: 'PLANT_SPATIAL_CONFIGURATION.CATALOGUE' IN TYPEOF (SELF.source);
END_ENTITY;
(*

```

Formal propositions:

WR1: The **catalogue_connector** shall be an aspect of the shape of a **characterized_object**.

WR2: The **catalogue_connector** shall have a **catalogue** as its source.

ISO 10303-227:2005(E)

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **catalogue_connector** entity:

4. **subtype_mandatory_externally_defined_item** (see 5.2.4.16).

5.2.3.1.28 catalogue_item

A **catalogue_item** is an **externally_defined_plant_item_definition** that identifies an item whose characteristics are standardized and have been recorded in a library or catalogue.

EXPRESS specification:

```
*)
ENTITY catalogue_item
  SUBTYPE OF (externally_defined_plant_item_definition);
WHERE
  WR1: 'PLANT_SPATIAL_CONFIGURATION.CATALOGUE' IN TYPEOF (SELF.source);
  WR2: SELF.frame_of_reference.name = 'physical definition';
END_ENTITY;
(*
```

Formal propositions:

WR1: A **catalogue_item** shall have a **catalogue** as the **external_source**.

WR2: A **catalogue_item** shall have a **frame_of_reference_name** of 'catalogue definition'.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **catalogue_item** entity:

5. **application_context_requires_ap_definition** (see 5.2.4.1);
6. **dependent_instantiable_application_context** (see 5.2.4.9);
7. **dependent_instantiable_product_definition_context** (see 5.2.4.11);
8. **product_definition_context_name_constraint** (see 5.2.4.13);
9. **subtype_mandatory_externally_defined_item** (see 5.2.4.16).

5.2.3.1.29 change_action

A **change_action** is a type of **directed_action** that identifies a change, or a request for a change.

EXPRESS specification:

```
*)
ENTITY change_action
  SUBTYPE OF (directed_action);
WHERE
  WR1: SIZEOF (QUERY (ca <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'ACTION_ASSIGNMENT.ASSIGNED_ACTION') |
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PLANT_SPATIAL_CONFIGURATION_CHANGE_ASSIGNMENT' IN
    TYPEOF (ca))) >= 1;
```



```

WR2: SIZEOF (QUERY (ar <* SELF\directed_action.directive.requests |
    NOT (SIZEOF (USEDIN (ar, 'PLANT_SPATIAL_CONFIGURATION.' +
        'ACTION_REQUEST_SOLUTION.REQUEST')) = 1))) = 0;
WR3: SIZEOF (USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.ACTION_STATUS.' +
    'ASSIGNED_ACTION')) = 1;
END_ENTITY;
(*

```

Formal propositions:

WR1: A **change_action** shall be assigned by at least one **plant_spatial_configuration_change_assignment**.

WR2: Each **versioned_action_request** that is referenced by a **change_action** shall have exactly one **action_request_solution**.

WR3: Each **change_action** shall be assigned exactly one **action_status**.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **change_action** entity:

10. **change_action_requires_date** (see 5.2.4.4);

5.2.3.1.30 change_item_id_assignment

A **change_item_id_assignment** assigns a name to a set of one or more instances selected by **change_item**.

EXPRESS specification:

```

*)
ENTITY change_item_id_assignment
    SUBTYPE OF (name_assignment);
    items : SET [1:?] OF change_item;
END_ENTITY;
(*

```

Attribute definitions:

items: the set of instances selected by **change_item** to which a name is assigned.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **change_item_id_assignment** entity:

11. **change_item_requires_id** (see 5.2.4.6).

ISO 10303-227:2005(E)

5.2.3.1.31 change_life_cycle_stage_assignment

A **change_life_cycle_stage_assignment** is a type of **group_assignment** that classifies a **directed_action** with a life cycle stage class.

EXPRESS specification:

```
*)
ENTITY change_life_cycle_stage_assignment
  SUBTYPE OF (group_assignment);
  items : SET [1:?] OF change_life_cycle_item;
END_ENTITY;
(*
```

Attribute definitions:

items: One or more **directed_action** that is being classified according to a class of life cycle stage by the assigned_group.

5.2.3.1.32 clamp_component_definition

A **clamp_component_definition** is a type of **product_definition** that defines a clamp used to make a connection between plant items.

EXPRESS specification

```
*)
ENTITY clamp_component_definition
  SUBTYPE OF (product_definition);
END_ENTITY;
(*
```

5.2.3.1.33 clamp_set_definition

A **clamp_set_definition** is a type of **product_definition** that defines a collection of clamp components.

EXPRESS specification

```
*)
ENTITY clamp_set_definition
  SUBTYPE OF (product_definition);
END_ENTITY;
(*
```

5.2.3.1.34 connection_functional_class

A **connection_functional_class** is a type of **group** that classifies items that are assigned to it as belonging to a common functional class of connections.

EXPRESS specification:

```

*)
ENTITY connection_functional_class
  SUBTYPE OF (group);
END_ENTITY;
( *

```

5.2.3.1.35 connection_material_definition

A **connection_material_definition** is a type of **product_definition** that defines a connection material.

EXPRESS specification

```

*)
ENTITY connection_material_definition
  SUBTYPE OF (product_definition);
END_ENTITY;
( *

```

5.2.3.1.36 connection_motion_class

A **connection_motion_class** is a type of **group** that classifies the connection motion of the items that are assigned to it.

EXPRESS specification:

```

*)
ENTITY connection_motion_class
  SUBTYPE OF (group);
WHERE
  WR1: SELF.name IN ['flexible', 'locked orientation'];
END_ENTITY;
( *

```

Formal propositions:

WR1: The name of the **connection_motion_class** shall be 'flexible' or 'locked orientation'.

5.2.3.1.37 connection_node

A **connection_node** is a type of **shape_aspect** that is either, part of the definition of a piping system, and connects more than one **line_termination_connections**, or is part of the definition of a mechanical system, and connects more than one **arrangement_termination_connections**. A **connection_node** shall be used for a connection that involves the termination of more than two lines or arrangements at a single point. The **connection_node** is either the junction for each of the line to line terminations that are involved in the line to line connection, or the junction for each of the arrangement to arrangement terminations that are involved in the arrangement to arrangement connection.

A **connection_node** is a type of **shape_aspect** that is part of the definition of a piping system, and connects more than one **line_termination_connections**. A **connection_node** shall be used for a

ISO 10303-227:2005(E)

connection that involves the termination of more than two lines at a single point. The **connection_node** is the junction for each of the line to line terminations that are involved in the line to line connection.

NOTE Two or more line terminations can be connected by a line connection. The most common case is that two line terminations are connected by a line connection, but there are branches where more than two lines are terminated at a single line connection. For the case of two lines being terminated, the line to line connection is simply a connection relationship between two line terminations. For the more than two, there needs to be a shape_-aspect that models the connection point at which all of the line terminations are connected. This connection point is represented by the connection_node. The connection_node represents the logical connection point for all line terminations within a single line connection when there are more than two lines being connected in a single connection.

EXPRESS specification:

```
*)
ENTITY connection_node
  SUBTYPE OF (shape_aspect);
WHERE
  WR1: ('PLANT_SPATIAL_CONFIGURATION.PIPING_SYSTEM' IN TYPEOF
        (SELF.of_shape.definition)) AND
        (SIZEOF(QUERY (sar <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT_RELATIONSHIP.' +
        'RELATING_SHAPE_ASPECT') |
        ('PLANT_SPATIAL_CONFIGURATION.LINE_TERMINATION_CONNECTION'
        IN TYPEOF(sar)))) >= 2) XOR
        ('PLANT_SPATIAL_CONFIGURATION.MECHANICAL_SYSTEM' IN TYPEOF
        (SELF.of_shape.definition)) AND
        (SIZEOF(QUERY (sar <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT_RELATIONSHIP.' +
        'RELATING_SHAPE_ASPECT') |
        ('PLANT_SPATIAL_CONFIGURATION.ARRANGEMENT_TERMINATION_CONNECTION'
        IN TYPEOF(sar)))) >= 2);
END_ENTITY;
(*
```

Formal propositions:

WR1: A **connection_node** shall be an aspect of the definition of the shape of a **pipng_system** and shall be the **relating_shape_aspect** for at least two **line_termination_connections**, or a **connection_node** shall be an aspect of the definition of the shape of a **mechanical_system** and shall be the **relating_shape_aspect** for at least two **arrangement_termination_connections**.

5.2.3.1.38 connector_end_type_class

A **connector_end_type_class** is a type of **group** that classifies the end type of the connectors that are assigned to it.

EXPRESS specification:

```
*)
ENTITY connector_end_type_class
  SUBTYPE OF (group);
END_ENTITY;
```

(*

5.2.3.1.39 descriptive_colour

A **descriptive_colour** is a type of **descriptive_representation_item** that identifies a colour.

EXPRESS specification:

```
*)
ENTITY descriptive_colour
  SUBTYPE OF (colour, descriptive_representation_item);
END_ENTITY;
(*
```

5.2.3.1.40 design_arrangement_performance

A **design_arrangement_performance** is a type of **property_definition** and **characterized_object** that identifies the performance characteristics of a mechanical system.

EXPRESS specification:

```
*)
ENTITY design_arrangement_performance
  SUBTYPE OF (property_definition, characterized_object);
WHERE
  WR1 : SIZEOF(QUERY (pd <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION.DEFINITION') |
    ('PLANT_SPATIAL_CONFIGURATION.ARRANGEMENT_LOAD' IN TYPEOF(pd)))) >=
  1;
  WR2 : SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
    (pdr.used_representation.name =
    'design arrangement characteristics')) = 1;
  WR3 : SIZEOF(QUERY (sfc <* QUERY (pdr <* USEDIN(SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
    (pdr.used_representation.name =
    'design arrangement characteristics')) |
    NOT (SIZEOF(sfc.used_representation.items) >= 1))) = 0;
  WR4 : SIZEOF(QUERY (sfc <* QUERY (pdr <* USEDIN(SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
    (pdr.used_representation.name =
    'design arrangement characteristics')) |
    NOT (SIZEOF(QUERY (it <* sfc.used_representation.items |
    ('PLANT_SPATIAL_CONFIGURATION.DESRIPTIVE_REPRESENTATION_ITEM' IN
    TYPEOF(it)) AND (it.name = 'arrangement data reference')) <= 1)))
    = 0;
END_ENTITY;
(*
```

Formal propositions:

WR1: A **design_arrangement_performance** shall have at least one **arrangement_load**.

ISO 10303-227:2005(E)

WR2: A **design_arrangement_performance** shall have exactly one representation with the **name** of 'design arrangement characteristics'.

WR3: The representation of the **design_arrangement_performance** with the **name** of 'design arrangement characteristics' shall have at least two **representation_items**.

WR4: The representation of the **design_arrangement_performance** with the **name** of 'design arrangement characteristics' shall have at most one **representation_item** that is of type **descriptive_representation_item** with a name of 'arrangement data reference'.

5.2.3.1.41 design_project

A **design_project** is a type of **organization** that identifies a task with a defined scope and purpose.

EXPRESS specification:

```
*)
ENTITY design_project
  SUBTYPE OF (organization);
WHERE
  WR1: SIZEOF (USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'ORGANIZATION_ASSIGNMENT.ASSIGNED_ORGANIZATION')) >= 1;
END_ENTITY;
(*
```

Formal propositions:

WR1: Each **design_project** shall be assigned to product data by at least one **organization_assignment**.

5.2.3.1.42 design_project_assignment

A **design_project_assignment** assigns a **product_definition** to a **design_project**.

EXPRESS specification:

```
*)
ENTITY design_project_assignment
  SUBTYPE OF (organization_assignment);
  items : SET [1:?] OF design_project_item;
WHERE
  WR1: 'PLANT_SPATIAL_CONFIGURATION.DESIGN_PROJECT' IN
    TYPEOF (SELF.assigned_organization);
END_ENTITY;
(*
```

Attribute definitions:

items: the set of **product_definitions** that are assigned to a **design_project**.

Formal propositions:

WR1: The **organization** that is assigned by a **design_project_assignment** shall be a **design_project**.

5.2.3.1.43 ducting_system

A **ducting_system** is a type of **product_definition** that identifies a system that controls the temperature, humidity, cleanliness, and circulation of environmental air.

EXPRESS specification:

```

*)
ENTITY ducting_system
  SUBTYPE OF (product_definition);
WHERE
  WR1: SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
    ('PLANT_SPATIAL_CONFIGURATION.PLANT' IN TYPEOF
    (pdr.relating_product_definition.formation.of_product)) AND
    (pdr.relating_product_definition.frame_of_reference.name =
    'functional_occurrence')))) = 1;
END_ENTITY;
(*

```

Formal propositions:

WR1: The **ducting_system** shall be related to exactly one **product_definition** that is the definition of a plant and has a context of 'functional occurrence'.

5.2.3.1.44 elbow_fitting_class

An **elbow_fitting_class** is a type of group that classifies the items that are assigned to it as elbow fittings. The name of the **elbow_fitting_class** further classifies the assigned items.

EXPRESS specification:

```

*)
ENTITY elbow_fitting_class
  SUBTYPE OF (group);
WHERE
  WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'CLASSIFICATION_ASSIGNMENT.ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (it <* aca.items |
    NOT ('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN
    TYPEOF (it)))) = 0))) = 0;
  WR2: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN

```

ISO 10303-227:2005(E)

```
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (pcd <* QUERY (it <* aca.items |
    'PLANT_SPATIAL_CONFIGURATIONS.PIPING_COMPONENT_DEFINITION' IN
    TYPEOF (it)) |
    NOT (SIZEOF (QUERY (acal <* USEDIN (pcd.formation.of_product,
    'PLANT_SPATIAL_CONFIGURATIONS.' +
    'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
    class_in_tree (acal.assigned_class, 'elbow')))) = 1))) = 0)))
    = 0;
END_ENTITY;
(*
```

Formal propositions:

WR1: An **elbow_fitting_class** shall classify items of type **pipng_component_definition**.

WR2: An **elbow_fitting_class** shall classify items of type **pipng_component_definition** that are a definition of a **product** that is classified as a 'elbow'.

5.2.3.1.45 electrical_connector_class

An **electrical_connector_class** is a type of **group** that classifies the items that are assigned to it as being electrical connectors. The name of the **electrical_connector_class** further classifies the assigned items.

EXPRESS specification:

```
*)
ENTITY electrical_connector_class
    SUBTYPE OF (group);
END_ENTITY;
(*
```

5.2.3.1.46 electrical_system

An **electrical_system** is a type of **product_definition** that identifies a system of wiring, switches, relays and other equipment associated with receiving and distributing electrical power.

EXPRESS specification:

```
*)
ENTITY electrical_system
    SUBTYPE OF (product_definition);
WHERE
    WR1: SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
    'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
    ('PLANT_SPATIAL_CONFIGURATIONS.PLANT' IN TYPEOF
    (pdr.relatng_product_definition.formation.of_product)) AND
    (pdr.relatng_product_definition.frame_of_reference.name =
    'functional occurrence')))) = 1;
END_ENTITY;
(*
```


Formal propositions:

WR1: The **electrical_system** shall be related to exactly one **product_definition** that is the definition of a plant and has a context of 'functional occurrence'.

5.2.3.1.47 externally_defined_class

An **externally_defined_class** is a type of **group** that classifies an item and is defined by reference to an external source.

NOTE An external source can be an ISO 13584 classification table [13]. This source should be specified as a known_source (see 5.2.3.1.65) and referenced with externally_defined_item.source.

EXPRESS specification:

```

*)
ENTITY externally_defined_class
  SUBTYPE OF (group, externally_defined_item);
WHERE
  WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (it <* aca.items |
    NOT ((SIZEOF (TYPEOF (it) *
    ['PLANT_SPATIAL_CONFIGURATION.ELECTRICAL_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.DUCTING_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.INSTRUMENTATION_AND_CONTROL_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.MECHANICAL_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.MECHANICAL_COMPONENT_DEFINITION',
    'PLANT_SPATIAL_CONFIGURATION.PIPING_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.PLANT',
    'PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTOR',
    'PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION',
    'PLANT_SPATIAL_CONFIGURATION.STRUCTURAL_SYSTEM']) = 1) OR
    (('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION'
    IN TYPEOF (it)) AND
    (SIZEOF (QUERY (pc <*
    it.formation.of_product.frame_of_reference |
    pc.discipline_type = 'process plant')) = 1)))))) = 0))) = 0;
END_ENTITY;
(*

```

Formal proposition:

WR1: An **externally_defined_class** shall classify either an **electrical_system**, **ducting_system**, **instrumentation_and_control_system**, **mechanical_system**, **mechanical_component_definition**, **pipng_system**, **plant**, **plant_item_connector**, **pipng_component_definition**, **structural_system**, or **product_definition** that is the definition of a plant item..

ISO 10303-227:2005(E)

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **externally_defined_class** entity:

12. **subtype_mandatory_externally_defined_item** (see 5.2.4.16);
13. **subtype_mandatory_pre_defined_item** (see 5.2.4.17).

5.2.3.1.48 externally_defined_document

An **externally_defined_document** is a type of **document** that is defined by reference to an external source.

EXPRESS specification:

```
* )
ENTITY externally_defined_document
  SUBTYPE OF (document, externally_defined_item);
END_ENTITY;
( *
```

5.2.3.1.49 externally_defined_plant_item_definition

An **externally_defined_plant_item_definition** is a type of **product_definition** that identifies an item or piece of equipment that may be used as a component of a plant and is defined by reference to an external source.

NOTE An external source can be a ISO 13584 library [13]. This source should be specified as a **known_source** (see 5.2.3.1.65) and referenced with **externally_defined_item.source**.

EXPRESS specification:

```
* )
ENTITY externally_defined_plant_item_definition
  SUBTYPE OF (product_definition, externally_defined_item);
END_ENTITY;
( *
```

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **externally_defined_plant_item_definition** entity:

14. **application_context_requires_ap_definition** (see 5.2.4.1);
15. **dependent_instantiable_application_context** (see 5.2.4.9);
16. **dependent_instantiable_product_context** (see 5.2.4.10);
17. **dependent_instantiable_product_definition_context** (see 5.2.4.11);
18. **product_context_discipline_type_constraint** (see 5.2.4.12);
19. **product_definition_context_name_constraint** (see 5.2.4.13);
20. **subtype_mandatory_externally_defined_item** (see 5.2.4.16);
21. **subtype_mandatory_pre_defined_item** (see 5.2.4.17).

5.2.3.1.50 externally_defined_representation_item

An **externally_defined_representation_item** is a type of **representation_item** that has meaning defined in a source outside of this part of ISO 10303.

EXPRESS specification:

```
*)
ENTITY externally_defined_representation_item
  SUBTYPE OF (representation_item, externally_defined_item);
END_ENTITY;
(*
```

5.2.3.1.51 flange_fitting_class

A **flange_fitting_class** is a type of **group** that classifies the items that are assigned to it as flange fittings.

EXPRESS specification:

```
*)
ENTITY flange_fitting_class
  SUBTYPE OF (group);
WHERE
  WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATIONS.' +
    'CLASSIFICATION_ASSIGNMENT.ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATIONS.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (it <* aca.items |
    NOT ('PLANT_SPATIAL_CONFIGURATIONS.PIPING_COMPONENT_DEFINITION' IN
    TYPEOF (it)))) = 0))) = 0;
  WR2: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATIONS.' +
    'CLASSIFICATION_ASSIGNMENT.ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATIONS.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (pcd <* QUERY (it <* aca.items |
    'PLANT_SPATIAL_CONFIGURATIONS.PIPING_COMPONENT_DEFINITION' IN
    TYPEOF (it)) |
    NOT (SIZEOF (QUERY (aca1 <* USEDIN (pcd.formation.of_product,
    'PLANT_SPATIAL_CONFIGURATIONS.' +
    'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
    class_in_tree (aca1.assigned_class, 'flange')) = 1))) = 0)))
    = 0;
END_ENTITY;
(*
```

Formal propositions:

WR1: A **flange_fitting_class** shall classify items of type **pipng_component_definition**.

ISO 10303-227:2005(E)

WR2: A **flange_fitting_class** shall classify items of type **pipng_component_definition** that are a definition of a **product** that is categorized as a 'flange'.

5.2.3.1.52 flange_fitting_neck_type_class

A **flange_fitting_neck_type_class** is a type of **group** that classifies the neck type of the flange fittings items that are assigned to it.

EXPRESS specification:

```
*)
ENTITY flange_fitting_neck_type_class
  SUBTYPE OF (group);
WHERE
  WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (it <* aca.items |
    NOT ('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN
    TYPEOF (it)))) = 0))) = 0;
  WR2: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (pcd <* QUERY (it <* aca.items |
    ('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN
    TYPEOF (it)))) |
    NOT (SIZEOF (QUERY (acal <* USEDIN (pcd.formation.of_product,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
    class_in_tree (acal.assigned_class, 'flange'))
    = 1))) = 0))) = 0;
END_ENTITY;
(*
```

Formal propositions:

WR1: A **flange_fitting_neck_type_classification** shall classify items of type **pipng_component_definition**.

WR2: A **flange_fitting_neck_type_classification** shall classify items of type **pipng_component_definition** that are a definition of a **product** that is categorized as a 'flange'.

5.2.3.1.53 heat_tracing_representation

A **heat_tracing_representation** is a type of **representation** that represents the means utilized to impart a temperature increase by an external wrapping or coiling.

EXPRESS specification:

```

*)
ENTITY heat_tracing_representation
  SUBTYPE OF (representation);
END_ENTITY;
( *

```

5.2.3.1.54 hvac_branch_connection

An **hvac_branch_connection** is a type of **shape_aspect_relationship** that identifies the connection between an HVAC section and a branch.

EXPRESS specification:

```

*)
ENTITY hvac_branch_connection
  SUBTYPE OF (shape_aspect_relationship);
WHERE
  WR1: SELF.description = 'branch location';
  WR2: 'PLANT_SPATIAL_CONFIGURATION.HVAC_SECTION_DEFINITION'
      IN TYPEOF (SELF.relating_shape_aspect.of_shape.definition);
  WR3: 'PLANT_SPATIAL_CONFIGURATION.HVAC_SECTION_TERMINATION'
      IN TYPEOF (SELF.related_shape_aspect);
END_ENTITY;
( *

```

Formal propositions:

WR1: The value of **hvac_branch_connection.description** shall be 'branch location'.

WR2: The **product_definition** that the **relating_shape_aspect** of an **hvac_branch_connection** is related to shall be an **hvac_section_definition**.

WR3: The **related_shape_aspect** of an **hvac_branch_connection** shall be an **hvac_section_termination**.

5.2.3.1.55 hvac_component_definition

An **hvac_component_definition** is a type of **product_definition** that defines an HVAC component.

EXPRESS specification

```

*)
ENTITY hvac_component_definition
  SUBTYPE OF (product_definition);
END_ENTITY;
( *

```

ISO 10303-227:2005(E)

5.2.3.1.56 hvac_connector

An **hvac_connector** is a type of **shape_aspect** that identifies a feature of a plant item that is designed to connect to another connector.

EXPRESS specification:

```
*)
ENTITY hvac_connector
  SUBTYPE OF(shape_aspect);
WHERE
  WR1: SELF\shape_aspect.of_shape\property_definition.
        definition\product_definition.
        frame_of_reference\application_context_element.name IN
        ['functional definition', 'physical definition',
         'functional occurrence', 'physical occurrence'];
  WR2: (NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION') |
        pd.name = 'hvac service characteristics')) >= 1)) OR
        (SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION') |
        pd.name = 'hvac service characteristics') |
        NOT (SIZEOF (QUERY (pdr <* USEDIN (sc,
        'PLANT_SPATIAL_CONFIGURATIONS.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
        pdr.used_representation.name =
        'design service characteristics')) = 1))) = 0);
  WR3: (NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION') |
        (pd.name = 'hvac service characteristics') )) >= 1)) OR
        (SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION') |
        pd.name = 'hvac service characteristics') |
        NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
        'PLANT_SPATIAL_CONFIGURATIONS.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
        pdr.used_representation.name = 'design service characteristics') |
        SIZEOF (dsc.used_representation.items) >= 2)) = 1))) = 0);
  WR4: ((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION') |
        pd.name = 'hvac service characteristics')) >= 1)) OR
        (SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION') |
        pd.name = 'hvac service characteristics') |
        NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
        'PLANT_SPATIAL_CONFIGURATIONS.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
        pdr.used_representation.name = 'design service characteristics') |
        {1 <= SIZEOF (QUERY (it <* dsc.used_representation.items |
        ('PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM' IN
        TYPEOF (it)) AND
        (it.name IN ['pressure', 'minimum pressure',
        'maximum pressure']))) <= 2}))) = 1))) = 0));
```

```

WR5: ((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'hvac service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'hvac service characteristics') |
NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'design service characteristics') |
SIZEOF (QUERY (it <* dsc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'pressure')))) <= 1)) = 1))) = 0));

WR6: ((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'hvac service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'hvac service characteristics') |
NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'design service characteristics') |
SIZEOF (QUERY (it <* dsc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'minimum pressure')))) <= 1)) = 1))) = 0));

WR7: ((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'hvac service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'hvac service characteristics') |
NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'design service characteristics') |
SIZEOF (QUERY (it <* dsc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'maximum pressure')))) <= 1)) = 1))) = 0));

WR8: ((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'hvac service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'hvac service characteristics') |
NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'design service characteristics') |
{1 <= SIZEOF (QUERY (it <* dsc.used_representation.items |
(SIZEOF (TYPEOF (it) *

```

ISO 10303-227:2005(E)

```
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']] = 2) AND
(it.name IN ['temperature', 'minimum temperature',
'maximum temperature']))) <= 2})) = 1))) = 0));
WR9: ((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'hvac service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'hvac service characteristics') |
NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'design service characteristics') |
SIZEOF (QUERY (it <* dsc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']] = 2) AND
(it.name = 'temperature')) <= 1)) = 1))) = 0));
WR10: ((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'hvac service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'hvac service characteristics') |
NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'design service characteristics') |
SIZEOF (QUERY (it <* dsc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']] = 2) AND
(it.name = 'minimum temperature')) <= 1)) = 1))) = 0));
WR11: ((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'hvac service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'hvac service characteristics') |
NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'design service characteristics') |
SIZEOF (QUERY (it <* dsc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']] = 2) AND
(it.name = 'maximum temperature')) <= 1)) = 1))) = 0));
WR12: (NOT (SELF\shape_aspect.of_shape\property_definition.
```



```

definition\product_definition.
frame_of_reference\application_context_element.name IN
['functional definition', 'functional occurrence']) OR
(SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
'PLANT_SPATIAL_CONFIGURATION.SHAPE_REPRESENTATION' IN
TYPEOF (pdr.used_representation))) = 0);
END_ENTITY;
(*

```

Formal propositions:

WR1: The **application_context_element** that applies to an **hvac_connector** (as its **product_definition_context**) shall have the name 'functional occurrence'.

WR2: If the **hvac_connector** has a **property_definition** with a name of 'hvac service characteristics', the **property_definition** shall have exactly one **representation** with the name of 'design service characteristics'.

WR3: If the **hvac_connector** has a **property_definition** with a name of 'hvac service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has at least two **representation_items**.

WR4: If the **hvac_connector** has a **property_definition** with a name of 'hvac service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has one or two **representation_items** of type **measure_representation_item** with a name of 'pressure', 'minimum pressure', or 'maximum pressure'.

WR5: If the **hvac_connector** has a **property_definition** with a name of 'hvac service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has at most one **representation_item** of type **measure_representation_item** with a name of 'pressure'.

WR6: If the **hvac_connector** has a **property_definition** with a name of 'hvac service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has at most one **representation_item** of type **measure_representation_item** with a name of 'minimum pressure'.

WR7: If the **hvac_connector** has a **property_definition** with a name of 'hvac service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has at most one **representation_item** of type **measure_representation_item** with a name of 'maximum pressure'.

WR8: If the **hvac_connector** has a **property_definition** with a name of 'hvac service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has one or two **representation_items** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a name of 'temperature', 'minimum temperature', or 'maximum temperature'.

WR9: If the **hvac_connector** has a **property_definition** with a name of 'hvac service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has at most one **representation_item** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a name of 'temperature'.

ISO 10303-227:2005(E)

WR10: If the **hvac_connector** has a **property_definition** with a **name** of 'hvac service characteristics', the **property_definition** shall have exactly one **representation** with a **name** of 'design service characteristics' that has at most one **representation_item** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a **name** of 'minimum temperature'.

WR11: If the **hvac_connector** has a **property_definition** with a **name** of 'hvac service characteristics', the **property_definition** shall have exactly one **representation** with a **name** of 'design service characteristics' that has at most one **representation_item** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a **name** of 'maximum temperature'.

WR12: If an **hvac_connector** is a type of functional connector it shall not have any **shape_representation**.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **plant_item_connector** entity:

22. **application_context_requires_ap_definition** (see 5.2.4.1);
23. **dependent_instantiable_application_context** (see 5.2.4.9);
24. **dependent_instantiable_product_definition_context** (see 5.2.4.11);
25. **product_definition_context_name_constraint** (see 5.2.4.13);
26. **product_definition_usage_constraint** (see 5.2.4.14).

5.2.3.1.57 hvac_cross_section

An **hvac_cross_section** is a type of **shape_aspect** that specifies the cross section of an HVAC connector.

EXPRESS specification:

```
*)
ENTITY hvac_cross_section
  SUBTYPE OF (shape_aspect);
END_ENTITY;
(*
```

5.2.3.1.58 hvac_fitting_class

An **hvac_fitting_class** is a type of **group** that classifies the items that are assigned to it as HVAC fittings.

EXPRESS specification:

```
*)
ENTITY hvac_fitting_class
  SUBTYPE OF (group);
WHERE
  WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (it <* aca.items |
    NOT ('PLANT_SPATIAL_CONFIGURATION.HVAC_COMPONENT_DEFINITION' IN
    TYPEOF (it)))) = 0))) = 0);
```

```

WR2: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
  'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
  'ASSIGNED_CLASS') |
  'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
  TYPEOF (ca)) |
  NOT (SIZEOF (QUERY (pcd <* QUERY (it <* aca.items |
  'PLANT_SPATIAL_CONFIGURATION.HVAC_COMPONENT_DEFINITION' IN
  TYPEOF (it)) |
  NOT (SIZEOF (QUERY (acal <* USEDIN (pcd.formation.of_product,
  'PLANT_SPATIAL_CONFIGURATION.' +
  'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
  class_in_tree (acal.assigned_class, 'hvac fitting'))
  = 1))) = 0))) = 0;
END_ENTITY;
(*)

```

Formal propositions:

WR1: An **hvac_fitting_class** shall classify items of type **hvac_component_definition**.

WR2: An **hvac_fitting_class** shall classify items of type **hvac_component_definition** that are a definition of a **product** that is categorized as a 'hvac fitting'.

5.2.3.1.59 hvac_plant_item_branch_connection

An **hvac_plant_item_branch_connection** is a type of **shape_aspect_relationship** that identifies the connection between an HVAC section and an hvac connector that branches from the section.

EXPRESS specification:

```

*)
ENTITY hvac_plant_item_branch_connection
  SUBTYPE OF (shape_aspect_relationship);
WHERE
  WR1: SELF.description = 'branch location';
  WR2: 'PLANT_SPATIAL_CONFIGURATION.HVAC_SECTION_DEFINITION'
  IN TYPEOF (SELF.relying_shape_aspect.of_shape.definition);
  WR3: 'PLANT_SPATIAL_CONFIGURATION.HVAC_CONNECTOR'
  IN TYPEOF (SELF.related_shape_aspect);
END_ENTITY;
(*)

```

Formal propositions:

WR1: The value of **hvac_plant_item_branch_connection.description** shall be 'branch location'.

WR2: The **product_definition** that the **relying_shape_aspect** of an **hvac_plant_item_branch_connection** is related to shall be an **hvac_section_definition**.

WR3: The **related_shape_aspect** of an **hvac_branch_connection** shall be an **hvac_connector**.

ISO 10303-227:2005(E)

5.2.3.1.60 hvac_plant_item_connection

An **hvac_plant_item_connection** is a type of **shape_aspect_relationship** that identifies the connection between an HVAC plant item termination and an HVAC connector.

EXPRESS specification:

```
*)
ENTITY hvac_plant_item_connection
  SUBTYPE OF (shape_aspect_relationship);
WHERE
  WR1: 'PLANT_SPATIAL_CONFIGURATION.HVAC_SECTION_TERMINATION'
      IN TYPEOF (SELF.relating_shape_aspect);
  WR2: 'PLANT_SPATIAL_CONFIGURATION.HVAC_CONNECTOR'
      IN TYPEOF (SELF.related_shape_aspect);
  WR3: SELF\shape_aspect_relationship.related_shape_aspect.
      of_shape\property_definition.
      definition\product_definition.
      frame_of_reference\application_context_element.
      name = 'physical occurrence';
END_ENTITY;
(*
```

Formal propositions:

WR1: The **relating_shape_aspect** of an **hvac_plant_item_connection** shall be an **hvac_section_termination**.

WR2: The **related_shape_aspect** of an **hvac_plant_item_connection** shall be an **hvac_connector**.

WR3: The **product_definition** that the **related_shape_aspect** of an **hvac_plant_item_connection** is related to shall have a context with the name 'physical occurrence'.

5.2.3.1.61 hvac_section_definition

An **hvac_section_definition** is a type of **product_definition** that identifies an HVAC section.

EXPRESS specification:

```
*)
ENTITY hvac_section_definition
  SUBTYPE OF (product_definition);
WHERE
  WR1: SIZEOF (QUERY (pdr <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
    'PLANT_SPATIAL_CONFIGURATION.HVAC_RUN_DEFINITION'
    IN TYPEOF (pdr.relating_product_definition))) >= 1;
  WR2: SIZEOF (QUERY( pd <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
    'PLANT_SPATIAL_CONFIGURATION.SHAPE_DEFINITION' IN
    TYPEOF (pd))) >= 1;
```

```

WR3: SELF.frame_of_reference\application_context_element.name =
'functional definition';
WR4: SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'hvac section characteristics')) = 1;
WR5: SIZEOF (QUERY (hssc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'hvac section characteristics') |
NOT ({1 <= SIZEOF (QUERY (it <* hssc.used_representation.items |
(it.name IN ['pressure drop',
'maximum pressure drop', 'minimum pressure drop '])) <= 2}))) = 0;
WR6: SIZEOF (QUERY (hssc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'hvac section characteristics') |
NOT (SIZEOF (QUERY (it <* hssc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'pressure drop')) <= 1))) = 0;
WR7: SIZEOF (QUERY (hssc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'hvac section characteristics') |
NOT (SIZEOF (QUERY (it <* hssc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'minimum pressure drop')) <= 1))) = 0;
WR8: SIZEOF (QUERY (hssc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'hvac section characteristics') |
NOT (SIZEOF (QUERY (it <* hssc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'maximum pressure drop')) <= 1))) = 0;
WR9: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'hvac section insulation')) >= 1)) OR
(SIZEOF (QUERY (si <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'hvac section insulation') |
NOT (SIZEOF (QUERY (pd <* USEDIN (si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (pds <* QUERY (pdr <* USEDIN (pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |

```

ISO 10303-227:2005(E)

```
'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
TYPEOF (pdr)) |
pds.used_representation.name =
'hvac section insulation characteristics')) = 1))) = 0))) = 0);
WR10: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'hvac section insulation')) >= 1)) OR
(SIZEOF (QUERY (si <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'hvac section insulation') |
NOT (SIZEOF (QUERY (pd <* USEDIN (si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN (pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
TYPEOF (pdr)) |
pds.used_representation.name =
'hvac section insulation characteristics') |
SIZEOF (sic.used_representation.items) >= 1)) = 1))) = 0))) = 0);
WR11: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'hvac section insulation')) >= 1)) OR
(SIZEOF (QUERY (si <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'hvac section insulation') |
NOT (SIZEOF (QUERY (pd <* USEDIN (si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN (pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
TYPEOF (pdr)) |
pds.used_representation.name =
'hvac section insulation characteristics') |
{1 <= SIZEOF (QUERY (it <* sic.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT']) = 2) AND
(it.name IN ['thickness', 'minimum thickness',
'maximum thickness']))) <= 2})) = 1))) = 0))) = 0);
WR12: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'hvac section insulation')) >= 1)) OR
(SIZEOF (QUERY (si <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'hvac section insulation') |
NOT (SIZEOF (QUERY (pd <* USEDIN (si,
```

```

'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN (pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
TYPEOF (pdr)) |
pds.used_representation.name =
'segment insulation characteristics') |
SIZEOF (QUERY (it <* sic.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'thickness')) <= 1)) = 1))) = 0))) = 0);
WR13: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'segment insulation')) >= 1)) OR
(SIZEOF (QUERY (si <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'hvac section insulation') |
NOT (SIZEOF (QUERY (pd <* USEDIN (si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN (pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
TYPEOF (pdr)) |
pds.used_representation.name =
'hvac section insulation characteristics') |
SIZEOF (QUERY (it <* sic.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'minimum thickness')) <= 1)) = 1))) = 0))) = 0);
WR14: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'hvac section insulation')) >= 1)) OR
(SIZEOF (QUERY (si <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'hvac section insulation') |
NOT (SIZEOF (QUERY (pd <* USEDIN (si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN (pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
TYPEOF (pdr)) |
pds.used_representation.name =
'hvac section insulation characteristics') |
SIZEOF (QUERY (it <* sic.used_representation.items |
(SIZEOF (TYPEOF (it) *

```

ISO 10303-227:2005(E)

```
[ 'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
  'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ] = 2) AND
(it.name = 'maximum thickness')) <= 1)) = 1))) = 0))) = 0);
WR15: SIZEOF (QUERY (pds <* QUERY (pd <* USEDIN (SELF,
  'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
  'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
  TYPEOF (pd)) |
  NOT (SIZEOF (QUERY (sa <*USEDIN (pds,
  'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT.OF_SHAPE') |
  'PLANT_SPATIAL_CONFIGURATION.HVAC_SECTION_TERMINATION' IN
  TYPEOF (sa))) = 2))) = 0);
END_ENTITY;
(*
```

Formal propositions:

WR1: An **hvac_section_definition** shall be the **related_product_definition** in a **product_definition - relationship** that has a **relating_product_definition** that is an **hvac_run_definition**.

WR2: An **hvac_section_definition** shall be referenced by a **shape_definition**.

WR3: An **hvac_section_definition** shall have a **frame_of_reference_name** of 'functional definition'.

WR4: An **hvac_section_definition** shall have exactly one representation with the name of 'hvac section characteristics'.

WR5: The representation of the **hvac_section_definition** with the name of 'hvac section characteristics' shall have between one and two **representation_items** with a name of 'pressure drop', 'maximum pressure drop', or 'minimum pressure drop'.

WR6: The representation of the **hvac_section_definition** with the name of 'hvac section characteristics' shall have at most one **representation_item** of type **measure_representation_item** with a name of 'pressure drop'.

WR7: The representation of the **hvac_section_definition** with the name of 'hvac section characteristics' shall have at most one **representation_item** of type **measure_representation_item** with a name of 'minimum pressure drop'.

WR8: The representation of the **hvac_section_definition** with the name of 'hvac section characteristics' shall have at most one **representation_item** of type **measure_representation_item** with a name of 'maximum pressure drop'.

WR9 If the **hvac_section_definition** is related to a **product_definition** as an 'hvac section insulation', the **product_definition** shall have a **product_definition_shape** that has exactly one **representation** with the **name** of 'hvac section insulation characteristics'.

WR10: If the **hvac_section_definition** is related to a **product_definition** as an 'hvac section insulation', the **product_definition** shall have a **product_definition_shape** that has exactly one **representation** with the **name** of 'hvac section insulation characteristics' that has at least one **representation_item**.

WR11: If the **hvac_section_definition** is related to a **product_definition** as an 'hvac section insulation', the **product_definition** shall have a **product_definition_shape** that has exactly one **representation** with the **name** of 'hvac section insulation characteristics' that has one or two **representation_items** of type

measure_representation_item and **length_measure_with_unit** with a **name** of 'thickness', 'minimum thickness', or 'maximum thickness'.

WR12: If the **hvac_section_definition** is related to a **product_definition** as an 'hvac section insulation', the **product_definition** shall have a **product_definition_shape** that has exactly one **representation** with the **name** of 'hvac section insulation characteristics' that has at most one **representation_item** items of type **measure_representation_item** and **length_measure_with_unit** with a **name** of 'thickness'.

WR13: If the **hvac_section_definition** is related to a **product_definition** as an 'hvac section insulation', the **product_definition** shall have a **product_definition_shape** that has exactly one **representation** with the **name** of 'hvac section insulation characteristics' that has at most one **representation_item** items of type **measure_representation_item** and **length_measure_with_unit** with a **name** of 'minimum thickness'.

WR14: If the **hvac_section_definition** is related to a **product_definition** as an 'hvac section insulation', the **product_definition** shall have a **product_definition_shape** that has exactly one **representation** with the **name** of 'hvac section insulation characteristics' that has at most one **representation_item** items of type **measure_representation_item** and **length_measure_with_unit** with a **name** of 'maximum thickness'.

WR15: The **hvac_section_definition** shall be related to exactly two instances of **hvac_section_termination**.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **hvac_section_definition** entity:

- 27. **application_context_requires_ap_definition** (see 5.2.4.1);
- 28. **dependent_instantiable_application_context** (see 5.2.4.9);
- 29. **dependent_instantiable_product_definition_context** (see 5.2.4.11);
- 30. **product_definition_context_name_constraint** (see 5.2.4.13).

5.2.3.1.62 hvac_section_termination

An **hvac_section_termination** is a type of **shape_aspect** that identifies the termination of an HVAC section.

EXPRESS specification:

```

*)
ENTITY hvac_section_termination
  SUBTYPE OF (shape_aspect);
WHERE
  WR1: SIZEOF (QUERY (sar <*
    USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
      'SHAPE_ASPECT_RELATIONSHIP.RELATING_SHAPE_ASPECT') +
    USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
      'SHAPE_ASPECT_RELATIONSHIP.RELATED_SHAPE_ASPECT') |
    NOT (SIZEOF (TYPEOF (sar) *
      ['PLANT_SPATIAL_CONFIGURATION.HVAC_BRANCH_CONNECTION',
      'PLANT_SPATIAL_CONFIGURATION.HVAC_PLANT_ITEM_CONNECTION',
      'PLANT_SPATIAL_CONFIGURATION.HVAC_TERMINATION_CONNECTION'])
    = 1))) = 0;

```

ISO 10303-227:2005(E)

```
WR2: SIZEOF (QUERY (sar <*
    USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.'+
    'SHAPE_ASPECT_RELATIONSHIP.RELATED_SHAPE_ASPECT') |
    SIZEOF (TYPEOF (sar) *
    [ 'PLANT_SPATIAL_CONFIGURATION.HVAC_BRANCH_CONNECTION',
    'PLANT_SPATIAL_CONFIGURATION.HVAC_PLANT_ITEM_CONNECTION'])) = 1))= 1;
END_ENTITY;
(*
```

Formal propositions:

WR1: An **hvac_section_termination** is the **relating_shape_aspect** or the **related_shape_aspect** in at least one **shape_aspect_relationship** that is an **hvac_branch_connection**, **hvac_plant_item_connection**, or **hvac_termination_connection**.

WR2: An **hvac_section_termination** is the **related_shape_aspect** in exactly one **shape_aspect_relationship** that is an **hvac_branch_connection** or an **hvac_plant_item_connection**.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **hvac_section_termination** entity:

31. **application_context_requires_ap_definition** (see 5.2.4.1);
32. **dependent_instantiable_application_context** (see 5.2.4.9);
33. **dependent_instantiable_product_definition_context** (see 5.2.4.11);
34. **product_definition_context_name_constraint** (see 5.2.4.13).

5.2.3.1.63 hvac_support_definition

An **hvac_support_definition** is a type of **product_definition** that defines a hvac support.

EXPRESS specification

```
*)
ENTITY hvac_support_definition
    SUBTYPE OF (product_definition);
END_ENTITY;
(*
```

5.2.3.1.64 hvac_support_class

An **hvac_support_class** is a type of **group** that classifies the items that are assigned to it as hvac supports. The name of the **hvac_support_class** may further classify the assigned items.

EXPRESS specification:

```
*)
ENTITY hvac_support_class
    SUBTYPE OF (group);
WHERE
    WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
```

```

'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
'ASSIGNED_CLASS') |
'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF (ca)) |
NOT (SIZEOF (QUERY (it <* aca.items |
NOT ('PLANT_SPATIAL_CONFIGURATION.HVAC_SUPPORT_DEFINITION' IN
TYPEOF (it)))) = 0))) = 0;
WR2: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
'ASSIGNED_CLASS') |
'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF (ca)) |
NOT (SIZEOF (QUERY (pcd <* QUERY (it <* aca.items |
'PLANT_SPATIAL_CONFIGURATION.HVAC_COMPONENT_DEFINITION' IN
TYPEOF (it)) |
NOT (SIZEOF (QUERY (acal <* USEDIN (pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATION.' +
'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
class_in_tree (acal.assigned_class, 'hvac support'))
= 1))) = 0))) = 0;
END_ENTITY;
(*

```

Formal propositions:

WR1: A **hvac_support_class** shall classify items of type **hvac_component_definition**.

WR2: A **hvac_support_class** shall classify items of type **hvac_component_definition** that are a definition of a **product** that is categorized as a 'hvac support'.

5.2.3.1.65 hvac_system

An **hvac_system** is a type of **product_definition** that identifies a system that is used for heating, ventilation, and air conditioning.

EXPRESS specification:

```

*)
ENTITY hvac_system
  SUBTYPE OF (product_definition);
WHERE
  WR1: SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
    ('PLANT_SPATIAL_CONFIGURATION.PLANT' IN TYPEOF
    (pdr.relating_product_definition.formation.of_product)) AND
    (pdr.relating_product_definition.frame_of_reference.name =
    'functional occurrence')) = 1;
END_ENTITY;
(*

```

ISO 10303-227:2005(E)

Formal propositions:

WR1: The **hvac_system** shall be related to exactly one **product_definition** that is the definition of a plant and has a context of 'functional occurrence'.

5.2.3.1.66 hvac_run_definition

An **hvac_run_definition** is a type of **product_definition** that identifies an HVAC run.

EXPRESS specification:

```
*)
ENTITY hvac_run_definition
  SUBTYPE OF (product_definition);
WHERE
  WR1: SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
    ('PLANT_SPATIAL_CONFIGURATION.HVAC_SYSTEM' IN
    TYPEOF (pdr.relatng_product_definition)))) = 1;
  WR2: SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PRODUCT_DEFINITION_RELATIONSHIP.RELATING_PRODUCT_DEFINITION') |
    'PLANT_SPATIAL_CONFIGURATION.HVAC_SECTION_DEFINITION' IN
    TYPEOF (pdr.related_product_definition))) >= 1;
  WR3: SELF.frame_of_reference.name =
    'functional definition';
  WR4: SIZEOF (QUERY (pds <* QUERY (pd <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
    'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
    TYPEOF (pd)) |
    NOT (SIZEOF (QUERY (sa <*USEDIN (pds,
    'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT.OF_SHAPE') |
    ('PLANT_SPATIAL_CONFIGURATION.HVAC_SECTION_TERMINATION' IN
    TYPEOF (sa)) AND
    (sa.description = 'hvac run termination')))) <= 2))) = 0;
END_ENTITY;
(*
```

Formal propositions:

WR1: An **hvac_run_definition** shall be related to exactly one **hvac_system**.

WR2: An **hvac_run_definition** shall be related to at least one **hvac_section_definition**.

WR3: An **hvac_run_definition** shall have an **application_context_element.name** of 'functional definition'.

WR4: An **hvac_run_definition** shall have at most two related instances of **hvac_section_termination** described as 'hvac run termination'.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **hvac_run_definition** entity:

- 35. **application_context_requires_ap_definition** (see 5.2.4.1);
- 36. **dependent_instantiable_application_context** (see 5.2.4.9);
- 37. **dependent_instantiable_product_definition_context** (see 5.2.4.11);
- 38. **product_definition_context_name_constraint** (see 5.2.4.13).

5.2.3.1.67 hvac_termination_connection

An **hvac_termination_connection** is a type of **shape_aspect_relationship** that identifies a connection between two HVAC section terminations.

EXPRESS specification:

```

*)
ENTITY hvac_termination_connection
  SUBTYPE OF (shape_aspect_relationship);
WHERE
  WR1: 'PLANT_SPATIAL_CONFIGURATIONS.HVAC_SECTION_TERMINATION'
      IN TYPEOF (SELF.relying_shape_aspect);
  WR2: 'PLANT_SPATIAL_CONFIGURATIONS.HVAC_SECTION_TERMINATION'
      IN TYPEOF (SELF.related_shape_aspect);
END_ENTITY;
( *

```

Formal propositions:

WR1: The **relying_shape_aspect** of an **hvac_termination_connection** shall be a an **hvac_section_termination**.

WR2: The **related_shape_aspect** of an **hvac_termination_connection** shall be a an **hvac_section_termination**.

5.2.3.1.68 hybrid_shape_representation

A **hybrid_shape_representation** is a type of **shape_representation** that is composed of CSG primitives, boolean operators, manifold solid boundary representation solids, shell based wireframe models, curves and surfaces.

EXPRESS specification:

```

*)
ENTITY hybrid_shape_representation
  SUBTYPE OF (shape_representation);
WHERE
  WR1: SIZEOF (QUERY (i <* SELF\representation.items |
    NOT (SIZEOF (['PLANT_SPATIAL_CONFIGURATIONS.ADVANCED_FACE',
    'PLANT_SPATIAL_CONFIGURATIONS.BOOLEAN_RESULT',
    'PLANT_SPATIAL_CONFIGURATIONS.CSG_SOLID',
    'PLANT_SPATIAL_CONFIGURATIONS.RECTANGULAR_PYRAMID',
    'PLANT_SPATIAL_CONFIGURATIONS.BLOCK',
    'PLANT_SPATIAL_CONFIGURATIONS.TORUS',
    'PLANT_SPATIAL_CONFIGURATIONS.RIGHT_CIRCULAR_CYLINDER',
    'PLANT_SPATIAL_CONFIGURATIONS.SPHERE',

```

ISO 10303-227:2005(E)

```
'PLANT_SPATIAL_CONFIGURATION.RIGHT_CIRCULAR_CONE',
'PLANT_SPATIAL_CONFIGURATION.EXTRUDED_AREA_SOLID',
'PLANT_SPATIAL_CONFIGURATION.REVOLVED_AREA_SOLID',
'PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_3D',
'PLANT_SPATIAL_CONFIGURATION.MANIFOLD_SOLID_BREP',
'PLANT_SPATIAL_CONFIGURATION.SHELL_BASED_WIREFRAME_MODEL',
'PLANT_SPATIAL_CONFIGURATION.CURVE',
'PLANT_SPATIAL_CONFIGURATION.POINT',
'PLANT_SPATIAL_CONFIGURATION.SURFACE',
'PLANT_SPATIAL_CONFIGURATION.VECTOR',
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.MAPPED_ITEM'] *
TYPEOF(i)) = 1))) = 0;
WR2: SIZEOF (QUERY (mi <* QUERY (item <* SELF\representation.items |
'PLANT_SPATIAL_CONFIGURATION.MAPPED_ITEM' IN TYPEOF(item)) |
NOT (SIZEOF (['PLANT_SPATIAL_CONFIGURATION.' +
'PLANT_CSG_SHAPE_REPRESENTATION',
'PLANT_SPATIAL_CONFIGURATION.HYBRID_SHAPE_REPRESENTATION'] *
TYPEOF(mi\mapped_item.mapping_source.mapped_representation))
= 1))) = 0;
END_ENTITY;
(*
```

Formal propositions:

WR1: A **hybrid_shape_representation** shall contain **representation_items** that are of type **advanced_face**, **boolean_result**, **csg_solid**, **rectangular_pyramid**, **block**, **torus**, **right_circular_cylinder**, **sphere**, **right_circular_cone**, **extruded_area_solid**, **revolved_area_solid**, **shell_based_wireframe_model**, **manifold_solid_brep**, **curve**, **point**, **surface**, **vector**, **axis2_placement_3d**, **measure_representation_item**, or **mapped_item**.

WR2: If there is a **mapped_item** in a **hybrid_shape_representation**, the source of the **mapped_item** shall be a **plant_csg_shape_representation** or a **hybrid_shape_representation**.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **hybrid_shape_representation** entity:

39. **subtype_mandatory_shape_representation** (see 5.2.4.18)

5.2.3.1.69 inline_equipment

An **inline_equipment** is a type of **pipng_component_definition** that identifies an item that is inserted into the flow of a process stream.

EXPRESS specification:

```
*)
ENTITY inline_equipment
  SUBTYPE OF (pipng_component_definition);
END_ENTITY;
```

(*)

5.2.3.1.70 instrumentation_and_control_system

An **instrumentation_and_control_system** is a type of **product_definition** that identifies a system of wiring, switches, controls, and other equipment associated with monitoring and controlling performance characteristics.

EXPRESS specification:

```
*)
ENTITY instrumentation_and_control_system
  SUBTYPE OF (product_definition);
WHERE
  WR1: SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
    ('PLANT_SPATIAL_CONFIGURATION.PLANT' IN TYPEOF
    (pdr.relating_product_definition.formation.of_product)) AND
    (pdr.relating_product_definition.frame_of_reference.name =
    'functional occurrence')))) = 1;
END_ENTITY;
(*)
```

Formal propositions:

WR1: The **instrumentation_and_control_system** shall be related to exactly one **product_definition** that is the definition of a plant and has a context of 'functional occurrence'.

5.2.3.1.71 interfering_shape_element

An **interfering_shape_element** identifies a portion of the shape of an item that interferes with the shape of another item.

EXPRESS specification:

```
*)
ENTITY interfering_shape_element
  SUBTYPE OF (shape_aspect, shape_aspect_relationship);
END_ENTITY;
(*)
```

5.2.3.1.72 known_source

A **known_source** is a type of **external_source** whose identification is standardized for all implementations of this part of ISO 10303. The purpose of the **known_source** entity data type is to identify particular sources of data that are used within the scope of this part of ISO 10303, and to associate specific data formats with such identification. The following known sources of data are identified in this part of ISO 10303:

ISO 13584 Dictionaries, conforming to the requirements of ISO 13584-42. In this part of ISO 10303, such Dictionaries are used to hold values of names for instances of **externally_defined_class**;

ISO 10303-227:2005(E)

ISO 13584 Parts Libraries, conforming to the requirements of ISO 13584-24. In this part of ISO 10303, such Parts Libraries are used to hold collections of **catalogue_connector** and **externally_defined_plant_item_definition**;

EXPRESS specification:

```
*)
ENTITY known_source
  SUBTYPE OF (external_source, pre_defined_item);
WHERE
  WR1: SELF\pre_defined_item.name IN
      ['ISO 13584 Dictionary', 'ISO 13584 Parts Library'];
END_ENTITY;
(*
```

Formal propositions:

WR1: The **name** of the **known_source** inherited from the **pre_defined_item** shall be 'ISO 13584 Dictionary', or 'ISO 13584 Parts Library'.

Attribute value definitions:

The **known_source** shall be used as follows, based on the standard values of the name attribute.

ISO 13584 Dictionary: the **known_source** shall be a dictionary as defined in ISO 13584-42. The string value given as the **item_id** of an **externally_defined_item** that references this **known_source** shall conform to the requirements for a Class_BSU as defined in ISO 13584-42.

ISO 13584 Parts Library: the **known_source** shall be a parts library as defined in ISO 13584-42. The string value given as the **item_id** of an **externally_defined_item** that references this **known_source** shall conform to the requirements for a BSU as defined in ISO 13584-42.

5.2.3.1.73 line_branch_connection

A **line_branch_connection** is a type of **shape_aspect_relationship** that identifies the connection between a line and a branch.

EXPRESS specification:

```
*)
ENTITY line_branch_connection
  SUBTYPE OF (shape_aspect_relationship);
WHERE
  WR1: SELF.description = 'branch location';
  WR2: 'PLANT_SPATIAL_CONFIGURATIONS.PLANT_LINE_SEGMENT_DEFINITION'
      IN TYPEOF (SELF.relatng_shape_aspect.of_shape.definition);
  WR3: 'PLANT_SPATIAL_CONFIGURATIONS.PLANT_LINE_SEGMENT_TERMINATION'
      IN TYPEOF (SELF.related_shape_aspect);
END_ENTITY;
(*
```


Formal propositions:

WR1: The value of **line_branch_connection.description** shall be 'branch location'.

WR2: The **product_definition** that the **relating_shape_aspect** of a **line_branch_connection** is related to shall be a **plant_line_segment_definition**.

WR3: The **related_shape_aspect** of a **line_branch_connection** shall be a **plant_line_segment_termination**.

5.2.3.1.74 line_less_piping_system

A **line_less_piping_system** is a type of **product_definition** that identifies a piping system that is not part of a line.

EXPRESS specification:

```
*)
ENTITY line_less_piping_system
  SUBTYPE OF (product_definition);
END_ENTITY;
(*
```

5.2.3.1.75 line_plant_item_branch_connection

A **line_plant_item_branch_connection** is a type of **shape_aspect_relationship** that identifies the connection between a line and a plant item connector that branches from the line.

EXPRESS specification:

```
*)
ENTITY line_plant_item_branch_connection
  SUBTYPE OF (shape_aspect_relationship);
END_ENTITY;
(*
```

5.2.3.1.76 line_plant_item_connection

A **line_plant_item_connection** is a type of **shape_aspect_relationship** that identifies the connection between a line segment and a plant item connector.

EXPRESS specification:

```
*)
ENTITY line_plant_item_connection
  SUBTYPE OF (shape_aspect_relationship);
WHERE
  WR1: 'PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_TERMINATION'
      IN TYPEOF (SELF.relating_shape_aspect);
  WR2: 'PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTOR'
      IN TYPEOF (SELF.related_shape_aspect);
  WR3: SELF\shape_aspect_relationship.related_shape_aspect.
```

ISO 10303-227:2005(E)

```
of_shape\property_definition.  
definition\product_definition.  
frame_of_reference\application_context_element.  
name = 'physical occurrence';  
END_ENTITY;  
(*
```

Formal propositions:

WR1: The **relating_shape_aspect** of a **line_plant_item_connection** shall be a **plant_line_segment_termination**.

WR2: The **related_shape_aspect** of a **line_plant_item_connection** shall be a **plant_item_connector**.

WR3: The **product_definition** that the **related_shape_aspect** of a **line_plant_item_connection** is related to shall have a context with the name 'physical occurrence'.

5.2.3.1.77 line_termination_connection

A **line_termination_connection** is a type of **shape_aspect_relationship** that identifies a connection between two line segment terminations, or between a line segment termination and a connection node.

EXPRESS specification:

```
*)  
ENTITY line_termination_connection  
  SUBTYPE OF (shape_aspect_relationship);  
WHERE  
  WR1: SIZEOF (TYPEOF (SELF.relating_shape_aspect) *  
    [ 'PLANT_SPATIAL_CONFIGURATION.CONNECTION_NODE' ,  
      'PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_TERMINATION' ]  
    ) >= 1;  
  WR2: 'PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_TERMINATION'  
    IN TYPEOF (SELF.related_shape_aspect);  
END_ENTITY;  
(*
```

Formal propositions:

WR1: The **relating_shape_aspect** of a **line_termination_connection** shall be a **connection_node** or a **plant_line_segment_termination**.

WR2: The **related_shape_aspect** of a **line_termination_connection** shall be a **plant_line_segment_termination**.

5.2.3.1.78 mechanical_component_class

A **mechanical_component_class** is a type of **group** that is a **characterized_object** representing a family of mechanical components the characteristics of which are specified using a range of values.

EXPRESS specification:

```

*)
ENTITY mechanical_component_class
  SUBTYPE OF(group, characterized_object);
END_ENTITY;
( *

```

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **mechanical_component_class** entity:

40. **subtype_exclusive_characterized_object** (see 5.2.4.15)

5.2.3.1.79 mechanical_component_definition

A **mechanical_component_definition** is a type of **product_definition** that defines a mechanical component.

EXPRESS specification:

```

*)
ENTITY mechanical_component_definition
  SUBTYPE OF(product_definition);
END_ENTITY;
( *

```

5.2.3.1.80 mechanical_connector_class

A **mechanical_connector_class** is a type of **group** that classifies the items that are assigned to it as being mechanical connectors.

EXPRESS specification:

```

*)
ENTITY mechanical_connector_class
  SUBTYPE OF(group);
END_ENTITY;
( *

```

5.2.3.1.81 mechanical_system

A **mechanical_system** is a type of **product_definition** that identifies a system of interconnected objects that convey mechanical power or torque.

EXPRESS specification:

```

*)
ENTITY mechanical_system
  SUBTYPE OF(product_definition);
WHERE
  WR1      : SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
  'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
  ('PLANT_SPATIAL_CONFIGURATION.PLANT' IN
  TYPEOF(pdr.relying_product_definition.formation.of_product)) AND
  (pdr.relying_product_definition.frame_of_reference.name =

```

ISO 10303-227:2005(E)

```
'functional occurrence')) = 1;  
END_ENTITY;  
(*
```

Formal propositions:

WR1: The mechanical **system** shall be related to exactly one **product_definition** that is the definition of a plant and has a context of 'functional occurrence'.

5.2.3.1.82 pipe_class

A **pipe_class** is a type of **group** that classifies the items that are assigned to it as pipes. The name of the **pipe_class** may further classify the assigned items.

EXPRESS specification:

```
*)  
ENTITY pipe_class  
  SUBTYPE OF (group);  
WHERE  
  WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,  
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +  
    'ASSIGNED_CLASS') |  
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN  
    TYPEOF (ca)) |  
    NOT (SIZEOF (QUERY (it <* aca.items |  
      NOT ('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN  
        TYPEOF (it)))) = 0))) = 0;  
  WR2: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,  
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +  
    'ASSIGNED_CLASS') |  
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN  
    TYPEOF (ca)) |  
    NOT (SIZEOF (QUERY (pcd <* QUERY (it <* aca.items |  
      'PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN  
        TYPEOF (it)) |  
      NOT (SIZEOF (QUERY (acal <* USEDIN (pcd.formation.of_product,  
        'PLANT_SPATIAL_CONFIGURATION.' +  
        'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |  
        class_in_tree (acal.assigned_class, 'pipe')) = 1))) = 0))) = 0;  
END_ENTITY;  
(*
```

Formal propositions:

WR1: A **pipe_class** shall classify items of type **pipng_component_definition**.

WR2: A **pipe_class** shall classify items of type **pipng_component_definition** that are a definition of a **product** that is categorized as a 'pipe'.

5.2.3.1.83 pipe_closure_fitting_class

A **pipe_closure_fitting_class** is a type of **group** that classifies the items that are assigned to it as pipe closure fittings. The name of the **pipe_closure_fitting_class** may further classify the assigned items.

EXPRESS specification:

```

*)
ENTITY pipe_closure_fitting_class
  SUBTYPE OF (group);
WHERE
  WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (it <* aca.items |
    NOT ('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN
    TYPEOF (it)))) = 0))) = 0;
  WR2: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (pcd <* QUERY (it <* aca.items |
    'PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN
    TYPEOF (it)) |
    NOT (SIZEOF (QUERY (acal <* USEDIN (pcd.formation.of_product,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
    class_in_tree (acal.assigned_class, 'pipe closure'))
    = 1))) = 0))) = 0;
END_ENTITY;
(*

```

Formal propositions:

WR1: A **pipe_closure_fitting_class** shall classify items of type **pipng_component_definition**.

WR2: A **pipe_closure_fitting_class** shall classify items of type **pipng_component_definition** that are a definition of a **product** that is categorized as a 'pipe closure'.

5.2.3.1.84 piping_component_class

A **piping_component_class** is a type of **group** that is a **characterized_object** representing a family of piping components the characteristics of which are specified using a range of values.

EXPRESS specification:

```

*)
ENTITY piping_component_class
  SUBTYPE OF (group, characterized_object);

```

ISO 10303-227:2005(E)

```
END_ENTITY;  
(*
```

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **pipng_component_class** entity:

41. **subtype_exclusive_characterized_object** (see 5.2.4.15)

5.2.3.1.85 **pipng_component_definition**

A **pipng_component_definition** is a type of **product_definition** that defines a piping component.

EXPRESS specification:

```
*)  
ENTITY pipng_component_definition  
  SUBTYPE OF (product_definition);  
END_ENTITY;  
(*
```

5.2.3.1.86 **pipng_connector_class**

A **pipng_connector_class** is a type of **group** that classifies the items that are assigned to it as being piping connectors.

EXPRESS specification:

```
*)  
ENTITY pipng_connector_class  
  SUBTYPE OF (group);  
END_ENTITY;  
(*
```

5.2.3.1.87 **pipng_spool_definition**

A **pipng_spool_definition** is a type of **product_definition** that defines an assembly of **pipng_components** and other **plant_items** to be fabricated in a shop and physically connected into one item.

NOTE Only welded or screwed **pipng_components** are included in a spool piece

```
*)  
ENTITY pipng_spool_definition  
  SUBTYPE OF (product_definition);  
WHERE  
  WR1: SIZEOF (USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +  
    'PRODUCT_DEFINITION_RELATIONSHIP.RELATING_PRODUCT_DEFINITION')) > 1;  
END_ENTITY;  
(*
```

Formal propositions:

WR1: The **pipng_spool_definition** shall relate more than **product_definition**.

5.2.3.1.88 piping_support_definition

A **piping_support_definition** is a type of **product_definition** that defines a piping support.

EXPRESS specification

```
*)
ENTITY piping_support_definition
  SUBTYPE OF (product_definition);
END_ENTITY;
(*
```

5.2.3.1.89 piping_support_fitting_class

A **piping_support_fitting_class** is a type of **group** that classifies the items that are assigned to it as piping support fittings. The name of the **piping_support_fitting_class** may further classify the assigned items.

EXPRESS specification:

```
*)
ENTITY piping_support_fitting_class
  SUBTYPE OF (group);
WHERE
  WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (it <* aca.items |
    NOT ('PLANT_SPATIAL_CONFIGURATION.PIPING_SUPPORT_DEFINITION' IN
    TYPEOF (it)))) = 0))) = 0;
  WR2: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (pcd <* QUERY (it <* aca.items |
    'PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN
    TYPEOF (it)) |
    NOT (SIZEOF (QUERY (acal <* USEDIN (pcd.formation.of_product,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
    class_in_tree (acal.assigned_class, 'piping support'))
    = 1))) = 0))) = 0;
END_ENTITY;
(*
```

Formal propositions:

WR1: A **piping_support_fitting_class** shall classify items of type **piping_component_definition**.

ISO 10303-227:2005(E)

WR2: A **pipng_support_fitting_class** shall classify items of type **pipng_component_definition** that are a definition of a **product** that is categorized as a 'pipng support'.

5.2.3.1.90 pipng_system

A **pipng_system** is a type of **product_definition** that identifies a system of interconnected objects that convey fluid, vapour, or particulate flow.

EXPRESS specification:

```
*)
ENTITY pipng_system
  SUBTYPE OF (product_definition);
WHERE
  WR1: SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
    ('PLANT_SPATIAL_CONFIGURATION.PLANT' IN TYPEOF
    (pdr.relatng_product_definition.formation.of_product)) AND
    (pdr.relatng_product_definition.frame_of_reference.name =
    'functional occurrence')))) = 1;
END_ENTITY;
(*
```

Formal propositions:

WR1: The **pipng_system** shall be related to exactly one **product_definition** that is the definition of a plant and has a context of 'functional occurrence'.

5.2.3.1.91 plant

A **plant** is a type of **product** that identifies a process plant facility.

EXPRESS specification:

```
*)
ENTITY plant
  SUBTYPE OF (product);
WHERE
  WR1: SIZEOF (QUERY (pscoa <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PLANT_SPATIAL_CONFIGURATION_ORGANIZATION_ASSIGNMENT.ITEMS') |
    pscoa.role.name =
    'plant operator')) +
    SIZEOF (QUERY (pscpaoa <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PLANT_SPATIAL_CONFIGURATION_PERSON_AND_ORGANIZATION_ASSIGNMENT.' +
    'ITEMS') |
    pscpaoa.role.name =
    'plant operator')) <= 1;
  WR2: SIZEOF (QUERY (pscoa <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PLANT_SPATIAL_CONFIGURATION_ORGANIZATION_ASSIGNMENT.ITEMS') |
```



```

pscoa.role.name = 'plant owner')) +
SIZEOF (QUERY (pscpaoa <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PLANT_SPATIAL_CONFIGURATIONS_PERSON_AND_ORGANIZATION_ASSIGNMENT.' +
'ITEMS') |
pscpaoa.role.name =
'plant owner')) +
SIZEOF (QUERY (pscpa <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PLANT_SPATIAL_CONFIGURATIONS_PERSON_ASSIGNMENT.ITEMS') |
pscpa.role.name = 'plant owner')) >= 1;
WR3: SIZEOF (QUERY (pscoa <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PLANT_SPATIAL_CONFIGURATIONS_ORGANIZATION_ASSIGNMENT.ITEMS') |
pscoa\organization_assignment.role.name =
'plant project owner')) +
SIZEOF (QUERY (pscpaoa <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PLANT_SPATIAL_CONFIGURATIONS_PERSON_AND_ORGANIZATION_ASSIGNMENT.' +
'ITEMS') |
pscpaoa\person_and_organization_assignment.role.name =
'plant project owner')) >= 1;
WR4: SIZEOF (QUERY (pdf <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_FORMATIONS_OF_PRODUCT') |
NOT (SIZEOF (QUERY (pd <* USEDIN (pdf,
'PLANT_SPATIAL_CONFIGURATIONS.PRODUCT_DEFINITION.FORMATION') |
pd.frame_of_reference.name = 'functional occurrence')) <= 1))) = 0;
END_ENTITY;
(*

```

Formal propositions:

WR1: A **plant** is associated with zero or one **person_and_organization** or **organization** in the role of plant operator.

WR2: A **plant** is associated with at least one **organization**, **person_and_organization**, or **person** in the role of plant owner.

WR3: A **plant** is associated with at least one **person_and_organization** or **organization** in the role of plant project owner.

WR4: A **plant** shall be related to at most one **product_definition** that has a context of 'functional occurrence'.

Informal proposition:

IP1: If the **plant** has shape, then the **shape_representation** depicting that shape shall have exactly one **axis2_placement_3d** instance in its items set with a name of 'origin'.

ISO 10303-227:2005(E)

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **plant** entity:

42. **application_context_requires_ap_definition** (see 5.2.4.1);
43. **dependent_instantiable_application_context** (see 5.2.4.9);
44. **dependent_instantiable_product_context** (see 5.2.4.10);
45. **product_context_discipline_type_constraint** (see 5.2.4.12).

5.2.3.1.92 plant_arrangement_definition

A **plant_arrangement_definition** is a type of **product_definition_with_associated_documents** that identifies a mechanical system arrangement.

EXPRESS specification:

*)

```
ENTITY plant_arrangement_definition
  SUBTYPE OF(product_definition_with_associated_documents);
WHERE
  WR1: SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
    ('PLANT_SPATIAL_CONFIGURATION.MECHANICAL_SYSTEM' IN
    TYPEOF(pdr.relatering_product_definition)))) = 1;
  WR2: SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
    ('PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_SEGMENT_DEFINITION' IN
    TYPEOF(pdr.related_product_definition)))) >= 1;
  WR3: NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
    'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
    (SIZEOF(USEDIN(pd, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')) >= 1))) = 0) OR
    (SIZEOF(QUERY (pd <* USEDIN(SELF,
    'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
    NOT (SIZEOF(QUERY (pdr <* USEDIN(pd,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
    (SIZEOF(QUERY (rep <* USEDIN(pdr.used_representation.context_of_items,
    'PLANT_SPATIAL_CONFIGURATION.REPRESENTATION.CONTEXT_OF_ITEMS') |
    (SIZEOF(QUERY (prop_def_rep <* USEDIN(rep,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.USED_REPRESENTATION') |
    (SIZEOF([ 'PLANT_SPATIAL_CONFIGURATION.SITE',
    'PLANT_SPATIAL_CONFIGURATION.SITE_BUILDING' ] *
    TYPEOF(prop_def_rep.definition)) = 1) OR
    ('PLANT_SPATIAL_CONFIGURATION.PLANT' IN
    TYPEOF(prop_def_rep.definition.definition.formation.of_product))))
    >= 1))) >= 1))) >= 1))) = 0);
  WR4: SELF.frame_of_reference.name = 'functional definition';
  WR5: SIZEOF(QUERY (pds <* QUERY (pd <* USEDIN(SELF,
    'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
    ('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
    TYPEOF(pd)))) |
    NOT (SIZEOF(QUERY (sa <* USEDIN(pds,
```

```
'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT.OF_SHAPE') |
('PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_SEGMENT_TERMINATION'
IN TYPEOF(sa)) AND
(sa.description = 'mechanical arrangement termination')) <= 2))) = 0;
END_ENTITY;
(*
```

Formal propositions:

WR1: A **plant_arrangement_definition** shall be related to exactly one **mechanical_system**.

WR2: A **plant_arrangement_definition** shall be related to at least one **plant_arrangement_segment_definition**.

WR3: If a **plant_arrangement_definition** has a representation, that representation shall be in the context of a **site_building**, a **site**, a **plant** or a ship.

WR4: A **plant_arrangement_definition** shall have an **application_context_element.name** of 'functional definition'.

WR5: A **plant_arrangement_definition** shall have at most two related instances of **plant_arrangement_segment_termination**.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **plant_arrangement_definition** entity:

46. **application_context_requires_ap_definition** (see 5.2.4.1);
47. **dependent_instantiable_application_context** (see 5.2.4.9);
48. **dependent_instantiable_product_definition_context** (see 5.2.4.11);
49. **product_definition_context_name_constraint** (see 5.2.4.13).

5.2.3.1.93 plant_arrangement_segment_definition

EXPRESS specification:

```
*)
ENTITY plant_arrangement_segment_definition
  SUBTYPE OF(product_definition);
WHERE
  WR1:  SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
    ('PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_DEFINITION' IN
    TYPEOF(pdr.relatng_product_definition)))) >= 1;
  WR2:  SIZEOF(QUERY (pd <* USEDIN(SELF,
    'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
    ('PLANT_SPATIAL_CONFIGURATION.SHAPE_DEFINITION' IN TYPEOF(pd)))) >=
1;
  WR3:  SELF.frame_of_reference\application_context_element.name =
    'functional definition';
  WR4:  SIZEOF(QUERY (pd <* USEDIN(SELF,
    'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
    NOT (SIZEOF(QUERY (pdr <* USEDIN(pd, 'PLANT_SPATIAL_CONFIGURATION.' +
```

ISO 10303-227:2005(E)

```

        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
        (pdr.used_representation.name =
        'arrangement segment characteristics')) = 1))) = 0;
WR5:  SIZEOF(QUERY (pd <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION')|
        NOT (SIZEOF(QUERY (lsc <* QUERY (pdr <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
        (pdr.used_representation.name =
        'arrangement segment characteristics'))|
        NOT (SIZEOF(lsc.used_representation.items) >= 2))) = 0))) = 0;
WR6:  SIZEOF(QUERY (pd <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION')|
        NOT (SIZEOF(QUERY (lsc <* QUERY (pdr <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
        (pdr.used_representation.name =
        'arrangement segment characteristics'))|
        NOT (SIZEOF(QUERY (it <* lsc.used_representation.items|
        ('PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM' IN
        TYPEOF(it)) AND (it.name = 'design pressure')) = 1))) = 0))) = 0;
WR7:  SIZEOF(QUERY (pd <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION')|
        NOT (SIZEOF(QUERY (lsc <* QUERY (pdr <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
        (pdr.used_representation.name =
        'arrangement segment characteristics'))|
        NOT (SIZEOF(QUERY (it <* lsc.used_representation.items|
        ('PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM' IN
        TYPEOF(it)) AND (it.name = 'design speed')) = 1))) = 0))) = 0;
WR8:  SIZEOF(QUERY (pd <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION')|
        NOT (SIZEOF(QUERY (lsc <* QUERY (pdr <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
        (pdr.used_representation.name = 'line segment characteristics'))|
        NOT (SIZEOF(QUERY (it <* lsc.used_representation.items|
        (SIZEOF(TYPEOF(it) *
        ['PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
        ('PLANT_SPATIAL_CONFIGURATIONS.' +
        'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ])) = 2) AND
        (it.name = 'design temperature')) = 1))) = 0))) = 0;
WR9:  SIZEOF(QUERY (pd <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION')|
        NOT (SIZEOF(QUERY (lsc <* QUERY (pdr <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
        (pdr.used_representation.name =
        'arrangement segment characteristics'))|
        NOT (SIZEOF(QUERY (it <* lsc.used_representation.items|
        ('PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM' IN
        TYPEOF(it)) AND (it.name = 'design torque')) = 1))) = 0))) = 0;
WR10: SIZEOF(QUERY (pds <* QUERY (pd <* USEDIN(SELF,

```

```

'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
TYPEOF(pd))) | NOT (SIZEOF(QUERY (sa <* USEDIN(pds,
'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT.OF_SHAPE') |
('PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_SEGMENT_TERMINATION'
IN TYPEOF(sa)))) = 2))) = 0;
END_ENTITY;
(*

```

Formal propositions:

WR1: A **plant_arrangement_segment_definition** shall be the **related_product_definition** in a **product_definition_relationship** that has a **relating_product_definition** that is a **plant_arrangement_definition**.

WR2: A **plant_arrangement_segment_definition** shall be referenced by a **shape_definition**.

WR3: A **plant_arrangement_segment_definition** shall have a **frame_of_reference** name of 'functional definition'.

WR4: A **plant_arrangement_segment_definition** shall have exactly one representation with the name of 'arrangement segment characteristics'.

WR5: The representation of the **plant_arrangement_segment_definition** with the name of 'arrangement segment characteristics' shall have at least two **representation_items**.

WR6: The representation of the **plant_arrangement_segment_definition** with the name of 'arrangement segment characteristics' shall have exactly one **representation_item** that is of type **measure_representation_item** with a name of 'design pressure'.

WR7: The representation of the **plant_arrangement_segment_definition** with the name of 'arrangement segment characteristics' shall have exactly one **representation_item** that is of type **measure_representation_item** with a name of 'design speed'.

WR8: The representation of the **plant_arrangement_segment_definition** with the name of 'arrangement segment characteristics' shall have exactly one **representation_item** that is of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a name of 'design temperature'.

WR9: The representation of the **plant_arrangement_segment_definition** with the name of 'arrangement segment characteristics' shall have exactly one **representation_item** that is of type **measure_representation_item** with a name of 'design torque'.

WR10: A **plant_arrangement_segment_definition** shall be have at most two related instances of **plant_arrangement_segment_termination**.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **plant_arrangement_segment_definition** entity:

50. **application_context_requires_ap_definition** (see 5.2.4.1);
51. **dependent_instantiable_application_context** (see 5.2.4.9);
52. **dependent_instantiable_product_definition_context** (see 5.2.4.11);

ISO 10303-227:2005(E)

53. **product_definition_context_name_constraint** (see 5.2.4.13).

5.2.3.1.94 **plant_arrangement_segment_termination**

A **plant_arrangement_segment_termination** is a type of **shape_aspect** that identifies the termination of an arrangement segment.

EXPRESS specification:

```
*)
ENTITY plant_arrangement_segment_termination
  SUBTYPE OF(shape_aspect);
WHERE
  WR1: (SELF.description = 'mechanical arrangement segment termination') AND
    ('PLANT_SPATIAL_CONFIGURATIONS.PLANT_ARRANGEMENT_SEGMENT_DEFINITION'
    IN TYPEOF(SELF.of_shape.definition)) XOR (((SELF.description =
    'mechanical arrangement termination') AND
    ('PLANT_SPATIAL_CONFIGURATIONS.PRODUCT_DEFINITION_RELATIONSHIP'
    IN TYPEOF(SELF.of_shape.definition))) AND
    ('PLANT_SPATIAL_CONFIGURATIONS.PLANT_ARRANGEMENT_SEGMENT_DEFINITION'
    IN TYPEOF(SELF.of_shape.definition.related_product_definition))) AND
    ('PLANT_SPATIAL_CONFIGURATIONS.PLANT_ARRANGEMENT_DEFINITION'
    IN TYPEOF(SELF.of_shape.definition.relatering_product_definition));
  WR2:      SIZEOF(QUERY (sar <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.'
+
    'SHAPE_ASPECT_RELATIONSHIP.RELATING_SHAPE_ASPECT') + USEDIN(SELF,
    'PLANT_SPATIAL_CONFIGURATIONS.' +
    'SHAPE_ASPECT_RELATIONSHIP.RELATED_SHAPE_ASPECT')) |
    NOT (SIZEOF(TYPEOF(sar) *
    ['PLANT_SPATIAL_CONFIGURATIONS.ARRANGEMENT_BRANCH_CONNECTION',
    'PLANT_SPATIAL_CONFIGURATIONS.ARRANGEMENT_PLANT_ITEM_CONNECTION',
    'PLANT_SPATIAL_CONFIGURATIONS.ARRANGEMENT_TERMINATION_CONNECTION' ]))
    = 1))) = 0;
  WR3:      (SIZEOF(QUERY (sar <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.'
+
    'SHAPE_ASPECT_RELATIONSHIP.RELATED_SHAPE_ASPECT')) |
    (SIZEOF(TYPEOF(sar) * [
    'PLANT_SPATIAL_CONFIGURATIONS.ARRANGEMENT_BRANCH_CONNECTION',
    'PLANT_SPATIAL_CONFIGURATIONS.ARRANGEMENT_TERMINATION_CONNECTION' ]))
    = 1))) = 1) OR
    (SIZEOF(QUERY (sar <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
    'SHAPE_ASPECT_RELATIONSHIP.RELATING_SHAPE_ASPECT')) |
    NOT ('PLANT_SPATIAL_CONFIGURATIONS.ARRANGEMENT_PLANT_ITEM_CONNECTION'
    IN TYPEOF(sar)))) = 0);
END_ENTITY;
(*
```

Formal propositions:

WR1: If a **plant_arrangement_segment_termination** is the termination of a mechanical arrangement segment, it shall be an aspect of the shape of a **plant_arrangement_segment_definition**. If the **plant_arrangement_segment_termination** is the termination of a mechanical arrangement, it shall be an aspect

of the shape of a **product_definition_relationship** in which the related_product_definition is a **plant_arrangement_segment_definition** and the relating_shape_aspect is a **plant_arrangement_definition**.

WR2: A **plant_arrangement_segment_termination** is the **relating_shape_aspect** or the **related_shape_aspect** in at least one **shape_aspect_relationship** that is a **arrangement_branch_connection**, **arrangement_plant_item_connection**, or **arrangement_termination_connection**.

WR3: A **plant_arrangement_segment_termination** is the related_shape_aspect in exactly one **shape_aspect_relationship** that is either a **arrangement_termination_connection** or **arrangement_branch_connection** or is the relating_shape_aspect in exactly one **arrangement_plant_item_connection**.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **plant_arrangement_segment_termination** entity:

- 54. **application_context_requires_ap_definition** (see 5.2.4.1);
- 55. **dependent_instantiable_application_context** (see 5.2.4.9);
- 56. **dependent_instantiable_product_definition_context** (see 5.2.4.11);
- 57. **product_definition_context_name_constraint** (see 5.2.4.13).

5.2.3.1.95 plant_csg_shape_representation

A **plant_csg_shape_representation** is a type of **shape_representation** that is composed of CSG primitives, revolved solids, extruded solids, and boolean operators.

EXPRESS specification:

```

*)
ENTITY plant_csg_shape_representation
  SUBTYPE OF (shape_representation);
WHERE
  WR1: SIZEOF (QUERY (item <* SELF.items |
    NOT (SIZEOF (['PLANT_SPATIAL_CONFIGURATION.CSG_SOLID',
      'PLANT_SPATIAL_CONFIGURATION.EXTRUDED_AREA_SOLID',
      'PLANT_SPATIAL_CONFIGURATION.REVOLVED_AREA_SOLID',
      'PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_3D',
      'PLANT_SPATIAL_CONFIGURATION.MAPPED_ITEM'] * TYPEOF (item)) = 1)))
    = 0;
  WR2: SIZEOF (QUERY (item <* SELF.items |
    SIZEOF (['PLANT_SPATIAL_CONFIGURATION.CSG_SOLID',
      'PLANT_SPATIAL_CONFIGURATION.EXTRUDED_AREA_SOLID',
      'PLANT_SPATIAL_CONFIGURATION.REVOLVED_AREA_SOLID',
      'PLANT_SPATIAL_CONFIGURATION.MAPPED_ITEM'] * TYPEOF (item))
    = 1)) >= 1;
  WR3: SIZEOF (QUERY (item <* SELF.items |
    ('PLANT_SPATIAL_CONFIGURATION.CSG_SOLID' IN TYPEOF (item)) AND
    (NOT (valid_advanced_csg_tree
      (item\csg_solid.tree_root_expression)))))) = 0;
  WR4: SIZEOF (QUERY (mi <* QUERY (item <* SELF.items |
    'PLANT_SPATIAL_CONFIGURATION.MAPPED_ITEM' IN TYPEOF (item)) |
    NOT ('PLANT_SPATIAL_CONFIGURATION.' +
      'PLANT_CSG_SHAPE_REPRESENTATION' IN
      TYPEOF (mi\mapped_item.mapping_source.mapped_representation)))))) = 0;

```

ISO 10303-227:2005(E)

END_ENTITY ;

(*

Formal propositions:

WR1: Each item of a **plant_csg_shape_representation** shall be a **csg_solid**, **extruded_area_solid**, **revolved_area_solid**, **axis2_placement_3d**, or **mapped_item**.

WR2: A **plant_csg_shape_representation** shall have at least one **representation_item** instance in its set of items that is of type **csg_solid**, **extruded_area_solid**, **revolved_area_solid**, or **mapped_item**.

WR3: A **plant_csg_shape_representation** shall be comprised of the proper CSG tree elements.

WR4: For each **mapped_item** in a **plant_csg_shape_representation**, the source of the **mapped_item** shall be a **plant_csg_shape_representation**.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **plant_csg_shape_representation** entity:

58. **subtype_mandatory_shape_representation** (see 5.2.4.18)

5.2.3.1.96 plant_design_csg_primitive

A **plant_design_csg_primitive** is a type of **solid_model** and a **shape_representation** which specifies a parameterised definition of a constructive solid geometry primitive that is specific to plant design.

NOTE The **plant_design_csg_primitive** is necessary in this part of ISO 10303 to facilitate the representation of CSG primitives specific to plant design CAD systems that were not acceptable as generic CSG primitives within ISO 10303-42.

A **plant_design_csg_primitive** represents one of the following types of CSG primitives specific to plant design:

hemisphere;
rectangle to ellipse;
trimmed sphere;
trimmed pyramid.

Each type of csg primitive has specific parameters defined for it. The parameters and their requirements are defined in the following clauses.

5.2.3.1.96.1 hemisphere

The hemisphere is a **plant_design_csg_primitive** with a name of 'hemisphere'. It has two parameters: position and radius. The position is defined by an **axis2_placement_3d**. The location attribute of the position specifies the centre of the circle formed by the centre cut through the sphere upon which the hemisphere is based. The orientation consists of an x,y plane and a z direction. The xy plane specifies the plane in which the centre cut circle is defined. The location point shall lie in the xy plane. The z axis direction specifies the direction from the centre point which the volume occupies. The radius is defined by a **measure_representation_item** that is also a **length_measure_with_unit**. It specifies the radius of the sphere upon which the hemisphere is based.

5.2.3.1.96.2 rectangle to ellipse

The rectangle to ellipse is a **plant_design_csg_primitive** with a name of 'rectangle to ellipse'. It has eight parameters: position, x size, y size, height, x offset, y offset, semi axis 1, and semi axis 2. The volume is defined by forming transition surfaces between the rectangle defined by x size and y size and the ellipse defined by the semi axis 1 and semi axis 2. The length of the transition is defined by the height. The rectangle to ellipse may be skewed if the x offset or y offset have non-zero values. The base of the volume is a rectangle with its centre at the location point of the position. The size of the rectangle is defined by the parameters x size along the X axis and y size along the Y axis. The ellipse is in the plane perpendicular to the Z axis at distance height in the positive Z direction. The centre of the ellipse is at x offset, y offset from the intersection point of the Z axis defined by the position and that plane.

The major axis of the ellipse is parallel to the X axis defined by the position, and the minor axis is parallel to the Y axis defined by the position.

5.2.3.1.96.3 trimmed sphere

The trimmed sphere is a **plant_design_csg_primitive** with a name of 'trimmed sphere'. It has two parameters: sphere, direction and height. The height varies from -radius to +radius. To place the cutting plane, locate a point along the vector defined by the direction with magnitude of the absolute value of the height coming out of centre of the sphere. A cutting plane passes through this point and is perpendicular to the direction. A positive value for the height indicates a trim of the section above the cutting plane. A negative value for the height indicates a trim of the section below the cutting plane.

5.2.3.1.96.4 trimmed pyramid

The trimmed pyramid is a **plant_design_csg_primitive** with a name of 'trimmed pyramid'. It defines a shape that is a rectangular pyramid that may be skewed. It has eight parameters that define a top and a bottom face, and a height: base position, base length, base width, height, top centre x, top centre y, top length and top width. The base position is and axis2_placement_3d. The base length and base width define the rectangle that comprises the base of the pyramid with the location point of the base position at the centre of the rectangle. The height defines the distance along the z axis at which to place the plane in which the top face of the pyramid is defined. The top centre x and top centre y parameters define the distance from the point formed by the intersection of the top plane and the z axis of the position at which to place the centre of the top face. The top length and top width define the boundaries of the top face of the pyramid.

EXPRESS specification:

```
* )
ENTITY plant_design_csg_primitive
  SUBTYPE OF (shape_representation, solid_model);
WHERE
  WR1: SELF.context_of_items.coordinate_space_dimension = 3;
  WR2: SELF\representation.name = SELF\representation_item.name;
  WR3: SELF\representation.name IN ['hemisphere', 'rectangle to ellipse',
  'trimmed sphere', 'trimmed pyramid'];
  WR4: (NOT (SELF\representation.name = 'hemisphere')) OR
  (SIZEOF (SELF.items) = 2);
  WR5: (NOT (SELF\representation.name = 'hemisphere')) OR
  (SIZEOF (QUERY (it <* SELF.items |
```

ISO 10303-227:2005(E)

```
(it.name = 'position') AND
('PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_3D' IN
TYPEOF (it))) = 1);
WR6: (NOT (SELF\representation.name = 'hemisphere')) OR
(SIZEOF (QUERY (it <* SELF.items |
(it.name = 'radius') AND
(SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
TYPEOF (it)) = 2))) = 1));
WR7: (NOT (SELF\representation.name = 'rectangle to ellipse')) OR
(SIZEOF (SELF.items) = 8);
WR8: (NOT (SELF\representation.name = 'rectangle to ellipse')) OR
(SIZEOF (QUERY (it <* SELF.items |
(it.name = 'position') AND
('PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_3D' IN
TYPEOF (it)))) = 1);
WR9: (NOT (SELF\representation.name = 'rectangle to ellipse')) OR
(SIZEOF (QUERY (it <* SELF.items |
(it.name = 'x size') AND
(SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
TYPEOF (it)) = 2) AND
('PLANT_SPATIAL_CONFIGURATION.POSITIVE_LENGTH_MEASURE' IN
TYPEOF (it\measure_with_unit.value_component)))) = 1);
WR10: (NOT (SELF\representation.name = 'rectangle to ellipse')) OR
(SIZEOF (QUERY (it <* SELF.items |
(it.name = 'y size') AND
(SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
TYPEOF (it)) = 2) AND
('PLANT_SPATIAL_CONFIGURATION.POSITIVE_LENGTH_MEASURE' IN
TYPEOF (it\measure_with_unit.value_component)))) = 1);
WR11: (NOT (SELF\representation.name = 'rectangle to ellipse')) OR
(SIZEOF (QUERY (it <* SELF.items |
(it.name = 'height') AND
(SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
TYPEOF (it)) = 2) AND
('PLANT_SPATIAL_CONFIGURATION.POSITIVE_LENGTH_MEASURE' IN
TYPEOF (it\measure_with_unit.value_component)))) = 1);
WR12: (NOT (SELF\representation.name = 'rectangle to ellipse')) OR
(SIZEOF (QUERY (it <* SELF.items |
(it.name = 'x offset') AND
(SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
TYPEOF (it)) = 2))) = 1);
WR13: (NOT (SELF\representation.name = 'rectangle to ellipse')) OR
(SIZEOF (QUERY (it <* SELF.items |
(it.name = 'y offset') AND
(SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
TYPEOF (it)) = 2))) = 1);
WR14: (NOT (SELF\representation.name = 'rectangle to ellipse')) OR
(SIZEOF (QUERY (it <* SELF.items |
```

```

        (it.name = 'semi axis 1') AND
        (SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
        'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
        TYPEOF (it)) = 2))) = 1);
WR15: (NOT (SELF\representation.name = 'rectangle to ellipse')) OR
        (SIZEOF (QUERY (it <* SELF.items |
        (it.name = 'semi axis 2') AND
        (SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
        'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
        TYPEOF (it)) = 2))) = 1);
WR16: (NOT (SELF\representation.name = 'trimmed sphere')) OR
        (SIZEOF (SELF.items) = 3);
WR17: (NOT (SELF\representation.name = 'trimmed sphere')) OR
        (SIZEOF (QUERY (it <* SELF.items |
        (it.name = 'base sphere') AND
        ('PLANT_SPATIAL_CONFIGURATION.SPHERE' IN
        TYPEOF (it)))) = 1);
WR18: (NOT (SELF\representation.name = 'trimmed sphere')) OR
        (SIZEOF (QUERY (it <* SELF.items |
        (it.name = 'cutting plane normal direction') AND
        ('PLANT_SPATIAL_CONFIGURATION.DIRECTION' IN
        TYPEOF (it)))) = 1);
WR19: (NOT (SELF\representation.name = 'trimmed sphere')) OR
        (SIZEOF (QUERY (it <* SELF.items |
        (it.name = 'height') AND
        (SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
        'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
        TYPEOF (it)) = 2))) = 1);
WR20: (NOT (SELF\representation.name = 'trimmed sphere')) OR
        (SIZEOF (QUERY (ht <* QUERY (it <* SELF.items |
        (it.name = 'height') AND
        (SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
        'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
        TYPEOF (it)) = 2)) |
        NOT (SIZEOF (QUERY (sphre <* QUERY (it <* SELF.items |
        (it.name = 'base sphere') AND
        ('PLANT_SPATIAL_CONFIGURATION.SPHERE' IN TYPEOF (it))) |
        NOT ({-sphre.radius < ht.value_component < sphre.radius})))
        = 0))) = 0);
WR21: (NOT (SELF\representation.name = 'trimmed pyramid')) OR
        (SIZEOF (SELF.items) = 8);
WR22: (NOT (SELF\representation.name = 'trimmed pyramid')) OR
        (SIZEOF (QUERY (it <* SELF.items |
        (it.name = 'base position') AND
        ('PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_3D' IN
        TYPEOF (it)))) = 1);
WR23: (NOT (SELF\representation.name = 'trimmed pyramid')) OR
        (SIZEOF (QUERY (it <* SELF.items |
        (it.name = 'base length') AND
        (SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
        'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
        TYPEOF (it)) = 2))) = 1);
WR24: (NOT (SELF\representation.name = 'trimmed pyramid')) OR
        (SIZEOF (QUERY (it <* SELF.items |

```

ISO 10303-227:2005(E)

```
(it.name = 'base width') AND
(SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
TYPEOF (it)) = 2))) = 1);
WR25: (NOT (SELF\representation.name = 'trimmed pyramid')) OR
(SIZEOF (QUERY (it <* SELF.items |
(it.name = 'height') AND
(SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
TYPEOF (it)) = 2))) = 1);
WR26: (NOT (SELF\representation.name = 'trimmed pyramid')) OR
(SIZEOF (QUERY (it <* SELF.items |
(it.name = 'top centre x') AND
(SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
TYPEOF (it)) = 2))) = 1);
WR27: (NOT (SELF\representation.name = 'trimmed pyramid')) OR
(SIZEOF (QUERY (it <* SELF.items |
(it.name = 'top centre y') AND
(SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
TYPEOF (it)) = 2))) = 1);
WR28: (NOT (SELF\representation.name = 'trimmed pyramid')) OR
(SIZEOF (QUERY (it <* SELF.items |
(it.name = 'top length') AND
(SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
TYPEOF (it)) = 2))) = 1);
WR29: (NOT (SELF\representation.name = 'trimmed pyramid')) OR
(SIZEOF (QUERY (it <* SELF.items |
(it.name = 'top width') AND
(SIZEOF (['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT'] *
TYPEOF (it)) = 2))) = 1);
END_ENTITY;
(*
```

Formal propositions:

WR1: The **plant_design_csg_primitive** shall be defined in three dimensions.

WR2: The **plant_design_csg_primitive** shall have a single name. The name attribute shall have the same value for the name attribute of the **representation** and **representation_item**.

WR3: The **plant_design_csg_primitive** shall have a name of either 'hemisphere', 'rectangle to ellipse', 'trimmed sphere', or 'trimmed pyramid'.

WR4: If the name of the **plant_design_csg_primitive** is 'hemisphere', it shall be defined by exactly two **representation_items**.

WR5: If the name of the **plant_design_csg_primitive** is 'hemisphere', exactly one of the **representation_items** in its definition shall be an **axis2_placement_3d** with a name of 'position'.

WR6: If the name of the **plant_design_csg_primitive** is 'hemisphere', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'radius'.

WR7: If the name of the **plant_design_csg_primitive** is 'rectangle to ellipse', it shall be defined by exactly eight **representation_items**.

WR8: If the name of the **plant_design_csg_primitive** is 'rectangle to ellipse', exactly one of the **representation_items** in its definition shall be an **axis2_placement_3d** with a name of 'position'.

WR9: If the name of the **plant_design_csg_primitive** is 'rectangle to ellipse', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'x size', the value of which is positive.

WR10: If the name of the **plant_design_csg_primitive** is 'rectangle to ellipse', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'y size', the value of which is positive.

WR11: If the name of the **plant_design_csg_primitive** is 'rectangle to ellipse', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'height', the value of which is positive.

WR12: If the name of the **plant_design_csg_primitive** is 'rectangle to ellipse', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'x offset'.

WR13: If the name of the **plant_design_csg_primitive** is 'rectangle to ellipse', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'y offset'.

WR14: If the name of the **plant_design_csg_primitive** is 'rectangle to ellipse', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'semi axis 1'.

WR15: If the name of the **plant_design_csg_primitive** is 'rectangle to ellipse', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'semi axis 2'.

WR16: If the name of the **plant_design_csg_primitive** is 'trimmed sphere', it shall be defined by exactly three **representation_items**.

WR17: If the name of the **plant_design_csg_primitive** is 'trimmed sphere', exactly one of the **representation_items** in its definition shall be a sphere with a name of 'base sphere'.

WR18: If the name of the **plant_design_csg_primitive** is 'trimmed sphere', exactly one of the **representation_items** in its definition shall be a direction with a name of 'cutting plane normal direction'.

WR19: If the name of the **plant_design_csg_primitive** is 'trimmed sphere', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'radius'.

WR20: If the name of the **plant_design_csg_primitive** is 'hemisphere', the value of the height parameter shall vary between negative radius and positive radius of the sphere.

ISO 10303-227:2005(E)

WR21: If the name of the **plant_design_csg_primitive** is 'trimmed pyramid', it shall be defined by exactly two **representation_items**.

WR22: If the name of the **plant_design_csg_primitive** is 'trimmed pyramid', exactly one of the **representation_items** in its definition shall be an **axis2_placement_3d** with a name of 'base position'.

WR23: If the name of the **plant_design_csg_primitive** is 'trimmed pyramid', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'base length'.

WR24: If the name of the **plant_design_csg_primitive** is 'trimmed pyramid', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'base width'.

WR25: If the name of the **plant_design_csg_primitive** is 'trimmed pyramid', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'height'.

WR26: If the name of the **plant_design_csg_primitive** is 'trimmed pyramid', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'top centre x'.

WR27: If the name of the **plant_design_csg_primitive** is 'trimmed pyramid', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'top centre y'.

WR28: If the name of the **plant_design_csg_primitive** is 'trimmed pyramid', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'top length'.

WR29: If the name of the **plant_design_csg_primitive** is 'trimmed pyramid', exactly one of the **representation_items** in its definition shall be a **measure_representation_item** and **length_measure_with_unit** with a name of 'top width'.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **plant_design_csg_primitive** entity:

59. **subtype_mandatory_shape_representation** (see 5.2.4.18)

5.2.3.1.97 plant_item_connection

A **plant_item_connection** is a type of **shape_aspect** and **shape_aspect_relationship** that identifies a connection between plant items.

NOTE A connection is a **shape_aspect** of the physical assembly where the two plant items are connected.

EXPRESS specification:

*)

```
ENTITY plant_item_connection
  SUBTYPE OF(shape_aspect, shape_aspect_relationship);
WHERE
  WR1: 'PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTOR' IN
```

```

        TYPEOF (SELF\shape_aspect_relationship.relatng_shape_aspect);
WR2: 'PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTOR' IN
        TYPEOF (SELF\shape_aspect_relationship.related_shape_aspect);
WR3: SELF\shape_aspect.of_shape\property_definition.
        definition\product_definition.
        frame_of_reference\application_context_element.name IN
        ['functional occurrence', 'physical occurrence',
        'functional definition', 'physical definition'];
WR4: (SELF\shape_aspect_relationship.relatng_shape_aspect.
        of_shape\property_definition.definition\product_definition.
        frame_of_reference\application_context_element.name =
        SELF\shape_aspect_relationship.related_shape_aspect.
        of_shape\property_definition.definition\product_definition.
        frame_of_reference\application_context_element.name);
WR5: SIZEOF (USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
        'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')) >= 1;
WR6: SIZEOF (QUERY (pscca <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
        NOT (SIZEOF (
        ['PLANT_SPATIAL_CONFIGURATION.CONNECTION_FUNCTIONAL_CLASS',
        'PLANT_SPATIAL_CONFIGURATION.CONNECTION_MOTION_CLASS'] *
        TYPEOF (pscca.assigned_class)) >= 1))) = 0;
WR7: SIZEOF (QUERY (pdr <* USEDIN (SELF.of_shape.definition,
        'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_RELATIONSHIP.' +
        'RELATED_PRODUCT_DEFINITION') |
        pdr.name = 'support usage connection')) <= 1;
END_ENTITY;
(*

```

Formal propositions:

WR1: The **relatng_shape_aspect** of a **plant_item_connection** shall be a **plant_item_connector**.

WR2: The **related_shape_aspect** of a **plant_item_connection** shall be a **plant_item_connector**.

WR3: The **application_context_element** that applies to a **plant_item_connection** shall have the name 'functional occurrence', 'physical occurrence', 'functional definition', or 'physical definition'.

WR4: The **application_context_elements** that apply to the **relatng_shape_aspect** and the **related_shape_aspect** of a **plant_item_connection** shall have the same name.

WR5: A **plant_item_connection** shall be classified at least once.

WR6: A **plant_item_connection** shall be classified as a **connection_functional_class**, as a **connection_motion_class**, or as both.

WR7: The **product_definition** of the **plant_item_connection** shall be the **related_product_definition** in at most one **product_definition_relationship** with a name of 'support usage connection'.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **plant_item_connection** entity:

ISO 10303-227:2005(E)

- 60. **application_context_requires_ap_definition** (see 5.2.4.1);
- 61. **dependent_instantiable_application_context** (see 5.2.4.9);
- 62. **dependent_instantiable_product_definition_context** (see 5.2.4.11);
- 63. **product_definition_context_name_constraint** (see 5.2.4.13);
- 64. **product_definition_usage_constraint** (see 5.2.4.14).

5.2.3.1.98 plant_item_connector

A **plant_item_connector** is a type of **shape_aspect** that identifies a feature of a plant item that is designed to connect to another connector.

EXPRESS specification:

*)

```
ENTITY plant_item_connector
  SUBTYPE OF(shape_aspect);
WHERE
  WR1: SELF\shape_aspect.of_shape\property_definition.
        definition\product_definition.
        frame_of_reference\application_context_element.name IN
        ['functional definition', 'physical definition',
         'functional occurrence', 'physical occurrence'];
  WR2: SIZEOF (QUERY (pic <*
    (bag_to_set (USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
      'SHAPE_ASPECT_RELATIONSHIP.RELATED_SHAPE_ASPECT')) +
    bag_to_set (USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
      'SHAPE_ASPECT_RELATIONSHIP.RELATING_SHAPE_ASPECT')))) |
    'PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTION' IN
    TYPEOF (pic))) <= 1;
  WR3: (NOT (SIZEOF (QUERY (aca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
    SIZEOF (TYPEOF (aca.assigned_class) *
    ['PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
    'PLANT_SPATIAL_CONFIGURATION.MECHANICAL_CONNECTOR_CLASS',
    'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS'])
    = 1)) >= 1)) OR
    ((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
    pd.name = 'service characteristics')) >= 1)) OR
    (SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
    pd.name = 'service characteristics') |
    NOT (SIZEOF (QUERY (pdr <* USEDIN (sc,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
    pdr.used_representation.name =
    'design service characteristics')) = 1))) = 0))) = 0));
  WR4: (NOT (SIZEOF (QUERY (aca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
    SIZEOF (TYPEOF (aca.assigned_class) *
    ['PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
```



```

'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS']]
= 1)) >= 1)) OR
(NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
(pd.name = 'service characteristics') )) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'service characteristics') |
NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'design service characteristics') |
SIZEOF (dsc.used_representation.items) >= 2)) = 1))) = 0));
WR5: (NOT (SIZEOF (QUERY (aca <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
SIZEOF (TYPEOF (aca.assigned_class) *
['PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS']))
= 1)) >= 1)) OR
((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'service characteristics') |
NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'design service characteristics') |
{1 <= SIZEOF (QUERY (it <* dsc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name IN ['pressure', 'minimum pressure',
'maximum pressure']))) <= 2}))) = 1))) = 0));
WR6: (NOT (SIZEOF (QUERY (aca <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
SIZEOF (TYPEOF (aca.assigned_class) *
['PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS']))
= 1)) >= 1)) OR
((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'service characteristics') |
NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'design service characteristics') |
SIZEOF (QUERY (it <* dsc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN

```

ISO 10303-227:2005(E)

```
TYPEOF (it)) AND
(it.name = 'pressure')) <= 1)) = 1))) = 0));
WR7: (NOT (SIZEOF (QUERY (aca <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
SIZEOF (TYPEOF (aca.assigned_class) *
['PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS'])
= 1)) >= 1)) OR
((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'service characteristics') |
NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'design service characteristics') |
SIZEOF (QUERY (it <* dsc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'minimum pressure')) <= 1)) = 1))) = 0));
WR8: (NOT (SIZEOF (QUERY (aca <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
SIZEOF (TYPEOF (aca.assigned_class) *
['PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS'])
= 1)) >= 1)) OR
((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'service characteristics') |
NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'design service characteristics') |
SIZEOF (QUERY (it <* dsc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'maximum pressure')) <= 1)) = 1))) = 0));
WR9: (NOT (SIZEOF (QUERY (aca <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
SIZEOF (TYPEOF (aca.assigned_class) *
['PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS'])
= 1)) >= 1)) OR
((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'service characteristics')) >= 1)) OR
```

```

(SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'service characteristics') |
NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'design service characteristics') |
{1 <= SIZEOF (QUERY (it <* dsc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']) = 2) AND
(it.name IN ['temperature', 'minimum temperature',
'maximum temperature']))) <= 2})) = 1))) = 0));
WR10: (NOT (SIZEOF (QUERY (aca <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
SIZEOF (TYPEOF (aca.assigned_class) *
['PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS'])
= 1)) >= 1)) OR
((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'service characteristics') |
NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'design service characteristics') |
SIZEOF (QUERY (it <* dsc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'temperature')) <= 1)) = 1))) = 0));
WR11: (NOT (SIZEOF (QUERY (aca <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
SIZEOF (TYPEOF (aca.assigned_class) *
['PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS'])
= 1)) >= 1)) OR
((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
pd.name = 'service characteristics') |
NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'design service characteristics') |

```

ISO 10303-227:2005(E)

```
        SIZEOF (QUERY (it <* dsc.used_representation.items |
        (SIZEOF (TYPEOF (it) *
        ['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
        'PLANT_SPATIAL_CONFIGURATION.' +
        'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']) = 2) AND
        (it.name = 'minimum temperature')) <= 1)) = 1))) = 0));
WR12: (NOT (SIZEOF (QUERY (aca <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
        SIZEOF (TYPEOF (aca.assigned_class) *
        ['PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
        'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS'])
        = 1)) >= 1)) OR
        ((NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
        pd.name = 'service characteristics')) >= 1)) OR
        (SIZEOF (QUERY (sc <* QUERY (pd <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
        pd.name = 'service characteristics') |
        NOT (SIZEOF (QUERY (dsc <* QUERY (pdr <* USEDIN (sc,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
        pdr.used_representation.name = 'design service characteristics') |
        SIZEOF (QUERY (it <* dsc.used_representation.items |
        (SIZEOF (TYPEOF (it) *
        ['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
        'PLANT_SPATIAL_CONFIGURATION.' +
        'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']) = 2) AND
        (it.name = 'maximum temperature')) <= 1)) = 1))) = 0));
WR13: (NOT (SELF\shape_aspect.of_shape\property_definition.
        definition\product_definition.
        frame_of_reference\application_context_element.name IN
        ['functional definition', 'functional occurrence'])) OR
        (SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
        'PLANT_SPATIAL_CONFIGURATION.SHAPE_REPRESENTATION' IN
        TYPEOF (pdr.used_representation))) = 0);
END_ENTITY;
(*
```

Formal propositions:

WR1: The **application_context_element** that applies to a **plant_item_connector** (as its **product_definition_context**) shall have the name 'functional definition', 'physical definition' 'functional occurrence', or 'physical occurrence'.

WR2: The **plant_item_connector** shall be the connector in at most one **plant_item_connection**.

WR3: If the **plant_item_connector** is classified as either a piping connector, a connector end type or a mechanical connector and has a **property_definition** with a name of 'service characteristics', the **property_definition** shall have exactly one **representation** with the name of 'design service characteristics'.

WR4: If the **plant_item_connector** is classified as either a piping connector or a connector end type and has a **property_definition** with a name of 'service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has at least two **representation_items**.

WR5: If the **plant_item_connector** is classified as either a piping connector or a connector end type and has a **property_definition** with a name of 'service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has one or two **representation_items** of type **measure_representation_item** with a name of 'pressure', 'minimum pressure', or 'maximum pressure'.

WR6: If the **plant_item_connector** is classified as either a piping connector or a connector end type and has a **property_definition** with a name of 'service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has at most one **representation_item** of type **measure_representation_item** with a name of 'pressure'.

WR7: If the **plant_item_connector** is classified as either a piping connector or a connector end type and has a **property_definition** with a name of 'service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has at most one **representation_item** of type **measure_representation_item** with a name of 'minimum pressure'.

WR8: If the **plant_item_connector** is classified as either a piping connector or a connector end type and has a **property_definition** with a name of 'service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has at most one **representation_item** of type **measure_representation_item** with a name of 'maximum pressure'.

WR9: If the **plant_item_connector** is classified as either a piping connector or a connector end type and has a **property_definition** with a name of 'service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has one or two **representation_items** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a name of 'temperature', 'minimum temperature', or 'maximum temperature'.

WR10: If the **plant_item_connector** is classified as either a piping connector or a connector end type and has a **property_definition** with a name of 'service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has at most one **representation_item** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a name of 'temperature'.

WR11: If the **plant_item_connector** is classified as either a piping connector or a connector end type and has a **property_definition** with a name of 'service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has at most one **representation_item** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a name of 'minimum temperature'.

WR12: If the **plant_item_connector** is classified as either a piping connector or a connector end type and has a **property_definition** with a name of 'service characteristics', the **property_definition** shall have exactly one **representation** with a name of 'design service characteristics' that has at most one **representation_item** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a name of 'maximum temperature'.

WR13: If a **plant_item_connector** is a functional connector it shall not have any **shape_representation**.

ISO 10303-227:2005(E)

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **plant_item_connector** entity:

65. **application_context_requires_ap_definition** (see 5.2.4.1);
66. **dependent_instantiable_application_context** (see 5.2.4.9);
67. **dependent_instantiable_product_definition_context** (see 5.2.4.11);
68. **product_definition_context_name_constraint** (see 5.2.4.13);
69. **product_definition_usage_constraint** (see 5.2.4.14).

5.2.3.1.99 **plant_item_interference**

A **plant_item_interference** is a type of **product_definition_relationship** that identifies interference between plant items.

EXPRESS specification:

```
*)
ENTITY plant_item_interference
  SUBTYPE OF (product_definition_relationship);
END_ENTITY;
(*
```

5.2.3.1.100 **plant_item_route**

A **plant_item_route** is a type of **product_definition_shape** that identifies the 3D path of a **plant_line_definition**, **plant_arrangement_definition**, **plant_arrangement_segment_definition** or a **plant_line_segment_definition**.

EXPRESS specification:

```
*)
ENTITY plant_item_route
  SUBTYPE OF (product_definition_shape);
WHERE
  WR1: SELF\property_definition.definition\product_definition.
    frame_of_reference\application_context_element.name =
    'physical occurrence';
  WR2: (SIZEOF (TYPEOF (SELF\property_definition.definition) *
    ['PLANT_SPATIAL_CONFIGURATIONS.PLANT_LINE_DEFINITION',
    'PLANT_SPATIAL_CONFIGURATIONS.PLANT_LINE_SEGMENT_DEFINITION']) = 1) XOR
    (SIZEOF (TYPEOF (SELF\property_definition.definition) *
    ['PLANT_SPATIAL_CONFIGURATIONS.PLANT_ARRANGEMENT_DEFINITION',
    'PLANT_SPATIAL_CONFIGURATIONS.PLANT_ARRANGEMENT_SEGMENT_DEFINITION']) =
    1);
END_ENTITY;
(*
```

Formal propositions:

WR1: The **name** of the **product_definition_context** that a **plant_item_route** is related to shall be 'physical occurrence'.

WR2: A **plant_item_route** shall be the definition of the shape of a **plant_line_definition**, **plant_arrangement_definition**, **plant_arrangement_segment_definition** or a **plant_line_segment_definition**.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **plant_item_route** entity:

- 70. **application_context_requires_ap_definition** (see 5.2.4.1);
- 71. **dependent_instantiable_application_context** (see 5.2.4.9);
- 72. **dependent_instantiable_product_definition_context** (see 5.2.4.11);
- 73. **product_definition_context_name_constraint** (see 5.2.4.13);
- 74. **product_definition_usage_constraint** (see 5.2.4.14).

5.2.3.1.101 plant_item_weight_representation

A **plant_item_weight_representation** is a type of **property_definition_representation** that specifies the weight of plant items.

EXPRESS specification:

```

*)
ENTITY plant_item_weight_representation
  SUBTYPE OF (property_definition_representation);
WHERE
  WR1: SELF.used_representation.name = 'item weight';
  WR2: SIZEOF (SELF.used_representation.items) >= 2;
  WR3: SIZEOF (QUERY (it <* SELF.used_representation.items |
    (it.name IN ['weight value',
    'maximum weight value', 'minimum weight value']) AND
    (NOT (SIZEOF (TYPEOF (it) *
    ['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
    'PLANT_SPATIAL_CONFIGURATION.QUALIFIED_REPRESENTATION_ITEM']) =
    2)))) = 0;
  WR4: SIZEOF (QUERY (it <* SELF.used_representation.items |
    ('PLANT_SPATIAL_CONFIGURATION.GEOMETRIC_REPRESENTATION_ITEM'
    IN TYPEOF (it)) AND
    (it.name = 'centre of gravity')))) = 1;
  WR5: {1 <= SIZEOF (QUERY (it <* SELF.used_representation.items |
    it.name IN ['weight value',
    'maximum weight value', 'minimum weight value'])) <= 2};
  WR6: SIZEOF (QUERY (it <* SELF\property_definition_representation.
    used_representation.items |
    (it.name IN ['maximum weight value', 'minimum weight value']) AND
    (NOT (SIZEOF (QUERY (tq <* QUERY (qual <*
    it\qualified_representation_item.qualifiers |
    'PLANT_SPATIAL_CONFIGURATION.TYPE_QUALIFIER' IN TYPEOF (qual)) |
    tq.name = 'operating')) = 1)))) = 0;
END_ENTITY;
(*

```

ISO 10303-227:2005(E)

Formal propositions:

WR1: The name of the **plant_item_weight_representation** shall be 'item weight'.

WR2: The **plant_item_weight_representation** shall contain at least two items.

WR3: If the **plant_item_weight_representation** contains a **representation_item** with a name of 'weight value', 'maximum weight value', or 'minimum weight value', the **representation_item** shall be a **measure_representation_item** and a **qualified_representation_item**.

WR4: The **plant_item_weight_representation** shall contain exactly one **representation_item** that is a **geometric_representation_item** with a name of 'centre of gravity'.

WR5: The **plant_item_weight_representation** shall have between 1 and 2 **representation_items** with a **name** of 'weight value', 'maximum weight value', or 'minimum weight value'.

WR6: If the **plant_item_weight_representation** has a **representation_item** with a **name** of 'maximum weight value' or 'minimum weight value', the **representation_item** shall have a **type_qualifier** with a **name** of 'operating'.

5.2.3.1.102 plant_line_definition

A **plant_line_definition** is a type of **product_definition_with_associated_documents** that identifies a piping system line.

EXPRESS specification:

```
*)
ENTITY plant_line_definition
  SUBTYPE OF (product_definition_with_associated_documents);
WHERE
  WR1: SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
    'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
    ('PLANT_SPATIAL_CONFIGURATIONS.PIPING_SYSTEM' IN
    TYPEOF (pdr.relatng_product_definition)))) = 1;
  WR2: SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
    'PRODUCT_DEFINITION_RELATIONSHIP.RELATING_PRODUCT_DEFINITION') |
    'PLANT_SPATIAL_CONFIGURATIONS.PLANT_LINE_SEGMENT_DEFINITION' IN
    TYPEOF (pdr.related_product_definition))) >= 1;
  WR3: (NOT (SIZEOF (QUERY (pd <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION') |
    SIZEOF (USEDIN (pd, 'PLANT_SPATIAL_CONFIGURATIONS.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')) >= 1)) = 0)) OR
    (SIZEOF (QUERY (pd <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION') |
    NOT (SIZEOF (QUERY (pdr <* USEDIN (pd,
    'PLANT_SPATIAL_CONFIGURATIONS.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
    SIZEOF (QUERY (rep <*
    USEDIN (pdr.used_representation.context_of_items,
    'PLANT_SPATIAL_CONFIGURATIONS.REPRESENTATION.CONTEXT_OF_ITEMS') |
    SIZEOF (QUERY (prop_def_rep <* USEDIN (rep,
    'PLANT_SPATIAL_CONFIGURATIONS.' +
    'PROPERTY_DEFINITION_REPRESENTATION.USED_REPRESENTATION') |
```



```

        (SIZEOF (['PLANT_SPATIAL_CONFIGURATION.SITE',
        'PLANT_SPATIAL_CONFIGURATION.SITE_BUILDING'] *
        TYPEOF (prop_def_rep.definition)) = 1) OR
        ('PLANT_SPATIAL_CONFIGURATION.PLANT' IN
        TYPEOF (prop_def_rep.definition.definition.formation.of_product)))
        >= 1)) >= 1)) >= 1))) = 0);
WR4: SELF.frame_of_reference.name =
    'functional definition';
WR5: SIZEOF (QUERY (pds <* QUERY (pd <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
    'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
    TYPEOF (pd)) |
    NOT (SIZEOF (QUERY (sa <*USEDIN (pds,
    'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT.OF_SHAPE') |
    ('PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_TERMINATION' IN
    TYPEOF (sa)) AND
    (sa.description = 'piping line termination')) <= 2))) = 0;
END_ENTITY;
(*

```

Formal propositions:

WR1: A **plant_line_definition** shall be related to exactly one **piping_system**.

WR2: A **plant_line_definition** shall be related to at least one **plant_line_segment_definition**.

WR3: If a **plant_line_definition** has a representation, that representation shall be in the context of a **site_building**, a **site**, or a **plant**.

WR4: A **plant_line_definition** shall have an **application_context_element.name** of 'functional definition'.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **plant_line_definition** entity:

- 75. **application_context_requires_ap_definition** (see 5.2.4.1);
- 76. **dependent_instantiable_application_context** (see 5.2.4.9);
- 77. **dependent_instantiable_product_definition_context** (see 5.2.4.11);
- 78. **product_definition_context_name_constraint** (see 5.2.4.13).

5.2.3.1.103 plant_line_segment_definition

A **plant_line_segment_definition** is a type of **product_definition** that identifies a line segment.

EXPRESS specification:

```

*)
ENTITY plant_line_segment_definition
    SUBTYPE OF (product_definition);
WHERE
    WR1: SIZEOF (QUERY (pdr <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.' +

```

ISO 10303-227:2005(E)

```
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
'PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_DEFINITION'
IN TYPEOF (pdr.relating_product_definition)) >= 1;
WR2: SIZEOF (QUERY( pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
'PLANT_SPATIAL_CONFIGURATION.SHAPE_DEFINITION' IN
TYPEOF (pd))) >= 1;
WR3: SELF.frame_of_reference\application_context_element.name =
'functional definition';
WR4: SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (pdr <* USEDIN (pd, 'PLANT_SPATIAL_CONFIGURATION.'
+
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'line segment characteristics')) = 1)))
= 0;
WR5: SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (lsc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'line segment characteristics') |
NOT (SIZEOF (lsc.used_representation.items) >= 2))) = 0))) = 0;
WR6: SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (lsc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'line segment characteristics') |
NOT (SIZEOF (QUERY (it <* lsc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'design pressure')))) = 1))) = 0))) = 0;
WR7: SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (lsc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'line segment characteristics') |
NOT (SIZEOF (QUERY (it <* lsc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'design temperature')))) = 1))) = 0))) = 0;
WR8: SIZEOF (QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (lsc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'line segment characteristics') |
NOT (SIZEOF (QUERY (it <* lsc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
```

```

        'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT']) = 2) AND
        (it.name = 'elevation')) <= 1))) = 0))) = 0;
WR9:  SIZEOF (QUERY (pd <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
        NOT (SIZEOF (QUERY (lsc <* QUERY (pdr <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
        pdr.used_representation.name = 'line segment characteristics') |
        NOT (SIZEOF (QUERY (it <* lsc.used_representation.items |
        ('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
        TYPEOF (it)) AND
        (it.name = 'corrosion allowance')) <= 1))) = 0))) = 0;
WR10: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
        pdr.name = 'segment insulation')) >= 1)) OR
        (SIZEOF (QUERY (si <* QUERY (pdr <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
        pdr.name = 'segment insulation') |
        NOT (SIZEOF (QUERY (pd <* USEDIN (si,
        'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
        NOT (SIZEOF (QUERY (pds <* QUERY (pdr <* USEDIN (pd,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
        'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
        TYPEOF (pdr)) |
        pds.used_representation.name =
        'segment insulation characteristics')) = 1))) = 0))) = 0);
WR11: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
        pdr.name = 'segment insulation')) >= 1)) OR
        (SIZEOF (QUERY (si <* QUERY (pdr <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
        pdr.name = 'segment insulation') |
        NOT (SIZEOF (QUERY (pd <* USEDIN (si,
        'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
        NOT (SIZEOF (QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN (pd,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
        'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
        TYPEOF (pdr)) |
        pds.used_representation.name =
        'segment insulation characteristics') |
        SIZEOF (sic.used_representation.items) >= 1)) = 1))) = 0))) = 0);
WR12: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
        pdr.name = 'segment insulation')) >= 1)) OR
        (SIZEOF (QUERY (si <* QUERY (pdr <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |

```

ISO 10303-227:2005(E)

```
pdr.name = 'segment insulation') |
NOT (SIZEOF (QUERY (pd <* USEDIN (si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN (pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
TYPEOF (pdr)) |
pds.used_representation.name =
'segment insulation characteristics') |
{1 <= SIZEOF (QUERY (it <* sic.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT']) = 2) AND
(it.name IN ['thickness', 'minimum thickness',
'maximum thickness']))) <= 2})) = 1))) = 0))) = 0);
WR13: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'segment insulation')) >= 1)) OR
(SIZEOF (QUERY (si <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'segment insulation') |
NOT (SIZEOF (QUERY (pd <* USEDIN (si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN (pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
TYPEOF (pdr)) |
pds.used_representation.name =
'segment insulation characteristics') |
SIZEOF (QUERY (it <* sic.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'thickness')) <= 1)) = 1))) = 0))) = 0);
WR14: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'segment insulation')) >= 1)) OR
(SIZEOF (QUERY (si <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'segment insulation') |
NOT (SIZEOF (QUERY (pd <* USEDIN (si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN (pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
TYPEOF (pdr)) |
pds.used_representation.name =
```

```

'segment insulation characteristics') |
SIZEOF (QUERY (it <* sic.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.LENGTH_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'minimum thickness')) <= 1)) = 1))) = 0))) = 0);
WR15: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'segment insulation')) >= 1)) OR
(SIZEOF (QUERY (si <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'segment insulation') |
NOT (SIZEOF (QUERY (pd <* USEDIN (si,
'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN (pd,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
'PLANT_SPATIAL_CONFIGURATIONS.PRODUCT_DEFINITION_SHAPE' IN
TYPEOF (pdr)) |
pds.used_representation.name =
'segment insulation characteristics') |
SIZEOF (QUERY (it <* sic.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.LENGTH_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'maximum thickness')) <= 1)) = 1))) = 0))) = 0);
WR16: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'segment insulation')) >= 1)) OR
(SIZEOF (QUERY (si <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
pdr.name = 'segment insulation') |
NOT (SIZEOF (QUERY (pd <* USEDIN (si,
'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION') |
NOT (SIZEOF (QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN (pd,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
'PLANT_SPATIAL_CONFIGURATIONS.PRODUCT_DEFINITION_SHAPE' IN
TYPEOF (pdr)) |
pds.used_representation.name =
'segment insulation characteristics') |
SIZEOF (QUERY (it <* sic.used_representation.items |
('PLANT_SPATIAL_CONFIGURATIONS.DESCRPTIVE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'boundaries')) <= 1)) = 1))) = 0))) = 0);
WR17: SIZEOF (QUERY (pds <* QUERY (pd <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION') |
'PLANT_SPATIAL_CONFIGURATIONS.PRODUCT_DEFINITION_SHAPE' IN
TYPEOF (pd)) |
NOT (SIZEOF (QUERY (sa <*USEDIN (pds,

```

ISO 10303-227:2005(E)

```
'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT.OF_SHAPE' ) |  
'PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_TERMINATION' IN  
TYPEOF (sa)) = 2))) = 0;  
END_ENTITY;  
(*
```

Formal propositions:

WR1: A **plant_line_segment_definition** shall be the **related_product_definition** in a **product_definition_relationship** that has a **relating_product_definition** that is a **plant_line_definition**.

WR2: A **plant_line_segment_definition** shall be referenced by a **shape_definition**.

WR3: A **plant_line_segment_definition** shall have a **frame_of_reference_name** of 'functional definition'.

WR4: A **plant_line_segment_definition** shall have exactly one representation with the name of 'line segment characteristics'.

WR5: The representation of the **plant_line_segment_definition** with the name of 'line segment characteristics' shall have at least two **representation_items**.

WR6: The representation of the **plant_line_segment_definition** with the name of 'line segment characteristics' shall have exactly one **representation_item** that is of type **measure_representation_item** with a name of 'design pressure'.

WR7: The representation of the **plant_line_segment_definition** with the name of 'line segment characteristics' shall have exactly one **representation_item** that is of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a name of 'design temperature'.

WR8: The representation of the **plant_line_segment_definition** with the name of 'line segment characteristics' shall have at most one **representation_item** that is of type **measure_representation_item** and **length_measure_with_unit** with a name of 'elevation'.

WR9: The representation of the **plant_line_segment_definition** with the name of 'line segment characteristics' shall have at most one **representation_item** that is of type **measure_representation_item** with a name of 'corrosion allowance'.

WR10: If the **plant_line_segment_definition** is related to a **product_definition** as a 'segment insulation', the **product_definition** shall have a **product_definition_shape** that has exactly one **representation** with the **name** of 'segment insulation characteristics'.

WR11: If the **plant_line_segment_definition** is related to a **product_definition** as a 'segment insulation', the **product_definition** shall have a **product_definition_shape** that has exactly one **representation** with the **name** of 'segment insulation characteristics' that has at least one **representation_item**.

WR12: If the **plant_line_segment_definition** is related to a **product_definition** as a 'segment insulation', the **product_definition** shall have a **product_definition_shape** that has exactly one **representation** with the **name** of 'segment insulation characteristics' that has one or two **representation_items** of type **measure_representation_item** and **length_measure_with_unit** with a **name** of 'thickness', 'minimum thickness', or 'maximum thickness'.

WR13: If the **plant_line_segment_definition** is related to a **product_definition** as a 'segment insulation', the **product_definition** shall have a **product_definition_shape** that has exactly one

representation with the **name** of 'segment insulation characteristics' that has at most one **representation_item** items of type **measure_representation_item** and **length_measure_with_unit** with a **name** of 'thickness'.

WR14: If the **plant_line_segment_definition** is related to a **product_definition** as a 'segment insulation', the **product_definition** shall have a **product_definition_shape** that has exactly one **representation** with the **name** of 'segment insulation characteristics' that has at most one **representation_item** items of type **measure_representation_item** and **length_measure_with_unit** with a **name** of 'minimum thickness'.

WR15: If the **plant_line_segment_definition** is related to a **product_definition** as a 'segment insulation', the **product_definition** shall have a **product_definition_shape** that has exactly one **representation** with the **name** of 'segment insulation characteristics' that has at most one **representation_item** items of type **measure_representation_item** and **length_measure_with_unit** with a **name** of 'maximum thickness'.

WR16: If the **plant_line_segment_definition** is related to a **product_definition** as a 'segment insulation', the **product_definition** shall have a **product_definition_shape** that has exactly one **representation** with the **name** of 'segment insulation characteristics' that has at most one **representation_item** items of type **descriptive_representation_item** with a **name** of 'boundaries'.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **plant_line_segment_definition** entity:

- 79. **application_context_requires_ap_definition** (see 5.2.4.1);
- 80. **dependent_instantiable_application_context** (see 5.2.4.9);
- 81. **dependent_instantiable_product_definition_context** (see 5.2.4.11);
- 82. **product_definition_context_name_constraint** (see 5.2.4.13).

5.2.3.1.104 plant_line_segment_termination

A **plant_line_segment_termination** is a type of **shape_aspect** that identifies the termination of a line segment.

EXPRESS specification:

*)

```
ENTITY plant_line_segment_termination
  SUBTYPE OF (shape_aspect);
WHERE
  WR1: ((SELF.description = 'piping line segment termination') AND
    ('PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_DEFINITION'
    IN TYPEOF (SELF.of_shape.definition))) XOR
    ((SELF.description = 'piping line termination') AND
    ('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_RELATIONSHIP'
    IN TYPEOF (SELF.of_shape.definition)) AND
    ('PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_DEFINITION'
    IN TYPEOF (SELF.of_shape.definition.related_product_definition)) AND
    ('PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_DEFINITION'
    IN TYPEOF (SELF.of_shape.definition.relating_product_definition)));
  WR2: SIZEOF (QUERY (sar <*
```

ISO 10303-227:2005(E)

```
USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'SHAPE_ASPECT_RELATIONSHIP.RELATING_SHAPE_ASPECT') +
USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'SHAPE_ASPECT_RELATIONSHIP.RELATED_SHAPE_ASPECT') |
NOT (SIZEOF (TYPEOF (sar) *
[ 'PLANT_SPATIAL_CONFIGURATION.LINE_BRANCH_CONNECTION',
'PLANT_SPATIAL_CONFIGURATION.LINE_PLANT_ITEM_CONNECTION',
'PLANT_SPATIAL_CONFIGURATION.LINE_TERMINATION_CONNECTION' ]))
= 1))) = 0;
WR3: (SIZEOF (QUERY (sar <*
USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'SHAPE_ASPECT_RELATIONSHIP.RELATED_SHAPE_ASPECT') |
SIZEOF (TYPEOF (sar) *
[ 'PLANT_SPATIAL_CONFIGURATION.LINE_BRANCH_CONNECTION',
'PLANT_SPATIAL_CONFIGURATION.LINE_TERMINATION_CONNECTION' ])) = 1))= 1)
OR (SIZEOF (QUERY (sar <*
USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'SHAPE_ASPECT_RELATIONSHIP.RELATING_SHAPE_ASPECT') |
NOT ('PLANT_SPATIAL_CONFIGURATION.LINE_PLANT_ITEM_CONNECTION' IN
TYPEOF (sar)))) = 0);
END_ENTITY;
(*
```

Formal propositions:

WR1: If a **plant_line_segment_termination** is the termination of a piping line segment, it shall be an aspect of the shape of a **plant_line_segment_definition**. If the **plant_line_segment_termination** is the termination of a piping line, it shall be an aspect of the shape of a **product_definition_relationship** in which the related_product_definition is a **plant_line_segment_definition** and the relating_shape_aspect is a **plant_line_definition**.

WR2: A **plant_line_segment_termination** is the **relating_shape_aspect** or the **related_shape_aspect** in at least one **shape_aspect_relationship** that is a **line_branch_connection**, **line_plant_item_connection**, or **line_termination_connection**.

WR3: A **plant_line_segment_termination** is the related_shape_aspect in exactly one **shape_aspect_relationship** that is either a **line_termination_connection** or **line_branch_connection** or is

the relating_shape_aspect in exactly one **line_plant_item_connection**.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **plant_line_segment_termination** entity:

83. **application_context_requires_ap_definition** (see 5.2.4.1);
84. **dependent_instantiable_application_context** (see 5.2.4.9);
85. **dependent_instantiable_product_definition_context** (see 5.2.4.11);
86. **product_definition_context_name_constraint** (see 5.2.4.13).

5.2.3.1.105 plant_spatial_configuration_change_assignment

A **plant_spatial_configuration_change_assignment** assigns a **change_action** to a set of one or more **change_items**.

EXPRESS specification:

```

*)
ENTITY plant_spatial_configuration_change_assignment
  SUBTYPE OF (action_assignment);
  items : SET [1:?] OF change_item;
WHERE
  WR1: 'PLANT_SPATIAL_CONFIGURATION.CHANGE_ACTION'
      IN TYPEOF (SELF.assigned_action);
END_ENTITY;
( *

```

Attribute definitions:

items: the set of **change_items** that an action is assigned to.

Formal propositions:

WR1: The assigned action shall be a **change_action**.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **plant_spatial_configuration_change_assignment** entity:

87. **change_item_requires_creation_date** (see 5.2.4.5);

88. **change_item_requires_id** (see 5.2.4.6).

5.2.3.1.106 plant_spatial_configuration_organization_assignment

A **plant_spatial_configuration_organization_assignment** assigns an **organization** to a set of one or more **catalogues**, **change_actions**, **design_projects**, **documents**, **plants**, **product_definition_formation**s, **product_definition_relationship**s, and **sites**.

EXPRESS specification:

```

*)
ENTITY plant_spatial_configuration_organization_assignment
  SUBTYPE OF (organization_assignment);
  items : SET [1:?] OF plant_spatial_configuration_organization_item;
WHERE
  WR1: plant_spatial_configuration_organization_correlation (SELF);
END_ENTITY;
( *

```

ISO 10303-227:2005(E)

Attribute definitions:

items: the set of **catalogues**, **change_actions**, **design_projects**, **documents**, **plants**, **product_definition_formation**s, **product_definition_relationship**s, and **sites** that an **organization** is assigned to.

Formal propositions:

WR1: The **plant_spatial_configuration_organization_correlation** function that correlates roles of organizations to elements of product data shall be satisfied.

5.2.3.1.107 **plant_spatial_configuration_person_and_organization_assignment**

A **plant_spatial_configuration_person_and_organization_assignment** assigns a **person_and_organization** to a set of one or more **change_items**, **plants**, and **sites**.

EXPRESS specification:

```
* )
ENTITY plant_spatial_configuration_person_and_organization_assignment
  SUBTYPE OF (person_and_organization_assignment);
  items : SET [1:?] OF
    plant_spatial_configuration_person_and_organization_item;
WHERE
  WR1: plant_spatial_configuration_person_and_organization_correlation(SELF);
END_ENTITY;
(*
```

Attribute definitions:

items: the set of **change_items**, **plants**, and **sites** that a **person_and_organization** is assigned to.

Formal propositions:

WR1: The **plant_spatial_configuration_person_and_organization_correlation** function that correlates roles of persons and organizations to elements of product data shall be satisfied.

5.2.3.1.108 **plant_spatial_configuration_person_assignment**

A **plant_spatial_configuration_person_assignment** assigns a **person** to a set of one or more **documents**, **plants**, **product_definition_relationship**s, and **sites**.

EXPRESS specification:

```
* )
ENTITY plant_spatial_configuration_person_assignment
  SUBTYPE OF (person_assignment);
  items : SET [1:?] OF plant_spatial_configuration_person_item;
WHERE
  WR1: plant_spatial_configuration_person_correlation (SELF);
END_ENTITY;
```

(*

Attribute definitions:

items: the set of **documents**, **plants**, **product_definition_relationships**, and **sites** that a **person** is assigned to.

Formal propositions:

WR1: The **plant_spatial_configuration_person_correlation** function that correlates roles of persons to elements of product data shall be satisfied.

5.2.3.1.109 presented_item_association

A **presented_item_association** is a type of **presented_item** that specifies the item that is the subject of a schematic.

EXPRESS specification:

```
*)
ENTITY presented_item_association
  SUBTYPE OF (presented_item);
  items : SET [1:?] OF presented_item_select;
END_ENTITY;
( *
```

Attribute definition:

items: the set of **action_methods** that are being presented.

5.2.3.1.110 presentation_with_association

A **presentation_with_association** is a type of **presentation_representation** that relates an item to its presentation.

EXPRESS specification:

```
*)
ENTITY presentation_with_association
  SUBTYPE OF (presentation_representation);
WHERE
  WR1: SIZEOF(SELF\representation.items) = 1;
  WR2: SIZEOF(QUERY(pir <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PRESENTED_ITEM_REPRESENTATION.PRESENTATION') |
    NOT ('PLANT_SPATIAL_CONFIGURATION.PRESENTED_ITEM_WITH_ASSOCIATION'
    IN TYPEOF(pir.item)))) = 0;
  WR3: SIZEOF (QUERY (it <* SELF.items |
    NOT (SIZEOF
    (['PLANT_SPATIAL_CONFIGURATION.ANNOTATION_SYMBOL_OCCURRENCE',
    'PLANT_SPATIAL_CONFIGURATION.ANNOTATION_TEXT_OCCURRENCE',
    'PLANT_SPATIAL_CONFIGURATION.ANNOTATION_CURVE_OCCURRENCE',
    'PLANT_SPATIAL_CONFIGURATION.ANNOTATION_POINT_OCCURRENCE'] *
    TYPEOF (it)) = 1))) = 0;
END_ENTITY;
```

ISO 10303-227:2005(E)

(*

Formal propositions:

WR1: Each `presentation_with_association` shall contain exactly one element in its set of items.

WR2: Each `presentation_with_association` shall be used as `presentation` in a `presented_item_representation` where the item is of type `presented_item_with_association`.

WR3: The `representation_item` in the set of items of a `presentation_with_association` shall be either an `annotation_symbol_occurrence`, `annotation_text_occurrence`, `annotation_curve_occurrence`, or `annotation_point_occurrence`.

5.2.3.1.111 `presented_item_with_association`

A `presented_item_with_association` is a type of `presented_item` that specifies the item that is being depicted by an `annotation_occurrence`. The item is associated directly to the schematic elements presenting it.

EXPRESS specification:

```
*)
ENTITY presented_item_with_association
  SUBTYPE OF (presented_item);
  items : SET [1:?] OF associated_item;
WHERE
  WR1: SIZEOF (QUERY (pir <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.PRESENTED_ITEM_REPRESENTATION.ITEM') |
    NOT ('PLANT_SPATIAL_CONFIGURATION.PRESENTATION_WITH_ASSOCIATION'
    IN TYPEOF (pir.presentation)))) = 0;
END_ENTITY;
(*
```

Formal propositions:

WR1: Each `presented_item_with_association` shall be used as item in a `presented_item_representation` where the presentation is of type `presentation_with_association`.

5.2.3.1.112 `process_capability`

A **process_capability** is a type of **property_definition** that identifies the physical or chemical process that is, or is intended to be, carried out by a **plant**.

EXPRESS specification:

```
*)
ENTITY process_capability
  SUBTYPE OF (property_definition);
WHERE
  WR1: 'PLANT_SPATIAL_CONFIGURATION.PLANT' IN
    TYPEOF(SELF.definition\product_definition.formation.of_product);
  WR2: SIZEOF (QUERY (pdr <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION_REPRESENTATION.' +
    'DEFINITION') |
    (pdr.used_representation.name = 'production capacity') AND
    (NOT (SIZEOF (QUERY (it <* pdr.used_representation.items |
```

```

('PLANT_SPATIAL_CONFIGURATION.DESCRPTIVE_REPRESENTATION_ITEM'
 IN TYPEOF (it)) AND
(it.name = 'production type')) = 1)))) = 0;
END_ENTITY;
(*

```

Formal propositions:

WR1: A **process_capability** is a property of a **plant**.

WR2: The **representation** instances associated with a **process_capability** shall have a name of 'production capacity' and shall contain exactly one **descriptive_representation_item** with a name of 'production type'.

5.2.3.1.113 purchase_assignment

A **purchase_assignment** assigns a set of one or more **products** to an **action** to identify that the **product** is purchased.

EXPRESS specification:

```

*)
ENTITY purchase_assignment
  SUBTYPE OF (action_assignment);
  items : SET [1:?] OF purchase_item;
END_ENTITY;
(*

```

Attribute definitions:

items: the set of **products** that are purchased.

5.2.3.1.114 reducer_fitting_class

A **reducer_fitting_class** is a type of **group** that classifies the items that are assigned to it as reducer fittings.

EXPRESS specification:

```

*)
ENTITY reducer_fitting_class
  SUBTYPE OF (group);
WHERE
  WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (it <* aca.items |
    NOT ('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN
    TYPEOF (it)))) = 0))) = 0;
  WR2: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,

```

ISO 10303-227:2005(E)

```
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
'ASSIGNED_CLASS') |
'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF (ca)) |
NOT (SIZEOF (QUERY (pcd <* QUERY (it <* aca.items |
'PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN
TYPEOF (it)) |
NOT (SIZEOF (QUERY (acal <* USEDIN (pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATION.' +
'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
class_in_tree (acal.assigned_class, 'reducer'))
= 1))) = 0))) = 0;
END_ENTITY;
(*
```

Formal propositions:

WR1: A **reducer_fitting_class** shall classify items of type **pipng_component_definition**.

WR2: A **reducer_fitting_class** shall classify items of type **pipng_component_definition** that are a definition of a **product** that is categorized as a 'reducer'.

5.2.3.1.115 reference_geometry

A **reference_geometry** is a type of **derived_shape_aspect** that is a geometric element that is not part of the definition of the shape of **plant_item**, but is provided as supplementary geometric information. A **reference_geometry** has a relationship to the shape definition geometry and may be derivable from shape geometry.

EXAMPLE Centrelines of symmetric elements and origin points are considered **reference_geometry**.

EXPRESS specification:

```
*)
ENTITY reference_geometry
  SUBTYPE OF (derived_shape_aspect);
WHERE
  WR1: SIZEOF (QUERY (pd <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
  'PROPERTY_DEFINITION.DEFINITION') |
  NOT (SIZEOF (USEDIN (pd, 'PLANT_SPATIAL_CONFIGURATION.' +
  'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')) >= 1))) >= 0;
END_ENTITY;
(*
```

Formal propositions:

WR1: Each **reference_geometry** shall have at least one **representation**.

5.2.3.1.116 reinforcing_component_definition

A **reinforcing_component_definition** is a type of **product_definition** that defines a reinforcing component.

EXPRESS specification

```

*)
ENTITY reinforcing_component_definition
  SUBTYPE OF (product_definition);
END_ENTITY;
( *

```

5.2.3.1.117 required_material_property

A **required_material_property** is a type of **material_property** that specifies the material or the requirements for the material that a plant item should be made from.

EXPRESS specification:

```

*)
ENTITY required_material_property
  SUBTYPE OF (material_property);
WHERE
  WR1: (SIZEOF (TYPEOF (SELF\property_definition.definition) *
    ['PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTOR',
    'PLANT_SPATIAL_CONFIGURATION.' +
    'EXTERNALLY_DEFINED_PLANT_ITEM_DEFINITION']) = 1) OR
    (('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION' IN
    TYPEOF (SELF.definition)) AND
    (SIZEOF (QUERY (pc <* SELF\property_definition.
    definition\product_definition.formation.of_product.
    frame_of_reference |
    pc.discipline_type = 'process plant')) = 1));
  WR2: SIZEOF (QUERY (ra <* QUERY (pdr <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_RELATIONSHIP.RELATED_PROPERTY_DEFINITION') |
    pdr.name = 'requirement allocation') |
    'PLANT_SPATIAL_CONFIGURATION.MATERIAL_PROPERTY' IN
    TYPEOF (ra.relating_property_definition))) >= 1;
END_ENTITY;
( *

```

Formal propositions:

WR1: A **required_material_property** shall be a property of a **plant_item_connector**, **externally-defined_plant_item**, or a **product_definition** that defines a plant item.

WR2: A **required_material_property** shall be related to at least one **material_property** as the 'requirement allocation'.

5.2.3.1.118 reserved_space

A **reserved_space** is a type of **shape_aspect** that identifies a space that is reserved for a plant item.

```

*)
ENTITY reserved_space
  SUBTYPE OF (shape_aspect);
WHERE

```

ISO 10303-227:2005(E)

```
WR1: SELF\shape_aspect.of_shape\property_definition.
      definition\product_definition.
      frame_of_reference\application_context_element.name =
      'physical occurrence';
END_ENTITY;
(*
```

Formal propositions:

WR1: A **reserved_space** shall be an aspect of the definition of the shape of a **product_definition** with a context with the name 'physical occurrence'.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **reserved_space** entity:

89. **application_context_requires_ap_definition** (see 5.2.4.1);
90. **dependent_instantiable_application_context** (see 5.2.4.9);
91. **dependent_instantiable_product_definition_context** (see 5.2.4.11);
92. **product_definition_context_name_constraint** (see 5.2.4.13);
93. **product_definition_usage_constraint** (see 5.2.4.14).

5.2.3.1.119 site

A **site** is a type of **characterized_object** and **property_definition** that identifies the geographic and topographic characteristics of the location of a plant.

EXPRESS specification:

```
*)
ENTITY site
  SUBTYPE OF (characterized_object, property_definition);
WHERE
  WR1: 'PLANT_SPATIAL_CONFIGURATION.PLANT' IN
      TYPEOF (SELF\property_definition.definition\product_definition.
      formation.of_product);
END_ENTITY;
(*
```

Formal propositions:

WR1: Each **site** shall be a property of a **plant**.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **site** entity:

94. **subtype_exclusive_characterized_object** (see 5.2.4.15)

5.2.3.1.120 site_building

A **site_building** is a type of **property_definition** that identifies a partially or totally enclosed structure located on a site.

EXPRESS specification:

```

*)
ENTITY site_building
  SUBTYPE OF (property_definition);
WHERE
  WR1: 'PLANT_SPATIAL_CONFIGURATION.SITE' IN
        TYPEOF (SELF.definition);
  WR2: SIZEOF (QUERY (pdr <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
        (pdr.used_representation.name = 'building number') AND
        (SIZEOF (QUERY (it <* pdr.used_representation.items |
        ('PLANT_SPATIAL_CONFIGURATION.DESRIPTIVE_REPRESENTATION_ITEM' IN
        TYPEOF (it)))) = 1))) = 1);
  WR3: SIZEOF (QUERY (pdr <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATION.' +
        'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
        SIZEOF (QUERY (it <* pdr.used_representation.items |
        (SIZEOF (['PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_2D',
        'PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_3D'] *
        TYPEOF (it)) = 1) AND
        (it.name = 'building orientation') AND
        (it.location.name = 'building location')) = 1)) <= 1;
END_ENTITY;
(*

```

Formal propositions:

WR1: A **site_building** shall be a property of a site.

WR2: The **site_building** shall have exactly one **representation** with a name of 'building number' that contains exactly one **representation_item** that is a **descriptive_representation_item**.

WR3: The **site_building** shall have at most one **representation** that contains exactly one **axis2_placement_2d** or **axis2_placement_3d** with a **name** of 'building orientation' and a **location** that has a **name** of 'building location'.

5.2.3.1.121 site_feature

A **site_feature** is a type of **property_definition** that identifies the composition, proportions, form or outward appearance of part of a site.

EXPRESS specification:

```

*)
ENTITY site_feature

```

ISO 10303-227:2005(E)

```
SUBTYPE OF (property_definition);
WHERE
WR1: 'PLANT_SPATIAL_CONFIGURATION.SITE' IN
    TYPEOF(SELF.definition);
WR2: SIZEOF (USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')) = 3;
WR3: SIZEOF (QUERY (pdr <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
    SIZEOF (QUERY (it <* pdr.used_representation.items |
    ('PLANT_SPATIAL_CONFIGURATION.DESCRPTIVE_REPRESENTATION_ITEM' IN
    TYPEOF (it)) AND
    (it.name = 'site feature type')))) = 1)) = 1;
WR4: SIZEOF (QUERY (pdr <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
    SIZEOF (QUERY (it <* pdr.used_representation.items |
    (SIZEOF (['PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_2D',
    'PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_3D'] *
    TYPEOF (it)) = 1) AND
    (it.name = 'feature orientation') AND
    (it.location.name = 'feature location')))) = 1)) = 1;
WR5: SIZEOF (QUERY (pdr <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
    SIZEOF (QUERY (it <* pdr.used_representation.items |
    ('PLANT_SPATIAL_CONFIGURATION.DESCRPTIVE_REPRESENTATION_ITEM' IN
    TYPEOF (pdr.used_representation)) AND
    (it.name = 'origin type') AND
    (it.description IN ['man made', 'natural']))) = 1)) = 1;
END_ENTITY;
(*
```

Formal propositions:

WR1: A **site_feature** is a property of a **site**.

WR2: A **site_feature** is referenced by exactly three **property_definition_representation** instances.

WR3: A **site_feature** shall have exactly one **representation** contains exactly one item of type **descriptive_representation_item** with the name of 'site feature type'.

WR4: The **site_feature** shall have at exactly one **representation** that contains exactly one **axis2_placement_2d** or **axis2_placement_3d** with a **name** of 'feature orientation' and a **location** that has a **name** of 'feature location'.

WR5: The **site_feature** shall have exactly one **representation** that contains exactly one **representation_item** that is a **descriptive_representation_item** with the name of 'origin type' and a **description** of either 'man made' or 'natural'.

5.2.3.1.122 site_representation

A **site_representation** is a type of **shape_representation** that represents the shape properties of a **site**.

EXPRESS specification:

```

*)
ENTITY site_representation
  SUBTYPE OF (shape_representation);
WHERE
  WR1: SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.USED_REPRESENTATION') |
    NOT('PLANT_SPATIAL_CONFIGURATION.SITE' IN
    TYPEOF (pdr.definition.definition)))) = 0;
  WR2: SIZEOF (QUERY (item <* SELF.items |
    NOT (SIZEOF (['PLANT_SPATIAL_CONFIGURATION.CONNECTED_FACE_SET',
    'PLANT_SPATIAL_CONFIGURATION.GEOMETRIC_CURVE_SET'] *
    TYPEOF (item)) = 1))) = 1;
  WR3: SIZEOF (QUERY (cfs <* QUERY (item <* SELF.items |
    'PLANT_SPATIAL_CONFIGURATION.CONNECTED_FACE_SET' IN TYPEOF (item)) |
    NOT (SIZEOF (QUERY (fcs <* cfs\connected_face_set.cfs_faces |
    NOT (SIZEOF (QUERY (bnds <* fcs.bounds |
    NOT ('PLANT_SPATIAL_CONFIGURATION.POLY_LOOP'
    IN TYPEOF (bnds.bound))))
    = 0))) = 0))) = 0;
  WR4: SIZEOF (QUERY (cfs <* QUERY (item <* SELF.items |
    'PLANT_SPATIAL_CONFIGURATION.CONNECTED_FACE_SET' IN TYPEOF (item)) |
    NOT (SIZEOF (QUERY (fcs <* cfs\connected_face_set.cfs_faces |
    NOT (SIZEOF (QUERY (bnds <* fcs.bounds |
    NOT (SIZEOF (bnds.bound\poly_loop.polygon) = 3)))
    = 0))) = 0))) = 0;
  WR5: SIZEOF (QUERY (gcs <* QUERY (item <* SELF.items |
    'PLANT_SPATIAL_CONFIGURATION.GEOMETRIC_CURVE_SET'
    IN TYPEOF (item)) |
    NOT (SIZEOF (QUERY (el <* gcs\geometric_set.elements |
    NOT (SIZEOF (['PLANT_SPATIAL_CONFIGURATION.CARTESIAN_POINT',
    'PLANT_SPATIAL_CONFIGURATION.POLYLINE'] * TYPEOF (el))
    = 1))) = 0))) = 0;
  WR6: SIZEOF (QUERY (gcs <* QUERY (item <* SELF.items |
    'PLANT_SPATIAL_CONFIGURATION.GEOMETRIC_CURVE_SET'
    IN TYPEOF (item)) |
    NOT (SIZEOF (QUERY (el <* gcs\geometric_set.elements |
    'PLANT_SPATIAL_CONFIGURATION.CARTESIAN_POINT' IN TYPEOF (el)))
    >= 1))) = 0;
  WR7: SIZEOF (QUERY (gcs <* QUERY (item <* SELF.items |
    'PLANT_SPATIAL_CONFIGURATION.GEOMETRIC_CURVE_SET'
    IN TYPEOF (item)) |
    NOT (SIZEOF (QUERY (pline <* QUERY (el <*
    gcs\geometric_set.elements |
    'PLANT_SPATIAL_CONFIGURATION.POLYLINE' IN TYPEOF (el)) |
    NOT (SIZEOF (QUERY (pline_pt <* pline\polyline.points |
    NOT (pline_pt IN gcs\geometric_set.elements)))) = 0))) = 0))) = 0;
END_ENTITY;
(*

```

ISO 10303-227:2005(E)

Formal propositions:

WR1: A **site_representation** shall be used to represent a **site**.

WR2: A **site_representation** shall have in its set of items exactly one **connected_face_set** or **geometric_curve_set**.

WR3: If the **representation_item** is a **connected_face_set**, it shall contain faces that are bounded by **poly_loops**.

WR4: If the **representation_item** is a **connected_face_set**, all of its **face** instances shall be bounded by **poly_loops** with topology defined by three **cartesian_points**.

WR5: If the **representation_item** is a **geometric_curve_set**, its **elements** set shall consist of **cartesian_point** or **polyline**.

WR6: If the **representation_item** is a **geometric_curve_set**, its **elements** shall consist of at least one **cartesian_point**.

WR7: If the **representation_item** is a **geometric_curve_set**, its **elements** that are of type **polyline** shall reference only points that are in the **elements** set.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **site_representation** entity:

95. **subtype_mandatory_shape_representation** (see 5.2.4.18)

5.2.3.1.123 **sited_plant**

A **sited_plant** is a type of **property_definition** that specifies a plant that is located on a site. The location need not be specified.

EXPRESS specification:

```
* )
ENTITY sited_plant
  SUBTYPE OF (property_definition);
UNIQUE
  UR1: SELF\property_definition.definition;
WHERE
  WR1: 'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION' IN TYPEOF
    (SELF.definition);
  WR2: SELF.definition.frame_of_reference.name = 'physical occurrence';
END_ENTITY;
(*
```

Formal propositions:

UR1: Each **sited_plant** shall be related to zero or one **characterized_definition**.

WR1: A **sited_plant** shall be the property of a **product_definition**.

WR2: A **sited_plant** shall be the property of a **product_definition** that is a physical occurrence.

5.2.3.1.124 spacer_fitting_class

A **spacer_fitting_class** is a type of **group** that classifies the items that are assigned to it as spacer fittings.

EXPRESS specification:

```

*)
ENTITY spacer_fitting_class
  SUBTYPE OF (group);
WHERE
  WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATIONS.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATIONS.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (it <* aca.items |
    NOT ('PLANT_SPATIAL_CONFIGURATIONS.PIPING_COMPONENT_DEFINITION' IN
    TYPEOF (it)))) = 0))) = 0;
  WR2: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATIONS.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATIONS.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (pcd <* QUERY (it <* aca.items |
    'PLANT_SPATIAL_CONFIGURATIONS.PIPING_COMPONENT_DEFINITION' IN
    TYPEOF (it)) |
    NOT (SIZEOF (QUERY (acal <* USEDIN (pcd.formation.of_product,
    'PLANT_SPATIAL_CONFIGURATIONS.' +
    'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
    class_in_tree (acal.assigned_class, 'spacer'))
    = 1))) = 0))) = 0;
END_ENTITY;
(*

```

Formal propositions:

WR1: A **spacer_fitting_class** shall classify items of type **pipng_component_definition**.

WR2: A **spacer_fitting_class** shall classify items of type **pipng_component_definition** that are a definition of a **product** that is categorized as a 'spacer'.

5.2.3.1.125 specialty_item_class

A **specialty_item_class** is a type of **group** that classifies the items are assigned to it as specialty items. The name of the **specialty_item_class** may further classify the assigned items.

EXPRESS specification:

```

*)
ENTITY specialty_item_class
  SUBTYPE OF (group);
END_ENTITY;

```

ISO 10303-227:2005(E)

(*

5.2.3.1.126 stream_design_case

A **stream_design_case** is a type of **property_definition** and **characterized_object** that identifies the characteristics of a gas, liquid, vapour, or particulate stream.

EXPRESS specification:

*)

```
ENTITY stream_design_case
  SUBTYPE OF (property_definition, characterized_object);
WHERE
  WR1: SIZEOF (QUERY (pd <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION.DEFINITION') |
    'PLANT_SPATIAL_CONFIGURATION.STREAM_PHASE' IN
    TYPEOF (pd))) >= 1;
  WR2: SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
    pdr.used_representation.name = 'stream flow characteristics')) = 1;
  WR3: SIZEOF (QUERY (sfc <* QUERY (pdr <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
    pdr.used_representation.name = 'stream flow characteristics') |
    NOT (SIZEOF (sfc.used_representation.items) >= 2))) = 0;
  WR4: SIZEOF (QUERY (sfc <* QUERY (pdr <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
    pdr.used_representation.name = 'stream flow characteristics') |
    NOT ({1 <= SIZEOF (QUERY (it <* sfc.used_representation.items |
    ('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
    TYPEOF (it)) AND
    (it.name IN ['flow rate', 'minimum flow rate',
    'maximum flow rate']))) <= 2}))) = 0;
  WR5: SIZEOF (QUERY (sfc <* QUERY (pdr <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
    pdr.used_representation.name = 'stream flow characteristics') |
    NOT (SIZEOF (QUERY (it <* sfc.used_representation.items |
    ('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
    TYPEOF (it)) AND
    (it.name = 'flow rate')) <= 1))) = 0;
  WR6: SIZEOF (QUERY (sfc <* QUERY (pdr <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
    pdr.used_representation.name = 'stream flow characteristics') |
    NOT (SIZEOF (QUERY (it <* sfc.used_representation.items |
    ('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
    TYPEOF (it)) AND
    (it.name = 'minimum flow rate')) <= 1))) = 0;
  WR7: SIZEOF (QUERY (sfc <* QUERY (pdr <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.' +
    'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
    pdr.used_representation.name = 'stream flow characteristics') |
```

```

NOT (SIZEOF (QUERY (it <* sfc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'maximum flow rate')))) <= 1))) = 0;
WR8: SIZEOF (QUERY (sfc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'stream flow characteristics') |
NOT ({1 <= SIZEOF (QUERY (it <* sfc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name IN ['pressure', 'minimum pressure',
'maximum pressure']))) <= 2}))) = 0;
WR9: SIZEOF (QUERY (sfc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'stream flow characteristics') |
NOT (SIZEOF (QUERY (it <* sfc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'pressure')))) <= 1))) = 0;
WR10: SIZEOF (QUERY (sfc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'stream flow characteristics') |
NOT (SIZEOF (QUERY (it <* sfc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'minimum pressure')))) <= 1))) = 0;
WR11: SIZEOF (QUERY (sfc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'stream flow characteristics') |
NOT (SIZEOF (QUERY (it <* sfc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'maximum pressure')))) <= 1))) = 0;
WR12: SIZEOF (QUERY (sfc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'stream flow characteristics') |
NOT (SIZEOF (QUERY (it <* sfc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.DESCRPTIVE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'stream data reference')))) <= 1))) = 0;
WR13: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =
'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =

```

ISO 10303-227:2005(E)

```

        'service characteristics') |
NOT (SIZEOF (QUERY (pdr <* USEDIN (sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'service operating characteristics')) = 1))) = 0);
WR14: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =
'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =
'service characteristics') |
NOT (SIZEOF (QUERY (soc <* QUERY (pdr <*
USEDIN (sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'service operating characteristics') |
NOT (SIZEOF (soc.used_representation.items) >= 3))) = 0))) = 0);
WR15: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =
'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name = 'service characteristics') |
NOT (SIZEOF (QUERY (soc <* QUERY (pdr <*
USEDIN (sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'service operating characteristics') |
{1 <= SIZEOF (QUERY (it <* soc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']) = 2) AND
(it.name IN ['temperature', 'minimum temperature',
'maximum temperature']))) <= 2})) = 1))) = 0);
WR16: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =
'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |

```



```

pdr.related_property_definition.name = 'service characteristics') |
NOT (SIZEOF (QUERY (soc <* QUERY (pdr <*
USEDIN (sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'service operating characteristics') |
SIZEOF (QUERY (it <* soc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'temperature')) <= 1)) = 1))) = 0);
WR17: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =
'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name = 'service characteristics') |
NOT (SIZEOF (QUERY (soc <* QUERY (pdr <*
USEDIN (sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'service operating characteristics') |
SIZEOF (QUERY (it <* soc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'minimum temperature')) <= 1)) = 1))) = 0);
WR18: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =
'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name = 'service characteristics') |
NOT (SIZEOF (QUERY (soc <* QUERY (pdr <*
USEDIN (sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'service operating characteristics') |
SIZEOF (QUERY (it <* soc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']) = 2) AND

```

ISO 10303-227:2005(E)

```
(it.name = 'maximum temperature')) <= 1)) = 1))) = 0);
WR19: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =
'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name = 'service characteristics') |
NOT (SIZEOF (QUERY (soc <* QUERY (pdr <*
USEDIN (sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'service operating characteristics') |
{1 <= SIZEOF (QUERY (it <* soc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name IN ['pressure', 'minimum pressure',
'maximum pressure']))) <= 2})) = 1))) = 0);
WR20: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =
'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name = 'service characteristics') |
NOT (SIZEOF (QUERY (soc <* QUERY (pdr <*
USEDIN (sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'service operating characteristics') |
SIZEOF (QUERY (it <* soc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'pressure')) <= 1)) = 1))) = 0);
WR21: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =
'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name = 'service characteristics') |
NOT (SIZEOF (QUERY (soc <* QUERY (pdr <*
USEDIN (sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
```

```

'service operating characteristics') |
SIZEOF (QUERY (it <* soc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'minimum pressure')) <= 1)) = 1))) = 0);
WR22: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =
'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name = 'service characteristics') |
NOT (SIZEOF (QUERY (soc <* QUERY (pdr <*
USEDIN (sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'service operating characteristics') |
SIZEOF (QUERY (it <* soc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'maximum pressure')) <= 1)) = 1))) = 0);
WR23: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =
'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name = 'service characteristics') |
NOT (SIZEOF (QUERY (soc <* QUERY (pdr <*
USEDIN (sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'service operating characteristics') |
{1 <= SIZEOF (QUERY (it <* soc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.TIME_MEASURE_WITH_UNIT']) = 2) AND
(it.name IN ['duration', 'minimum duration',
'maximum duration']))) <= 2}))) = 1))) = 0);
WR24: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =
'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name = 'service characteristics') |

```

ISO 10303-227:2005(E)

```
NOT (SIZEOF (QUERY (soc <* QUERY (pdr <*
USEDIN (sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'service operating characteristics') |
SIZEOF (QUERY (it <* soc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.TIME_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'duration')))) <= 1)) = 1))) = 0);
WR25: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =
'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name = 'service characteristics') |
NOT (SIZEOF (QUERY (soc <* QUERY (pdr <*
USEDIN (sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'service operating characteristics') |
SIZEOF (QUERY (it <* soc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.TIME_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'minimum duration')))) <= 1)) = 1))) = 0);
WR26: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name =
'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name = 'service characteristics') |
NOT (SIZEOF (QUERY (soc <* QUERY (pdr <*
USEDIN (sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name =
'service operating characteristics') |
SIZEOF (QUERY (it <* soc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.TIME_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'maximum duration')))) <= 1)) = 1))) = 0);
WR27: (NOT (SIZEOF (QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
```

```

pdr.related_property_definition.name =
'service characteristics')) >= 1)) OR
(SIZEOF (QUERY (sc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION') |
pdr.related_property_definition.name = 'service characteristics') |
NOT ('PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTOR' IN
TYPEOF (sc.related_property_definition.definition)))) = 0);
END_ENTITY;
(*

```

Formal propositions:

WR1: A **stream_design_case** shall have at least one **stream_phase**.

WR2: A **stream_design_case** shall have exactly one representation with the **name** of 'stream flow characteristics'.

WR3: The representation of the **stream_design_case** with the **name** of 'stream flow characteristics' shall have at least two **representation_items**.

WR4: The representation of the **stream_design_case** with the **name** of 'stream flow characteristics' shall have between one and two **representation_items** that are of type **measure_representation_item** with a name of 'flow rate', 'maximum flow rate', or 'minimum flow rate'.

WR5: The representation of the **stream_design_case** with the **name** of 'stream flow characteristics' shall have at most one **representation_item** that is of type **measure_representation_item** with a name of 'flow rate'.

WR6: The representation of the **stream_design_case** with the **name** of 'stream flow characteristics' shall have at most one **representation_item** that is of type **measure_representation_item** with a name of 'minimum flow rate'.

WR7: The representation of the **stream_design_case** with the **name** of 'stream flow characteristics' shall have at most one **representation_item** that is of type **measure_representation_item** with a name of 'maximum flow rate'.

WR8: The representation of the **stream_design_case** with the **name** of 'stream flow characteristics' shall have between one and two **representation_items** that are of type **measure_representation_item** with a name of 'pressure', 'maximum pressure', or 'minimum pressure'.

WR9: The representation of the **stream_design_case** with the **name** of 'stream flow characteristics' shall have at most one **representation_item** that is of type **measure_representation_item** with a name of 'pressure'.

WR10: The representation of the **stream_design_case** with the **name** of 'stream flow characteristics' shall have at most one **representation_item** that is of type **measure_representation_item** with a name of 'minimum pressure'.

WR11: The representation of the **stream_design_case** with the **name** of 'stream flow characteristics' shall have at most one **representation_item** that is of type **measure_representation_item** with a name of 'maximum pressure'.

ISO 10303-227:2005(E)

WR12: The representation of the **stream_design_case** with the **name** of ‘stream flow characteristics’ shall have at most one **representation_item** that is of type **descriptive_representation_item** with a name of ‘stream reference data’.

WR13: If the **stream_design_case** relates to a **property_definition** with a **name** of ‘service characteristics’, the **property_definition** that is related with a **name** of ‘service characteristics’ shall have exactly one **representation** with the **name** of ‘stream operating characteristics’.

WR14: If the **stream_design_case** relates to a **property_definition** with a **name** of ‘service characteristics’, the **representation** with the **name** of ‘stream operating characteristics’ of that **property_definition** shall have at least three **representation_items**.

WR15: If the **stream_design_case** relates to a **property_definition** with a **name** of ‘service characteristics’, the **representation** with the **name** of ‘stream operating characteristics’ of that **property_definition** shall have one or two **representation_items** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a **name** of ‘temperature’, ‘minimum temperature’, or ‘maximum temperature’.

WR16: If the **stream_design_case** relates to a **property_definition** with a **name** of ‘services characteristics’, the **representation** with the **name** of ‘stream operating characteristics’ of that **property_definition** shall have at most one **representation_item** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a **name** of ‘temperature’.

WR17: If the **stream_design_case** relates to a **property_definition** with a **name** of ‘service characteristics’, the **representation** with the **name** of ‘stream operating characteristics’ of that **property_definition** shall have at most one **representation_item** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a **name** of ‘minimum temperature’.

WR18: If the **stream_design_case** relates to a **property_definition** with a **name** of ‘service characteristics’, the **representation** with the **name** of ‘stream operating characteristics’ of that **property_definition** shall have at most one **representation_item** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a **name** of ‘maximum temperature’.

WR19: If the **stream_design_case** relates to a **property_definition** with a **name** of ‘service characteristics’, the **representation** with the **name** of ‘stream operating characteristics’ of that **property_definition** shall have one or two **representation_items** of type **measure_representation_item** with a **name** of ‘pressure’, ‘minimum pressure’, or ‘maximum pressure’.

WR20: If the **stream_design_case** relates to a **property_definition** with a **name** of ‘service characteristics’, the **representation** with the **name** of ‘stream operating characteristics’ of that **property_definition** shall have at most one **representation_item** of type **measure_representation_item** with a **name** of ‘pressure’.

WR21: If the **stream_design_case** relates to a **property_definition** with a **name** of ‘service characteristics’, the **representation** with the **name** of ‘stream operating characteristics’ of that **property_definition** shall have at most one **representation_item** of type **measure_representation_item** with a **name** of ‘minimum pressure’.

WR22: If the **stream_design_case** relates to a **property_definition** with a **name** of ‘service characteristics’, the **representation** with the **name** of ‘stream operating characteristics’ of that **property_definition** shall have at most one **representation_item** of type **measure_representation_item** with a **name** of ‘maximum pressure’.

WR23: If the **stream_design_case** relates to a **property_definition** with a **name** of 'service characteristics', the **representation** with the **name** of 'stream operating characteristics' of that **property_definition** shall have one or two **representation_items** of type **measure_representation_item** and **time_measure_with_unit** with a **name** of 'duration', 'minimum duration', or 'maximum duration'.

WR24: If the **stream_design_case** relates to a **property_definition** with a **name** of 'service characteristics', the **representation** with the **name** of 'stream operating characteristics' of that **property_definition** shall have at most one **representation_item** of type **measure_representation_item** and **time_measure_with_unit** with a **name** of 'duration'.

WR25: If the **stream_design_case** relates to a **property_definition** with a **name** of 'service characteristics', the **representation** with the **name** of 'stream operating characteristics' of that **property_definition** shall have at most one **representation_item** of type **measure_representation_item** and **time_measure_with_unit** with a **name** of 'minimum duration'.

WR26: If the **stream_design_case** relates to a **property_definition** with a **name** of 'service characteristics', the **representation** with the **name** of 'stream operating characteristics' of that **property_definition** shall have at most one **representation_item** of type **measure_representation_item** and **time_measure_with_unit** with a **name** of 'maximum duration'.

WR27: If the **stream_design_case** relates to a **property_definition** with a **name** of 'service characteristics', that **property_definition** shall be a property of a **plant_item_connector**.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **stream_design_case** entity:

96. **subtype_exclusive_characterized_object** (see 5.2.4.15)

5.2.3.1.127 **stream_phase**

A **stream_phase** is a type of **property_definition** that identifies the characteristics of a gas, liquid, vapour, or particulate phase.

EXPRESS specification:

```

*)
ENTITY stream_phase
  SUBTYPE OF (property_definition);
WHERE
  WR1: 'PLANT_SPATIAL_CONFIGURATION.STREAM_DESIGN_CASE' IN
      TYPEOF (SELF.DEFINITION);
  WR2: SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
      'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
      pdr.used_representation.name = 'stream phase characteristics')) = 1;
  WR3: SIZEOF (QUERY (spc <* QUERY (pdr <* USEDIN (SELF,
      'PLANT_SPATIAL_CONFIGURATION.' +
      'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
      pdr.used_representation.name = 'stream phase characteristics') |
      NOT (SIZEOF (spc.used_representation.items) >= 5))) = 0;
  WR4: SIZEOF (QUERY (spc <* QUERY (pdr <* USEDIN (SELF,
      'PLANT_SPATIAL_CONFIGURATION.' +
      'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |

```

ISO 10303-227:2005(E)

```
    pdr.used_representation.name = 'stream phase characteristics') |
NOT (SIZEOF (QUERY (it <* spc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.RATIO_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'constituent mole fraction')))) = 1))) = 0;
WR5: SIZEOF (QUERY (spc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'stream phase characteristics') |
NOT (SIZEOF (QUERY (it <* spc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATIONS.DESCRPTIVE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'constituents')))) = 1))) = 0;
WR6: SIZEOF (QUERY (spc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'stream phase characteristics') |
NOT (SIZEOF (QUERY (it <* spc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'phase density')))) = 1))) = 0;
WR7: SIZEOF (QUERY (spc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'stream phase characteristics') |
NOT (SIZEOF (QUERY (it <* spc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.RATIO_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'phase fraction')))) = 1))) = 0;
WR8: SIZEOF (QUERY (spc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'stream phase characteristics') |
NOT ({1 <= SIZEOF (QUERY (it <* spc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']) = 2) AND
(it.name IN ['temperature', 'minimum temperature',
'maximum temperature'])))) <= 2}))) = 0;
WR9: SIZEOF (QUERY (spc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'stream phase characteristics') |
NOT (SIZEOF (QUERY (it <* spc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'temperature')))) <= 1))) = 0;
WR10: SIZEOF (QUERY (spc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
```



```

'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'stream phase characteristics') |
NOT (SIZEOF (QUERY (it <* spc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'minimum temperature')))) <= 1))) = 0;
WR11: SIZEOF (QUERY (spc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'stream phase characteristics') |
NOT (SIZEOF (QUERY (it <* spc.used_representation.items |
(SIZEOF (TYPEOF (it) *
['PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT']) = 2) AND
(it.name = 'maximum temperature')))) <= 1))) = 0;
WR12: SIZEOF (QUERY (spc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'stream phase characteristics') |
NOT (SIZEOF (QUERY (it <* spc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'specific gravity')))) <= 1))) = 0;
WR13: SIZEOF (QUERY (spc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'stream phase characteristics') |
NOT (SIZEOF (QUERY (it <* spc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'surface tension')))) <= 1))) = 0;
WR14: SIZEOF (QUERY (spc <* QUERY (pdr <* USEDIN (SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
pdr.used_representation.name = 'stream phase characteristics') |
NOT (SIZEOF (QUERY (it <* spc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM' IN
TYPEOF (it)) AND
(it.name = 'viscosity')))) <= 1))) = 0;
END_ENTITY;
(*

```

Formal propositions:

WR1: A **stream_phase** shall define a property of a **stream_design_case**.

WR2: A **stream_phase** shall have exactly one **representation** with the name of 'stream phase characteristics'.

ISO 10303-227:2005(E)

WR3: The representation of the **stream_phase** with the name of ‘stream phase characteristics’ shall have at least five **representation_items**.

WR4: The representation of the **stream_phase** with the name of ‘stream phase characteristics’ shall have exactly one **representation_item** that is of type **measure_representation_item** and **ratio_measure_with_unit** with a name of ‘constituent mole fraction’.

WR5: The representation of the **stream_phase** with the name of ‘stream phase characteristics’ shall have exactly one **representation_item** that is of type **descriptive_representation_item** with a name of ‘constituents’.

WR6: The representation of the **stream_phase** with the name of ‘stream phase characteristics’ shall have exactly one **representation_item** that is of type **measure_representation_item** with a name of ‘phase density’.

WR7: The representation of the **stream_phase** with the name of ‘stream phase characteristics’ shall have exactly one **representation_item** that is of type **measure_representation_item** and **ratio_measure_with_unit** with a name of ‘phase fraction’.

WR8: The representation of the **stream_phase** with the name of ‘stream phase characteristics’ shall have one or two **representation_items** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a name of ‘temperature’, ‘minimum temperature’, or ‘maximum temperature’.

WR9: The representation of the **stream_phase** with the name of ‘stream phase characteristics’ shall have at most one **representation_item** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a name of ‘temperature’.

WR10: The representation of the **stream_phase** with the name of ‘stream phase characteristics’ shall have at most one **representation_item** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a name of ‘minimum temperature’.

WR11: The representation of the **stream_phase** with the name of ‘stream phase characteristics’ shall have at most one **representation_item** of type **measure_representation_item** and **thermodynamic_temperature_measure_with_unit** with a name of ‘maximum temperature’.

WR12: The representation of the **stream_phase** with the name of ‘stream phase characteristics’ shall have at most one **representation_item** that is of type **measure_representation_item** with a name of ‘specific gravity’.

WR13: The representation of the **stream_phase** with the name of ‘stream phase characteristics’ shall have at most one **representation_item** that is of type **measure_representation_item** with a name of ‘surface tension’.

WR14: The representation of the **stream_phase** with the name of ‘stream phase characteristics’ shall have at most one **representation_item** that is of type **measure_representation_item** with a name of ‘viscosity’.

5.2.3.1.128 structural_load_connector_class

A **structural_load_connector_class** is a type of **group** that classifies the items that are assigned to it as being structural load connectors. The **name** of the **structural_connector_class** further classifies the assigned items.

EXPRESS specification:

```

*)
ENTITY structural_load_connector_class
  SUBTYPE OF (group);
END_ENTITY;
( *

```

5.2.3.1.129 structural_system

A **structural_system** is a type of **product_definition** that identifies a system or assembly of structural components.

EXPRESS specification:

```

*)
ENTITY structural_system
  SUBTYPE OF (product_definition);
WHERE
  WR1: SIZEOF (QUERY (pdr <* USEDIN (SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
    'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
    ('PLANT_SPATIAL_CONFIGURATION.PLANT' IN TYPEOF
    (pdr.relater_product_definition.formation.of_product)) AND
    (pdr.relater_product_definition.frame_of_reference.name =
    'functional occurrence')))) = 1;
END_ENTITY;
( *

```

Formal propositions:

WR1: The **structural_system** shall be related to exactly one **product_definition** that is the definition of a plant and has a context of 'functional occurrence'.

5.2.3.1.130 support_constraint_representation

A **support_constraint_representation** is a type of **representation** that identifies limitations on the movement of a plant item.

EXPRESS specification:

```

*)
ENTITY support_constraint_representation
  SUBTYPE OF (representation);
WHERE
  WR1: SIZEOF (SELF.items) >= 3;
  WR2: SIZEOF (QUERY (it <* SELF.items |
    ('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM'
    IN TYPEOF (it)) AND
    (it.name IN ['negative x', 'positive x', 'negative y',
    'positive y', 'negative z', 'positive z',
    'negative x rotation', 'positive x rotation',
    'negative y rotation', 'positive y rotation',

```

ISO 10303-227:2005(E)

```
        'negative z rotation', 'positive z rotation'] ))) = 1;
WR3: SIZEOF (QUERY (it <* SELF.items |
        'PLANT_SPATIAL_CONFIGURATIONS.RATIO_MEASURE_WITH_UNIT'
        IN TYPEOF (it))) = 1;
WR4: SIZEOF (QUERY (it <* SELF.items |
        'PLANT_SPATIAL_CONFIGURATIONS.DESCRPTIVE_REPRESENTATION_ITEM'
        IN TYPEOF (it))) = 1;
END_ENTITY;
(*
```

Formal propositions:

WR1: The **support_constraint_representation** shall contain at least three items.

WR2: The **support_constraint_representation** shall contain **measure_representation_items** that have a name of 'negative x', 'positive x', 'negative y', 'positive y', 'negative z', 'positive z', 'negative x rotation', 'positive x rotation', 'negative y rotation', 'positive y rotation', 'negative z rotation', or 'positive z rotation'.

WR3: The **support_constraint_representation** shall contain exactly one **ratio_measure_with_unit**.

WR4: The **support_constraint_representation** shall contain exactly one **descriptive_representation_item**.

5.2.3.1.131 swage_fitting_class

A **swage_fitting_class** is a type of **group** that classifies the items that are assigned to it as swage fittings.

EXPRESS specification:

```
*)
ENTITY swage_fitting_class
  SUBTYPE OF (group);
WHERE
  WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.CLASSIFICATION_ASSIGNMENT.' +
        'ASSIGNED_CLASS') |
        'PLANT_SPATIAL_CONFIGURATIONS.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
        TYPEOF (ca)) |
        NOT (SIZEOF (QUERY (it <* aca.items |
        NOT ('PLANT_SPATIAL_CONFIGURATIONS.PIPING_COMPONENT_DEFINITION' IN
        TYPEOF (it)))) = 0))) = 0;
  WR2: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
        'PLANT_SPATIAL_CONFIGURATIONS.CLASSIFICATION_ASSIGNMENT.' +
        'ASSIGNED_CLASS') |
        'PLANT_SPATIAL_CONFIGURATIONS.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
        TYPEOF (ca)) |
        NOT (SIZEOF (QUERY (pcd <* QUERY (it <* aca.items |
        'PLANT_SPATIAL_CONFIGURATIONS.PIPING_COMPONENT_DEFINITION' IN
        TYPEOF (it)) |
        NOT (SIZEOF (QUERY (acal <* USEDIN (pcd.formation.of_product,
        'PLANT_SPATIAL_CONFIGURATIONS.' +
        'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
```

```

        class_in_tree (aca.assigned_class, 'swage'))
        = 1))) = 0))) = 0;
END_ENTITY;
(*

```

Formal propositions:

WR1: A **swage_fitting_class** shall classify items of type **pipng_component_definition**.

WR2: A **swage_fitting_class** shall classify items of type **pipng_component_definition** that are a definition of a **product** that is categorized as a 'swage'.

5.2.3.1.132 system_class

A **system_class** is a type of **group** that classifies items that are assigned to it as systems. The name of the **system_class** may further classify the assigned item.

EXPRESS specification:

```

*)
ENTITY system_class
  SUBTYPE OF (group);
WHERE
  WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (it <* aca.items |
    NOT (SIZEOF (TYPEOF (it) *
    ['PLANT_SPATIAL_CONFIGURATION.CABLEWAY_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.DUCTING_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.ELECTRICAL_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.INSTRUMENTATION_AND_CONTROL_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.MECHANICAL_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.PIPING_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.STRUCTURAL_SYSTEM'])) = 1)
    )) = 0))) = 0;
END_ENTITY;
(*

```

Formal propositions:

WR1: A **system_class** shall classify items of type **cableway_system**, **ducting_system**, **electrical_system**, **instrumentation_and_control_system**, **mechanical_system**, **pipng_system**, and **structural_system**.

5.2.3.1.133 system_space

A **system_space** is a type of **product_definition_shape** that identifies the shape of the space allocated for an **electrical_system**, **ducting_system**, **instrumentation_and_control_system**, **pipng_system**, or **structural_system**.

ISO 10303-227:2005(E)

EXPRESS specification:

```
*)
ENTITY system_space
  SUBTYPE OF (product_definition_shape);
WHERE
  WR1: SIZEOF (TYPEOF (SELF.definition) *
    ['PLANT_SPATIAL_CONFIGURATION.ELECTRICAL_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.DUCTING_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.' +
    'INSTRUMENTATION_AND_CONTROL_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.MECHANICAL_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.PIPING_SYSTEM',
    'PLANT_SPATIAL_CONFIGURATION.STRUCTURAL_SYSTEM']) = 1;
END_ENTITY;
(*
```

Formal propositions:

WR1: A **system_space** shall define the shape of the space allocation for an **electrical_system**, **ducting_system**, **instrumentation_and_control_system**, **mechanical_system**, **pipng_system**, or **structural_system**.

5.2.3.1.134 valve_class

A **valve_class** is a type of **group** that classifies the items are assigned to it as valves. The name of the **valve_class** may further classify the assigned items.

EXPRESS specification:

```
*)
ENTITY valve_class
  SUBTYPE OF (group);
WHERE
  WR1: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (it <* aca.items |
    NOT ('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN
    TYPEOF (it)))) = 0))) = 0;
  WR2: SIZEOF (QUERY (aca <* QUERY (ca <* USEDIN (SELF,
    'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' +
    'ASSIGNED_CLASS') |
    'PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
    TYPEOF (ca)) |
    NOT (SIZEOF (QUERY (pcd <* QUERY (it <* aca.items |
    'PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN
    TYPEOF (it)) |
    NOT (SIZEOF (QUERY (aca1 <* USEDIN (pcd.formation.of_product,
    'PLANT_SPATIAL_CONFIGURATION.' +
```

```

        'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
        class_in_tree (aca1.assigned_class, 'valve'))
        = 1))) = 0))) = 0;
END_ENTITY;
(*

```

Formal propositions:

WR1: A **valve_class** shall classify items of type **pipng_component_definition**.

WR2: A **valve_class** shall classify items of type **pipng_component_definition** that are a definition of a **product** that is categorized as a 'valve'.

5.2.3.2 Plant spatial configuration imported entity modifications

5.2.3.2.1 action_request_status

The base definition of the **action_request_status** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **action_request_status** entity:

97. **change_life_cycle_stage_usage_requires_stage** (see 5.2.4.8).

5.2.3.2.2 application_context

The base definition of the **application_context** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **application_context** entity:

98. **application_context_requires_ap_definition** (see 5.2.4.1);

99. **dependent_instantiable_application_context** (see 5.2.4.9).

5.2.3.2.3 application_protocol_definition

The base definition of the **application_protocol_definition** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **application_protocol_definition** entity:

100. **application_context_requires_ap_definition** (see 5.2.4.1).

ISO 10303-227:2005(E)

5.2.3.2.4 approval

The base definition of the **approval** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **approval** entity:

101. **approval_requires_approval_date_time** (see 5.2.4.2);
102. **approval_requires_approval_person_organization** (see 5.2.4.3).

5.2.3.2.5 approval_date_time

The base definition of the **approval_date_time** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **approval_date_time** entity:

103. **approval_requires_approval_date_time** (see 5.2.4.2).

5.2.3.2.6 approval_person_organization

The base definition of the **approval_person_organization** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **approval_person_organization** entity:

104. **approval_requires_approval_person_organization** (see 5.2.4.3).

5.2.3.2.7 description_attribute

The base definition of the **description_attribute** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **description_attribute** entity:

105. **description_attribute_limited_usage** (see 5.2.4.22).

5.2.3.2.8 externally_defined_item

The base definition of the **externally_defined_item** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **externally_defined_item** entity:

- 106. **subtype_mandatory_externally_defined_item** (see 5.2.4.16).
- 107. **description_attribute_limited_usage** (see 5.2.4.22).

5.2.3.2.9 external_source

The base definition of the **external_source** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rules:

The following global rule defined in this part of ISO 10303 applies to the **external_source** entity:

- 108. **description_attribute_limited_usage** (see 5.2.4.22)
- 109. **mandatory_entity_type_for_external_schema_context** (see 5.2.4.23).

5.2.3.2.10 external_source_relationship

The base definition of the **external_source_relationship** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rules:

The following global rule defined in this part of ISO 10303 applies to the **external_source_relationship** entity:

- 110. **mandatory_entity_type_for_external_schema_context** (see 5.2.4.23).

5.2.3.2.11 id_attribute

The base definition of the **description_attribute** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **id_attribute** entity:

- 111. **version2_p41_uninstantiable_basic_attributes** (see 5.2.4.21).

5.2.3.2.12 name_attribute

The base definition of the **name_attribute** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **description_attribute** entity:

- 112. **version2_p41_uninstantiable_basic_attributes** (see 5.2.4.21).

ISO 10303-227:2005(E)

5.2.3.2.13 pre_defined_item

The base definition of the **pre_defined_item** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **pre_defined_item** entity:

113. **subtype_mandatory_defined_item** (see 5.2.4.17).

5.2.3.2.14 product_context

The base definition of the **product_context** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **product_context** entity:

114. **dependent_instantiable_product_context** (see 5.2.4.10);

115. **product_context_discipline_type_constraint** (see 5.2.4.12).

5.2.3.2.15 product_definition

The base definition of the **product_definition** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **product_definition** entity:

116. **product_definition_usage_constraint** (see 5.2.4.14).

5.2.3.2.16 product_definition_context

The base definition of the **product_definition_context** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **product_definition_context** entity:

117. **dependent_instantiable_product_definition_context** (see 5.2.4.11);

118. **product_definition_context_name_constraint** (see 5.2.4.13).

5.2.3.2.17 role_association

The base definition of the **role_association** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rule:

The following global rule defined in this part of ISO 10303 applies to the **role_association** entity:

119. **version2_p41_object_role_selection** (see 5.2.4.20).

5.2.3.2.18 versioned_action_request

The base definition of the **versioned_action_request** entity is given in ISO 10303-41. The following modifications apply to this part of ISO 10303.

Associated global rules:

The following global rules defined in this part of ISO 10303 apply to the **versioned_action_request** entity:

120. **change_life_cycle_stage_usage_requires_approval** (see 5.2.4.7);

121. **change_life_cycle_stage_usage_requires_stage** (see 5.2.4.8).

5.2.4 Plant spatial configuration rule definitions**5.2.4.1 application_context_requires_ap_definition**

The **application_context_requires_ap_definition** rule specifies that each instance of **application_context** shall be referenced by exactly one **application_protocol_definition** that specifies this part of ISO 10303.

EXPRESS specification:

```

*)
RULE application_context_requires_ap_definition FOR
  (application_context, application_protocol_definition);
WHERE
  WR1: SIZEOF (QUERY (ac <* application_context |
    NOT (SIZEOF (QUERY (apd <* application_protocol_definition |
      (ac ::= apd.application)
      AND
      (apd.application_interpreted_model_schema_name =
        'plant_spatial_configuration')) = 1 ))) = 0;
END_RULE;
( *
```

Argument definitions:

application_context: the set of all instances of the **application_context** entity data type.

application_protocol_definition: the set of all instances of the **application_protocol_definition** entity data type.

ISO 10303-227:2005(E)

Formal propositions:

WR1: For each instance of **application_context**, there shall be exactly one instance of **application_protocol_definition** that references the instance of **application_context** as its **application** with a value of 'plant_spatial_configuration' as its **application_interpreted_model_schema_name**.

5.2.4.2 approval_requires_approval_date_time

Every **approval** shall have exactly one **approval_date_time**.

EXPRESS specification:

```
*)
RULE approval_requires_approval_date_time FOR
  (approval_date_time,
   approval);
WHERE
  WR1: SIZEOF (QUERY (app <* approval |
    NOT (SIZEOF (QUERY (adt <* approval_date_time |
      (app ::= adt.dated_approval))) = 1))) = 0;
END_RULE;
(*
```

Formal propositions:

WR1: For each **approval** there shall be exactly one **approval_date_time** that has the **approval** as its **dated_approval**.

5.2.4.3 approval_requires_approval_person_organization

Every **approval** shall have exactly one **approval_person_organization**.

EXPRESS specification:

```
*)
RULE approval_requires_approval_person_organization FOR
  (approval_person_organization,
   approval);
WHERE
  WR1: SIZEOF (QUERY (app <* approval |
    NOT (SIZEOF (QUERY (apo <* approval_person_organization |
      (app ::= apo.authorized_approval))) = 1))) = 0;
END_RULE;
(*
```

Formal propositions:

WR1: For each **approval** there shall be exactly one **approval_person_organization** that has the **approval** as its **authorized_approval**.

5.2.4.4 change_action_requires_date

Every **change_action** shall have a date assigned to it.

EXPRESS specification:

```

*)
RULE change_action_requires_date FOR
  (change_action,
   applied_date_assignment);
WHERE
  WR1: SIZEOF (QUERY (ca <* change_action |
    NOT (SIZEOF (QUERY (pscda <*
      applied_date_assignment |
        (ca IN pscda.items)))) = 1))) = 0;
END_RULE;
(*

```

Formal propositions:

WR1: For each **change_action** there shall be exactly one **applied_date_assignment** that contains the **change_action** in its set of **items**.

5.2.4.5 change_item_requires_creation_date

Every item of a **plant_spatial_configuration_change_assignment** shall have a date assigned to it with the role of 'creation date'.

EXPRESS specification:

```

*)
RULE change_item_requires_creation_date FOR
  (plant_spatial_configuration_change_assignment,
   applied_date_assignment);
WHERE
  WR1: SIZEOF (QUERY (pscca <*
    plant_spatial_configuration_change_assignment |
    NOT (SIZEOF (QUERY (ch_it <* pscca.items |
      NOT (SIZEOF (QUERY (pscda <*
        applied_date_assignment |
          (NOT (ch_it IN pscda.items) OR
            (pscda.role.name = 'creation date')))) = 1))) = 0))) = 0;
END_RULE;
(*

```

Formal propositions:

WR1: For each item of a **plant_spatial_configuration_change_assignment** there shall be exactly one **applied_date_assignment** with a role of 'creation date' that assigns a date to the item.

ISO 10303-227:2005(E)

5.2.4.6 change_item_requires_id

Every item of a **plant_spatial_configuration_change_assignment** shall have an identification assigned to it.

EXPRESS specification:

```
*)
RULE change_item_requires_id FOR
  (plant_spatial_configuration_change_assignment,
   change_item_id_assignment);
WHERE
  WR1: SIZEOF (QUERY (pscca <*
    plant_spatial_configuration_change_assignment |
    NOT (SIZEOF (QUERY (ch_it <* pscca.items |
    NOT (SIZEOF (QUERY (ciia <* change_item_id_assignment |
    (ch_it IN ciia.items))) = 1))) = 0))) = 0;
END_RULE;
(*
```

Formal propositions:

WR1: For each item of a **plant_spatial_configuration_change_assignment** there shall be exactly one **change_item_id_assignment** that assigns an identification to the item.

5.2.4.7 change_life_cycle_stage_usage_requires_approval

Every **versioned_action_request** shall have an approval assigned to it.

EXPRESS specification:

```
*)
RULE change_life_cycle_stage_usage_requires_approval FOR
  (versioned_action_request,
   applied_approval_assignment);
WHERE
  WR1: SIZEOF (QUERY (vareq <* versioned_action_request |
    NOT (SIZEOF (QUERY (pscaa <*
    applied_approval_assignment |
    vareq IN pscaa.items)) = 1))) = 0;
END_RULE;
(*
```

Formal propositions:

WR1: For each **versioned_action_request** there shall be exactly one **applied_approval_assignment** that contains the **versioned_action_request** in its set of items.

5.2.4.8 change_life_cycle_stage_usage_requires_stage

Every **versioned_action_request** shall have a status assigned to it.

EXPRESS specification:

```

*)
RULE change_life_cycle_stage_usage_requires_stage FOR
  (versioned_action_request,
   action_request_status);
WHERE
  WR1: SIZEOF (QUERY (vareq <* versioned_action_request |
    NOT (SIZEOF (QUERY (ars <* action_request_status |
      vareq ::= ars.assigned_request))) = 1))) = 0;
END_RULE;
(*

```

Formal propositions:

WR1: For each **versioned_action_request** there shall be exactly one **action_request_status** that has the **versioned_action_request** as its **assigned_request**.

5.2.4.9 dependent_instantiable_application_context

The **dependent_instantiable_application_context** rule specifies that all instances of **application_context** are dependent on their usage to define another entity.

EXPRESS specification:

```

*)
RULE dependent_instantiable_application_context FOR (application_context);
WHERE
  WR1: SIZEOF (QUERY (ac <* application_context |
    NOT (SIZEOF (USEDIN (ac, '')) >= 1))) = 0;
END_RULE;
(*

```

Argument definition:

application_context: the set of all instances of the **application_context** entity data type.

Formal propositions:

WR1: For each instance of **application_context**, there shall be a reference to the **application_context** instance from an attribute of another entity.

5.2.4.10 dependent_instantiable_product_context

The **dependent_instantiable_product_context** rule specifies that all instances of **product_context** are dependent on their usage to define another entity.

EXPRESS specification:

```

*)

```

ISO 10303-227:2005(E)

```
RULE dependent_instantiable_product_context FOR (product_context);
WHERE
  WR1: SIZEOF (QUERY (pc <* product_context |
    NOT (SIZEOF (USEDIN (pc, '')) >= 1))) = 0;
END_RULE;
(*
```

Argument definition:

product_context: the set of all instances of the **product_context** entity data type.

Formal propositions:

WR1: For each instance of **product_context**, there shall be a reference to the **product_context** instance from an attribute of another entity.

5.2.4.11 dependent_instantiable_product_definition_context

The **dependent_instantiable_product_definition_context** rule specifies that all instances of **product_definition_context** are dependent on their usage to define another entity.

EXPRESS specification:

```
*)
RULE dependent_instantiable_product_definition_context FOR
  (product_definition_context);
WHERE
  WR1: SIZEOF (QUERY (pdc <* product_definition_context |
    NOT (SIZEOF (USEDIN (pdc, '')) >= 1))) = 0;
END_RULE;
(*
```

Argument definition:

product_definition_context: the set of all instances of the **product_definition_context** entity data type.

Formal propositions:

WR1: For each instance of **product_definition_context**, there shall be a reference to the **product_definition_context** instance from an attribute of another entity.

5.2.4.12 product_context_discipline_type_constraint

Every **product_context** shall have a **discipline_type** of 'process plant'.

EXPRESS specification:

```
*)
RULE product_context_discipline_type_constraint FOR
  (product_context);
```



```

WHERE
  WR1: SIZEOF (QUERY (pc <* product_context |
    NOT (pc.discipline_type = 'process plant')))) = 0;
END_RULE;
(*

```

Formal propositions:

WR1: For each **product_context**, the **name** shall be 'process plant'.

5.2.4.13 product_definition_context_name_constraint

Every **product_definition_context** shall have a name of 'functional definition', 'physical definition', 'functional occurrence', 'physical occurrence', 'catalogue definition', or 'fabrication assembly'.

EXPRESS specification:

```

*)
RULE product_definition_context_name_constraint FOR
  (product_definition_context);
WHERE
  WR1: SIZEOF (QUERY (pdc <* product_definition_context |
    NOT (pdc.name IN
      ['functional definition', 'physical definition',
      'functional occurrence', 'physical occurrence',
      'catalogue definition', 'fabrication assembly',
      'material']))) = 0;
END_RULE;
(*

```

Formal propositions:

WR1: For each **product_definition_context**, the **name** shall be 'functional definition', 'physical definition', 'functional occurrence', 'physical occurrence', 'catalogue definition', 'fabrication assembly' or 'material'.

5.2.4.14 product_definition_usage_constraint

Every **product_definition** that identifies an item that may be used as a component of a plant shall have restricted participation in relationships with other **product_definitions**.

EXPRESS specification:

```

*)
RULE product_definition_usage_constraint FOR (product_definition);
WHERE
  WR1: SIZEOF (QUERY (pd <* product_definition |
    ((pd.frame_of_reference.name = 'physical occurrence') AND
    (NOT (SIZEOF (QUERY (pdr <* USEDIN (pd,
      'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_RELATIONSHIP.' +
      'RELATED_PRODUCT_DEFINITION') |

```

ISO 10303-227:2005(E)

```
        SIZEOF (TYPEOF (pdr) *
        [ 'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_USAGE' ,
        'PLANT_SPATIAL_CONFIGURATION.MAKE_FROM_USAGE_OPTION' ,
        'PLANT_SPATIAL_CONFIGURATION.ASSEMBLY_COMPONENT_USAGE' ])
        = 1)) <= 1)))) = 0;
END_RULE;
(*
```

Formal propositions:

WR1: For each **product_definition** that has a **product_definition_context** where the name is 'physical occurrence', the **product_definition** shall be the **related product_definition** in at most one **product_definition_usage**, **make_from_usage_option**, or **assembly_component_usage**.

5.2.4.15 subtype_exclusive_characterized_object

All instances of **characterized_object** shall be an instance of at most one of **piping_component_class**, **site**, **stream_design_case**, or **inspection_condition**.

EXPRESS specification:

```
*)
RULE subtype_exclusive_characterized_object FOR
  (characterized_object);
WHERE
  WR1: SIZEOF (QUERY (co <*characterized_object |
    NOT (SIZEOF (['PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_CLASS' ,
    'PLANT_SPATIAL_CONFIGURATION.SITE' ,
    'PLANT_SPATIAL_CONFIGURATION.STREAM_DESIGN_CASE' ]
    * TYPEOF (co)) <= 1))) = 0;
END_RULE;
(*
```

Formal propositions:

WR1: Every instance of **characterized_object** shall also be an instance of at most one of **piping_component_class**, **site**, or **stream_design_case**.

5.2.4.16 subtype_mandatory_externally_defined_item

All instances of **externally_defined_item** shall either be instances of **known_source** or of **externally_defined_document**.

EXPRESS specification:

```
*)
RULE subtype_mandatory_externally_defined_item FOR
  (externally_defined_item);
WHERE
  WR1: SIZEOF (QUERY (edi <* externally_defined_item |
    NOT (SIZEOF (['PLANT_SPATIAL_CONFIGURATION.CATALOGUE_CONNECTOR' ,
```

```

'PLANT_SPATIAL_CONFIGURATION.EXTERNALLY_DEFINED_CLASS' ,
'PLANT_SPATIAL_CONFIGURATION.EXTERNALLY_DEFINED_PLANT_ITEM_DEFINITION' ,
  'PLANT_SPATIAL_CONFIGURATION.EXTERNALLY_DEFINED_DOCUMENT' ]
* TYPEOF (edi) = 1))) = 0;
END_RULE;
(*

```

Formal propositions:

WR1: Every instance of **externally_defined_item** shall also be an instance of one of **catalogue_connector**, **externally_defined_classification**, **externally_defined_plant_item_definition**, or **externally_defined_document**.

5.2.4.17 subtype_mandatory_pre_defined_item

All instances of **pre_defined_item** shall be instances of **known_source**.

EXPRESS specification:

```

*)
RULE subtype_mandatory_pre_defined_item FOR
  (pre_defined_item);
WHERE
  WR1: SIZEOF (QUERY (pdi <* pre_defined_item |
    NOT ('PLANT_SPATIAL_CONFIGURATION.KNOWN_SOURCE' IN
      TYPEOF (pdi)))) = 0;
END_RULE;
(*

```

Formal propositions:

WR1: Every instance of **pre_defined_item** shall also be an instance of **known_source**.

5.2.4.18 subtype_mandatory_shape_representation

All instances of **shape_representation** shall be instances of exactly one of **hybrid_shape_representation**, **plant_csg_shape_representation**, **shape_dimension_representation**, **site_representation**, or **plant_design_csg_primitive**.

EXPRESS specification:

```

*)
RULE subtype_mandatory_shape_representation FOR
  (shape_representation);
WHERE
  WR1: SIZEOF (QUERY (sr <* shape_representation |
    NOT (SIZEOF (['PLANT_SPATIAL_CONFIGURATION.' +
      'PLANT_CSG_SHAPE_REPRESENTATION',
      'PLANT_SPATIAL_CONFIGURATION.HYBRID_SHAPE_REPRESENTATION',
      'PLANT_SPATIAL_CONFIGURATION.SHAPE_DIMENSION_REPRESENTATION' ,

```

ISO 10303-227:2005(E)

```
'PLANT_SPATIAL_CONFIGURATION.' +
'SITE_REPRESENTATION',
'PLANT_SPATIAL_CONFIGURATION.PLANT_DESIGN_CSG_PRIMITIVE']
* TYPEOF (sr)) = 1))) = 0;
END_RULE;
(*
```

Formal propositions:

WR1: Every instance of **shape_representation** shall be an instance of exactly one of **plant_csg_shape_representation**, **hybrid_shape_representation**, **shape_dimension_representation**, **site_representation**, or **plant_design_csg_primitive**.

5.2.4.19 value_for_application_context

The application attribute of **application_context** shall have a value of 'plant spatial configuration'.

EXPRESS specification:

```
*)
RULE value_for_application_context FOR
  (application_context);
WHERE
  WR1: SIZEOF (QUERY (ac <* application_context |
    NOT (ac.application = 'plant spatial configuration')))) = 0;
END_RULE;
(*
```

Formal propositions:

WR1: Every **application_context** shall have an application attribute with a value of 'plant spatial configuration'.

5.2.4.20 version2_p41_object_role_selection

Every **role_association** instance shall associate a role with only a **plant_spatial_configuration_change_assignment**.

EXPRESS specification:

```
*)
RULE version2_p41_object_role_selection FOR
  (role_association);
WHERE
  WR1: SIZEOF (QUERY (ra <* role_association |
    NOT ('PLANT_SPATIAL_CONFIGURATION.' +
    'PLANT_SPATIAL_CONFIGURATION_CHANGE_ASSIGNMENT' IN
    TYPEOF (ra.item_with_role)))) = 0;
END_RULE;
(*
```

Formal propositions:

WR1: Each **role_association** shall reference only instances of **plant_spatial_configuration_change_assignment** as its **item_with_role**.

5.2.4.21 version2_p41_uninstantiable_basic_attributes

There shall be no instances of **id_attribute**, or **name_attribute** populated according to this part of ISO 10303.

EXPRESS specification:

```
*)
RULE version2_p41_uninstantiable_basic_attributes FOR
  (id_attribute, name_attribute);
WHERE
  WR1: SIZEOF (bag_to_set (id_attribute)) = 0;
  WR2: SIZEOF (bag_to_set (name_attribute)) = 0;
END_RULE;
(*
```

Formal propositions:

WR1: There shall be zero instances of **id_attribute**.

WR2: There shall be zero instances of **name_attribute**.

5.2.4.22 description_attribute_limited_usage

The **description_attribute_limited_usage** rule limits the use of the **description_attribute** to provide only the description of the **external_source** object where the description equals 'target schema name' or 'target entity name'.

EXPRESS specification:

```
*)
RULE description_attribute_limited_usage FOR (description_attribute );
WHERE
  WR1: SIZEOF (QUERY (da <* description_attribute |
    NOT (da.attribute_value IN
      ['target entity name', 'target schema name']))) = 0;
  WR2: SIZEOF (QUERY (da <* description_attribute |
    NOT (SIZEOF(TYPEOF(da.described_item) *
      ['PLANT_SPATIAL_CONFIGURATION.EXTERNAL_SOURCE']) = 1))) = 0;
END_RULE;
(*
```

Formal propositions:

WR1: Every instance of **description_attribute** shall have the value of its **attribute_value** attribute equal 'target schema name' or 'target entity name'.

WR2: Every instance of **description_attribute**, it shall have an **external_source** as it's **described_item**.

ISO 10303-227:2005(E)

5.2.4.23 mandatory_entity_type_for_external_schema_context

The `mandatory_entity_type_for_external_schema_context` rule specifies that every instance of `external_source` whose description equals 'target schema name' or 'target entity name' must be related to another instance of `external_source` with the corresponding description to form a schema/entity hierarchical relationship.

EXPRESS specification:

```
*)
RULE mandatory_entity_type_for_external_schema_context
  FOR (external_source);
WHERE
  WR1: SIZEOF (QUERY (tsn <* QUERY(es <* external_source |
    es.description = 'target schema name') |
    NOT (SIZEOF (QUERY (esr <* USEDIN (tsn,
      'PLANT_SPATIAL_CONFIGURATION.EXTERNAL_SOURCE_RELATIONSHIP.' +
      'RELATING_SOURCE') |
      NOT (esr.related_source.description = 'target entity name'))
    = 0))) = 0;
  WR2: SIZEOF (QUERY (tsn <* QUERY(es <* external_source |
    es.description = 'target entity name') |
    NOT (SIZEOF (QUERY (esr <* USEDIN (tsn,
      'PLANT_SPATIAL_CONFIGURATION.EXTERNAL_SOURCE_RELATIONSHIP.' +
      'RELATED_SOURCE') |
      NOT (esr.relying_source.description = 'target schema name'))
    = 0))) = 0;
END_RULE;
(*
```

Formal propositions:

WR1: Every instance of `external_source` whose description equals 'target schema name' must be the `relating_source` of an instance of `external_source_relationship` whose `related_source` is an instance of `external_source` that has a description equal to 'target entity name'.

WR2: Every instance of `external_source` whose description equals 'target entity name' must be the `related_source` of an instance of `external_source_relationship` whose `relating_source` is an instance of `external_source` that has a description equal to 'target schema name'.

5.2.5 Plant spatial configuration function definitions

5.2.5.1 applied_identification_correlation

The **`applied_organization_correlation`** boolean function returns TRUE if the **`name`** attribute of the **`identification_role`** entity is coordinated with the type of entity selected in the **`items`** of an **`applied_organization_assignment`**.

EXPRESS specification:

```
*)
FUNCTION applied_identification_correlation
  (aia : applied_identification_assignment ) : BOOLEAN;
  LOCAL
    i_role : STRING;
```

```

END_LOCAL;
  i_role := aia\identification_assignment.role.name;
CASE i_role OF
  'global unambiguous identifier' :
      IF SIZEOF (aia.items) <>
        SIZEOF (QUERY (x <* aia.items |
          'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION'
        IN TYPEOF (x)))
      THEN RETURN(FALSE);
      END_IF;
  'stock code' : IF SIZEOF (aia.items) <>
        SIZEOF (QUERY (x <* aia.items |
          'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION'
        IN TYPEOF (x)))
      THEN RETURN(FALSE);
      END_IF;
  'weld id' : IF SIZEOF (aia.items) <>
        SIZEOF (QUERY (x <* aia.items |
          'PLANT_SPATIAL_CONFIGURATION.MATERIAL_PROPERTY'
        IN TYPEOF (x)))
      THEN RETURN(FALSE);
      END_IF;
  'connecting portion id'
    : IF SIZEOF (aia.items) <>
        SIZEOF (QUERY (x <* aia.items |
          'PLANT_SPATIAL_CONFIGURATION.MATERIAL_PROPERTY'
        IN TYPEOF (x)))
      THEN RETURN(FALSE);
      END_IF;
  'analysis data point id'
    : IF SIZEOF (aia.items) <>
        SIZEOF (QUERY (x <* aia.items |
          'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT'
        IN TYPEOF (x)))
      THEN RETURN(FALSE);
      END_IF;
  'document version id'
    : IF SIZEOF (aia.items) <>
        SIZEOF (QUERY (x <* aia.items |
          'PLANT_SPATIAL_CONFIGURATION.DOCUMENT'
        IN TYPEOF (x)))
      THEN RETURN(FALSE);
      END_IF;
  OTHERWISE : RETURN(TRUE);
END_CASE;
RETURN (TRUE);
END_FUNCTION;
(*

```

Argument definitions:

aia: the input **applied_identification_assignment** to be checked.

ISO 10303-227:2005(E)

5.2.5.2 bag_to_set

The **bag_to_set** function converts BAGs into SETs.

EXAMPLE It can be used to convert the BAGs returned by the USEDIN function into SETs that can be properly assigned to variables that are SETs.

EXPRESS specification:

```
*)
FUNCTION bag_to_set (the_bag: BAG OF GENERIC:intype) :
    SET OF GENERIC:intype;
    LOCAL
        the_set : SET OF GENERIC:intype := [];
        i       : INTEGER;
    END_LOCAL;
    IF SIZEOF(the_bag) > 0 THEN
        REPEAT i := 1 TO HIINDEX(the_bag) BY 1;
            the_set := the_set + the_bag[i];
        END_REPEAT;
    END_IF;
    RETURN(the_set);
END_FUNCTION;
(*
```

Argument definition:

the_bag: the BAG that is to be converted into a SET.

5.2.5.3 class_in_tree

The **class_in_tree** function is a boolean function that returns true if the specified **group** has the **name** specified by the **val** parameter, or if the specified **group** has a parent in a tree of related **groups** with the **name** specified by the **val** parameter.

EXPRESS specification:

```
*)
FUNCTION class_in_tree (class : group; val : STRING) : BOOLEAN;
    IF class.name = val THEN RETURN (TRUE);
    ELSE
        RETURN (SIZEOF (QUERY (gr <* USEDIN (class,
            'PLANT_SPATIAL_CONFIGURATION.' +
            'GROUP_RELATIONSHIP.RELATED_GROUP') |
            class_in_tree (gr.relater_group, val))) = 1);
    END_IF;
    RETURN (FALSE);
END_FUNCTION;
(*
```


Argument definitions:

class: the **group** containing the **name** for which the specified value is required.

val: the **value** that is required for the name of the **group**.

5.2.5.4 plant_spatial_configuration_organization_correlation

The **plant_spatial_configuration_organization_correlation** boolean function returns TRUE if the **name** attribute of the **organization_role** entity is coordinated with the type of entity selected in the **items** of a **plant_spatial_configuration_organization_assignment**.

EXAMPLE If the role for an **organization** is 'vendor', then all of the **items** in the set must be either **product** or **document**.

EXPRESS specification:

```

*)
FUNCTION plant_spatial_configuration_organization_correlation
  (e : plant_spatial_configuration_organization_assignment) : BOOLEAN;
LOCAL
  o_role : STRING;
END_LOCAL;
  o_role := e\organization_assignment.role.name;
CASE o_role OF
  'vendor'          : IF SIZEOF (e.items) <>
                     SIZEOF (QUERY (x <* e.items |
                     SIZEOF(['PLANT_SPATIAL_CONFIGURATION.PRODUCT',
                               'PLANT_SPATIAL_CONFIGURATION.DOCUMENT'] *
                     TYPEOF (x)) = 1))
                     THEN RETURN(FALSE);
                     END_IF;
  'owner'           : IF SIZEOF (e.items) <>
                     SIZEOF (QUERY (x <* e.items |
                     SIZEOF(['PLANT_SPATIAL_CONFIGURATION.SITE',
                               'PLANT_SPATIAL_CONFIGURATION.DOCUMENT'] *
                     TYPEOF (x)) = 1))
                     THEN RETURN(FALSE);
                     END_IF;
  'plant operator' : IF SIZEOF (e.items) <>
                     SIZEOF (QUERY (x <* e.items |
                     'PLANT_SPATIAL_CONFIGURATION.PLANT'
                     IN TYPEOF (x)))
                     THEN RETURN(FALSE);
                     END_IF;
  'plant owner'    : IF SIZEOF (e.items) <>
                     SIZEOF (QUERY (x <* e.items |
                     'PLANT_SPATIAL_CONFIGURATION.PLANT'
                     IN TYPEOF (x)))
                     THEN RETURN(FALSE);
                     END_IF;
  'project owner'  : IF SIZEOF (e.items) <>
                     SIZEOF (QUERY (x <* e.items |

```

ISO 10303-227:2005(E)

```
        'PLANT_SPATIAL_CONFIGURATION.DESIGN_PROJECT'
        IN TYPEOF (x)))
        THEN RETURN(FALSE);
        END_IF;
'assessor' : IF SIZEOF (e.items) <>
        SIZEOF (QUERY (x <* e.items |
        'PLANT_SPATIAL_CONFIGURATION.' +
        'PRODUCT_DEFINITION_RELATIONSHIP'
        IN TYPEOF (x)))
        THEN RETURN(FALSE);
        END_IF;
        OTHERWISE : RETURN(TRUE);
    END_CASE;
    RETURN (TRUE);
END_FUNCTION;
(*
```

Argument definition:

e: the input **plant_spatial_configuration_organization_assignment** to be checked.

5.2.5.5 plant_spatial_configuration_person_and_organization_correlation

The **plant_spatial_configuration_person_and_organization_correlation** boolean function returns TRUE if the **name** attribute of the **person_organization_role** entity is coordinated with the type of entity selected in the **items** of a **plant_spatial_configuration_person_and_organization_assignment**.

EXAMPLE If the role for a **person_and_organization** is 'owner', then all of the **items** in the set must be either **site** or **change_item**.

EXPRESS specification:

```
*)
FUNCTION plant_spatial_configuration_person_and_organization_correlation
(e : plant_spatial_configuration_person_and_organization_assignment )
: BOOLEAN;
LOCAL
    po_role : STRING;
END_LOCAL;
    po_role := e\person_and_organization_assignment.role.name;
CASE po_role OF
    'owner' : IF SIZEOF (e.items) <>
        SIZEOF (QUERY (x <* e.items |
        SIZEOF(['PLANT_SPATIAL_CONFIGURATION.SITE',
        'PLANT_SPATIAL_CONFIGURATION.' +
        'CHANGE_ITEM'] *
        TYPEOF (x)) = 1))
        THEN RETURN(FALSE);
        END_IF;
    'plant owner' : IF SIZEOF (e.items) <>
        SIZEOF (QUERY (x <* e.items |
        'PLANT_SPATIAL_CONFIGURATION.PLANT'
        IN TYPEOF (x)))
```

```

                THEN RETURN(FALSE);
                END_IF;
'plant operator' : IF SIZEOF (e.items) <>
                SIZEOF (QUERY (x < * e.items |
                'PLANT_SPATIAL_CONFIGURATION.PLANT'
                IN TYPEOF (x)))
                THEN RETURN(FALSE);
                END_IF;
        OTHERWISE : RETURN(TRUE);
    END_CASE;
    RETURN (TRUE);
END_FUNCTION;
(*

```

Argument definition:

e: the input **plant_spatial_configuration_person_and_organization_assignment** to be checked.

5.2.5.6 plant_spatial_configuration_person_correlation

The **plant_spatial_configuration_person_correlation** boolean function returns TRUE if the **name** attribute of the **person_role** entity is coordinated with the type of entity selected in the **items** of a **plant_spatial_configuration_person_assignment**.

EXAMPLE If the role for a **person** is 'owner', then all of the **items** in the set must be either **site** or **document**.

EXPRESS specification:

```

*)
FUNCTION plant_spatial_configuration_person_correlation
(e : plant_spatial_configuration_person_assignment ) : BOOLEAN;
LOCAL
    p_role : STRING;
END_LOCAL;
    p_role := e\person_assignment.role.name;
CASE p_role OF
    'vendor' : IF SIZEOF (e.items) <>
                SIZEOF (QUERY (x < * e.items |
                'PLANT_SPATIAL_CONFIGURATION.DOCUMENT'
                IN TYPEOF (x)))
                THEN RETURN(FALSE);
                END_IF;
    'owner' : IF SIZEOF (e.items) <>
                SIZEOF (QUERY (x < * e.items |
                SIZEOF(['PLANT_SPATIAL_CONFIGURATION.SITE',
                'PLANT_SPATIAL_CONFIGURATION.DOCUMENT'] *
                TYPEOF (x)) = 1))
                THEN RETURN(FALSE);
                END_IF;
    'plant owner' : IF SIZEOF (e.items) <>
                SIZEOF (QUERY (x < * e.items |
                'PLANT_SPATIAL_CONFIGURATION.PLANT'
                IN TYPEOF (x)))

```

ISO 10303-227:2005(E)

```

                                THEN RETURN(FALSE);
                                END_IF;
'assessor'                      : IF SIZEOF (e.items) <>
                                SIZEOF (QUERY (x < * e.items |
                                'PLANT_SPATIAL_CONFIGURATION.' +
                                'PRODUCT_DEFINITION_RELATIONSHIP'
                                IN TYPEOF (x)))
                                THEN RETURN(FALSE);
                                END_IF;
                                OTHERWISE : RETURN(TRUE);
END_CASE;
RETURN (TRUE);
END_FUNCTION;
(*
```

Argument definition:

e: the input **plant_spatial_configuration_person_assignment** to be checked.

5.2.5.7 valid_advanced_csg_tree

The **valid_advanced_csg_tree** function returns true if the elements that comprise the CSG tree passed in as a parameter satisfy the requirements defined for advanced CSG trees.

EXPRESS specification:

```

*)
FUNCTION valid_advanced_csg_tree (tree_element : boolean_operand) : BOOLEAN;
-- return true if the tree_element is a valid primitive
IF SIZEOF (TYPEOF (tree_element) *
['PLANT_SPATIAL_CONFIGURATION.BLOCK',
'PLANT_SPATIAL_CONFIGURATION.TORUS',
'PLANT_SPATIAL_CONFIGURATION.RIGHT_CIRCULAR_CYLINDER',
'PLANT_SPATIAL_CONFIGURATION.SPHERE',
'PLANT_SPATIAL_CONFIGURATION.RIGHT_CIRCULAR_CONE',
'PLANT_SPATIAL_CONFIGURATION.ECCENTRIC_CONE',
'PLANT_SPATIAL_CONFIGURATION.PLANT_DESIGN_CSG_PRIMITIVE',
'PLANT_SPATIAL_CONFIGURATION.CYCLIDE_SEGMENT_SOLID',
'PLANT_SPATIAL_CONFIGURATION.RECTANGULAR_PYRAMID',
'PLANT_SPATIAL_CONFIGURATION.EXTRUDED_AREA_SOLID',
'PLANT_SPATIAL_CONFIGURATION.REVOLVED_AREA_SOLID',
'PLANT_SPATIAL_CONFIGURATION.HALF_SPACE_SOLID']) = 1
THEN RETURN (TRUE);
ELSE
-- if the tree_element is a boolean_result check its operations and
-- operands
IF 'PLANT_SPATIAL_CONFIGURATION.BOOLEAN_RESULT'
IN TYPEOF (tree_element)
THEN
-- addition and subtraction are the only valid operations
IF NOT (tree_element\boolean_result.operator
IN [boolean_operator.union, boolean_operator.difference])
```

```

THEN RETURN (FALSE);
END_IF;
-- if the operand is a half_space_solid, check for advanced surface
-- otherwise return false and recursively check second operand
IF 'PLANT_SPATIAL_CONFIGURATION.HALF_SPACE_SOLID' IN
  TYPEOF (tree_element\boolean_result.first_operand) THEN
  IF 'PLANT_SPATIAL_CONFIGURATION.ELEMENTARY_SURFACE' IN
    TYPEOF (tree_element\boolean_result.
      first_operand\half_space_solid.base_surface) THEN
    IF 'PLANT_SPATIAL_CONFIGURATION.HALF_SPACE_SOLID' IN
      TYPEOF (tree_element\boolean_result.second_operand) THEN
      IF 'PLANT_SPATIAL_CONFIGURATION.ELEMENTARY_SURFACE' IN
        TYPEOF (tree_element\boolean_result.
          second_operand\half_space_solid.base_surface) THEN
        RETURN (TRUE);
      ELSE RETURN (FALSE);
    END_IF;
    ELSE RETURN (valid_advanced_csg_tree
      (tree_element\boolean_result.second_operand));
  END_IF;
  ELSE RETURN (FALSE);
END_IF;
ELSE
  IF 'PLANT_SPATIAL_CONFIGURATION.HALF_SPACE_SOLID' IN
    TYPEOF (tree_element\boolean_result.second_operand) THEN
    IF 'PLANT_SPATIAL_CONFIGURATION.ELEMENTARY_SURFACE' IN TYPEOF
      (tree_element\boolean_result.second_operand\half_space_solid.
        base_surface) THEN
      RETURN (valid_advanced_csg_tree
        (tree_element\boolean_result.first_operand));
    ELSE
      RETURN (FALSE);
    END_IF;
  ELSE
    RETURN (valid_advanced_csg_tree
      (tree_element\boolean_result.first_operand) AND
      valid_advanced_csg_tree
      (tree_element\boolean_result.second_operand));
  END_IF;
END_IF;
END_IF;
RETURN (FALSE);
END_FUNCTION;
( *

```

Argument definition:

tree_element: (input) the **boolean_operand** to be evaluated.

```

*)
END_SCHEMA;
( *

```

6 Conformance requirements

Conformance to this part of ISO 10303 includes satisfying the requirements stated in this part, the requirements of the implementation methods supported, and the relevant requirements of the normative references.

An implementation shall support at least one of the following implementation methods:

ISO 10303-21;

ISO 10303-28.

Requirements with respect to implementation methods-specific requirements are specified in annex C.

The Protocol Information Conformance Statement (PICS) proforma lists the options or the combinations of options that may be included in the implementation. The PICS proforma is provided in annex D.

This part of ISO 10303 provides for a number of options that may be supported by an implementation. These options have been grouped into the following conformance classes:

- class 1 - provides piping system functional information;
- class 2 - provides equipment and component spatial information;
- class 3 - provides plant layout and piping design information along with HVAC, cableway, and mechanical system information;
- class 4 - provides piping fabrication and installation information;
- class 5 - provides piping inspection information;
- class 6 - provides HVAC system functional information;
- class 7 - provides HVAC spatial information;
- class 8 - provides cableway spatial information;
- class 9 - provides piping and HVAC analysis information
- class 10 - provides mechanical system functional information;
- class 11 - provides mechanical system spatial information.

Support for a particular conformance class requires support of all the options specified in this class. All eleven conformance classes include information concerning plant item characterization, connectors, connections, and shape information.

Table 2 defines the units of functionality included within each conformance class.

Conformance to a particular class requires that all AIM elements defined as part of that class be supported. Table 3 defines the classes that each AIM element belongs to.

NOTE ISO 10303-32 describes the conformance assessment process.

6.1 Conformance class 1, piping system functional information

This conformance class provides piping system functional information. This conformance class contains functional information of the piping system and catalogue reference information, but no shape or spatial information. This conformance class enables the following activity:

- exchange of functional information on plant piping systems.

NOTE 1 The purpose of this conformance class is to provide an interface with ISO 10303-221² [3] and piping functional design and schematics software.

NOTE 2 This conformance class is related to the following data flows between AAM activities:

- piping and instrumentation diagrams (preliminary) A222 to A223, A224, and A225;
- piping and instrumentation diagrams (AFD) A222 to A232 and A235;
- piping and instrumentation diagrams (design) A232 to A241;
- piping and instrumentation diagrams A241 to A242, A243, A244, A245, and O4.

6.2 Conformance class 2, equipment and component spatial information

This conformance class provides equipment and component spatial information. This conformance class contains basic equipment performance characteristics, connector location and orientation information, material specifications, version information, explicit shape, and catalogue reference information. This conformance class enables the exchange of minimal vendor equipment and component information.

NOTE This conformance class is related to the following data flows between AAM activities:

- equipment list C3 to A32;
- equipment characteristics C3 to A32;
- material requirements C3 to A32;
- specifications and standards C3 to A32 and A33;
- plant items A35 to A43.

6.3 Conformance class 3, plant layout and piping design information along with HVAC, cableway, and mechanical system information

This conformance class provides plant layout and piping design information along with HVAC, cableway, and mechanical system information. This conformance class contains design, layout, and spatial information for the plant, and catalogue reference information. This conformance class enables the exchange of plant layout and piping design information along with HVAC, cableway, and mechanical system information and supports the following activities:

ISO 10303-227:2005(E)

- area classification;
- space analysis;
- plant arrangement (placement of space occupying elements);
- spatial design of piping systems including pipe routing and component placement and placement of pipe supports;
- operation and maintenance analysis;
- constructability reviews;
- interference checking;
- development of equipment list and line list;
- development of equipment takeoffs;
- development of material takeoffs for piping and piping components;
- connectivity and topology checks;
- material and connection compatibility checks;
- provision of spatial design information to support fabrication and construction;
- spool and weld identification;
- plant startup;
- plant commissioning;
- plant operation;
- configuration management of plant items and piping system information.

NOTE 1 Although not explicitly cited above, this conformance class also supports the activities listed for the other conformance classes, except for piping inspection information.

NOTE 2 This conformance class is related to the following data flows between AAM activities:

- corporate standards to A22 and A24;
- societal requirements to A22 and A24;

- site information (existing) I3 to A222 and A224;
- site information (existing) I1 to A242;
- process flow diagrams C2 to A222, A223, A224, and A225;
- process flow diagrams C4 to A241;
- equipment list A223 to A222, A232, A233, and A241;
- equipment list A241 to A242, A245, and A32;
- equipment list C3 to A32;
- equipment characteristics (required) C1 to A222 and A223;
- equipment characteristics (functional) A222 to A223;
- equipment characteristics (performance) A223 to A222, A232, A233, and A241;
- equipment characteristics (performance) A241 to A242, A245, and A32;
- equipment characteristics (process) C1 to A241;
- equipment characteristics C3 to A32;
- piping and instrumentation diagrams (preliminary) A222 to A223, A224, and A225;
- piping and instrumentation diagrams (AFD) A222 to A232, A234, and A235;
- piping and instrumentation diagrams (design) C2 to A241;
- system layout (preliminary) A224 to A222, A232, A234, A235, and A242;
- system design (preliminary) A222 to A224, A232, A234, A235, and A242;
- system layout and design A242 to A243, A244, A245, and A41;
- change request (design) A222, A223, A224, and A225 to A21;
- change request (design) A241, A242, and A245 to A23;
- supplier documentation I3 to A241 and A242;
- specifications and standards C9 to A241, A242, A243, and A244;
- specifications and standards C3 to A32 and A33;

ISO 10303-227:2005(E)

- material requirements A241 to A242, A245, and A32;
- material requirements C3 to A32;
- project-specific documents A241, A242, A243 to A32, A33, A34, and A35;
- plant items A35 to A43.

6.4 Conformance class 4, piping fabrication and installation information

This conformance class provides piping fabrication and installation information. This conformance class contains system, plant item, and line identification, piping information, plant item characteristics and shape, and catalogue reference information. This conformance class enables the exchange of piping fabrication and installation information.

NOTE This conformance class is related to the following data flows between AAM activities:

- plant items I1 to A43;
- change request A43 to A2;
- specifications and standards to A43;
- company requirements to A43;
- project-specific documents to A43;
- supplier documentation C1 to A43;
- piping materials I2 to A4233;
- piping installation documents C2 to A42331;
- piping fabrication documents C7 to A42331;
- piping materials I2 to A42331;
- standard practice C3 to A42332;
- shop fabrication details and schedule I1 to A42332.

6.5 Conformance class 5, piping inspection information

This conformance class provides piping inspection information in addition to the piping fabrication and installation information provided in conformance class 4. This conformance class contains system, plant item, and line identification, piping information, plant item characteristics and shape, catalogue reference

information, and piping inspection information. This conformance class enables the exchange of piping inspection information in addition to piping fabrication and installation information.

NOTE 1 There are two categories of piping inspection information. Category A focuses on the whereabouts of the inspected result only. Category B focuses on both the whereabouts and the details of the inspected result.

NOTE 2 This conformance class is related to the following data flows between AAM activities:

- plant items I1 to A43;
- change request A43 to A2;
- specifications and standards to A43;
- company requirements to A43;
- project-specific documents to A43;
- supplier documentation C1 to A43;
- piping materials I2 to A4233;
- piping installation documents C2 to A42331;
- piping fabrication documents C7 to A42331;
- piping materials I2 to A42331;
- standard practice C3 to A42332;
- shop fabrication details and schedule I1 to A42332;
- piping inspection documents C5 to A42333;
- inspection procedure C8 to A42333;
- construction documentation C4 to A42334.

6.6 Conformance class 6, HVAC system functional information

This conformance class provides HVAC system functional information. This conformance class contains functional information of the HVAC system and catalogue reference information, but no shape or spatial information. This conformance class enables the following activity:

- exchange of functional information on heating, ventilation, and air-conditioning (HVAC) systems.

NOTE This conformance class is related to the following data flows between AAM activities:

ISO 10303-227:2005(E)

- piping and instrumentation diagrams (preliminary) A222 to A223, A224, and A225;
- piping and instrumentation diagrams (AFD) A222 to A232 and A235;
- piping and instrumentation diagrams (design) A232 to A241;
- piping and instrumentation diagrams A241 to A242, A243, A244, A245, and O4.

6.7 Conformance class 7, HVAC spatial information

This conformance class provides HVAC layout and design information. This conformance class contains design, layout, and spatial information for the HVAC systems within the plant, and catalogue reference information. This conformance class enables the exchange of HVAC layout and design information and supports the following activities:

- area classification;
- space analysis;
- plant arrangement (placement of space occupying elements);
- spatial design of HVAC systems including component placement;
- HVAC operation and maintenance analysis;
- HVAC constructability reviews;
- interference checking;
- development of HVAC equipment list and line list;
- development of HVAC equipment takeoffs;
- development of material takeoffs for HVAC and HVAC components;
- connectivity and topology checks;
- material and connection compatibility checks;
- provision of spatial design information to support HVAC fabrication and construction.

NOTE This conformance class is related to the following data flows between AAM activities:

- corporate standards to A22 and A24;
- societal requirements to A22 and A24;
- site information (existing) I3 to A222 and A224;

- site information (existing) I1 to A242;
- HVAC equipment list A223 to A222, A232, A233, and A241;
- HVAC equipment list A241 to A242, A245, and A32;
- HVAC equipment list C3 to A32;
- HVAC equipment characteristics (required) C1 to A222 and A223;
- HVAC equipment characteristics C3 to A32;
- system layout (preliminary) A224 to A222, A232, A234, A235, and A242;
- system design (preliminary) A222 to A224, A232, A234, A235, and A242;
- system layout and design A242 to A243, A244, A245, and A41;
- change request (design) A222, A223, A224, and A225 to A21;
- change request (design) A241, A242, and A245 to A23;
- supplier documentation I3 to A241 and A242;
- specifications and standards C9 to A241, A242, A243, and A244;
- specifications and standards C3 to A32 and A33;
- material requirements A241 to A242, A245, and A32;
- material requirements C3 to A32;
- project-specific documents A241, A242, A243 to A32, A33, A34, and A35;
- plant items A35 to A43.

6.8 Conformance class 8, cableway spatial information

This conformance class provides cableway spatial information. This conformance class contains layout and spatial information for the cableway systems within the plant. This conformance class enables the exchange of cableway layout and spatial information, but does not provide the details of the cableway contents or the operating characteristics. Details of cableway contents or operating are beyond the scope of this edition of ISO 10303-227.

NOTE This conformance class is related to the following data flows between AAM activities:

- corporate standards to A22 and A24;

ISO 10303-227:2005(E)

- societal requirements to A22 and A24;
- site information (existing) I3 to A222 and A224;
- site information (existing) I1 to A242;
- system layout (preliminary) A224 to A222, A232, A234, A235, and A242;
- system design (preliminary) A222 to A224, A232, A234, A235, and A242;
- system layout and design A242 to A243, A244, A245, and A41;
- change request (design) A222, A223, A224, and A225 to A21;
- change request (design) A241, A242, and A245 to A23.

6.9 Conformance class 9, piping and HVAC analysis information

This conformance class provides piping and HVAC analysis information. It enables the exchange of sufficient information about a piping or HVAC system for the performance of stress or flow analysis on the receiving system. It does not, however, include exchange of the results of such an analysis.

NOTE This conformance class is related to the data flow in the following AAM activity:

- analyze final plant design A245.

6.10 Conformance class 10, mechanical system functional information

This conformance class provides mechanical system functional information. This conformance class contains functional information of the mechanical system, catalogue and reference data library information, but no shape or spatial information. This conformance class enables the following activity:

- exchange of functional information on propulsion, manoeuvring, lifting and transmission systems.

6.11 Conformance class 11, mechanical system spatial information

This conformance class provides mechanical spatial information. This conformance class contains design, layout and spatial information for the mechanical systems within the plant, catalogue and reference data library information. This conformance class enables the exchange of mechanical system layout and design information and supports the following activities:

- weight distribution analysis (the spatial distribution of weights);
- spatial design of mechanical systems including component placement;
- interference checking;
- development of mechanical component and arrangement lists;
- connectivity and topology checks;
- material and connection compatibility checks;

- provision of spatial design information to support machinery installation, operation and maintenance.

6.12 Options within a conformance class

Conformance classes define usage by discipline and life cycle stage. Examples are: 1 (Piping system functional information), 4 (Piping fabrication and installation information), or 7 (HVAC spatial information). Each conformance class may be augmented by one or more Options, which are intended to specify the capabilities of conforming systems while recognizing the limitations of existing system. Options are defined for three types of usage: shape representation (geometry and topology), plant usage, and unit of functionality. The resulting conformance class with Option is specified as a combination of conformance class number and Option letters. An example would be: Conformance Class 3 with Options A, R.

A shape representation Option specifies the type of geometric and topological entities used to provide a shape representation for plant_items. These options are mutually exclusive; for example, only one of A, B, or C may be specified. However, for conformance class numbers (2, 3, 4,5, 7, 8, or 11) that include shape representation, one shape representation Option must be specified. The entities included by each Option are defined in Table 3.

- Option A indicates the use of Brep (Boundary representation) shape representation for the plant_item entities in the conformance class. This option is intended for use with software systems that utilize surface models and/or Brep solid models.

- Option B indicates the use of simple CSG shape representations for the plant_item entities in the conformance class. A simple CSG shape representation is generated entirely from CSG primitive solids. The use of solids constructed by swept surfaces, extrusion, or Brep is not supported. This option is intended for use with software systems that utilize traditional CSG solid models.

- Option C indicates the use of hybrid CSG shape representations for the plant_item entities in the conformance class. A hybrid CSG shape representation is generated from CSG primitive solids, Brep solids, or solids defined by swept surfaces, or extrusions. This option is intended for use with software systems that utilize both Brep and CSG solid models.

A plant usage Option specifies the type of plant information exchanged: generic plant information or shipbuilding information. These options are typically mutually exclusive; for example, only one of P or S is specified.

- Option P indicates all of the entities for the plant characterization UoF are supported, except Ship.

- Option S indicates all of the entities for the plant characterization UoF are supported, such that all Plant application objects are of type Ship.

A unit of functionality Option specifies additional capabilities manifested by a specific unit of functionality. Many software systems currently provide only limited support for these units of functionality. The use of these Options indicates support for all of the entities defined by that unit of functionality. These options are not mutually exclusive. One or more of these options may be specified.

- Option H indicates use of hull applicability to exchange data about multiple ships. Option S must also be specified. The entities included by this Option are defined in Table 3.

- Option M indicates that all of entities for the associative schematics UoF are supported.

- Option R indicates all of the entities for the change information UoF are supported Change information allows revision history to be optionally included in an ISO 10303-227 file for any conformance class.

ISO 10303-227:2005(E)

— Option T indicates all of the entities for the site characterization UoF are supported. Option P must also be specified.

Table 2 — Conformance classes

Units of functionality	Conformance classes										
	1 PSFN	2 EPSP	3 PLSP	4 PFB	5 PIN	6 HSFN	7 HSP	8 CSP	9 PHAN	10 MSFN	11 MSSP
Cableway_component_characterization	-	-	X	-	-	-	-	X	-	-	-
Connection	X	X	X	X	X	X	X	X	X	X	X
Connector	X	X	X	X	X	X	X	X	X	X	X
HVAC_component_characterization	-	-	X	-	-	X	X	-	X	-	-
HVAC_system_functional_characterization	-	-	X	-	-	X	X	-	X	-	-
Mechanical_component_characterization	-	-	X	-	-	-	-	-	-	X	X
Mechanical_system_functional_characterization	-	-	X	-	-	-	-	-	-	X	X
Piping_inspection	-	-	-	-	X	-	-	-	-	-	-
Piping_component_characterization	X	X	X	X	X	-	-	-	X	-	-
Piping_system_functional_characterization	X	X	X	-	-	-	-	-	X	-	-
Plant_item_characterization	X	X	X	X	X	X	X	X	X	X	X
Shape	X	X	X	X	X	X	X	X	X	X	X
Shape_representation Options (Note 1) (Options A, or B, or C)		A, B, C	A, B, C	A, B, C	A, B, C		A, B, C	A, B, C			A, B, C
Plant Usage Options (Options P, S)	P, S	P, S	P, S	P, S	P, S	P, S	P, S	P, S	P, S	P, S	P, S
Hull applicability (Option H)	H	H	H	H	H	H	H	H	H	H	H
Associative_schematics (Option M)	M	M	M	-	-	M	M	M	M	M	M
Change information (Option R)	R	R	R	R	R	R	R	R	R	R	R
Site_characterization (Option T)	T	T	T	T	T	T	T	T	T	T	T

ISO 10303-227:2005(E)

- 1 – PSFN - Piping system functional information
- 2 – EPSP - Equipment and piping spatial information
- 3 – PLSP - Plant spatial information
- 4 – PFB - Piping fabrication and installation information
- 5 – PIN - Piping inspection information
- 6 – HSFN - HVAC system functional information
- 7 – HSP - HVAC spatial information
- 8 – CSP - Cableway spatial information
- 9 – PHAN - Piping and HVAC analysis information
- 10 - MSFN – Mechanical system functional information
- 11- MSSP – Mechanical system spatial information

Note 1: All conformance classes include geometric entities to represent locations, connect points, and reference geometry, e.g., centrelines. These specific geometric entities are specified in the mapping tables

Table 2 specifies which units of functionality participate in specific conformance classes. An “X” indicates that all ARM entities in the unit of functionality are included in the conformance class. An option, “M”, “R”, or “T”, indicates that all the ARM entities for that unit of functionality are also included. A shape representation option, “A”, “B”, “C”, indicates that specific geometry and topology entities defined in Table 3 are included in the conformance class. An Option “H” indicates that specific effectivity entities defined in Table 3 are included in the conformance class. A plant usage Option, “P” or “S”, indicates plants may not be of type ship or must be of type ship respectively.

Table 3 explicitly specifies which AIM entities participate in specific conformance classes. Since specific change objects apply to specific ARM entities, Table 3 also defines which objects in the change information UoF are required within a given conformance class.

Table 3 — Conformance class (1–11) elements

AIM element	Conformance class										
	1	2	3	4	5	6	7	8	9	10	11
action	X	X	X	X	X	X	X	X	X	X	X
action_assignment	X	X	X	X	X	X	X	X	X	X	X
action_directive	X	X	X	X	X	X	X	X	X	X	X
action_method	R	R	R	R	R	R	R	R	R	R	R
action_method_relationship	X	X	X	X	X	X	X	X	X	X	X
action_relationship	R	R	R	R	R	R	R	R	R	R	R
action_request_assignment	X	X	X	X	X	X	X	X	X	X	X
action_request_solution	R	R	R	R	R	R	R	R	R	R	R
action_request_status	X	X	X	X	X	X	X	X	X	X	X
action_status	R	R	R	R	R	R	R	R	R	R	R
advanced_face	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
amount_of_substance_measure_with_unit	X	X	X	X	X	X	X	X	X	X	X
amount_of_substance_unit	X	X	X	X	X	X	X	X	X	X	X
analysis_tracing_representation	-	-	-	-	-	-	-	-	-	X	X
angular_location	X	X	X	X	X	X	X	X	X	X	X
annotation_curve_occurrence	X	X	X	-	-	X	X	X	X	X	X
annotation_fill_area	X	X	X	-	-	X	X	X	X	X	X
annotation_fill_area_occurrence	X	X	X	-	-	X	X	X	X	X	X
annotation_occurrence	X	X	X	-	-	X	X	X	X	X	X
annotation_occurrence_relationship	X	X	X	-	-	X	X	X	X	X	X
annotation_point_occurrence	X	X	X	-	-	X	X	X	X	X	X
annotation_symbol	X	X	X	-	-	X	X	X	X	X	X
annotation_symbol_occurrence	X	X	X	-	-	X	X	X	X	X	X
annotation_text	X	X	X	-	-	X	X	X	X	X	X
annotation_text_occurrence	X	X	X	-	-	X	X	X	X	X	X
annotation_text_with_extent	X	X	X	-	-	X	X	X	X	X	X
application_context	X	X	X	X	X	X	X	X	X	X	X
application_context_element	X	X	X	X	X	X	X	X	X	X	X
application_protocol_definition	X	X	X	X	X	X	X	X	X	X	X
applied_action_request_assignment	X	X	X	X	X	X	X	X	X	X	X
applied_approval_assignment	X	X	X	X	X	X	X	X	X	X	X
applied_classification_assignment	X	X	X	X	X	X	X	X	X	X	X

Table 3 — Conformance class (1 –11) elements (continued)

AIM element	Conformance class										
	1	2	3	4	5	6	7	8	9	10	11
applied_date_and_time_assignment	X	X	X	X	X	X	X	X	X	X	X
applied_date_assignment	X	X	X	X	X	X	X	X	X	X	X
applied_document_reference	X	X	X	X	X	X	X	X	X	X	X
applied_document_usage_constraint_assignment	X	X	X	X	X	X	X	X	X	X	X
applied_effectivity_assignment	H	H	H	H	H	H	H	H	H	H	H
applied_effectivity_context_assignment	H	H	H	H	H	H	H	H	H	H	H
applied_identification_assignment	X	X	X	X	X	X	X	X	X	X	X
approval	P, R	P, R	P, R	P, R	P, R	P, R	P, R	P, R	P, R	P, R	P, R
approval_assignment	P, R	P, R	P, R	P, R	P, R	P, R	P, R	P, R	P, R	P, R	P, R
approval_date_time	R	R	R	R	R	R	R	R	R	R	R
approval_person_organization	R	R	R	R	R	R	R	R	R	R	R
approval_role	R	R	R	R	R	R	R	R	R	R	R
approval_status	P	P	P	P	P	P	P	P	P	P	P
area_dependent_annotation_representation	X	X	X	-	-	X	X	X	X	X	X
area_in_set	X	X	X	-	-	X	X	X	X	X	X
arrangement_branch_connection	-	-	-	-	-	-	-	-	-	X	X
arrangement_less_mechanical_system	-	-	-	-	-	-	-	-	-	X	X
arrangement_load	-	-	-	-	-	-	-	-	-	X	X
arrangement_plant_item_branch_connection	-	-	-	-	-	-	-	-	-	X	X
arrangement_plant_item_connection	-	-	-	-	-	-	-	-	-	X	X
arrangement_termination_connection	-	-	-	-	-	-	-	-	-	X	X
assembly_component_usage	X	X	X	X	X	X	X	X	X	X	X
axis1_placement	X	X	X	X	X	X	X	X	X	X	X
axis2_placement_2d	X	X	X	X	X	X	X	X	X	X	X
axis2_placement_3d	X	X	X	X	X	X	X	X	X	X	X
b_spline_curve	X	X	X	X	X	X	X	X	X	X	X
b_spline_curve_with_knots	X	X	X	X	X	X	X	X	X	X	X
b_spline_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
b_spline_surface_with_knots	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
bezier_curve	X	X	X	X	X	X	X	X	X	X	X

Table 3 — Conformance class (1 –11) elements (continued)

AIM element	Conformance class										
	1	2	3	4	5	6	7	8	9	10	11
bezier_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
blank_fitting_class	X	X	X	X	X	-	-	-	X	-	-
block	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
bolt_and_nut_component_class	X	X	X	X	X	X	X	X	X	X	X
bolt_and_nut_component_definition	X	X	X	X	X	X	X	X	X	X	X
bolt_and_nut_set_definition	X	X	X	X	X	X	X	X	X	X	X
boolean_result	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
boundary_curve	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
bounded_curve	X	X	X	X	X	X	X	X	X	X	X
bounded_pcurve	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
bounded_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
bounded_surface_curve	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
brep_with_voids	-	A,C	A,C	A,C	A,C	-	A,C	A,C	-	-	A,C
cableway_component_class	-	-	X	-	-	-	-	X	-	-	-
cableway_component_definition	-	-	X	-	-	-	-	X	-	-	-
cableway_connector_class	-	-	X	-	-	-	-	X	-	-	-
cableway_system	P	P	P	P	P	P	P	P	P	P	P
calendar_date	X	X	X	X	X	X	X	X	X	X	X
camera_image	X	X	X	-	-	X	X	X	X	X	X
camera_model	X	X	X	-	-	X	X	X	X	X	X
camera_model_d2	X	X	X	-	-	X	X	X	X	X	X
camera_model_d2_shape_clipping	X	X	X	-	-	X	X	X	X	X	X
camera_usage	X	X	X	-	-	X	X	X	X	X	X
cartesian_point	X	X	X	X	X	X	X	X	X	X	X
cartesian_transformation_operator	X	X	X	X	X	X	X	X	X	X	X
cartesian_transformation_operator_3d	X	X	X	X	X	X	X	X	X	X	X
catalogue	X	X	X	X	X	X	X	X	X	X	X
catalogue_connector	X	X	X	X	X	X	X	X	X	X	X
catalogue_item	X	X	X	X	X	X	X	X	X	X	X
celsius_temperature_measure_with_unit	X	X	X	X	X	X	X	X	X	X	X
centre_of_symmetry	X	X	X	X	X	X	X	X	X	X	X
change_action	R	R	R	R	R	R	R	R	R	R	R
change_item_id_assignment	R	R	R	R	R	R	R	R	R	R	R

Table 3 — Conformance class (1 –11) elements (continued)

AIM element	Conformance class										
	1	2	3	4	5	6	7	8	9	10	11
change_life_cycle_stage_assignment	R	R	R	R	R	R	R	R	R	R	R
characterized_object	X	X	X	X	X	X	X	X	X	X	X
circle	X	X	X	X	X	X	X	X	X	X	X
clamp_component_definition	X	X	X	X	X	X	X	X	X	X	X
clamp_set_definition	X	X	X	X	X	X	X	X	X	X	X
classification_assignment	X	X	X	X	X	X	X	X	X	X	X
classification_role	X	X	X	X	X	X	X	X	X	X	X
closed_shell	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
colour	X	X	X	X	X	X	X	X	X	X	X
colour_rgb	X	X	X	X	X	X	X	X	X	X	X
colour_specification	X	X	X	X	X	X	X	X	X	X	X
composite_curve	X	X	X	X	X	X	X	X	X	X	X
composite_curve_on_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
composite_curve_segment	X	X	X	X	X	X	X	X	X	X	X
conic	X	X	X	X	X	X	X	X	X	X	X
conical_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
connected_face_set	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
connection_functional_class	X	X	X	X	X	X	X	X	X	X	X
connection_material_definition	X	X	X	X	X	X	X	X	X	X	X
connection_motion_class	X	X	X	X	X	X	X	X	X	X	X
connection_node	X	X	X	-	-	-	-	-	X	-	-
connector_end_type_class	X	X	X	X	X	X	X	X	X	X	X
context_dependent_invisibility	X	X	X	-	-	X	X	X	X	X	X
context_dependent_unit	X	X	X	X	X	X	X	X	X	X	X
conversion_based_unit	X	X	X	X	X	X	X	X	X	X	X
coordinated_universal_time_offset	X	X	X	X	X	X	X	X	X	X	X
csg_solid	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
curve	X	X	X	X	X	X	X	X	X	X	X
curve_bounded_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
curve_replica	X	X	X	X	X	X	X	X	X	X	X
curve_style	X	X	X	-	-	X	X	X	X	X	X
curve_style_font	X	X	X	-	-	X	X	X	X	X	X
curve_style_font_pattern	X	X	X	-	-	X	X	X	X	X	X
curve_style_wide	X	X	X	-	-	X	X	X	X	X	X
cyclide_segment_solid	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
cylindrical_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
data_environment	-	-	-	-	X	-	-	-	-	-	-

Table 3 — Conformance class (1 –11) elements (continued)

AIM element	Conformance class										
	1	2	3	4	5	6	7	8	9	10	11
date	X	X	X	X	X	X	X	X	X	X	X
date_and_time	X	X	X	X	X	X	X	X	X	X	X
date_and_time_assignment	X	X	X	X	X	X	X	X	X	X	X
date_assignment	X	X	X	X	X	X	X	X	X	X	X
date_role	X	X	X	X	X	X	X	X	X	X	X
date_time_role	X	X	X	X	X	X	X	X	X	X	X
defined_symbol	X	X	X	-	-	X	X	X	X	X	X
definitional_representation	X	X	X	X	X	X	X	X	X	X	X
degenerate_pcurve	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
degenerate_toroidal_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
derived_shape_aspect	X	X	X	X	X	X	X	X	X	X	X
derived_unit	X	X	X	X	X	X	X	X	X	X	X
derived_unit_element	X	X	X	X	X	X	X	X	X	X	X
description_attribute	-	-	-	-	-	-	-	-	-	-	-
descriptive_colour	X	X	X	X	X	X	X	X	X	X	X
descriptive_representation_item	X	X	X	X	X	X	X	X	X	X	X
design_arrangement_performance	-	-	-	-	-	-	-	-	-	X	X
design_project	X	X	X	X	X	X	X	X	X	X	X
design_project_assignment	X	X	X	X	X	X	X	X	X	X	X
dimensional_characteristic_representation	X	X	X	X	X	X	X	X	X	X	X
dimensional_exponents	X	X	X	X	X	X	X	X	X	X	X
dimensional_location	X	X	X	X	X	X	X	X	X	X	X
dimensional_size	X	X	X	X	X	X	X	X	X	X	X
directed_action	X	X	X	X	X	X	X	X	X	X	X
direction	X	X	X	X	X	X	X	X	X	X	X
document	X	X	X	X	X	X	X	X	X	X	X
document_reference	X	X	X	X	X	X	X	X	X	X	X
document_relationship	X	X	X	X	X	X	X	X	X	X	X
document_representation_type	X	X	X	X	X	X	X	X	X	X	X
document_type	X	X	X	X	X	X	X	X	X	X	X
document_usage_constraint	X	X	X	X	X	X	X	X	X	X	X
document_usage_constraint_assignment	X	X	X	X	X	X	X	X	X	X	X
document_usage_role	X	X	X	X	X	X	X	X	X	X	X
draughting_callout	X	X	X	-	-	X	X	X	X	X	X
draughting_callout_relationship	X	X	X	-	-	X	X	X	X	X	X
drawing_definition	X	X	X	-	-	X	X	X	X	X	X

Table 3 — Conformance class (1 –11) elements (continued)

AIM element	Conformance class										
	1	2	3	4	5	6	7	8	9	10	11
drawing_revision	X	X	X	-	-	X	X	X	X	X	X
drawing_revision_sequence	X	X	X	-	-	X	X	X	X	X	X
drawing_sheet_revision	X	X	X	-	-	X	X	X	X	X	X
drawing_sheet_revision_usage	X	X	X	-	-	X	X	X	X	X	X
ducting_system	P	P	P	P	P	P	P	P	P	P	P
eccentric_cone	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
edge	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
edge_curve	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
edge_loop	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
effectivity	H	H	H	H	H	H	H	H	H	H	H
effectivity_assignment	H	H	H	H	H	H	H	H	H	H	H
effectivity_context_assignment	H	H	H	H	H	H	H	H	H	H	H
effectivity_context_role	H	H	H	H	H	H	H	H	H	H	H
elbow_fitting_class	X	X	X	X	X	-	-	-	X	-	-
electric_current_measure_with_unit	X	X	X	X	X	X	X	X	X	X	X
electric_current_unit	X	X	X	X	X	X	X	X	X	X	X
electrical_connector_class	X	X	X	X	X	X	X	X	X	X	X
electrical_system	P	P	P	P	P	P	P	P	P	P	P
elementary_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
ellipse	X	X	X	X	X	X	X	X	X	X	X
ellipsoid	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
evaluated_degenerate_pcurve	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
executed_action	X	X	X	X	X	X	X	X	X	X	X
external_source	X	X	X	X	X	X	X	X	X	X	X
external_source_relationship	X	X	X	X	X	X	X	X	X	X	X
externally_defined_class	X	X	X	X	X	X	X	X	X	X	X
externally_defined_curve_font	X	X	X	-	-	X	X	X	X	X	X
externally_defined_document	P	P	P	P	P	P	P	P	P	P	P
externally_defined_hatch_style	X	X	X	-	-	X	X	X	X	X	X
externally_defined_item	X	X	X	X	X	X	X	X	X	X	X
externally_defined_item_relationship	X	X	X	X	X	X	X	X	X	X	X
externally_defined_plant_item_definition	X	X	X	X	X	X	X	X	X	X	X
externally_defined_representation_item	X	X	X	X	X	X	X	X	X	X	X
externally_defined_symbol	X	X	X	-	-	X	X	X	X	X	X
externally_defined_text_font	X	X	X	-	-	X	X	X	X	X	X

Table 3 — Conformance class (1 –11) elements (continued)

AIM element	Conformance class										
	1	2	3	4	5	6	7	8	9	10	11
externally_defined_tile_style	X	X	X	-	-	X	X	X	X	X	X
extruded_area_solid	-	A,C	A,C	A,C	A,C	-	A,C	A,C	-	-	A,C
extruded_face_solid	-	A,C	A,C	A,C	A,C	-	A,C	A,C	-	-	A,C
face	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
face_bound	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
face_outer_bound	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
face_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
faceted_brep	-	A,C	A,C	A,C	A,C	-	A,C	A,C	-	-	A,C
fill_area_style	X	X	X	-	-	X	X	X	X	X	X
fill_area_style_colour	X	X	X	-	-	X	X	X	X	X	X
fill_area_style_hatching	X	X	X	-	-	X	X	X	X	X	X
fill_area_style_tile_symbol_with_style	X	X	X	-	-	X	X	X	X	X	X
fill_area_style_tiles	X	X	X	-	-	X	X	X	X	X	X
flange_fitting_class	X	X	X	X	X	-	-	-	X	-	-
flange_fitting_neck_type_class	X	X	X	X	X	-	-	-	X	-	-
founded_item	X	X	X	X	X	X	X	X	X	X	X
functionally_defined_transformation	X	X	X	X	X	X	X	X	X	X	X
geometric_curve_set	X	X	X	X	X	X	X	X	X	X	X
geometric_representation_context	X	X	X	X	X	X	X	X	X	X	X
geometric_representation_item	X	X	X	X	X	X	X	X	X	X	X
geometric_set	X	X	X	X	X	X	X	X	X	X	X
geometric_set_replica	X	X	X	X	X	X	X	X	X	X	X
global_uncertainty_assigned_context	X	X	X	X	X	X	X	X	X	X	X
global_unit_assigned_context	X	X	X	X	X	X	X	X	X	X	X
graphical_transformation	X	X	X	-	-	X	X	X	X	X	X
group	X	X	X	X	X	X	X	X	X	X	X
group_assignment	X	X	X	X	X	X	X	X	X	X	X
group_relationship	X	X	X	X	X	X	X	X	X	X	X
half_space_2d	-	-	-	-	-	-	-	-	-	-	-
half_space_solid	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
heat_tracing_representation	X	X	X	X	X	X	X	X	X	X	X
hvac_branch_connection	X	X	X	X	X	X	X	X	X	X	X
hvac_component_definition	-	-	X	-	-	X	X	-	X	-	-
hvac_connector	X	X	X	X	X	X	X	X	X	X	X
hvac_cross_section	X	X	X	X	X	X	X	X	X	X	X
hvac_fitting_class	-	-	X	-	-	X	X	-	X	-	-

Table 3 — Conformance class (1 –11) elements (continued)

AIM element	Conformance class										
	1	2	3	4	5	6	7	8	9	10	11
hvac_plant_item_branch_connection	-	-	X	-	-	X	X	-	X	-	-
hvac_plant_item_connection	-	-	X	-	-	X	X	-	X	-	-
hvac_run_definition	-	-	X	-	-	X	X	-	X	-	-
hvac_section_definition	-	-	X	-	-	X	X	-	X	-	-
hvac_section_termination	-	-	X	-	-	X	X	-	X	-	-
hvac_support_class	-	-	X	-	-	X	X	-	X	-	-
hvac_support_definition	-	-	X	-	-	X	X	-	X	-	-
hvac_system	P	P	P	P	P	P	P	P	P	P	P
hvac_termination_connection	-	-	X	-	-	X	X	-	X	-	-
hybrid_shape_representation	-	A,C	A,C	A,C	A,C	-	A,C	A,C	-	-	A,C
hyperbola	X	X	X	X	X	X	X	X	X	X	X
id_attribute	-	-	-	-	-	-	-	-	-	-	-
identification_assignment	X	X	X	X	X	X	X	X	X	X	X
identification_role	X	X	X	X	X	X	X	X	X	X	X
inline_equipment	X	X	X	X	X	-	-	-	X	-	-
instrumentation_and_control_system	P	P	P	P	P	P	P	P	P	P	P
interfering_shape_element	X	X	X	X	X	X	X	X	X	X	X
intersection_curve	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
invisibility	X	X	X	-	-	X	X	X	X	X	X
item_defined_transformation	X	X	X	-	-	X	X	X	X	X	X
item_identified_representation_usage	X	X	X	X	X	X	X	X	X	X	X
known_source	X	X	X	X	X	X	X	X	X	X	X
length_measure_with_unit	X	X	X	X	X	X	X	X	X	X	X
length_unit	X	X	X	X	X	X	X	X	X	X	X
line	X	X	X	X	X	X	X	X	X	X	X
line_branch_connection	X	X	X	-	-	-	-	-	X	-	-
line_less_piping_system	P	P	P	P	P	P	P	P	P	P	P
line_plant_item_branch_connection	X	X	X	-	-	-	-	-	X	-	-
line_plant_item_connection	X	X	X	-	-	-	-	-	X	-	-
line_termination_connection	X	X	X	-	-	-	-	-	X	-	-
local_time	X	X	X	X	X	X	X	X	X	X	X
loop	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
luminous_intensity_measure_with_unit	X	X	X	X	X	X	X	X	X	X	X
luminous_intensity_unit	X	X	X	X	X	X	X	X	X	X	X
make_from_usage_option	X	X	X	X	X	X	X	X	X	X	X
manifold_solid_brep	-	A,C	A,C	A,C	A,C	-	A,C	A,C	-	-	A,C

Table 3 — Conformance class (1 –11) elements (continued)

AIM element	Conformance class										
	1	2	3	4	5	6	7	8	9	10	11
mapped_item	X	X	X	X	X	X	X	X	X	X	X
mass_measure_with_unit	X	X	X	X	X	X	X	X	X	X	X
mass_unit	X	X	X	X	X	X	X	X	X	X	X
material_designation	X	X	X	X	X	X	X	X	X	X	X
material_designation_characterization	X	X	X	X	X	X	X	X	X	X	X
material_property	X	X	X	X	X	X	X	X	X	X	X
material_property_representation	X	X	X	X	X	X	X	X	X	X	X
measure_representation_item	X	X	X	X	X	X	X	X	X	X	X
measure_with_unit	X	X	X	X	X	X	X	X	X	X	X
mechanical_component_class	-	-	-	-	-	-	-	-	-	X	X
mechanical_component_definition	-	-	-	-	-	-	-	-	-	X	X
mechanical_connector_class	-	-	-	-	-	-	-	-	-	X	X
mechanical_system	-	-	-	-	-	-	-	-	-	X	X
name_assignment	R	R	R	R	R	R	R	R	R	R	R
name_attribute	-	-	-	-	-	-	-	-	-	-	-
named_unit	X	X	X	X	X	X	X	X	X	X	X
object_role	R	R	R	R	R	R	R	R	R	R	R
offset_curve_2d	X	X	X	X	X	X	X	X	X	X	X
offset_curve_3d	X	X	X	X	X	X	X	X	X	X	X
offset_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
one_direction_repeat_factor	X	X	X	-	-	X	X	X	X	X	X
open_shell	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
organization	X	X	X	X	X	X	X	X	X	X	X
organization_assignment	X	X	X	X	X	X	X	X	X	X	X
organization_role	X	X	X	X	X	X	X	X	X	X	X
organizational_project	X	X	X	X	X	X	X	X	X	X	X
oriented_closed_shell	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
oriented_edge	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
oriented_face	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
oriented_open_shell	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
oriented_path	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
outer_boundary_curve	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
parabola	X	X	X	X	X	X	X	X	X	X	X
parametric_representation_context	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
path	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
pcurve	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T

Table 3 — Conformance class (1 –11) elements (continued)

AIM element	Conformance class										
	1	2	3	4	5	6	7	8	9	10	11
person	X	X	X	X	X	X	X	X	X	X	X
person_and_organization	X	X	X	X	X	X	X	X	X	X	X
person_and_organization_assignment	X	X	X	X	X	X	X	X	X	X	X
person_and_organization_role	X	X	X	X	X	X	X	X	X	X	X
person_assignment	X	X	X	X	X	X	X	X	X	X	X
person_role	X	X	X	X	X	X	X	X	X	X	X
pipe_class	X	X	X	X	X	-	-	-	X	-	-
pipe_closure_fitting_class	X	X	X	X	X	-	-	-	X	-	-
pipng_component_class	X	X	X	X	X	-	-	-	X	-	-
pipng_component_definition	X	X	X	X	X	X	X	X	X	X	X
pipng_connector_class	X	X	X	X	X	-	-	-	X	-	-
pipng_spool_definition	X	X	X	X	X	-	-	-	X	-	-
planar_box	X	X	X	-	-	X	X	X	X	X	X
planar_extent	X	X	X	-	-	X	X	X	X	X	X
plane	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
plane_angle_measure_with_unit	X	X	X	X	X	X	X	X	X	X	X
plane_angle_unit	X	X	X	X	X	X	X	X	X	X	X
plant	P	P	P	P	P	P	P	P	P	P	P
plant_arrangement_definition	-	-	-	-	-	-	-	-	-	X	X
plant_arrangement_segment_definition	-	-	-	-	-	-	-	-	-	X	X
plant_arrangement_segment_termination	-	-	-	-	-	-	-	-	-	X	X
plant_csg_shape_representation	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
plant_design_csg_primitive	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
plant_item_connection	X	X	X	X	X	X	X	X	X	X	X
plant_item_connector	X	X	X	X	X	X	X	X	X	X	X
plant_item_interference	X	X	X	X	X	X	X	X	X	X	X
plant_item_route	X	X	X	X	X	X	X	X	X	X	X
plant_item_weight_representation	X	X	X	X	X	X	X	X	X	X	X
plant_line_definition	X	X	X	-	-	-	-	-	X	-	-
plant_line_segment_definition	X	X	X	-	-	-	-	-	X	-	-
plant_line_segment_termination	X	X	X	-	-	-	-	-	X	-	-
plant_spatial_configuration_change_assignment	R	R	R	R	R	R	R	R	R	R	R

Table 3 — Conformance class (1 –11) elements (continued)

AIM element	Conformance class										
	1	2	3	4	5	6	7	8	9	10	11
plant_spatial_configuration_ organization_assignment	X	X	X	X	X	X	X	X	X	X	X
plant_spatial_configuration_ person_and_organization_ assignment	P,R, T	P,R,T	P,R,T	P,R,T	P,R,T	P,R, T	P,R,T	P,R,T	P,R, T	P,R,T	P,R,T
plant_spatial_configuration_ person_assignment	X	X	X	X	X	X	X	X	X	X	X
point	X	X	X	X	X	X	X	X	X	X	X
point_on_curve	X	X	X	X	X	X	X	X	X	X	X
point_on_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
point_replica	X	X	X	X	X	X	X	X	X	X	X
point_style	X	X	X	-	-	X	X	X	X	X	X
poly_loop	X	X	X	X	X	X	X	X	X	X	X
polyline	X	X	X	X	X	X	X	X	X	X	X
pre_defined_colour	X	X	X	-	-	X	X	X	X	X	X
pre_defined_curve_font	X	X	X	-	-	X	X	X	X	X	X
pre_defined_item	X	X	X	X	X	X	X	X	X	X	X
precision_qualifier	X	X	X	X	X	X	X	X	X	X	X
presentation_area	X	X	X	-	-	X	X	X	X	X	X
presentation_layer_assignment	X	X	X	X	X	X	X	X	X	X	X
presentation_layer_usage	X	X	X	-	-	X	X	X	X	X	X
presentation_representation	X	X	X	-	-	X	X	X	X	X	X
presentation_representation_ relationship	X	X	X	-	-	X	X	X	X	X	X
presentation_scaled_placement	X	X	X	-	-	X	X	X	X	X	X
presentation_set	X	X	X	-	-	X	X	X	X	X	X
presentation_size	X	X	X	-	-	X	X	X	X	X	X
presentation_style_assignment	X	X	X	-	-	X	X	X	X	X	X
presentation_style_by_context	X	X	X	-	-	X	X	X	X	X	X
presentation_view	X	X	X	-	-	X	X	X	X	X	X
presentation_with_association	X	X	X	-	-	X	X	X	X	X	X
presented_item	X	X	X	-	-	X	X	X	X	X	X
presented_item_association	X	X	X	-	-	X	X	X	X	X	X
presented_item_representation	X	X	X	-	-	X	X	X	X	X	X
presented_item_with_ association	X	X	X	-	-	X	X	X	X	X	X
process_capability	P	P	P	P	P	P	P	P	P	P	P
product	X	X	X	X	X	X	X	X	X	X	X
product_context	X	X	X	X	X	X	X	X	X	X	X
product_data_representation_ view	X	X	X	-	-	X	X	X	X	X	X

Table 3 — Conformance class (1 –11) elements (continued)

AIM element	Conformance class										
	1	2	3	4	5	6	7	8	9	10	11
product_definition	X	X	X	X	X	X	X	X	X	X	X
product_definition_context	X	X	X	X	X	X	X	X	X	X	X
product_definition_formation	X	X	X	X	X	X	X	X	X	X	X
product_definition_formation_relationship	X	X	X	X	X	X	X	X	X	X	X
product_definition_formation_with_specified_source	X	X	X	X	X	X	X	X	X	X	X
product_definition_relationship	X	X	X	X	X	X	X	X	X	X	X
product_definition_shape	X	X	X	X	X	X	X	X	X	X	X
product_definition_substitute	X	X	X	X	X	X	X	X	X	X	X
product_definition_usage	X	X	X	X	X	X	X	X	X	X	X
product_definition_with_associated_documents	X	X	X	-	-	-	-	-	X	-	-
product_material_composition_relationship	X	X	X	X	X	X	X	X	X	X	X
property_definition	X	X	X	X	X	X	X	X	X	X	X
property_definition_relationship	X	X	X	X	X	X	X	X	X	X	X
property_definition_representation	X	X	X	X	X	X	X	X	X	X	X
purchase_assignment	X	X	X	X	X	X	X	X	X	X	X
qualified_representation_item	X	X	X	X	X	X	X	X	X	X	X
quasi_uniform_curve	X	X	X	X	X	X	X	X	X	X	X
quasi_uniform_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
ratio_measure_with_unit	X	X	X	X	X	X	X	X	X	X	X
ratio_unit	X	X	X	X	X	X	X	X	X	X	X
rational_b_spline_curve	X	X	X	X	X	X	X	X	X	X	X
rational_b_spline_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
rectangular_composite_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
rectangular_pyramid	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
rectangular_trimmed_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
reducer_fitting_class	X	X	X	X	X	-	-	-	X	-	-
reference_geometry	X	X	X	X	X	X	X	X	X	X	X
reinforcing_component_definition	X	X	X	X	X	-	-	-	X	-	-
reparametrised_composite_curve_segment	X	X	X	X	X	X	X	X	X	X	X
representation	X	X	X	X	X	X	X	X	X	X	X
representation_context	X	X	X	X	X	X	X	X	X	X	X
representation_item	X	X	X	X	X	X	X	X	X	X	X

Table 3 — Conformance class (1 –11) elements (continued)

AIM element	Conformance class										
	1	2	3	4	5	6	7	8	9	10	11
representation_item_relationship	X	X	X	X	X	X	X	X	X	X	X
representation_map	X	X	X	X	X	X	X	X	X	X	X
representation_relationship	X	X	X	-	-	X	X	X	X	X	X
representation_relationship_with_transformation	X	X	X	-	-	X	X	X	X	X	X
required_material_property	X	X	X	X	X	X	X	X	X	X	X
reserved_space	X	X	X	X	X	X	X	X	X	X	X
revolved_area_solid	-	A,C	A,C	A,C	A,C	-	A,C	A,C	-	-	A,C
revolved_face_solid	-	A,C	A,C	A,C	A,C	-	A,C	A,C	-	-	A,C
right_angular_wedge	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
right_circular_cone	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
right_circular_cylinder	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
shape_aspect	X	X	X	X	X	X	X	X	X	X	X
shape_aspect_deriving_relationship	X	X	X	X	X	X	X	X	X	X	X
shape_aspect_relationship	X	X	X	X	X	X	X	X	X	X	X
shape_definition_representation	X	X	X	X	X	X	X	X	X	X	X
shape_dimension_representation	X	X	X	X	X	X	X	X	X	X	X
shape_representation	X	X	X	X	X	X	X	X	X	X	X
shell_based_wireframe_model	-	A,C	A,C	A,C	A,C	-	A,C	A,C	-	-	A,C
si_unit	X	X	X	X	X	X	X	X	X	X	X
site	T	T	T	T	T	T	T	T	T	T	T
site_building	T	T	T	T	T	T	T	T	T	T	T
site_feature	T	T	T	T	T	T	T	T	T	T	T
site_representation	T	T	T	T	T	T	T	T	T	T	T
sited_plant	T	T	T	T	T	T	T	T	T	T	T
solid_angle_measure_with_unit	X	X	X	X	X	X	X	X	X	X	X
solid_angle_unit	X	X	X	X	X	X	X	X	X	X	X
solid_model	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
spacer_fitting_class	X	X	X	X	X	-	-	-	X	-	-
specialty_item_class	X	X	X	X	X	-	-	-	X	-	-
sphere	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
spherical_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
stream_design_case	X	X	X	-	-	X	X	-	X	-	-
stream_phase	X	X	X	-	-	-	-	-	X	-	-
structural_load_connector_class	X	X	X	X	X	X	X	X	X	X	X

Table 3 — Conformance class (1 –11) elements (continued)

AIM element	Conformance class										
	1	2	3	4	5	6	7	8	9	10	11
structural_system	P	P	P	P	P	P	P	P	P	P	P
styled_item	X	X	X	-	-	X	X	X	X	X	X
support_constraint_representation	X	X	X	X	X	X	X	X	X	X	X
surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
surface_curve	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
surface_of_linear_extrusion	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
surface_of_revolution	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
surface_patch	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
surface_replica	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
swage_fitting_class	X	X	X	X	X	-	-	-	X	-	-
swept_area_solid	-	A,C	A,C	A,C	A,C	-	A,C	A,C	-	-	A,C
swept_face_solid	-	A,C	A,C	A,C	A,C	-	A,C	A,C	-	-	A,C
swept_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
symbol_colour	X	X	X	-	-	X	X	X	X	X	X
symbol_representation	X	X	X	-	-	X	X	X	X	X	X
symbol_representation_map	X	X	X	-	-	X	X	X	X	X	X
symbol_representation_relationship	X	X	X	-	-	X	X	X	X	X	X
symbol_style	X	X	X	-	-	X	X	X	X	X	X
symbol_target	X	X	X	-	-	X	X	X	X	X	X
symmetric_shape_aspect	X	X	X	X	X	X	X	X	X	X	X
system_class	P	P	P	P	P	P	P	P	P	P	P
system_space	X	X	X	X	X	X	X	X	X	X	X
text_literal	X	X	X	-	-	X	X	X	X	X	X
text_literal_with_associated_curves	X	X	X	-	-	X	X	X	X	X	X
text_literal_with_blanking_box	X	X	X	-	-	X	X	X	X	X	X
text_literal_with_delineation	X	X	X	-	-	X	X	X	X	X	X
text_literal_with_extent	X	X	X	-	-	X	X	X	X	X	X
text_string_representation	X	X	X	-	-	X	X	X	X	X	X
text_style	X	X	X	-	-	X	X	X	X	X	X
text_style_for_defined_font	X	X	X	-	-	X	X	X	X	X	X
text_style_with_box_characteristics	X	X	X	-	-	X	X	X	X	X	X
text_style_with_mirror	X	X	X	-	-	X	X	X	X	X	X
thermodynamic_temperature_measure_with_unit	X	X	X	X	X	X	X	X	X	X	X
thermodynamic_temperature_unit	X	X	X	X	X	X	X	X	X	X	X

Table 3 — Conformance class (1 –11) elements (concluded)

AIM element	Conformance class										
	1	2	3	4	5	6	7	8	9	10	11
time_measure_with_unit	X	X	X	X	X	X	X	X	X	X	X
time_unit	X	X	X	X	X	X	X	X	X	X	X
topological_representation_item	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
toroidal_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
torus	-	B,C	B,C	B,C	B,C	-	B,C	B,C	-	-	B,C
trimmed_curve	X	X	X	X	X	X	X	X	X	X	X
two_direction_repeat_factor	X	X	X	-	-	X	X	X	X	X	X
type_qualifier	X	X	X	X	X	X	X	X	X	X	X
uncertainty_measure_with_unit	X	X	X	X	X	X	X	X	X	X	X
uniform_curve	X	X	X	X	X	X	X	X	X	X	X
uniform_surface	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
valve_class	X	X	X	X	X	-	-	-	X	-	-
vector	X	X	X	X	X	X	X	X	X	X	X
versioned_action_request	X	X	X	X	X	X	X	X	X	X	X
vertex	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
vertex_loop	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
vertex_point	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
vertex_shell	T	A,C,T	A,C,T	A,C,T	A,C,T	T	A,C,T	A,C,T	T	T	A,C,T
view_dependent_annotation_representation	X	X	X	-	-	X	X	X	X	X	X
wire_shell	-	A,C	A,C	A,C	A,C	-	A,C	A,C	-	-	A,C

Annex A
(normative)
AIM EXPRESS expanded listing

```
( * ***** *)

SCHEMA plant_spatial_configuration;

( * *****
Constants in the schema plant_spatial_configuration
***** *)

    CONSTANT
        dummy_tri : topological_representation_item := representation_item('')
    || topological_representation_item();
        dummy_gri : geometric_representation_item := representation_item('') ||
geometric_representation_item();
    END_CONSTANT;

( * *****
Types in the schema plant_spatial_configuration
***** *)

    TYPE action_request_item = SELECT
        (product);
    END_TYPE;

    TYPE ahead_or_behind = ENUMERATION OF
        (ahead,
         exact,
         behind);
    END_TYPE;

    TYPE amount_of_substance_measure = REAL;
    END_TYPE;

    TYPE angle_relator = ENUMERATION OF
        (equal,
         large,
         small);
    END_TYPE;

    TYPE approval_item = SELECT
        (change_action,
         electrical_system,
         ducting_system,
         instrumentation_and_control_system,
         piping_system,
         structural_system,
         cableway_system,
         hvac_system,
         versioned_action_request);
```

```
END_TYPE;

TYPE area_measure = REAL;
END_TYPE;

TYPE area_or_view = SELECT
    (presentation_area,
     presentation_view);
END_TYPE;

TYPE associated_item = SELECT
    (document,
     ducting_system,
     hvac_section_termination,
     organizational_project,
     piping_system,
     plant_item_connection,
     plant_item_connector,
     plant_line_definition,
     plant_line_segment_definition,
     plant_line_segment_termination,
     product,
     product_definition,
     representation,
     shape_dimension_representation,
     plant_arrangement_definition,
     plant_arrangement_segment_definition,
     mechanical_system,
     plant_arrangement_segment_termination);
END_TYPE;

TYPE attribute_type = SELECT
    (label,
     text);
END_TYPE;

TYPE axis2_placement = SELECT
    (axis2_placement_2d,
     axis2_placement_3d);
END_TYPE;

TYPE b_spline_curve_form = ENUMERATION OF
    (polyline_form,
     circular_arc,
     elliptic_arc,
     parabolic_arc,
     hyperbolic_arc,
     unspecified);
END_TYPE;

TYPE b_spline_surface_form = ENUMERATION OF
    (plane_surf,
     cylindrical_surf,
     conical_surf,
```

ISO 10303-227:2005(E)

```
spherical_surf,  
toroidal_surf,  
surf_of_revolution,  
ruled_surf,  
generalised_cone,  
quadric_surf,  
surf_of_linear_extrusion,  
unspecified);  
END_TYPE;  
  
TYPE boolean_operand = SELECT  
  (solid_model,  
   half_space_solid,  
   csg_primitive,  
   boolean_result,  
   half_space_2d);  
END_TYPE;  
  
TYPE boolean_operator = ENUMERATION OF  
  (union,  
   intersection,  
   difference);  
END_TYPE;  
  
TYPE box_characteristic_select = SELECT  
  (box_height,  
   box_width,  
   box_slant_angle,  
   box_rotate_angle);  
END_TYPE;  
  
TYPE box_height = positive_ratio_measure;  
END_TYPE;  
  
TYPE box_rotate_angle = plane_angle_measure;  
END_TYPE;  
  
TYPE box_slant_angle = plane_angle_measure;  
END_TYPE;  
  
TYPE box_width = positive_ratio_measure;  
END_TYPE;  
  
TYPE celsius_temperature_measure = REAL;  
END_TYPE;  
  
TYPE change_item = SELECT  
  (assembly_component_usage,  
   axis2_placement_2d,  
   axis2_placement_3d,  
   document,  
   ducting_system,  
   electrical_system,  
   externally_defined_plant_item_definition,
```

```

hvac_connector,
instrumentation_and_control_system,
line_branch_connection,
line_plant_item_branch_connection,
line_plant_item_connection,
line_termination_connection,
mechanical_system,
piping_system,
plant,
plant_item_connection,
plant_item_connector,
plant_line_definition,
plant_line_segment_definition,
plant_line_segment_termination,
process_capability,
product,
product_definition,
product_definition_relationship,
product_definition_shape,
property_definition,
reference_geometry,
representation,
shape_aspect,
shape_aspect_relationship,
site,
site_feature,
sited_plant,
structural_system);
END_TYPE;

TYPE change_life_cycle_item = SELECT
  (directed_action);
END_TYPE;

TYPE character_spacing_select = SELECT
  (length_measure,
   ratio_measure,
   measure_with_unit);
END_TYPE;

TYPE character_style_select = SELECT
  (text_style_for_defined_font);
END_TYPE;

TYPE characterized_action_definition = SELECT
  (action,
   action_method,
   action_method_relationship,
   action_relationship);
END_TYPE;

TYPE characterized_definition = SELECT
  (characterized_object,
   characterized_product_definition,

```

ISO 10303-227:2005(E)

```
        shape_definition);
END_TYPE;

TYPE characterized_material_property = SELECT
    (material_property_representation,
     product_material_composition_relationship);
END_TYPE;

TYPE characterized_product_definition = SELECT
    (product_definition,
     product_definition_relationship);
END_TYPE;

TYPE classification_item = SELECT
    (cableway_system,
     drawing_revision,
     ducting_system,
     electrical_system,
     hvac_component_definition,
     hvac_connector,
     instrumentation_and_control_system,
     material_property,
     piping_component_definition,
     piping_system,
     plant_item_connection,
     plant_item_connector,
     applied_document_reference,
     product,
     product_definition,
     structural_system,
     mechanical_system,
     mechanical_component_definition);
END_TYPE;

TYPE configuration_design_item = SELECT
    (product_definition,
     product_definition_formation);
END_TYPE;

TYPE context_dependent_measure = REAL;
END_TYPE;

TYPE count_measure = NUMBER;
END_TYPE;

TYPE csg_primitive = SELECT
    (sphere,
     ellipsoid,
     block,
     right_angular_wedge,
     rectangular_pyramid,
     torus,
     right_circular_cone,
     eccentric_cone,
```

```

        right_circular_cylinder,
        cyclide_segment_solid);
END_TYPE;

TYPE csg_select = SELECT
    (boolean_result,
     csg_primitive);
END_TYPE;

TYPE curve_font_or_scaled_curve_font_select = SELECT
    (curve_style_font_select);
END_TYPE;

TYPE curve_on_surface = SELECT
    (pcurve,
     surface_curve,
     composite_curve_on_surface);
END_TYPE;

TYPE curve_or_annotation_curve_occurrence = SELECT
    (curve,
     annotation_curve_occurrence);
END_TYPE;

TYPE curve_or_render = SELECT
    (curve_style);
END_TYPE;

TYPE curve_style_font_select = SELECT
    (curve_style_font,
     pre_defined_curve_font,
     externally_defined_curve_font);
END_TYPE;

TYPE date_and_time_item = SELECT
    (change_action,
     change_item,
     change_life_cycle_stage_assignment,
     product);
END_TYPE;

TYPE date_time_or_event_occurrence = SELECT
    (date_time_select);
END_TYPE;

TYPE date_time_select = SELECT
    (date,
     local_time,
     date_and_time);
END_TYPE;

TYPE dated_item = SELECT
    (action_directive,
     change_action,

```

ISO 10303-227:2005(E)

```
        change_item,  
        product);  
END_TYPE;  
  
TYPE day_in_month_number = INTEGER;  
WHERE  
    WR1:  
        (1 <= SELF) AND (SELF <= 31);  
END_TYPE;  
  
TYPE defined_symbol_select = SELECT  
    (externally_defined_symbol);  
END_TYPE;  
  
TYPE derived_property_select = SELECT  
    (property_definition);  
END_TYPE;  
  
TYPE description_attribute_select = SELECT  
    (action_request_solution,  
    application_context,  
    approval_role,  
    date_role,  
    date_time_role,  
    effectivity,  
    external_source,  
    organization_role,  
    person_and_organization_role,  
    person_and_organization,  
    person_role,  
    property_definition_representation,  
    representation);  
END_TYPE;  
  
TYPE design_project_item = SELECT  
    (product_definition);  
END_TYPE;  
  
TYPE dimension_count = INTEGER;  
WHERE  
    WR1:  
        SELF > 0;  
END_TYPE;  
  
TYPE dimensional_characteristic = SELECT  
    (dimensional_location,  
    dimensional_size);  
END_TYPE;  
  
TYPE document_item = SELECT  
    (externally_defined_plant_item_definition,  
    heat_tracing_representation,  
    material_property,  
    piping_component_class,
```



```

    piping_system,
    plant_item_connector,
    plant_line_segment_definition,
    product,
    product_definition,
    product_definition_relationship,
    property_definition,
    representation,
    representation_item,
    site,
    mechanical_system,
    analysis_tracing_representation,
    plant_arrangement_segment_definition,
    mechanical_component_class);
END_TYPE;

TYPE draughting_callout_element = SELECT
    (annotation_text_occurrence,
     annotation_symbol_occurrence,
     annotation_curve_occurrence);
END_TYPE;

TYPE draughting_titled_item = SELECT
    (drawing_revision,
     drawing_sheet_revision);
END_TYPE;

TYPE effectivity_context_item = SELECT
    (product_definition);
END_TYPE;

TYPE effectivity_item = SELECT
    (product,
     product_definition);
END_TYPE;

TYPE electric_current_measure = REAL;
END_TYPE;

TYPE fill_area_style_tile_shape_select = SELECT
    (fill_area_style_tile_symbol_with_style);
END_TYPE;

TYPE fill_style_select = SELECT
    (fill_area_style_colour,
     externally_defined_tile_style,
     fill_area_style_tiles,
     externally_defined_hatch_style,
     fill_area_style_hatching);
END_TYPE;

TYPE font_select = SELECT
    (pre_defined_text_font,
     externally_defined_text_font);

```

ISO 10303-227:2005(E)

END_TYPE;

```
TYPE founded_item_select = SELECT
  (founded_item,
   representation_item);
END_TYPE;
```

```
TYPE geometric_set_select = SELECT
  (point,
   curve,
   surface);
END_TYPE;
```

```
TYPE hiding_or_blanking_select = SELECT
  (presentation_area,
   presentation_view,
   product_data_representation_view,
   annotation_fill_area,
   area_dependent_annotation_representation,
   view_dependent_annotation_representation);
END_TYPE;
```

```
TYPE hour_in_day = INTEGER;
WHERE
  WR1:
    (0 <= SELF) AND (SELF < 24);
END_TYPE;
```

```
TYPE id_attribute_select = SELECT
  (action,
   property_definition,
   shape_aspect,
   shape_aspect_relationship,
   application_context,
   group,
   organizational_project,
   representation);
END_TYPE;
```

```
TYPE identified_item = SELECT
  (document,
   product_definition,
   property_definition,
   shape_aspect);
END_TYPE;
```

```
TYPE identifier = STRING;
END_TYPE;
```

```
TYPE invisibility_context = SELECT
  (presentation_layer_usage,
   presentation_representation,
   presentation_set);
END_TYPE;
```

```

TYPE invisible_item = SELECT
  (styled_item,
   presentation_layer_assignment,
   representation);
END_TYPE;
TYPE knot_type = ENUMERATION OF
  (uniform_knots,
   quasi_uniform_knots,
   piecewise_bezier_knots,
   unspecified);
END_TYPE;
TYPE label = STRING;
END_TYPE;
TYPE layered_item = SELECT
  (presentation_representation,
   representation_item);
END_TYPE;

TYPE length_measure = REAL;
END_TYPE;

TYPE list_of_reversible_topology_item = LIST [0:?] OF
reversible_topology_item;
END_TYPE;

TYPE luminous_intensity_measure = REAL;
END_TYPE;

TYPE marker_select = SELECT
  (marker_type);
END_TYPE;

TYPE marker_type = ENUMERATION OF
  (dot,
   x,
   plus,
   asterisk,
   ring,
   square,
   triangle);
END_TYPE;

TYPE mass_measure = REAL;
END_TYPE;

TYPE measure_value = SELECT
  (length_measure,
   mass_measure,
   time_measure,
   electric_current_measure,
   thermodynamic_temperature_measure,
   celsius_temperature_measure,
   amount_of_substance_measure,

```

ISO 10303-227:2005(E)

```
    luminous_intensity_measure,  
    plane_angle_measure,  
    solid_angle_measure,  
    area_measure,  
    volume_measure,  
    ratio_measure,  
    parameter_value,  
    numeric_measure,  
    context_dependent_measure,  
    positive_length_measure,  
    positive_plane_angle_measure,  
    positive_ratio_measure,  
    count_measure);  
END_TYPE;  
  
TYPE minute_in_hour = INTEGER;  
WHERE  
    WR1:  
        (0 <= SELF) AND (SELF <= 59);  
END_TYPE;  
  
TYPE month_in_year_number = INTEGER;  
WHERE  
    WR1:  
        (1 <= SELF) AND (SELF <= 12);  
END_TYPE;  
  
TYPE name_attribute_select = SELECT  
    (action_request_solution,  
    derived_unit,  
    effectivity,  
    person_and_organization,  
    product_definition,  
    product_definition_substitute,  
    property_definition_representation);  
END_TYPE;  
  
TYPE numeric_measure = NUMBER;  
END_TYPE;  
  
TYPE parameter_value = REAL;  
END_TYPE;  
  
TYPE pcurve_or_surface = SELECT  
    (pcurve,  
    surface);  
END_TYPE;  
  
TYPE person_organization_select = SELECT  
    (person,  
    organization,  
    person_and_organization);  
END_TYPE;
```

```
TYPE plane_angle_measure = REAL;
END_TYPE;
```

```
TYPE plant_spatial_configuration_organization_item = SELECT
  (catalogue,
   change_action,
   design_project,
   document,
   plant,
   product_definition_formation,
   product_definition_relationship,
   representation,
   site);
END_TYPE;
```

```
TYPE plant_spatial_configuration_person_and_organization_item = SELECT
  (change_item,
   plant,
   site);
END_TYPE;
```

```
TYPE plant_spatial_configuration_person_item = SELECT
  (document,
   plant,
   product_definition_relationship,
   representation,
   site);
END_TYPE;
```

```
TYPE positive_length_measure = length_measure;
WHERE
  WR1:
    SELF > 0.00000;
END_TYPE;
```

```
TYPE positive_plane_angle_measure = plane_angle_measure;
WHERE
  WR1:
    SELF > 0.00000;
END_TYPE;
```

```
TYPE positive_ratio_measure = ratio_measure;
WHERE
  WR1:
    SELF > 0.00000;
END_TYPE;
```

```
TYPE preferred_surface_curve_representation = ENUMERATION OF
  (curve_3d,
   pcurve_s1,
   pcurve_s2);
END_TYPE;
```

```
TYPE presentable_text = STRING;
```

ISO 10303-227:2005(E)

```
END_TYPE;

TYPE presentation_representation_select = SELECT
  (presentation_representation,
   presentation_set);
END_TYPE;

TYPE presentation_size_assignment_select = SELECT
  (presentation_view,
   presentation_area,
   area_in_set);
END_TYPE;

TYPE presentation_style_select = SELECT
  (point_style,
   curve_style,
   symbol_style,
   fill_area_style,
   text_style);
END_TYPE;

TYPE presented_item_select = SELECT
  (product_definition);
END_TYPE;

TYPE product_or_formation_or_definition = SELECT
  (product,
   product_definition_formation,
   product_definition);
END_TYPE;

TYPE property_or_shape_select = SELECT
  (property_definition,
   shape_definition);
END_TYPE;

TYPE purchase_item = SELECT
  (product);
END_TYPE;

TYPE ratio_measure = REAL;
END_TYPE;

TYPE represented_definition = SELECT
  (property_definition,
   property_definition_relationship,
   shape_aspect,
   shape_aspect_relationship);
END_TYPE;

TYPE reversible_topology = SELECT
  (reversible_topology_item,
   list_of_reversible_topology_item,
   set_of_reversible_topology_item);
```

```

END_TYPE;

TYPE reversible_topology_item = SELECT
  (edge,
   path,
   face,
   face_bound,
   closed_shell,
   open_shell);
END_TYPE;

TYPE role_select = SELECT
  (action_assignment,
   action_request_assignment,
   approval_assignment,
   approval_date_time,
   document_reference,
   effectivity_assignment,
   group_assignment,
   name_assignment);
END_TYPE;

TYPE second_in_minute = REAL;
WHERE
  WR1:
    (0 <= SELF) AND (SELF <= 60.0000);
END_TYPE;

TYPE set_of_reversible_topology_item = SET [0:?] OF
reversible_topology_item;
END_TYPE;

TYPE shape_definition = SELECT
  (product_definition_shape,
   shape_aspect,
   shape_aspect_relationship);
END_TYPE;

TYPE shell = SELECT
  (vertex_shell,
   wire_shell,
   open_shell,
   closed_shell);
END_TYPE;

TYPE si_prefix = ENUMERATION OF
  (exa,
   peta,
   tera,
   giga,
   mega,
   kilo,
   hecto,
   deca,

```

ISO 10303-227:2005(E)

```
        deci,  
        centi,  
        milli,  
        micro,  
        nano,  
        pico,  
        femto,  
        atto);  
END_TYPE;  
  
TYPE si_unit_name = ENUMERATION OF  
    (metre,  
     gram,  
     second,  
     ampere,  
     kelvin,  
     mole,  
     candela,  
     radian,  
     steradian,  
     hertz,  
     newton,  
     pascal,  
     joule,  
     watt,  
     coulomb,  
     volt,  
     farad,  
     ohm,  
     siemens,  
     weber,  
     tesla,  
     henry,  
     degree_Celsius,  
     lumen,  
     lux,  
     becquerel,  
     gray,  
     sievert);  
END_TYPE;  
  
TYPE size_select = SELECT  
    (positive_length_measure,  
     measure_with_unit);  
END_TYPE;  
  
TYPE solid_angle_measure = REAL;  
END_TYPE;  
  
TYPE source = ENUMERATION OF  
    (made,  
     bought,  
     not_known);  
END_TYPE;
```



```
TYPE source_item = SELECT
  (identifier);
END_TYPE;

TYPE style_context_select = SELECT
  (group,
   presentation_layer_assignment,
   representation,
   representation_item,
   presentation_set);
END_TYPE;

TYPE supported_item = SELECT
  (action_directive,
   action,
   action_method);
END_TYPE;

TYPE surface_boundary = SELECT
  (boundary_curve,
   degenerate_pcurve);
END_TYPE;

TYPE symbol_style_select = SELECT
  (symbol_colour);
END_TYPE;

TYPE text = STRING;
END_TYPE;

TYPE text_alignment = label;
END_TYPE;

TYPE text_delineation = label;
END_TYPE;

TYPE text_or_character = SELECT
  (annotation_text,
   text_literal);
END_TYPE;

TYPE text_path = ENUMERATION OF
  (left,
   right,
   up,
   down);
END_TYPE;

TYPE thermodynamic_temperature_measure = REAL;
END_TYPE;

TYPE time_measure = REAL;
END_TYPE;
```

ISO 10303-227:2005(E)

```
TYPE transformation = SELECT
  (item_defined_transformation,
   functionally_defined_transformation);
END_TYPE;
```

```
TYPE transition_code = ENUMERATION OF
  (discontinuous,
   continuous,
   cont_same_gradient,
   cont_same_gradient_same_curvature);
END_TYPE;
```

```
TYPE trimming_preference = ENUMERATION OF
  (cartesian,
   parameter,
   unspecified);
END_TYPE;
```

```
TYPE trimming_select = SELECT
  (cartesian_point,
   parameter_value);
END_TYPE;
```

```
TYPE unit = SELECT
  (named_unit,
   derived_unit);
END_TYPE;
```

```
TYPE value_qualifier = SELECT
  (precision_qualifier,
   type_qualifier);
END_TYPE;
```

```
TYPE vector_or_direction = SELECT
  (vector,
   direction);
END_TYPE;
```

```
TYPE volume_measure = REAL;
END_TYPE;
```

```
TYPE wireframe_model = SELECT
  (shell_based_wireframe_model);
END_TYPE;
```

```
TYPE year_number = INTEGER;
END_TYPE;
```

```
(* *****
Entities in the schema plant_spatial_configuration
***** *)
ENTITY action;
```

```

    name : label;
    description : OPTIONAL text;
    chosen_method : action_method;
DERIVE
    id : identifier := get_id_value(SELF);
WHERE
    WR1:
        SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'ID_ATTRIBUTE.IDENTIFIED_ITEM')) <= 1;
    END_ENTITY;

ENTITY action_assignment
ABSTRACT SUPERTYPE;
    assigned_action : action;
DERIVE
    role : object_role := get_role(SELF);
WHERE
    WR1:
        SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'ROLE_ASSOCIATION.ITEM_WITH_ROLE')) <= 1;
    END_ENTITY;

ENTITY action_directive;
    name : label;
    description : OPTIONAL text;
    analysis : text;
    comment : text;
    requests : SET [1:?] OF versioned_action_request;
END_ENTITY;

ENTITY action_method;
    name : label;
    description : OPTIONAL text;
    consequence : text;
    purpose : text;
END_ENTITY;

ENTITY action_method_relationship;
    name : label;
    description : OPTIONAL text;
    relating_method : action_method;
    related_method : action_method;
END_ENTITY;

ENTITY action_relationship;
    name : label;
    description : OPTIONAL text;
    relating_action : action;
    related_action : action;
END_ENTITY;

ENTITY action_request_assignment
ABSTRACT SUPERTYPE;
    assigned_action_request : versioned_action_request;

```

ISO 10303-227:2005(E)

```
DERIVE
  role : object_role := get_role(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'ROLE_ASSOCIATION.ITEM_WITH_ROLE')) <= 1;
  END_ENTITY;

ENTITY action_request_solution;
  method : action_method;
  request : versioned_action_request;
DERIVE
  description : text := get_description_value(SELF);
  name : label := get_name_value(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'DESCRIPTION_ATTRIBUTE.DESCRIBED_ITEM')) <= 1;
  WR2:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'NAME_ATTRIBUTE.NAMED_ITEM')) <= 1;
  END_ENTITY;

ENTITY action_request_status;
  status : label;
  assigned_request : versioned_action_request;
END_ENTITY;

ENTITY action_status;
  status : label;
  assigned_action : executed_action;
END_ENTITY;

ENTITY advanced_face
SUBTYPE OF (face_surface);
WHERE
  WR1:
    SIZEOF([ 'PLANT_SPATIAL_CONFIGURATION.ELEMENTARY_SURFACE',
'PLANT_SPATIAL_CONFIGURATION.B_SPLINE_SURFACE',
'PLANT_SPATIAL_CONFIGURATION.SWEPT_SURFACE' ] * TYPEOF(face_geometry)) = 1;
  WR2:
    SIZEOF(QUERY (elp_fbnds <* QUERY (bnds <* bounds |
('PLANT_SPATIAL_CONFIGURATION.EDGE_LOOP' IN TYPEOF(bnds.bound))) | NOT
(SIZEOF(QUERY (oe <* elp_fbnds.bound\path.edge_list | NOT
('PLANT_SPATIAL_CONFIGURATION.EDGE_CURVE' IN
TYPEOF(oe\oriented_edge.edge_element)))) = 0))) = 0;
  WR3:
    SIZEOF(QUERY (elp_fbnds <* QUERY (bnds <* bounds |
('PLANT_SPATIAL_CONFIGURATION.EDGE_LOOP' IN TYPEOF(bnds.bound))) | NOT
(SIZEOF(QUERY (oe <* elp_fbnds.bound\path.edge_list | NOT (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.LINE', 'PLANT_SPATIAL_CONFIGURATION.CONIC',
'PLANT_SPATIAL_CONFIGURATION.POLYLINE',
'PLANT_SPATIAL_CONFIGURATION.SURFACE_CURVE',
```

```

'PLANT_SPATIAL_CONFIGURATION.B_SPLINE_CURVE' ] *
TYPEOF(oe.edge_element\edge_curve.edge_geometry) = 1))) = 0))) = 0;
WR4:
    SIZEOF(QUERY (elp_fbnds <* QUERY (bnds <* bounds|
('PLANT_SPATIAL_CONFIGURATION.EDGE_LOOP' IN TYPEOF(bnds.bound)))| NOT
(SIZEOF(QUERY (oe <* elp_fbnds.bound\path.edge_list| NOT
((( 'PLANT_SPATIAL_CONFIGURATION.VERTEX_POINT' IN TYPEOF(oe\edge.edge_start))
AND ('PLANT_SPATIAL_CONFIGURATION.CARTESIAN_POINT' IN
TYPEOF(oe\edge.edge_start\vertex_point.vertex_geometry))) AND
(( 'PLANT_SPATIAL_CONFIGURATION.VERTEX_POINT' IN TYPEOF(oe\edge.edge_end)) AND
('PLANT_SPATIAL_CONFIGURATION.CARTESIAN_POINT' IN
TYPEOF(oe\edge.edge_end\vertex_point.vertex_geometry)))))) = 0))) = 0;
WR5:
    SIZEOF(QUERY (elp_fbnds <* QUERY (bnds <* bounds|
('PLANT_SPATIAL_CONFIGURATION.EDGE_LOOP' IN TYPEOF(bnds.bound)))|
('PLANT_SPATIAL_CONFIGURATION.ORIENTED_PATH' IN TYPEOF(elp_fbnds.bound))) =
0;
WR6:
    NOT ('PLANT_SPATIAL_CONFIGURATION.SWEPT_SURFACE' IN
TYPEOF(face_geometry)) OR (SIZEOF([ 'PLANT_SPATIAL_CONFIGURATION.LINE',
'PLANT_SPATIAL_CONFIGURATION.CONIC', 'PLANT_SPATIAL_CONFIGURATION.POLYLINE',
'PLANT_SPATIAL_CONFIGURATION.B_SPLINE_CURVE' ] *
TYPEOF(face_geometry\swept_surface.swept_curve) = 1));
WR7:
    SIZEOF(QUERY (vlp_fbnds <* QUERY (bnds <* bounds|
('PLANT_SPATIAL_CONFIGURATION.VERTEX_LOOP' IN TYPEOF(bnds.bound)))| NOT
(( 'PLANT_SPATIAL_CONFIGURATION.VERTEX_POINT' IN
TYPEOF(vlp_fbnds\face_bound.bound\vertex_loop.loop_vertex)) AND
('PLANT_SPATIAL_CONFIGURATION.CARTESIAN_POINT' IN
TYPEOF(vlp_fbnds\face_bound.bound\vertex_loop.loop_vertex\vertex_point.vertex
_geometry)))) = 0;
WR8:
    SIZEOF(QUERY (bnd <* bounds| NOT (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.EDGE_LOOP',
'PLANT_SPATIAL_CONFIGURATION.VERTEX_LOOP' ] * TYPEOF(bnd.bound) = 1))) = 0;
WR9:
    SIZEOF(QUERY (elp_fbnds <* QUERY (bnds <* bounds|
('PLANT_SPATIAL_CONFIGURATION.EDGE_LOOP' IN TYPEOF(bnds.bound)))| NOT
(SIZEOF(QUERY (oe <* elp_fbnds.bound\path.edge_list|
('PLANT_SPATIAL_CONFIGURATION.SURFACE_CURVE' IN
TYPEOF(oe\oriented_edge.edge_element\edge_curve.edge_geometry)) AND NOT
(SIZEOF(QUERY (sc_ag <*
oe.edge_element\edge_curve.edge_geometry\surface_curve.associated_geometry|
NOT ('PLANT_SPATIAL_CONFIGURATION.PCURVE' IN TYPEOF(sc_ag)))) = 0))) = 0))) =
0;
WR10:
    (NOT ('PLANT_SPATIAL_CONFIGURATION.SWEPT_SURFACE' IN
TYPEOF(face_geometry)) OR (NOT ('PLANT_SPATIAL_CONFIGURATION.POLYLINE' IN
TYPEOF(face_geometry\swept_surface.swept_curve)) OR
(SIZEOF(face_geometry\swept_surface.swept_curve\polyline.points) >= 3))) AND
(SIZEOF(QUERY (elp_fbnds <* QUERY (bnds <* bounds|
('PLANT_SPATIAL_CONFIGURATION.EDGE_LOOP' IN TYPEOF(bnds.bound)))| NOT
(SIZEOF(QUERY (oe <* elp_fbnds.bound\path.edge_list|
('PLANT_SPATIAL_CONFIGURATION.POLYLINE' IN

```

ISO 10303-227:2005(E)

```
TYPEOF(oe\oriented_edge.edge_element\edge_curve.edge_geometry)) AND NOT  
(SIZEOF(oe\oriented_edge.edge_element\edge_curve.edge_geometry\polyline.point  
s) >= 3))) = 0))) = 0);
```

```
END_ENTITY;
```

```
ENTITY amount_of_substance_measure_with_unit  
SUBTYPE OF (measure_with_unit);
```

```
WHERE
```

```
WR1:
```

```
'PLANT_SPATIAL_CONFIGURATION.AMOUNT_OF_SUBSTANCE_UNIT' IN
```

```
TYPEOF(SELF\measure_with_unit.unit_component);
```

```
END_ENTITY;
```

```
ENTITY amount_of_substance_unit
```

```
SUBTYPE OF (named_unit);
```

```
WHERE
```

```
WR1:
```

```
(((((SELF\named_unit.dimensions.length_exponent = 0.00000) AND  
(SELF\named_unit.dimensions.mass_exponent = 0.00000)) AND  
(SELF\named_unit.dimensions.time_exponent = 0.00000)) AND  
(SELF\named_unit.dimensions.electric_current_exponent = 0.00000)) AND  
(SELF\named_unit.dimensions.thermodynamic_temperature_exponent = 0.00000))  
AND (SELF\named_unit.dimensions.amount_of_substance_exponent = 1.00000)) AND  
(SELF\named_unit.dimensions.luminous_intensity_exponent = 0.00000);
```

```
END_ENTITY;
```

```
ENTITY analysis_tracing_representation
```

```
SUBTYPE OF (representation);
```

```
END_ENTITY;
```

```
ENTITY angular_location
```

```
SUBTYPE OF (dimensional_location);
```

```
angle_selection : angle_relator;
```

```
END_ENTITY;
```

```
ENTITY annotation_curve_occurrence
```

```
SUBTYPE OF (annotation_occurrence);
```

```
WHERE
```

```
WR1:
```

```
'PLANT_SPATIAL_CONFIGURATION.CURVE' IN
```

```
TYPEOF(SELF\styled_item.item);
```

```
END_ENTITY;
```

```
ENTITY annotation_fill_area
```

```
SUBTYPE OF (geometric_representation_item);
```

```
boundaries : SET [1:?] OF curve;
```

```
END_ENTITY;
```

```
ENTITY annotation_fill_area_occurrence
```

```
SUBTYPE OF (annotation_occurrence);
```

```
fill_style_target : point;
```

```
WHERE
```

```
WR1:
```

```

        'PLANT_SPATIAL_CONFIGURATION.ANNOTATION_FILL_AREA' IN
TYPEOF(SELF.item);
    END_ENTITY;

    ENTITY annotation_occurrence
    SUPERTYPE OF (ONEOF(annotation_point_occurrence,
annotation_curve_occurrence, annotation_fill_area_occurrence,
annotation_text_occurrence, annotation_symbol_occurrence))
    SUBTYPE OF (styled_item);
    WHERE
        WR1:
            'PLANT_SPATIAL_CONFIGURATION.GEOMETRIC_REPRESENTATION_ITEM' IN
TYPEOF(SELF);
    END_ENTITY;

    ENTITY annotation_occurrence_relationship;
    name : label;
    description : text;
    relating_annotation_occurrence : annotation_occurrence;
    related_annotation_occurrence : annotation_occurrence;
    END_ENTITY;

    ENTITY annotation_point_occurrence
    SUBTYPE OF (annotation_occurrence);
    WHERE
        WR1:
            'PLANT_SPATIAL_CONFIGURATION.POINT' IN
TYPEOF(SELF\styled_item.item);
    END_ENTITY;

    ENTITY annotation_symbol
    SUBTYPE OF (mapped_item);
    WHERE
        WR1:
            'PLANT_SPATIAL_CONFIGURATION.SYMBOL_REPRESENTATION_MAP' IN
TYPEOF(SELF\mapped_item.mapping_source);
        WR2:
            'PLANT_SPATIAL_CONFIGURATION.SYMBOL_TARGET' IN
TYPEOF(SELF\mapped_item.mapping_target);
        WR3:
            'PLANT_SPATIAL_CONFIGURATION.GEOMETRIC_REPRESENTATION_ITEM' IN
TYPEOF(SELF);
    END_ENTITY;

    ENTITY annotation_symbol_occurrence
    SUBTYPE OF (annotation_occurrence);
    WHERE
        WR1:
            SIZEOF([ 'PLANT_SPATIAL_CONFIGURATION.ANNOTATION_SYMBOL',
'PLANT_SPATIAL_CONFIGURATION.DEFINED_SYMBOL' ] *
TYPEOF(SELF\styled_item.item)) > 0;
    END_ENTITY;

    ENTITY annotation_text

```

ISO 10303-227:2005(E)

```
SUBTYPE OF (mapped_item);
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT' IN
  TYPEOF(SELF\mapped_item.mapping_target);
  WR2:
    'PLANT_SPATIAL_CONFIGURATION.TEXT_STRING_REPRESENTATION' IN
  TYPEOF(SELF\mapped_item.mapping_source.mapped_representation);
  WR3:
    'PLANT_SPATIAL_CONFIGURATION.GEOMETRIC_REPRESENTATION_ITEM' IN
  TYPEOF(SELF);
END_ENTITY;

ENTITY annotation_text_occurrence
SUBTYPE OF (annotation_occurrence);
WHERE
  WR1:
    SIZEOF([ 'PLANT_SPATIAL_CONFIGURATION.TEXT_LITERAL',
'PLANT_SPATIAL_CONFIGURATION.ANNOTATION_TEXT',
'PLANT_SPATIAL_CONFIGURATION.ANNOTATION_TEXT_CHARACTER',
'PLANT_SPATIAL_CONFIGURATION.DEFINED_CHARACTER_GLYPH',
'PLANT_SPATIAL_CONFIGURATION.COMPOSITE_TEXT' ] *
  TYPEOF(SELF\styled_item.item)) > 0;
END_ENTITY;

ENTITY annotation_text_with_extent
SUBTYPE OF (annotation_text);
  extent : planar_extent;
END_ENTITY;

ENTITY application_context;
  application : label;
DERIVE
  description : text := get_description_value(SELF);
  id : identifier := get_id_value(SELF);
INVERSE
  context_elements : SET [1:?] OF application_context_element FOR
frame_of_reference;
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'DESCRIPTION_ATTRIBUTE.DESCRIBED_ITEM')) <= 1;
  WR2:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'ID_ATTRIBUTE.IDENTIFIED_ITEM')) <= 1;
END_ENTITY;

ENTITY application_context_element
SUPERTYPE OF (ONEOF(product_context, product_definition_context));
  name : label;
  frame_of_reference : application_context;
END_ENTITY;

ENTITY application_protocol_definition;
```



```

    status : label;
    application_interpreted_model_schema_name : label;
    application_protocol_year : year_number;
    application : application_context;
END_ENTITY;

ENTITY applied_action_request_assignment
SUBTYPE OF (action_request_assignment);
    items : SET [1:?] OF action_request_item;
END_ENTITY;

ENTITY applied_approval_assignment
SUBTYPE OF (approval_assignment);
    items : SET [1:?] OF approval_item;
END_ENTITY;

ENTITY applied_classification_assignment
SUBTYPE OF (classification_assignment);
    items : SET [1:?] OF classification_item;
WHERE
    WR1:
        NOT (SIZEOF(QUERY (item <* SELF.items| NOT
('PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTION' IN TYPEOF(item)))) = 0)
OR (SIZEOF(TYPEOF(SELF.assigned_class) * [
'PLANT_SPATIAL_CONFIGURATION.CONNECTION_FUNCTIONAL_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTION_MOTION_CLASS' ]) >= 1);
    WR2:
        NOT (SIZEOF(QUERY (item <* SELF.items| NOT
('PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTOR' IN TYPEOF(item)))) = 0)
OR (SIZEOF(TYPEOF(SELF.assigned_class) * [
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS',
'PLANT_SPATIAL_CONFIGURATION.ELECTRICAL_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.MECHANICAL_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.EXTERNALLY_DEFINED_CLASS',
('PLANT_SPATIAL_CONFIGURATION.' + 'STRUCTURAL_LOAD_CONNECTOR_CLASS') ]) >=
1);
END_ENTITY;

ENTITY applied_date_and_time_assignment
SUBTYPE OF (date_and_time_assignment);
    items : SET [1:?] OF date_and_time_item;
END_ENTITY;

ENTITY applied_date_assignment
SUBTYPE OF (date_assignment);
    items : SET [1:?] OF dated_item;
END_ENTITY;

ENTITY applied_document_reference
SUBTYPE OF (document_reference);
    items : SET [1:?] OF document_item;
END_ENTITY;

```

ISO 10303-227:2005(E)

```
ENTITY applied_document_usage_constraint_assignment
SUBTYPE OF (document_usage_constraint_assignment);
  items : SET [1:?] OF document_item;
END_ENTITY;

ENTITY applied_effectivity_assignment
SUBTYPE OF (effectivity_assignment);
  items : SET [1:?] OF effectivity_item;
END_ENTITY;

ENTITY applied_effectivity_context_assignment
SUBTYPE OF (effectivity_context_assignment);
  items : SET [1:?] OF effectivity_context_item;
END_ENTITY;

ENTITY applied_identification_assignment
SUBTYPE OF (identification_assignment);
  items : SET [1:?] OF identified_item;
WHERE
  WR1:
    applied_identification_correlation(SELF);
END_ENTITY;

ENTITY approval;
  status : approval_status;
  level : label;
END_ENTITY;

ENTITY approval_assignment
ABSTRACT SUPERTYPE;
  assigned_approval : approval;
DERIVE
  role : object_role := get_role(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'ROLE_ASSOCIATION.ITEM_WITH_ROLE')) <= 1;
END_ENTITY;

ENTITY approval_date_time;
  date_time : date_time_select;
  dated_approval : approval;
DERIVE
  role : object_role := get_role(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'ROLE_ASSOCIATION.ITEM_WITH_ROLE')) <= 1;
END_ENTITY;

ENTITY approval_person_organization;
  person_organization : person_organization_select;
  authorized_approval : approval;
  role : approval_role;
```

```

END_ENTITY;

ENTITY approval_role;
    role : label;
DERIVE
    description : text := get_description_value(SELF);
WHERE
    WR1:
        SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'DESCRIPTION_ATTRIBUTE.DESCRIBED_ITEM')) <= 1;
END_ENTITY;

ENTITY approval_status;
    name : label;
END_ENTITY;

ENTITY area_dependent_annotation_representation
SUBTYPE OF (presentation_representation);
WHERE
    WR1:
        SIZEOF(QUERY (item <* SELF\representation.items| NOT (SIZEOF([
('PLANT_SPATIAL_CONFIGURATIONS.' + 'ANNOTATION_OCCURRENCE'),
'PLANT_SPATIAL_CONFIGURATIONS.AXIS2_PLACEMENT' ] * TYPEOF(item)) = 1))) = 0;
    WR2:
        SIZEOF(QUERY (item <* SELF\representation.items|
('PLANT_SPATIAL_CONFIGURATIONS.ANOTATION_OCCURRENCE' IN TYPEOF(item)))) >= 1;
END_ENTITY;

ENTITY area_in_set;
    area : presentation_area;
    in_set : presentation_set;
END_ENTITY;

ENTITY arrangement_branch_connection
SUBTYPE OF (shape_aspect_relationship);
WHERE
    WR1:
        SELF.description = 'branch location';
    WR2:
        'PLANT_SPATIAL_CONFIGURATIONS.PLANT_ARRANGEMENT_SEGMENT_DEFINITION'
IN TYPEOF(SELF.relatng_shape_aspect.of_shape.definition);
    WR3:
        'PLANT_SPATIAL_CONFIGURATIONS.PLANT_ARRANGEMENT_SEGMENT_TERMINATION'
IN TYPEOF(SELF.related_shape_aspect);
END_ENTITY;

ENTITY arrangement_less_mechanical_system
SUBTYPE OF (product_definition);
END_ENTITY;

ENTITY arrangement_load
SUBTYPE OF (property_definition);
WHERE
    WR1:

```

ISO 10303-227:2005(E)

```
'PLANT_SPATIAL_CONFIGURATION.DESIGN_ARRANGEMENT_PERFORMANCE' IN
TYPEOF(SELF.definition);
  WR2:
    SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'arrangement load characteristics')) = 1;
  WR3:
    SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'arrangement load characteristics')) | NOT
(SIZEOF(spc.used_representation.items) >= 1))) = 0;
  WR4:
    SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'arrangement load characteristics')) | NOT
(SIZEOF(QUERY (it <* spc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.DESCRPTIVE_REPRESENTATION_ITEM' IN TYPEOF(it))
AND (it.name = 'constituent loads')) = 1))) = 0;
  END_ENTITY;

ENTITY arrangement_plant_item_branch_connection
SUBTYPE OF (shape_aspect_relationship);
END_ENTITY;

ENTITY arrangement_plant_item_connection
SUBTYPE OF (shape_aspect_relationship);
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.' +
'PLANT_ARRANGEMENT_SEGMENT_TERMINATION' IN
TYPEOF(SELF.relying_shape_aspect);
  WR2:
    'PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTOR' IN
TYPEOF(SELF.related_shape_aspect);
  WR3:

SELF\shape_aspect_relationship.related_shape_aspect.of_shape\property_definit
ion.definition\product_definition.frame_of_reference\application_context_elem
ent.name = 'physical occurrence';
  END_ENTITY;

ENTITY arrangement_termination_connection
SUBTYPE OF (shape_aspect_relationship);
WHERE
  WR1:
    SIZEOF(TYPEOF(SELF.relying_shape_aspect) * [
'PLANT_SPATIAL_CONFIGURATION.CONNECTION_NODE' ,
'PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_SEGMENT_TERMINATION' ]) >= 1;
  WR2:
    'PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_SEGMENT_TERMINATION'
IN TYPEOF(SELF.related_shape_aspect);
  END_ENTITY;
```

```

ENTITY assembly_component_usage
SUBTYPE OF (product_definition_usage);
  reference_designator : OPTIONAL identifier;
END_ENTITY;

ENTITY axis1_placement
SUBTYPE OF (placement);
  axis : OPTIONAL direction;
DERIVE
  z : direction := NVL(normalise(axis), dummy_gri || direction([ 0.00000,
0.00000, 1.00000 ]));
WHERE
  WR1:
    SELF\geometric_representation_item.dim = 3;
END_ENTITY;

ENTITY axis2_placement_2d
SUBTYPE OF (placement);
  ref_direction : OPTIONAL direction;
DERIVE
  p : LIST [2:2] OF direction := build_2axes(ref_direction);
WHERE
  WR1:
    SELF\geometric_representation_item.dim = 2;
END_ENTITY;

ENTITY axis2_placement_3d
SUBTYPE OF (placement);
  axis : OPTIONAL direction;
  ref_direction : OPTIONAL direction;
DERIVE
  p : LIST [3:3] OF direction := build_axes(axis, ref_direction);
WHERE
  WR1:
    SELF\placement.location.dim = 3;
  WR2:
    NOT EXISTS(axis) OR (axis.dim = 3);
  WR3:
    NOT EXISTS(ref_direction) OR (ref_direction.dim = 3);
  WR4:
    (NOT EXISTS(axis) OR NOT EXISTS(ref_direction)) OR
(cross_product(axis, ref_direction).magnitude > 0.00000);
END_ENTITY;

ENTITY b_spline_curve
SUPERTYPE OF (ONEOF(uniform_curve, b_spline_curve_with_knots,
quasi_uniform_curve, bezier_curve) ANDOR rational_b_spline_curve)
SUBTYPE OF (bounded_curve);
  degree : INTEGER;
  control_points_list : LIST [2:?] OF cartesian_point;
  curve_form : b_spline_curve_form;
  closed_curve : LOGICAL;
  self_intersect : LOGICAL;

```

ISO 10303-227:2005(E)

```
    DERIVE
      upper_index_on_control_points : INTEGER := SIZEOF(control_points_list)
- 1;
      control_points : ARRAY [0:upper_index_on_control_points] OF
cartesian_point := list_to_array(control_points_list, 0,
upper_index_on_control_points);
    WHERE
      WR1:
        ((( 'PLANT_SPATIAL_CONFIGURATION.UNIFORM_CURVE' IN TYPEOF(SELF)) OR
( 'PLANT_SPATIAL_CONFIGURATION.QUASI_UNIFORM_CURVE' IN TYPEOF(SELF))) OR
( 'PLANT_SPATIAL_CONFIGURATION.BEZIER_CURVE' IN TYPEOF(SELF))) OR
( 'PLANT_SPATIAL_CONFIGURATION.B_SPLINE_CURVE_WITH_KNOTS' IN TYPEOF(SELF));
    END_ENTITY;

ENTITY b_spline_curve_with_knots
SUBTYPE OF (b_spline_curve);
  knot_multiplicities : LIST [2:?] OF INTEGER;
  knots : LIST [2:?] OF parameter_value;
  knot_spec : knot_type;
DERIVE
  upper_index_on_knots : INTEGER := SIZEOF(knots);
WHERE
  WR1:
    constraints_param_b_spline(degree, upper_index_on_knots,
upper_index_on_control_points, knot_multiplicities, knots);
  WR2:
    SIZEOF(knot_multiplicities) = upper_index_on_knots;
END_ENTITY;

ENTITY b_spline_surface
SUPERTYPE OF (ONEOF(b_spline_surface_with_knots, uniform_surface,
quasi_uniform_surface, bezier_surface) ANDOR rational_b_spline_surface)
SUBTYPE OF (bounded_surface);
  u_degree : INTEGER;
  v_degree : INTEGER;
  control_points_list : LIST [2:?] OF LIST [2:?] OF cartesian_point;
  surface_form : b_spline_surface_form;
  u_closed : LOGICAL;
  v_closed : LOGICAL;
  self_intersect : LOGICAL;
DERIVE
  u_upper : INTEGER := SIZEOF(control_points_list) - 1;
  v_upper : INTEGER := SIZEOF(control_points_list[1]) - 1;
  control_points : ARRAY [0:u_upper] OF ARRAY [0:v_upper] OF
cartesian_point := make_array_of_array(control_points_list, 0, u_upper, 0,
v_upper);
  WHERE
    WR1:
      ((( 'PLANT_SPATIAL_CONFIGURATION.UNIFORM_SURFACE' IN TYPEOF(SELF)) OR
( 'PLANT_SPATIAL_CONFIGURATION.QUASI_UNIFORM_SURFACE' IN TYPEOF(SELF))) OR
( 'PLANT_SPATIAL_CONFIGURATION.BEZIER_SURFACE' IN TYPEOF(SELF))) OR
( 'PLANT_SPATIAL_CONFIGURATION.B_SPLINE_SURFACE_WITH_KNOTS' IN TYPEOF(SELF));
    END_ENTITY;
```

```

ENTITY b_spline_surface_with_knots
SUBTYPE OF (b_spline_surface);
  u_multiplicities : LIST [2:?] OF INTEGER;
  v_multiplicities : LIST [2:?] OF INTEGER;
  u_knots : LIST [2:?] OF parameter_value;
  v_knots : LIST [2:?] OF parameter_value;
  knot_spec : knot_type;
DERIVE
  knot_u_upper : INTEGER := SIZEOF(u_knots);
  knot_v_upper : INTEGER := SIZEOF(v_knots);
WHERE
  WR1:
    constraints_param_b_spline(SELF\b_spline_surface.u_degree,
knot_u_upper, SELF\b_spline_surface.u_upper, u_multiplicities, u_knots);
  WR2:
    constraints_param_b_spline(SELF\b_spline_surface.v_degree,
knot_v_upper, SELF\b_spline_surface.v_upper, v_multiplicities, v_knots);
  WR3:
    SIZEOF(u_multiplicities) = knot_u_upper;
  WR4:
    SIZEOF(v_multiplicities) = knot_v_upper;
END_ENTITY;

ENTITY bezier_curve
SUBTYPE OF (b_spline_curve);
END_ENTITY;

ENTITY bezier_surface
SUBTYPE OF (b_spline_surface);
END_ENTITY;

ENTITY blank_fitting_class
SUBTYPE OF (group);
WHERE
  WR1:
    SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (it <* aca.items| NOT
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))) =
0))) = 0;
  WR2:
    SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (pcd <* QUERY (it <* aca.items|
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))|
NOT (SIZEOF(QUERY (aca1 <* USEDIN(pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
class_in_tree(aca1.assigned_class, 'blank')) = 1))) = 0))) = 0;
  END_ENTITY;

ENTITY block
SUBTYPE OF (geometric_representation_item);

```

ISO 10303-227:2005(E)

```
    position : axis2_placement_3d;
    x : positive_length_measure;
    y : positive_length_measure;
    z : positive_length_measure;
END_ENTITY;

ENTITY bolt_and_nut_component_class
SUBTYPE OF (group);
WHERE
    WR1:
        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (it <* aca.items| NOT
('PLANT_SPATIAL_CONFIGURATION.BOLT_AND_NUT_COMPONENT_DEFINITION' IN
TYPEOF(it)))) = 0))) = 0;
    WR2:
        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (pcd <* QUERY (it <* aca.items|
('PLANT_SPATIAL_CONFIGURATION.BOLT_AND_NUT_COMPONENT_DEFINITION' IN
TYPEOF(it)))| NOT (SIZEOF(QUERY (acal <* USEDIN(pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
class_in_tree(acal.assigned_class, 'bolt and nut component')) = 1))) = 0)))
= 0;
END_ENTITY;

ENTITY bolt_and_nut_component_definition
SUBTYPE OF (product_definition);
END_ENTITY;

ENTITY bolt_and_nut_set_definition
SUBTYPE OF (product_definition);
END_ENTITY;

ENTITY boolean_result
SUBTYPE OF (geometric_representation_item);
    operator : boolean_operator;
    first_operand : boolean_operand;
    second_operand : boolean_operand;
END_ENTITY;

ENTITY boundary_curve
SUBTYPE OF (composite_curve_on_surface);
WHERE
    WR1:
        SELF\composite_curve.closed_curve;
END_ENTITY;

ENTITY bounded_curve
SUPERTYPE OF (ONEOF(polyline, b_spline_curve, trimmed_curve,
bounded_pcurve, bounded_surface_curve, composite_curve))
SUBTYPE OF (curve);
```



```

END_ENTITY;

ENTITY bounded_pcurve
SUBTYPE OF (pcurve, bounded_curve);
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.BOUNDED_CURVE' IN
TYPEOF(SELF\pcurve.reference_to_curve.items[1]);
END_ENTITY;

ENTITY bounded_surface
SUPERTYPE OF (ONEOF(b_spline_surface, rectangular_trimmed_surface,
curve_bounded_surface, rectangular_composite_surface))
SUBTYPE OF (surface);
END_ENTITY;

ENTITY bounded_surface_curve
SUBTYPE OF (surface_curve, bounded_curve);
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.BOUNDED_CURVE' IN
TYPEOF(SELF\surface_curve.curve_3d);
END_ENTITY;

ENTITY brep_with_voids
SUBTYPE OF (manifold_solid_brep);
  voids : SET [1:?] OF oriented_closed_shell;
END_ENTITY;

ENTITY cableway_component_class
SUBTYPE OF (group);
WHERE
  WR1:
    SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' + 'CLASSIFICATION_ASSIGNMENT.ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (it <* aca.items| NOT
('PLANT_SPATIAL_CONFIGURATION.CABLEWAY_COMPONENT_DEFINITION' IN TYPEOF(it)))
= 0))) = 0;
  WR2:
    SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (pcd <* QUERY (it <* aca.items|
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))|
NOT (SIZEOF(QUERY (acal <* USEDIN(pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
class_in_tree(acal.assigned_class, 'cableway component')) = 1))) = 0))) = 0;
END_ENTITY;

ENTITY cableway_component_definition
SUBTYPE OF (product_definition);
END_ENTITY;

```

ISO 10303-227:2005(E)

```
ENTITY cableway_connector_class
SUBTYPE OF (group);
END_ENTITY;

ENTITY cableway_system
SUBTYPE OF (product_definition);
WHERE
  WR1:
    SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.PLANT' IN
TYPEOF(pdr.relating_product_definition.formation.of_product)) AND
(pdr.relating_product_definition.frame_of_reference.name = 'functional
occurrence')))) = 1;
END_ENTITY;

ENTITY calendar_date
SUBTYPE OF (date);
  day_component : day_in_month_number;
  month_component : month_in_year_number;
WHERE
  WR1:
    valid_calendar_date(SELF);
END_ENTITY;

ENTITY camera_image
SUBTYPE OF (mapped_item);
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.CAMERA_USAGE' IN
TYPEOF(SELF\mapped_item.mapping_source);
  WR2:
    'PLANT_SPATIAL_CONFIGURATION.PLANAR_BOX' IN
TYPEOF(SELF\mapped_item.mapping_target);
  WR3:
    'PLANT_SPATIAL_CONFIGURATION.GEOMETRIC_REPRESENTATION_ITEM' IN
TYPEOF(SELF);
END_ENTITY;

ENTITY camera_model
SUPERTYPE OF (camera_model_d2)
SUBTYPE OF (geometric_representation_item);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'ITEM_DEFINED_TRANSFORMATION.' + 'TRANSFORM_ITEM_1')) + SIZEOF(USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' + 'REPRESENTATION_MAP.MAPPING_ORIGIN')) > 0;
  WR2:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'STYLED_ITEM.ITEM')) = 0;
END_ENTITY;

ENTITY camera_model_d2
SUBTYPE OF (camera_model);
```

```

    view_window : planar_box;
    view_window_clipping : BOOLEAN;
WHERE
    WR1:
        SELF\geometric_representation_item.dim = 2;
END_ENTITY;

ENTITY camera_model_d2_shape_clipping
SUBTYPE OF (camera_model_d2);
    shape_clipping : curve;
END_ENTITY;

ENTITY camera_usage
SUBTYPE OF (representation_map);
WHERE
    WR1:
        NOT ('PLANT_SPATIAL_CONFIGURATION.PRESENTATION_REPRESENTATION' IN
TYPEOF(SELF\representation_map.mapped_representation));
    WR2:
        'PLANT_SPATIAL_CONFIGURATION.CAMERA_MODEL' IN
TYPEOF(SELF\representation_map.mapping_origin);
END_ENTITY;

ENTITY cartesian_point
SUBTYPE OF (point);
    coordinates : LIST [1:3] OF length_measure;
END_ENTITY;

ENTITY cartesian_transformation_operator
SUPERTYPE OF (cartesian_transformation_operator_3d)
SUBTYPE OF (geometric_representation_item,
functionally_defined_transformation);
    axis1 : OPTIONAL direction;
    axis2 : OPTIONAL direction;
    local_origin : cartesian_point;
    scale : OPTIONAL REAL;
DERIVE
    scl : REAL := NVL(scale, 1.00000);
WHERE
    WR1:
        scl > 0.00000;
END_ENTITY;

ENTITY cartesian_transformation_operator_3d
SUBTYPE OF (cartesian_transformation_operator);
    axis3 : OPTIONAL direction;
DERIVE
    u : LIST [3:3] OF direction := base_axis(3,
SELF\cartesian_transformation_operator.axis1,
SELF\cartesian_transformation_operator.axis2, axis3);
WHERE
    WR1:
        SELF\geometric_representation_item.dim = 3;
END_ENTITY;

```

ISO 10303-227:2005(E)

```
ENTITY catalogue
SUBTYPE OF (document, external_source);
END_ENTITY;

ENTITY catalogue_connector
SUBTYPE OF (shape_aspect, externally_defined_item);
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.CHARACTERIZED_OBJECT' IN
TYPEOF(SELF.of_shape);
  WR2:
    'PLANT_SPATIAL_CONFIGURATION.CATALOGUE' IN TYPEOF(SELF.source);
END_ENTITY;

ENTITY catalogue_item
SUBTYPE OF (externally_defined_plant_item_definition);
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.CATALOGUE' IN TYPEOF(SELF.source);
  WR2:
    SELF.frame_of_reference.name = 'physical definition';
END_ENTITY;

ENTITY celsius_temperature_measure_with_unit
SUBTYPE OF (measure_with_unit);
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.THERMODYNAMIC_TEMPERATURE_UNIT' IN
TYPEOF(SELF\measure_with_unit.unit_component);
END_ENTITY;

ENTITY centre_of_symmetry
SUBTYPE OF (derived_shape_aspect);
WHERE
  WR1:
    SIZEOF(QUERY (sadr <*
SELF\derived_shape_aspect.deriving_relationships| NOT
('PLANT_SPATIAL_CONFIGURATION.SYMMETRIC_SHAPE_ASPECT' IN
TYPEOF(sadr\shape_aspect_relationship.related_shape_aspect)))) = 0;
END_ENTITY;

ENTITY change_action
SUBTYPE OF (directed_action);
WHERE
  WR1:
    SIZEOF(QUERY (ca <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'ACTION_ASSIGNMENT.ASSIGNED_ACTION') | ('PLANT_SPATIAL_CONFIGURATION.' +
'PLANT_SPATIAL_CONFIGURATION_CHANGE_ASSIGNMENT' IN TYPEOF(ca)))) >= 1;
  WR2:
    SIZEOF(QUERY (ar <* SELF\directed_action.directive.requests| NOT
(SIZEOF(USEDIN(ar, 'PLANT_SPATIAL_CONFIGURATION.' +
'ACTION_REQUEST_SOLUTION.REQUEST')) = 1))) = 0;
  WR3:
```

```

        SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.ACTION_STATUS.' +
'ASSIGNED_ACTION')) = 1;
    END_ENTITY;

```

```

ENTITY change_item_id_assignment
SUBTYPE OF (name_assignment);
    items : SET [1:?] OF change_item;
END_ENTITY;

```

```

ENTITY change_life_cycle_stage_assignment
SUBTYPE OF (group_assignment);
    items : SET [1:?] OF change_life_cycle_item;
END_ENTITY;

```

```

ENTITY characterized_object;
    name : label;
    description : OPTIONAL text;
END_ENTITY;

```

```

ENTITY circle
SUBTYPE OF (conic);
    radius : positive_length_measure;
END_ENTITY;

```

```

ENTITY clamp_component_definition
SUBTYPE OF (product_definition);
END_ENTITY;

```

```

ENTITY clamp_set_definition
SUBTYPE OF (product_definition);
END_ENTITY;

```

```

ENTITY classification_assignment
ABSTRACT SUPERTYPE;
    assigned_class : group;
    role : classification_role;
END_ENTITY;

```

```

ENTITY classification_role;
    name : label;
    description : OPTIONAL text;
END_ENTITY;

```

```

ENTITY closed_shell
SUBTYPE OF (connected_face_set);
END_ENTITY;

```

```

ENTITY colour;
END_ENTITY;

```

```

ENTITY colour_rgb
SUBTYPE OF (colour_specification);
    red : REAL;
    green : REAL;

```

ISO 10303-227:2005(E)

```
    blue : REAL;
WHERE
  WR1:
    (0.00000 <= red) AND (red <= 1.00000);
  WR2:
    (0.00000 <= green) AND (green <= 1.00000);
  WR3:
    (0.00000 <= blue) AND (blue <= 1.00000);
END_ENTITY;

ENTITY colour_specification
SUBTYPE OF (colour);
  name : label;
END_ENTITY;

ENTITY composite_curve
SUBTYPE OF (bounded_curve);
  segments : LIST [1:?] OF composite_curve_segment;
  self_intersect : LOGICAL;
DERIVE
  n_segments : INTEGER := SIZEOF(segments);
  closed_curve : LOGICAL := segments[n_segments].transition <>
discontinuous;
WHERE
  WR1:
    NOT closed_curve AND (SIZEOF(QUERY (temp <* segments|
(temp.transition = discontinuous))) = 1) OR closed_curve AND (SIZEOF(QUERY
(temp <* segments| (temp.transition = discontinuous))) = 0);
END_ENTITY;

ENTITY composite_curve_on_surface
SUPERTYPE OF (boundary_curve)
SUBTYPE OF (composite_curve);
DERIVE
  basis_surface : SET [0:2] OF surface := get_basis_surface(SELF);
WHERE
  WR1:
    SIZEOF(basis_surface) > 0;
  WR2:
    constraints_composite_curve_on_surface(SELF);
END_ENTITY;

ENTITY composite_curve_segment
SUBTYPE OF (founded_item);
  transition : transition_code;
  same_sense : BOOLEAN;
  parent_curve : curve;
INVERSE
  using_curves : BAG [1:?] OF composite_curve FOR segments;
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATIONS.BOUNDED_CURVE' IN TYPEOF(parent_curve);
END_ENTITY;
```

```

ENTITY conic
SUPERTYPE OF (ONEOF(circle, ellipse, hyperbola, parabola))
SUBTYPE OF (curve);
    position : axis2_placement;
END_ENTITY;

ENTITY conical_surface
SUBTYPE OF (elementary_surface);
    radius : length_measure;
    semi_angle : plane_angle_measure;
WHERE
    WR1:
        radius >= 0.00000;
END_ENTITY;

ENTITY connected_face_set
SUPERTYPE OF (ONEOF(closed_shell, open_shell))
SUBTYPE OF (topological_representation_item);
    cfs_faces : SET [1:?] OF face;
END_ENTITY;

ENTITY connection_functional_class
SUBTYPE OF (group);
END_ENTITY;

ENTITY connection_material_definition
SUBTYPE OF (product_definition);
END_ENTITY;

ENTITY connection_motion_class
SUBTYPE OF (group);
WHERE
    WR1:
        SELF.name IN [ 'flexible', 'locked orientation' ];
END_ENTITY;

ENTITY connection_node
SUBTYPE OF (shape_aspect);
WHERE
    WR1:
        ('PLANT_SPATIAL_CONFIGURATION.PIPING_SYSTEM' IN
        TYPEOF(SELF.of_shape.definition)) AND (SIZEOF(QUERY (sar <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT_RELATIONSHIP.' +
        'RELATING_SHAPE_ASPECT') |
        ('PLANT_SPATIAL_CONFIGURATION.LINE_TERMINATION_CONNECTION' IN TYPEOF(sar))))
        >= 2) XOR ('PLANT_SPATIAL_CONFIGURATION.MECHANICAL_SYSTEM' IN
        TYPEOF(SELF.of_shape.definition)) AND (SIZEOF(QUERY (sar <* USEDIN(SELF,
        'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT_RELATIONSHIP.' +
        'RELATING_SHAPE_ASPECT') |
        ('PLANT_SPATIAL_CONFIGURATION.ARRANGEMENT_TERMINATION_CONNECTION' IN
        TYPEOF(sar)))) >= 2);
    END_ENTITY;

ENTITY connector_end_type_class

```

ISO 10303-227:2005(E)

```
SUBTYPE OF (group);
END_ENTITY;

ENTITY context_dependent_invisibility
SUBTYPE OF (invisibility);
  presentation_context : invisibility_context;
END_ENTITY;

ENTITY context_dependent_unit
SUBTYPE OF (named_unit);
  name : label;
END_ENTITY;

ENTITY conversion_based_unit
SUBTYPE OF (named_unit);
  name : label;
  conversion_factor : measure_with_unit;
END_ENTITY;

ENTITY coordinated_universal_time_offset;
  hour_offset : INTEGER;
  minute_offset : OPTIONAL INTEGER;
  sense : ahead_or_behind;
DERIVE
  actual_minute_offset : INTEGER := NVL(minute_offset, 0);
WHERE
  WR1:
    (0 <= hour_offset) AND (hour_offset < 24);
  WR2:
    (0 <= actual_minute_offset) AND (actual_minute_offset <= 59);
  WR3:
    NOT (((hour_offset <> 0) OR (actual_minute_offset <> 0)) AND (sense
= exact));
END_ENTITY;

ENTITY csg_solid
SUBTYPE OF (solid_model);
  tree_root_expression : csg_select;
END_ENTITY;

ENTITY curve
SUPERTYPE OF (ONEOF(line, conic, pcurve, surface_curve, offset_curve_2d,
offset_curve_3d, curve_replica))
SUBTYPE OF (geometric_representation_item);
END_ENTITY;

ENTITY curve_bounded_surface
SUBTYPE OF (bounded_surface);
  basis_surface : surface;
  boundaries : SET [1:?] OF boundary_curve;
  implicit_outer : BOOLEAN;
WHERE
  WR1:
```



```

        NOT implicit_outer OR (SIZEOF(QUERY (temp <* boundaries|
('PLANT_SPATIAL_CONFIGURATION.OUTER_BOUNDARY_CURVE' IN TYPEOF(temp)))) = 0);
    WR2:
        NOT implicit_outer OR ('PLANT_SPATIAL_CONFIGURATION.BOUNDED_SURFACE'
IN TYPEOF(basis_surface));
    WR3:
        SIZEOF(QUERY (temp <* boundaries|
('PLANT_SPATIAL_CONFIGURATION.OUTER_BOUNDARY_CURVE' IN TYPEOF(temp)))) <= 1;
    WR4:
        SIZEOF(QUERY (temp <* boundaries|
(temp\composite_curve_on_surface.basis_surface[1] <> SELF.basis_surface))) =
0;
    END_ENTITY;

ENTITY curve_replica
SUBTYPE OF (curve);
    parent_curve : curve;
    transformation : cartesian_transformation_operator;
WHERE
    WR1:
        transformation.dim = parent_curve.dim;
    WR2:
        acyclic_curve_replica(SELF, parent_curve);
END_ENTITY;

ENTITY curve_style;
    name : label;
    curve_font : curve_font_or_scaled_curve_font_select;
    curve_width : size_select;
    curve_colour : colour;
END_ENTITY;

ENTITY curve_style_font;
    name : label;
    pattern_list : LIST [1:?] OF curve_style_font_pattern;
END_ENTITY;

ENTITY curve_style_font_pattern;
    visible_segment_length : positive_length_measure;
    invisible_segment_length : positive_length_measure;
END_ENTITY;

ENTITY curve_style_wide
SUBTYPE OF (curve_style_font);
    interior_style : fill_area_style;
END_ENTITY;

ENTITY cyclide_segment_solid
SUBTYPE OF (geometric_representation_item);
    position : axis2_placement_3d;
    radius1 : positive_length_measure;
    radius2 : positive_length_measure;
    cone_angle1 : plane_angle_measure;
    cone_angle2 : plane_angle_measure;

```

ISO 10303-227:2005(E)

```
    turn_angle : plane_angle_measure;
END_ENTITY;

ENTITY cylindrical_surface
SUBTYPE OF (elementary_surface);
    radius : positive_length_measure;
END_ENTITY;

ENTITY data_environment;
    name : label;
    description : text;
    elements : SET [1:?] OF property_definition_representation;
END_ENTITY;

ENTITY date
SUPERTYPE OF (calendar_date);
    year_component : year_number;
END_ENTITY;

ENTITY date_and_time;
    date_component : date;
    time_component : local_time;
END_ENTITY;

ENTITY date_and_time_assignment
ABSTRACT SUPERTYPE;
    assigned_date_and_time : date_and_time;
    role : date_time_role;
END_ENTITY;

ENTITY date_assignment
ABSTRACT SUPERTYPE;
    assigned_date : date;
    role : date_role;
END_ENTITY;

ENTITY date_role;
    name : label;
DERIVE
    description : text := get_description_value(SELF);
WHERE
    WR1:
        SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'DESCRIPTION_ATTRIBUTE.DESCRIBED_ITEM')) <= 1;
END_ENTITY;

ENTITY date_time_role;
    name : label;
DERIVE
    description : text := get_description_value(SELF);
WHERE
    WR1:
        SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'DESCRIPTION_ATTRIBUTE.DESCRIBED_ITEM')) <= 1;
```

```

END_ENTITY;

ENTITY defined_symbol
SUBTYPE OF (geometric_representation_item);
  definition : defined_symbol_select;
  target : symbol_target;
END_ENTITY;

ENTITY definitional_representation
SUBTYPE OF (representation);
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.PARAMETRIC_REPRESENTATION_CONTEXT' IN
TYPEOF(SELF\representation.context_of_items);
END_ENTITY;

ENTITY degenerate_pcurve
SUBTYPE OF (point);
  basis_surface : surface;
  reference_to_curve : definitional_representation;
WHERE
  WR1:
    SIZEOF(reference_to_curve\representation.items) = 1;
  WR2:
    'PLANT_SPATIAL_CONFIGURATION.CURVE' IN
TYPEOF(reference_to_curve\representation.items[1]);
  WR3:
    reference_to_curve\representation.items[1]\geometric_representation_item.dim
= 2;
END_ENTITY;

ENTITY degenerate_toroidal_surface
SUBTYPE OF (toroidal_surface);
  select_outer : BOOLEAN;
WHERE
  WR1:
    major_radius < minor_radius;
END_ENTITY;

ENTITY derived_shape_aspect
SUPERTYPE OF (centre_of_symmetry)
SUBTYPE OF (shape_aspect);
INVERSE
  deriving_relationships : SET [1:?] OF shape_aspect_relationship FOR
relating_shape_aspect;
WHERE
  WR1:
    SIZEOF(QUERY (dr < *
SELF\derived_shape_aspect.deriving_relationships| NOT
('PLANT_SPATIAL_CONFIGURATION.' + 'SHAPE_ASPECT_DERIVING_RELATIONSHIP' IN
TYPEOF(dr)))) = 0;
END_ENTITY;

```

ISO 10303-227:2005(E)

```
ENTITY derived_unit;
  elements : SET [1:?] OF derived_unit_element;
DERIVE
  name : label := get_name_value(SELF);
WHERE
  WR1:
    (SIZEOF(elements) > 1) OR (SIZEOF(elements) = 1) AND
(elements[1].exponent <> 1.00000);
  WR2:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'NAME_ATTRIBUTE.NAMED_ITEM')) <= 1;
END_ENTITY;

ENTITY derived_unit_element;
  unit : named_unit;
  exponent : REAL;
END_ENTITY;

ENTITY description_attribute;
  attribute_value : text;
  described_item : description_attribute_select;
END_ENTITY;

ENTITY descriptive_colour
SUBTYPE OF (colour, descriptive_representation_item);
END_ENTITY;

ENTITY descriptive_representation_item
SUBTYPE OF (representation_item);
  description : text;
END_ENTITY;

ENTITY design_arrangement_performance
SUBTYPE OF (property_definition, characterized_object);
WHERE
  WR1:
    SIZEOF(QUERY (pd <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION.DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.ARRANGEMENT_LOAD' IN TYPEOF(pd)))) >= 1;
  WR2:
    SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'design arrangement characteristics')) = 1;
  WR3:
    SIZEOF(QUERY (sfc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'design arrangement characteristics')) | NOT
(SIZEOF(sfc.used_representation.items) >= 1))) = 0;
  WR4:
    SIZEOF(QUERY (sfc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'design arrangement characteristics')) | NOT
```

```
(SIZEOF(QUERY (it <* sfc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.DESRIPTIVE_REPRESENTATION_ITEM' IN TYPEOF(it))
AND (it.name = 'arrangement data reference')) <= 1))) = 0;
END_ENTITY;
```

```
ENTITY design_project
SUBTYPE OF (organization);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'ORGANIZATION_ASSIGNMENT.ASSIGNED_ORGANIZATION')) >= 1;
END_ENTITY;
```

```
ENTITY design_project_assignment
SUBTYPE OF (organization_assignment);
  items : SET [1:?] OF design_project_item;
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.DESIGN_PROJECT' IN
TYPEOF(SELF.assigned_organization);
END_ENTITY;
```

```
ENTITY dimensional_characteristic_representation;
  dimension : dimensional_characteristic;
  representation : shape_dimension_representation;
END_ENTITY;
```

```
ENTITY dimensional_exponents;
  length_exponent : REAL;
  mass_exponent : REAL;
  time_exponent : REAL;
  electric_current_exponent : REAL;
  thermodynamic_temperature_exponent : REAL;
  amount_of_substance_exponent : REAL;
  luminous_intensity_exponent : REAL;
END_ENTITY;
```

```
ENTITY dimensional_location
SUPERTYPE OF (angular_location)
SUBTYPE OF (shape_aspect_relationship);
END_ENTITY;
```

```
ENTITY dimensional_size;
  applies_to : shape_aspect;
  name : label;
WHERE
  WR1:
    applies_to.product_definitional = TRUE;
END_ENTITY;
```

```
ENTITY directed_action
SUBTYPE OF (executed_action);
  directive : action_directive;
END_ENTITY;
```

ISO 10303-227:2005(E)

```
ENTITY direction
SUBTYPE OF (geometric_representation_item);
  direction_ratios : LIST [2:3] OF REAL;
WHERE
  WR1:
    SIZEOF(QUERY (tmp <* direction_ratios| (tmp <> 0.00000))) > 0;
END_ENTITY;

ENTITY document;
  id : identifier;
  name : label;
  description : OPTIONAL text;
  kind : document_type;
INVERSE
  representation_types : SET [0:?] OF document_representation_type FOR
represented_document;
END_ENTITY;

ENTITY document_reference
ABSTRACT SUPERTYPE;
  assigned_document : document;
  source : label;
DERIVE
  role : object_role := get_role(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'ROLE_ASSOCIATION.ITEM_WITH_ROLE')) <= 1;
END_ENTITY;

ENTITY document_relationship;
  name : label;
  description : OPTIONAL text;
  relating_document : document;
  related_document : document;
END_ENTITY;

ENTITY document_representation_type;
  name : label;
  represented_document : document;
END_ENTITY;

ENTITY document_type;
  product_data_type : label;
END_ENTITY;

ENTITY document_usage_constraint;
  source : document;
  subject_element : label;
  subject_element_value : text;
END_ENTITY;

ENTITY document_usage_constraint_assignment
```

```

ABSTRACT SUPERTYPE;
    assigned_document_usage : document_usage_constraint;
    role : document_usage_role;
END_ENTITY;

ENTITY document_usage_role;
    name : label;
    description : OPTIONAL text;
END_ENTITY;

ENTITY draughting_callout
SUBTYPE OF (geometric_representation_item);
    contents : SET [1:?] OF draughting_callout_element;
END_ENTITY;

ENTITY draughting_callout_relationship;
    name : label;
    description : text;
    relating_draughting_callout : draughting_callout;
    related_draughting_callout : draughting_callout;
END_ENTITY;

ENTITY drawing_definition;
    drawing_number : identifier;
    drawing_type : OPTIONAL label;
END_ENTITY;

ENTITY drawing_revision
SUBTYPE OF (presentation_set);
    revision_identifier : identifier;
    drawing_identifier : drawing_definition;
    intended_scale : OPTIONAL text;
UNIQUE
    UR1 : revision_identifier, drawing_identifier;
END_ENTITY;

ENTITY drawing_revision_sequence;
    predecessor : drawing_revision;
    successor : drawing_revision;
WHERE
    WR1:
        predecessor :<>: successor;
END_ENTITY;

ENTITY drawing_sheet_revision
SUBTYPE OF (presentation_area);
    revision_identifier : identifier;
WHERE
    WR1:
        SIZEOF(QUERY (item <* SELF\representation.items|
('PLANT_SPATIAL_CONFIGURATION.MAPPED_ITEM' IN TYPEOF(item)) AND
('PLANT_SPATIAL_CONFIGURATION.DRAWING_SHEET_REVISION' IN
TYPEOF(item\mapped_item.mapping_source.mapped_representation)))) = 0;
END_ENTITY;

```

ISO 10303-227:2005(E)

```
ENTITY drawing_sheet_revision_usage
SUBTYPE OF (area_in_set);
  sheet_number : identifier;
UNIQUE
  UR1 : sheet_number, in_set;
WHERE
  WR1:
    ('PLANT_SPATIAL_CONFIGURATION.DRAWING_SHEET_REVISION' IN
TYPEOF(SELF\area_in_set.area)) AND
('PLANT_SPATIAL_CONFIGURATION.DRAWING_REVISION' IN
TYPEOF(SELF\area_in_set.in_set));
END_ENTITY;

ENTITY ducting_system
SUBTYPE OF (product_definition);
WHERE
  WR1:
    SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.PLANT' IN
TYPEOF(pdr.relating_product_definition.formation.of_product)) AND
(pdr.relating_product_definition.frame_of_reference.name = 'functional
occurrence')))) = 1;
END_ENTITY;

ENTITY eccentric_cone
SUBTYPE OF (geometric_representation_item);
  position : axis2_placement_3d;
  semi_axis_1 : positive_length_measure;
  semi_axis_2 : positive_length_measure;
  height : positive_length_measure;
  x_offset : length_measure;
  y_offset : length_measure;
  ratio : REAL;
WHERE
  WR1:
    ratio >= 0.00000;
END_ENTITY;

ENTITY edge
SUPERTYPE OF (ONEOF(edge_curve, oriented_edge))
SUBTYPE OF (topological_representation_item);
  edge_start : vertex;
  edge_end : vertex;
END_ENTITY;

ENTITY edge_curve
SUBTYPE OF (edge, geometric_representation_item);
  edge_geometry : curve;
  same_sense : BOOLEAN;
END_ENTITY;

ENTITY edge_loop
```



```

SUBTYPE OF (loop, path);
DERIVE
  ne : INTEGER := SIZEOF(SELF\path.edge_list);
WHERE
  WR1:
    SELF\path.edge_list[1].edge_start ::=
SELF\path.edge_list[ne].edge_end;
END_ENTITY;

ENTITY effectivity
SUPERTYPE OF (serial_numbered_effectivity);
  id : identifier;
DERIVE
  name : label := get_name_value(SELF);
  description : text := get_description_value(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'NAME_ATTRIBUTE.NAMED_ITEM')) <= 1;
  WR2:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'DESCRIPTION_ATTRIBUTE.DESCRIBED_ITEM')) <= 1;
END_ENTITY;

ENTITY effectivity_assignment
ABSTRACT SUPERTYPE;
  assigned_effectivity : effectivity;
DERIVE
  role : object_role := get_role(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'ROLE_ASSOCIATION.ITEM_WITH_ROLE')) <= 1;
END_ENTITY;

ENTITY effectivity_context_assignment
ABSTRACT SUPERTYPE;
  assigned_effectivity_assignment : effectivity_assignment;
  role : effectivity_context_role;
END_ENTITY;

ENTITY effectivity_context_role;
  name : label;
  description : OPTIONAL text;
END_ENTITY;

ENTITY elbow_fitting_class
SUBTYPE OF (group);
WHERE
  WR1:
    SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' + 'CLASSIFICATION_ASSIGNMENT.ASSIGNED_CLASS') |
('PLANT_SPATIAL_CONFIGURATIONS.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca))) | NOT (SIZEOF(QUERY (it <* aca.items | NOT

```

ISO 10303-227:2005(E)

```
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it))) =
0))) = 0;
    WR2:
        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS'))|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (pcd <* QUERY (it <* aca.items|
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))|
NOT (SIZEOF(QUERY (acal <* USEDIN(pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS'))|
class_in_tree(acal.assigned_class, 'elbow')) = 1))) = 0))) = 0;
    END_ENTITY;

ENTITY electric_current_measure_with_unit
SUBTYPE OF (measure_with_unit);
WHERE
    WR1:
        'PLANT_SPATIAL_CONFIGURATION.ELECTRIC_CURRENT_UNIT' IN
TYPEOF(SELF\measure_with_unit.unit_component);
    END_ENTITY;

ENTITY electric_current_unit
SUBTYPE OF (named_unit);
WHERE
    WR1:
        ((((((SELF\named_unit.dimensions.length_exponent = 0.00000) AND
(SELF\named_unit.dimensions.mass_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.time_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.electric_current_exponent = 1.00000)) AND
(SELF\named_unit.dimensions.thermodynamic_temperature_exponent = 0.00000))
AND (SELF\named_unit.dimensions.amount_of_substance_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.luminous_intensity_exponent = 0.00000);
    END_ENTITY;

ENTITY electrical_connector_class
SUBTYPE OF (group);
END_ENTITY;

ENTITY electrical_system
SUBTYPE OF (product_definition);
WHERE
    WR1:
        SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION'))|
('PLANT_SPATIAL_CONFIGURATION.PLANT' IN
TYPEOF(pdr.relatng_product_definition.formation.of_product)) AND
(pdr.relatng_product_definition.frame_of_reference.name = 'functional
occurrence')) = 1;
    END_ENTITY;

ENTITY elementary_surface
SUPERTYPE OF (ONEOF(plane, cylindrical_surface, conical_surface,
spherical_surface, toroidal_surface))
SUBTYPE OF (surface);
```

```

    position : axis2_placement_3d;
END_ENTITY;

ENTITY ellipse
SUBTYPE OF (conic);
    semi_axis_1 : positive_length_measure;
    semi_axis_2 : positive_length_measure;
END_ENTITY;

ENTITY ellipsoid
SUBTYPE OF (geometric_representation_item);
    position : axis2_placement_3d;
    semi_axis_1 : positive_length_measure;
    semi_axis_2 : positive_length_measure;
    semi_axis_3 : positive_length_measure;
END_ENTITY;

ENTITY evaluated_degenerate_pcurve
SUBTYPE OF (degenerate_pcurve);
    equivalent_point : cartesian_point;
END_ENTITY;

ENTITY executed_action
SUBTYPE OF (action);
END_ENTITY;

ENTITY external_source;
    source_id : source_item;
DERIVE
    description : text := get_description_value(SELf);
WHERE
    WR1:
        SIZEOF(USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'DESCRIPTION_ATTRIBUTE.DESCRIBED_ITEM')) <= 1;
END_ENTITY;

ENTITY external_source_relationship;
    name : label;
    description : OPTIONAL text;
    relating_source : external_source;
    related_source : external_source;
END_ENTITY;

ENTITY externally_defined_class
SUBTYPE OF (group, externally_defined_item);
WHERE
    WR1:
        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELf,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS') |
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca))) | NOT (SIZEOF(QUERY (it <* aca.items | NOT ((SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.ELECTRICAL_SYSTEM',
'PLANT_SPATIAL_CONFIGURATION.DUCTING_SYSTEM',
'PLANT_SPATIAL_CONFIGURATION.INSTRUMENTATION_AND_CONTROL_SYSTEM',

```

ISO 10303-227:2005(E)

```
'PLANT_SPATIAL_CONFIGURATION.MECHANICAL_SYSTEM',
'PLANT_SPATIAL_CONFIGURATION.MECHANICAL_COMPONENT_DEFINITION',
'PLANT_SPATIAL_CONFIGURATION.PIPING_SYSTEM',
'PLANT_SPATIAL_CONFIGURATION.PLANT',
'PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTOR',
'PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION',
'PLANT_SPATIAL_CONFIGURATION.STRUCTURAL_SYSTEM' ]) = 1) OR
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION' IN TYPEOF(it)) AND
(SIZEOF(QUERY (pc <* it.formation.of_product.frame_of_reference|
(pc.discipline_type = 'process plant')))) = 1)))) = 0))) = 0;
END_ENTITY;

ENTITY externally_defined_curve_font
SUBTYPE OF (externally_defined_item);
END_ENTITY;

ENTITY externally_defined_document
SUBTYPE OF (document, externally_defined_item);
END_ENTITY;

ENTITY externally_defined_hatch_style
SUBTYPE OF (externally_defined_item, geometric_representation_item);
END_ENTITY;

ENTITY externally_defined_item;
    item_id : source_item;
    source : external_source;
END_ENTITY;

ENTITY externally_defined_item_relationship;
    name : label;
    description : OPTIONAL text;
    relating_item : externally_defined_item;
    related_item : externally_defined_item;
END_ENTITY;

ENTITY externally_defined_plant_item_definition
SUBTYPE OF (product_definition, externally_defined_item);
END_ENTITY;

ENTITY externally_defined_representation_item
SUBTYPE OF (representation_item, externally_defined_item);
END_ENTITY;

ENTITY externally_defined_symbol
SUBTYPE OF (externally_defined_item);
END_ENTITY;

ENTITY externally_defined_text_font
SUBTYPE OF (externally_defined_item);
END_ENTITY;

ENTITY externally_defined_tile_style
SUBTYPE OF (externally_defined_item, geometric_representation_item);
```

```

END_ENTITY;

ENTITY extruded_area_solid
SUBTYPE OF (swept_area_solid);
    extruded_direction : direction;
    depth : positive_length_measure;
WHERE
    WR1:

dot_product(SELF\swept_area_solid.swept_area.basis_surface\elementary_surface
.position.p[3], extruded_direction) <> 0.00000;
END_ENTITY;

ENTITY extruded_face_solid
SUBTYPE OF (swept_face_solid);
    extruded_direction : direction;
    depth : positive_length_measure;
WHERE
    WR1:

dot_product(SELF\swept_face_solid.swept_face.face_geometry\elementary_surface
.position.p[3], extruded_direction) <> 0.00000;
END_ENTITY;

ENTITY face
SUPERTYPE OF (ONEOF(face_surface, oriented_face))
SUBTYPE OF (topological_representation_item);
    bounds : SET [1:?] OF face_bound;
WHERE
    WR1:
        NOT mixed_loop_type_set(list_to_set(list_face_loops(SELF)));
    WR2:
        SIZEOF(QUERY (temp <* bounds|
('PLANT_SPATIAL_CONFIGURATION.FACE_OUTER_BOUND' IN TYPEOF(temp)))) <= 1;
END_ENTITY;

ENTITY face_bound
SUBTYPE OF (topological_representation_item);
    bound : loop;
    orientation : BOOLEAN;
END_ENTITY;

ENTITY face_outer_bound
SUBTYPE OF (face_bound);
END_ENTITY;

ENTITY face_surface
SUBTYPE OF (face, geometric_representation_item);
    face_geometry : surface;
    same_sense : BOOLEAN;
WHERE
    WR1:
        NOT ('PLANT_SPATIAL_CONFIGURATION.ORIENTED_SURFACE' IN
TYPEOF(face_geometry));

```

ISO 10303-227:2005(E)

```
END_ENTITY;

ENTITY faceted_brep
SUBTYPE OF (manifold_solid_brep);
END_ENTITY;

ENTITY fill_area_style;
  name : label;
  fill_styles : SET [1:?] OF fill_style_select;
WHERE
  WR1:
    SIZEOF(QUERY (fill_style <* SELF.fill_styles|
('PLANT_SPATIAL_CONFIGURATION.' + 'FILL_AREA_STYLE_COLOUR' IN
TYPEOF(fill_style)))) <= 1;
END_ENTITY;

ENTITY fill_area_style_colour;
  name : label;
  fill_colour : colour;
END_ENTITY;

ENTITY fill_area_style_hatching
SUBTYPE OF (geometric_representation_item);
  hatch_line_appearance : curve_style;
  start_of_next_hatch_line : one_direction_repeat_factor;
  point_of_reference_hatch_line : cartesian_point;
  pattern_start : cartesian_point;
  hatch_line_angle : plane_angle_measure;
END_ENTITY;

ENTITY fill_area_style_tile_symbol_with_style
SUBTYPE OF (geometric_representation_item);
  symbol : annotation_symbol_occurrence;
END_ENTITY;

ENTITY fill_area_style_tiles
SUBTYPE OF (geometric_representation_item);
  tiling_pattern : two_direction_repeat_factor;
  tiles : SET [1:?] OF fill_area_style_tile_shape_select;
  tiling_scale : positive_ratio_measure;
END_ENTITY;

ENTITY flange_fitting_class
SUBTYPE OF (group);
WHERE
  WR1:
    SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' + 'CLASSIFICATION_ASSIGNMENT.ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (it <* aca.items| NOT
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))) =
0))) = 0;
  WR2:
```

```

        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' + 'CLASSIFICATION_ASSIGNMENT.ASSIGNED_CLASS')) |
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca))) | NOT (SIZEOF(QUERY (pcd <* QUERY (it <* aca.items |
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it))) |
NOT (SIZEOF(QUERY (acal <* USEDIN(pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')) |
class_in_tree(acal.assigned_class, 'flange')) = 1))) = 0))) = 0;
        END_ENTITY;

ENTITY flange_fitting_neck_type_class
SUBTYPE OF (group);
WHERE
    WR1:
        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')) |
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca))) | NOT (SIZEOF(QUERY (it <* aca.items | NOT
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))) =
0))) = 0;
    WR2:
        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')) |
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca))) | NOT (SIZEOF(QUERY (pcd <* QUERY (it <* aca.items |
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it))) |
NOT (SIZEOF(QUERY (acal <* USEDIN(pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')) |
class_in_tree(acal.assigned_class, 'flange')) = 1))) = 0))) = 0;
        END_ENTITY;

ENTITY founded_item;
END_ENTITY;

ENTITY functionally_defined_transformation;
    name : label;
    description : OPTIONAL text;
END_ENTITY;

ENTITY geometric_curve_set
SUBTYPE OF (geometric_set);
WHERE
    WR1:
        SIZEOF(QUERY (temp <* SELF\geometric_set.elements |
('PLANT_SPATIAL_CONFIGURATION.SURFACE' IN TYPEOF(temp)))) = 0;
        END_ENTITY;

ENTITY geometric_representation_context
SUBTYPE OF (representation_context);
    coordinate_space_dimension : dimension_count;
END_ENTITY;

ENTITY geometric_representation_item

```

ISO 10303-227:2005(E)

```
SUPERTYPE OF (ONEOF(point, direction, vector, placement,
cartesian_transformation_operator, curve, surface, edge_curve, face_surface,
poly_loop, vertex_point, solid_model, boolean_result, sphere,
right_circular_cone, right_circular_cylinder, torus, block,
right_angular_wedge, ellipsoid, rectangular_pyramid, cyclide_segment_solid,
half_space_solid, half_space_2d, shell_based_wireframe_model, geometric_set))
  SUBTYPE OF (representation_item);
  DERIVE
    dim : dimension_count := dimension_of(SELf);
  WHERE
    WR1:
      SIZEOF(QUERY (using_rep <* using_representations(SELf) | NOT
('PLANT_SPATIAL_CONFIGURATION.GEOMETRIC_REPRESENTATION_CONTEXT' IN
TYPEOF(using_rep.context_of_items)))) = 0;
  END_ENTITY;

ENTITY geometric_set
  SUPERTYPE OF (ONEOF(geometric_curve_set, geometric_set_replica))
  SUBTYPE OF (geometric_representation_item);
  elements : SET [1:?] OF geometric_set_select;
  END_ENTITY;

ENTITY geometric_set_replica
  SUBTYPE OF (geometric_set);
  parent_set : geometric_set;
  transformation : cartesian_transformation_operator;
  DERIVE
    SELf\geometric_set.elements : SET [1:?] OF geometric_set_select :=
build_transformed_set(transformation, parent_set);
  WHERE
    WR1:
      acyclic_set_replica(SELf, parent_set);
  END_ENTITY;

ENTITY global_uncertainty_assigned_context
  SUBTYPE OF (representation_context);
  uncertainty : SET [1:?] OF uncertainty_measure_with_unit;
  END_ENTITY;

ENTITY global_unit_assigned_context
  SUBTYPE OF (representation_context);
  units : SET [1:?] OF unit;
  END_ENTITY;

ENTITY graphical_transformation
  SUBTYPE OF (item_defined_transformation);
  WHERE
    WR1:
      'PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_2D' IN
TYPEOF(SELf\item_defined_transformation.transform_item_1);
    WR2:
      'PLANT_SPATIAL_CONFIGURATION.PRESENTATION_SCALED_PLACEMENT' IN
TYPEOF(SELf\item_defined_transformation.transform_item_2);
  END_ENTITY;
```



```

ENTITY group;
  name : label;
  description : OPTIONAL text;
DERIVE
  id : identifier := get_id_value(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'ID_ATTRIBUTE.IDENTIFIED_ITEM')) <= 1;
END_ENTITY;

ENTITY group_assignment
ABSTRACT SUPERTYPE;
  assigned_group : group;
DERIVE
  role : object_role := get_role(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'ROLE_ASSOCIATION.ITEM_WITH_ROLE')) <= 1;
END_ENTITY;

ENTITY group_relationship;
  name : label;
  description : OPTIONAL text;
  relating_group : group;
  related_group : group;
END_ENTITY;

ENTITY half_space_2d
SUBTYPE OF (geometric_representation_item);
  base_curve : curve;
  agreement_flag : BOOLEAN;
END_ENTITY;

ENTITY half_space_solid
SUBTYPE OF (geometric_representation_item);
  base_surface : surface;
  agreement_flag : BOOLEAN;
END_ENTITY;

ENTITY heat_tracing_representation
SUBTYPE OF (representation);
END_ENTITY;

ENTITY hvac_branch_connection
SUBTYPE OF (shape_aspect_relationship);
WHERE
  WR1:
    SELF.description = 'branch location';
  WR2:
    'PLANT_SPATIAL_CONFIGURATION.HVAC_SECTION_DEFINITION' IN
TYPEOF(SELF.relatng_shape_aspect.of_shape.definition);

```

ISO 10303-227:2005(E)

```
WR3:
    'PLANT_SPATIAL_CONFIGURATION.HVAC_SECTION_TERMINATION' IN
    TYPEOF(SELF.related_shape_aspect);
    END_ENTITY;

    ENTITY hvac_component_definition
    SUBTYPE OF (product_definition);
    END_ENTITY;

    ENTITY hvac_connector
    SUBTYPE OF (shape_aspect);
    WHERE
        WR1:

SELF\shape_aspect.of_shape\property_definition.definition\product_definition.
frame_of_reference\application_context_element.name IN [ 'functional
definition', 'physical definition', 'functional occurrence', 'physical
occurrence' ];
        WR2:
            NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| (pd.name =
'hvac service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
(pd.name = 'hvac service characteristics'))| NOT (SIZEOF(QUERY (pdr <*
USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'design service characteristics')) = 1))) =
0);
            WR3:
                NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| (pd.name =
'hvac service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
(pd.name = 'hvac service characteristics'))| NOT (SIZEOF(QUERY (dsc <* QUERY
(pdr <* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'design service characteristics'))|
(SIZEOF(dsc.used_representation.items) >= 2))) = 1))) = 0);
            WR4:
                NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| (pd.name =
'hvac service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
(pd.name = 'hvac service characteristics'))| NOT (SIZEOF(QUERY (dsc <* QUERY
(pdr <* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'design service characteristics'))| (1 <=
SIZEOF(QUERY (it <* dsc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name IN [ 'pressure', 'minimum pressure', 'maximum pressure' ])))) AND
(SIZEOF(QUERY (it <* dsc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name IN [ 'pressure', 'minimum pressure', 'maximum pressure' ])))) <= 2)))
= 1))) = 0);
```

WR5:

```

NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| (pd.name =
'hvac service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
(pd.name = 'hvac service characteristics'))| NOT (SIZEOF(QUERY (dsc <* QUERY
(pdr <* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'design service characteristics'))|
(SIZEOF(QUERY (it <* dsc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'pressure')) <= 1))) = 1))) = 0);

```

WR6:

```

NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| (pd.name =
'hvac service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
(pd.name = 'hvac service characteristics'))| NOT (SIZEOF(QUERY (dsc <* QUERY
(pdr <* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'design service characteristics'))|
(SIZEOF(QUERY (it <* dsc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'minimum pressure')) <= 1))) = 1))) = 0);

```

WR7:

```

NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| (pd.name =
'hvac service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
(pd.name = 'hvac service characteristics'))| NOT (SIZEOF(QUERY (dsc <* QUERY
(pdr <* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'design service characteristics'))|
(SIZEOF(QUERY (it <* dsc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'maximum pressure')) <= 1))) = 1))) = 0);

```

WR8:

```

NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| (pd.name =
'hvac service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
(pd.name = 'hvac service characteristics'))| NOT (SIZEOF(QUERY (dsc <* QUERY
(pdr <* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'design service characteristics'))| (1 <=
SIZEOF(QUERY (it <* dsc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
('PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ])) = 2) AND (it.name IN [
'temperature', 'minimum temperature', 'maximum temperature' ]))) AND
(SIZEOF(QUERY (it <* dsc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
('PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ])) = 2) AND (it.name IN [

```

ISO 10303-227:2005(E)

```
'temperature', 'minimum temperature', 'maximum temperature' ]))) <= 2))) = 1))) = 0);
```

WR9:

```
NOT (SIZEOF(QUERY (pd <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') | (pd.name = 'hvac service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') | (pd.name = 'hvac service characteristics')) | NOT (SIZEOF(QUERY (dsc <* QUERY (pdr <* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' + 'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') | (pdr.used_representation.name = 'design service characteristics')) | (SIZEOF(QUERY (it <* dsc.used_representation.items | (SIZEOF(TYPEOF(it) * [ 'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM', ('PLANT_SPATIAL_CONFIGURATION.' + 'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ]) = 2) AND (it.name = 'temperature')))) <= 1))) = 1))) = 0);
```

WR10:

```
NOT (SIZEOF(QUERY (pd <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') | (pd.name = 'hvac service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') | (pd.name = 'hvac service characteristics')) | NOT (SIZEOF(QUERY (dsc <* QUERY (pdr <* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' + 'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') | (pdr.used_representation.name = 'design service characteristics')) | (SIZEOF(QUERY (it <* dsc.used_representation.items | (SIZEOF(TYPEOF(it) * [ 'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM', ('PLANT_SPATIAL_CONFIGURATION.' + 'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ]) = 2) AND (it.name = 'minimum temperature')))) <= 1))) = 1))) = 0);
```

WR11:

```
NOT (SIZEOF(QUERY (pd <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') | (pd.name = 'hvac service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') | (pd.name = 'hvac service characteristics')) | NOT (SIZEOF(QUERY (dsc <* QUERY (pdr <* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' + 'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') | (pdr.used_representation.name = 'design service characteristics')) | (SIZEOF(QUERY (it <* dsc.used_representation.items | (SIZEOF(TYPEOF(it) * [ 'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM', ('PLANT_SPATIAL_CONFIGURATION.' + 'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ]) = 2) AND (it.name = 'maximum temperature')))) <= 1))) = 1))) = 0);
```

WR12:

```
NOT  
(SELF\shape_aspect.of_shape\property_definition.definition\product_definition.frame_of_reference\application_context_element.name IN [ 'functional definition', 'functional occurrence' ]) OR (SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' + 'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') | ('PLANT_SPATIAL_CONFIGURATION.SHAPE_REPRESENTATION' IN TYPEOF(pdr.used_representation)))) = 0);
```

END_ENTITY;

```

ENTITY hvac_cross_section
SUBTYPE OF (shape_aspect);
END_ENTITY;

ENTITY hvac_fitting_class
SUBTYPE OF (group);
WHERE
  WR1:
    SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (it <* aca.items| NOT
('PLANT_SPATIAL_CONFIGURATION.HVAC_COMPONENT_DEFINITION' IN TYPEOF(it)))) =
0))) = 0;
  WR2:
    SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (pcd <* QUERY (it <* aca.items|
('PLANT_SPATIAL_CONFIGURATION.HVAC_COMPONENT_DEFINITION' IN TYPEOF(it)))| NOT
(SIZEOF(QUERY (aca1 <* USEDIN(pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
class_in_tree(aca1.assigned_class, 'hvac fitting')) = 1))) = 0))) = 0;
END_ENTITY;

ENTITY hvac_plant_item_branch_connection
SUBTYPE OF (shape_aspect_relationship);
WHERE
  WR1:
    SELF.description = 'branch location';
  WR2:
    'PLANT_SPATIAL_CONFIGURATION.HVAC_SECTION_DEFINITION' IN
TYPEOF(SELF.relying_shape_aspect.of_shape.definition);
  WR3:
    'PLANT_SPATIAL_CONFIGURATION.HVAC_CONNECTOR' IN
TYPEOF(SELF.related_shape_aspect);
END_ENTITY;

ENTITY hvac_plant_item_connection
SUBTYPE OF (shape_aspect_relationship);
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.HVAC_SECTION_TERMINATION' IN
TYPEOF(SELF.relying_shape_aspect);
  WR2:
    'PLANT_SPATIAL_CONFIGURATION.HVAC_CONNECTOR' IN
TYPEOF(SELF.related_shape_aspect);
  WR3:
    SELF\shape_aspect_relationship.related_shape_aspect.of_shape\property_definit
ion.definition\product_definition.frame_of_reference\application_context_elem
ent.name = 'physical occurrence';
END_ENTITY;

```

ISO 10303-227:2005(E)

```
ENTITY hvac_run_definition
  SUBTYPE OF (product_definition);
WHERE
  WR1:
    SIZEOF(QUERY (pdr <* USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.HVAC_SYSTEM' IN
TYPEOF(pdr.relatin_g_product_definition)))) = 1;
  WR2:
    SIZEOF(QUERY (pdr <* USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATIN_G_PRODUCT_DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.HVAC_SECTION_DEFINITION' IN
TYPEOF(pdr.related_product_definition)))) >= 1;
  WR3:
    SELF.frame_of_reference.name = 'functional definition';
  WR4:
    SIZEOF(QUERY (pds <* QUERY (pd <* USEDIN(SELf,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pd))) | NOT
(SIZEOF(QUERY (sa <* USEDIN(pds,
'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT.OF_SHAPE') |
('PLANT_SPATIAL_CONFIGURATION.HVAC_SECTION_TERMINATION' IN TYPEOF(sa)) AND
(sa.description = 'hvac run termination')))) <= 2))) = 0;
  END_ENTITY;
```

```
ENTITY hvac_section_definition
  SUBTYPE OF (product_definition);
WHERE
  WR1:
    SIZEOF(QUERY (pdr <* USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.HVAC_RUN_DEFINITION' IN
TYPEOF(pdr.relatin_g_product_definition)))) >= 1;
  WR2:
    SIZEOF(QUERY (pd <* USEDIN(SELf,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.SHAPE_DEFINITION' IN TYPEOF(pd)))) >= 1;
  WR3:
    SELF.frame_of_reference\application_context_element.name =
'functional definition';
  WR4:
    SIZEOF(QUERY (pdr <* USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'hvac section characteristics')) = 1;
  WR5:
    SIZEOF(QUERY (hssc <* QUERY (pdr <* USEDIN(SELf,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'hvac section characteristics')) | NOT ((1 <=
SIZEOF(QUERY (it <* hssc.used_representation.items | (it.name IN [ 'pressure
drop', 'maximum pressure drop', 'minimum pressure drop ' ])))) AND
(SIZEOF(QUERY (it <* hssc.used_representation.items | (it.name IN [ 'pressure
drop', 'maximum pressure drop', 'minimum pressure drop ' ])))) <= 2)))) = 0;
```

```

WR6:
    SIZEOF(QUERY (hssc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'hvac section characteristics'))| NOT
(SIZEOF(QUERY (it <* hssc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'pressure drop')))) <= 1))) = 0;
WR7:
    SIZEOF(QUERY (hssc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'hvac section characteristics'))| NOT
(SIZEOF(QUERY (it <* hssc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'minimum pressure drop')))) <= 1))) = 0;
WR8:
    SIZEOF(QUERY (hssc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'hvac section characteristics'))| NOT
(SIZEOF(QUERY (it <* hssc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'maximum pressure drop')))) <= 1))) = 0;
WR9:
    NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'hvac section insulation')) >= 1) OR (SIZEOF(QUERY (si <* QUERY (pdr <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'hvac section insulation'))| NOT (SIZEOF(QUERY (pd <* USEDIN(si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (pds <* QUERY (pdr <* USEDIN(pd, 'PLANT_SPATIAL_CONFIGURATION.'
+ 'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pdr)))|
(pds.used_representation.name = 'hvac section insulation characteristics'))
= 1))) = 0))) = 0);
WR10:
    NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'hvac section insulation')) >= 1) OR (SIZEOF(QUERY (si <* QUERY (pdr <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'hvac section insulation'))| NOT (SIZEOF(QUERY (pd <* USEDIN(si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN(pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pdr)))|
(pds.used_representation.name = 'hvac section insulation characteristics'))|
(SIZEOF(sic.used_representation.items) >= 1))) = 1))) = 0))) = 0);
WR11:

```

ISO 10303-227:2005(E)

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')) | (pdr.name =
'hvac section insulation')) >= 1) OR (SIZEOF(QUERY (si <* QUERY (pdr <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')) | (pdr.name =
'hvac section insulation')) | NOT (SIZEOF(QUERY (pd <* USEDIN(si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')) | NOT
(SIZEOF(QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN(pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')) |
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pdr))) |
(pds.used_representation.name = 'hvac section insulation characteristics')) |
(1 <= SIZEOF(QUERY (it <* sic.used_representation.items | (SIZEOF(TYPEOF(it) *
[ 'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ]) = 2) AND (it.name
IN [ 'thickness', 'minimum thickness', 'maximum thickness' ])))) AND
(SIZEOF(QUERY (it <* sic.used_representation.items | (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ]) = 2) AND (it.name
IN [ 'thickness', 'minimum thickness', 'maximum thickness' ])))) <= 2))) =
1))) = 0))) = 0);
```

WR12:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')) | (pdr.name =
'hvac section insulation')) >= 1) OR (SIZEOF(QUERY (si <* QUERY (pdr <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')) | (pdr.name =
'hvac section insulation')) | NOT (SIZEOF(QUERY (pd <* USEDIN(si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')) | NOT
(SIZEOF(QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN(pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')) |
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pdr))) |
(pds.used_representation.name = 'segment insulation characteristics')) |
(SIZEOF(QUERY (it <* sic.used_representation.items | (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ]) = 2) AND (it.name =
'thickness')) <= 1))) = 1))) = 0))) = 0);
```

WR13:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')) | (pdr.name =
'segment insulation')) >= 1) OR (SIZEOF(QUERY (si <* QUERY (pdr <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')) | (pdr.name =
'hvac section insulation')) | NOT (SIZEOF(QUERY (pd <* USEDIN(si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')) | NOT
(SIZEOF(QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN(pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')) |
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pdr))) |
(pds.used_representation.name = 'hvac section insulation characteristics')) |
```



```
(SIZEOF(QUERY (it <* sic.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ]) = 2) AND (it.name =
'minimum thickness'))) <= 1))) = 1))) = 0))) = 0);
```

```
WR14:
```

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'hvac section insulation'))) >= 1) OR (SIZEOF(QUERY (si <* QUERY (pdr <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'hvac section insulation')| NOT (SIZEOF(QUERY (pd <* USEDIN(si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN(pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pdr)))|
(pds.used_representation.name = 'hvac section insulation characteristics')|)
(SIZEOF(QUERY (it <* sic.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ]) = 2) AND (it.name =
'maximum thickness'))) <= 1))) = 1))) = 0))) = 0);
```

```
WR15:
```

```
SIZEOF(QUERY (pds <* QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pd)))| NOT
(SIZEOF(QUERY (sa <* USEDIN(pds,
'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT.OF_SHAPE')|
('PLANT_SPATIAL_CONFIGURATION.HVAC_SECTION_TERMINATION' IN TYPEOF(sa)))) =
2))) = 0;
```

```
END_ENTITY;
```

```
ENTITY hvac_section_termination
```

```
  SUBTYPE OF (shape_aspect);
```

```
  WHERE
```

```
    WR1:
```

```
      SIZEOF(QUERY (sar <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'SHAPE_ASPECT_RELATIONSHIP.RELATING_SHAPE_ASPECT') + USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'SHAPE_ASPECT_RELATIONSHIP.RELATED_SHAPE_ASPECT')| NOT (SIZEOF(TYPEOF(sar) *
[ 'PLANT_SPATIAL_CONFIGURATION.HVAC_BRANCH_CONNECTION',
'PLANT_SPATIAL_CONFIGURATION.HVAC_PLANT_ITEM_CONNECTION',
'PLANT_SPATIAL_CONFIGURATION.HVAC_TERMINATION_CONNECTION' ]) = 1))) = 0;
```

```
    WR2:
```

```
      SIZEOF(QUERY (sar <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'SHAPE_ASPECT_RELATIONSHIP.RELATED_SHAPE_ASPECT')| (SIZEOF(TYPEOF(sar) * [
'PLANT_SPATIAL_CONFIGURATION.HVAC_BRANCH_CONNECTION',
'PLANT_SPATIAL_CONFIGURATION.HVAC_PLANT_ITEM_CONNECTION' ]) = 1))) = 1;
```

```
    END_ENTITY;
```

```
ENTITY hvac_support_class
```

```
  SUBTYPE OF (group);
```

```
  WHERE
```

```
    WR1:
```

ISO 10303-227:2005(E)

```
        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS') |
('PLANT_SPATIAL_CONFIGURATIONS.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca))) | NOT (SIZEOF(QUERY (it <* aca.items | NOT
('PLANT_SPATIAL_CONFIGURATIONS.HVAC_SUPPORT_DEFINITION' IN TYPEOF(it)))) =
0))) = 0;
        WR2:
        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS') |
('PLANT_SPATIAL_CONFIGURATIONS.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca))) | NOT (SIZEOF(QUERY (pcd <* QUERY (it <* aca.items |
('PLANT_SPATIAL_CONFIGURATIONS.HVAC_COMPONENT_DEFINITION' IN TYPEOF(it))) | NOT
(SIZEOF(QUERY (acal <* USEDIN(pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATIONS.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
class_in_tree(acal.assigned_class, 'hvac support')))) = 1))) = 0))) = 0;
        END_ENTITY;

        ENTITY hvac_support_definition
        SUBTYPE OF (product_definition);
        END_ENTITY;

        ENTITY hvac_system
        SUBTYPE OF (product_definition);
        WHERE
        WR1:
        SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
('PLANT_SPATIAL_CONFIGURATIONS.PLANT' IN
TYPEOF(pdr.relating_product_definition.formation.of_product)) AND
(pdr.relating_product_definition.frame_of_reference.name = 'functional
occurrence')))) = 1;
        END_ENTITY;

        ENTITY hvac_termination_connection
        SUBTYPE OF (shape_aspect_relationship);
        WHERE
        WR1:
        'PLANT_SPATIAL_CONFIGURATIONS.HVAC_SECTION_TERMINATION' IN
TYPEOF(SELF.relating_shape_aspect);
        WR2:
        'PLANT_SPATIAL_CONFIGURATIONS.HVAC_SECTION_TERMINATION' IN
TYPEOF(SELF.related_shape_aspect);
        END_ENTITY;

        ENTITY hybrid_shape_representation
        SUBTYPE OF (shape_representation);
        WHERE
        WR1:
        SIZEOF(QUERY (i <* SELF\representation.items | NOT (SIZEOF([
'PLANT_SPATIAL_CONFIGURATIONS.ADVANCED_FACE',
'PLANT_SPATIAL_CONFIGURATIONS.BOOLEAN_RESULT',
'PLANT_SPATIAL_CONFIGURATIONS.CSG_SOLID',
'PLANT_SPATIAL_CONFIGURATIONS.RECTANGULAR_PYRAMID',
'PLANT_SPATIAL_CONFIGURATIONS.BLOCK', 'PLANT_SPATIAL_CONFIGURATIONS.TORUS',
```

```

'PLANT_SPATIAL_CONFIGURATION.RIGHT_CIRCULAR_CYLINDER',
'PLANT_SPATIAL_CONFIGURATION.SPHERE',
'PLANT_SPATIAL_CONFIGURATION.RIGHT_CIRCULAR_CONE',
'PLANT_SPATIAL_CONFIGURATION.EXTRUDED_AREA_SOLID',
'PLANT_SPATIAL_CONFIGURATION.REVOLVED_AREA_SOLID',
'PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_3D',
'PLANT_SPATIAL_CONFIGURATION.MANIFOLD_SOLID_BREP',
'PLANT_SPATIAL_CONFIGURATION.SHELL_BASED_WIREFRAME_MODEL',
'PLANT_SPATIAL_CONFIGURATION.CURVE', 'PLANT_SPATIAL_CONFIGURATION.POINT',
'PLANT_SPATIAL_CONFIGURATION.SURFACE', 'PLANT_SPATIAL_CONFIGURATION.VECTOR',
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.MAPPED_ITEM' ] * TYPEOF(i)) = 1))) = 0;
  WR2:
    SIZEOF(QUERY (mi <* QUERY (item <* SELF\representation.items|
('PLANT_SPATIAL_CONFIGURATION.MAPPED_ITEM' IN TYPEOF(item)))| NOT (SIZEOF([
('PLANT_SPATIAL_CONFIGURATION.' + 'PLANT_CSG_SHAPE_REPRESENTATION'),
'PLANT_SPATIAL_CONFIGURATION.HYBRID_SHAPE_REPRESENTATION' ] *
TYPEOF(mi\mapped_item.mapping_source.mapped_representation)) = 1))) = 0;
  END_ENTITY;

ENTITY hyperbola
SUBTYPE OF (conic);
  semi_axis : positive_length_measure;
  semi_imag_axis : positive_length_measure;
END_ENTITY;

ENTITY id_attribute;
  attribute_value : identifier;
  identified_item : id_attribute_select;
END_ENTITY;

ENTITY identification_assignment
ABSTRACT SUPERTYPE;
  assigned_id : identifier;
  role : identification_role;
END_ENTITY;

ENTITY identification_role;
  name : label;
  description : OPTIONAL text;
END_ENTITY;

ENTITY inline_equipment
SUBTYPE OF (piping_component_definition);
END_ENTITY;

ENTITY instrumentation_and_control_system
SUBTYPE OF (product_definition);
WHERE
  WR1:
    SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')|
('PLANT_SPATIAL_CONFIGURATION.PLANT' IN
TYPEOF(pdr.relatng_product_definition.formation.of_product)) AND

```

ISO 10303-227:2005(E)

```
(pdr.relatng_product_definition.frame_of_reference.name = 'functional
occurrence')) = 1;
END_ENTITY;

ENTITY interfering_shape_element
SUBTYPE OF (shape_aspect, shape_aspect_relationship);
END_ENTITY;

ENTITY intersection_curve
SUBTYPE OF (surface_curve);
WHERE
  WR1:
    SIZEOF(SELF\surface_curve.associated_geometry) = 2;
  WR2:
    associated_surface(SELF\surface_curve.associated_geometry[1]) <>
associated_surface(SELF\surface_curve.associated_geometry[2]);
END_ENTITY;

ENTITY invisibility;
  invisible_items : SET [1:?] OF invisible_item;
END_ENTITY;

ENTITY item_defined_transformation;
  name : label;
  description : OPTIONAL text;
  transform_item_1 : representation_item;
  transform_item_2 : representation_item;
END_ENTITY;

ENTITY item_identified_representation_usage;
  name : label;
  description : OPTIONAL text;
  definition : represented_definition;
  used_representation : representation;
  identified_item : representation_item;
WHERE
  WR1:
    SELF.used_representation IN
using_representations(SELF.identified_item);
END_ENTITY;

ENTITY known_source
SUBTYPE OF (external_source, pre_defined_item);
WHERE
  WR1:
    SELF\pre_defined_item.name IN [ 'ISO 13584 Dictionary', 'ISO 13584
Parts Library' ];
END_ENTITY;

ENTITY length_measure_with_unit
SUBTYPE OF (measure_with_unit);
WHERE
  WR1:
```

```

        'PLANT_SPATIAL_CONFIGURATION.LENGTH_UNIT' IN
    TYPEOF(SELF\measure_with_unit.unit_component);
    END_ENTITY;

    ENTITY length_unit
    SUBTYPE OF (named_unit);
    WHERE
        WR1:
            ((((((SELF\named_unit.dimensions.length_exponent = 1.00000) AND
            (SELF\named_unit.dimensions.mass_exponent = 0.00000)) AND
            (SELF\named_unit.dimensions.time_exponent = 0.00000)) AND
            (SELF\named_unit.dimensions.electric_current_exponent = 0.00000)) AND
            (SELF\named_unit.dimensions.thermodynamic_temperature_exponent = 0.00000))
            AND (SELF\named_unit.dimensions.amount_of_substance_exponent = 0.00000)) AND
            (SELF\named_unit.dimensions.luminous_intensity_exponent = 0.00000);
    END_ENTITY;

    ENTITY line
    SUBTYPE OF (curve);
        pnt : cartesian_point;
        dir : vector;
    WHERE
        WR1:
            dir.dim = pnt.dim;
    END_ENTITY;

    ENTITY line_branch_connection
    SUBTYPE OF (shape_aspect_relationship);
    WHERE
        WR1:
            SELF.description = 'branch location';
        WR2:
            'PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_DEFINITION' IN
    TYPEOF(SELF.relating_shape_aspect.of_shape.definition);
        WR3:
            'PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_TERMINATION' IN
    TYPEOF(SELF.related_shape_aspect);
    END_ENTITY;

    ENTITY line_less_piping_system
    SUBTYPE OF (product_definition);
    END_ENTITY;

    ENTITY line_plant_item_branch_connection
    SUBTYPE OF (shape_aspect_relationship);
    END_ENTITY;

    ENTITY line_plant_item_connection
    SUBTYPE OF (shape_aspect_relationship);
    WHERE
        WR1:
            'PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_TERMINATION' IN
    TYPEOF(SELF.relating_shape_aspect);
        WR2:

```

ISO 10303-227:2005(E)

```
'PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTOR' IN
TYPEOF(SELF.related_shape_aspect);
WR3:

SELF\shape_aspect_relationship.related_shape_aspect.of_shape\property_definition.definition\product_definition.frame_of_reference\application_context_element.name = 'physical occurrence';
END_ENTITY;

ENTITY line_termination_connection
SUBTYPE OF (shape_aspect_relationship);
WHERE
WR1:
SIZEOF(TYPEOF(SELF.relatng_shape_aspect) * [
'PLANT_SPATIAL_CONFIGURATION.CONNECTION_NODE',
'PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_TERMINATION' ]) >= 1;
WR2:
'PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_TERMINATION' IN
TYPEOF(SELF.related_shape_aspect);
END_ENTITY;

ENTITY local_time;
hour_component : hour_in_day;
minute_component : OPTIONAL minute_in_hour;
second_component : OPTIONAL second_in_minute;
zone : coordinated_universal_time_offset;
WHERE
WR1:
valid_time(SELF);
END_ENTITY;

ENTITY loop
SUPERTYPE OF (ONEOF(vertex_loop, edge_loop, poly_loop))
SUBTYPE OF (topological_representation_item);
END_ENTITY;

ENTITY luminous_intensity_measure_with_unit
SUBTYPE OF (measure_with_unit);
WHERE
WR1:
'PLANT_SPATIAL_CONFIGURATION.LUMINOUS_INTENSITY_UNIT' IN
TYPEOF(SELF\measure_with_unit.unit_component);
END_ENTITY;

ENTITY luminous_intensity_unit
SUBTYPE OF (named_unit);
WHERE
WR1:
((((((SELF\named_unit.dimensions.length_exponent = 0.00000) AND
(SELF\named_unit.dimensions.mass_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.time_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.electric_current_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.thermodynamic_temperature_exponent = 0.00000))
```

```
AND (SELF\named_unit.dimensions.amount_of_substance_exponent = 0.00000) AND
(SELF\named_unit.dimensions.luminous_intensity_exponent = 1.00000);
END_ENTITY;
```

```
ENTITY make_from_usage_option
SUBTYPE OF (product_definition_usage);
    ranking : INTEGER;
    ranking_rationale : text;
    quantity : measure_with_unit;
WHERE
    WR1:
        NOT ('NUMBER' IN TYPEOF(quantity.value_component)) OR
(quantity.value_component > 0);
END_ENTITY;
```

```
ENTITY manifold_solid_brep
SUBTYPE OF (solid_model);
    outer : closed_shell;
END_ENTITY;
```

```
ENTITY mapped_item
SUBTYPE OF (representation_item);
    mapping_source : representation_map;
    mapping_target : representation_item;
WHERE
    WR1:
        acyclic_mapped_representation(using_representations(SELF), [ SELF
]);
END_ENTITY;
```

```
ENTITY mass_measure_with_unit
SUBTYPE OF (measure_with_unit);
WHERE
    WR1:
        'PLANT_SPATIAL_CONFIGURATION.MASS_UNIT' IN
TYPEOF(SELF\measure_with_unit.unit_component);
END_ENTITY;
```

```
ENTITY mass_unit
SUBTYPE OF (named_unit);
WHERE
    WR1:
        ((((((SELF\named_unit.dimensions.length_exponent = 0.00000) AND
(SELF\named_unit.dimensions.mass_exponent = 1.00000)) AND
(SELF\named_unit.dimensions.time_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.electric_current_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.thermodynamic_temperature_exponent = 0.00000))
AND (SELF\named_unit.dimensions.amount_of_substance_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.luminous_intensity_exponent = 0.00000);
END_ENTITY;
```

```
ENTITY material_designation;
    name : label;
    definitions : SET [1:?] OF characterized_definition;
```

ISO 10303-227:2005(E)

```
END_ENTITY;

ENTITY material_designation_characterization;
    name : label;
    description : text;
    designation : material_designation;
    property : characterized_material_property;
END_ENTITY;

ENTITY material_property
SUBTYPE OF (property_definition);
UNIQUE
    UR1 : SELF\property_definition.name,
SELF\property_definition.definition;
WHERE
    WR1:
        ('PLANT_SPATIAL_CONFIGURATION.CHARACTERIZED_OBJECT' IN
TYPEOF(SELF\property_definition.definition)) OR
        (SIZEOF(bag_to_set(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')) - QUERY (temp <*
bag_to_set(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')) |
('PLANT_SPATIAL_CONFIGURATION.' + 'MATERIAL_PROPERTY_REPRESENTATION' IN
TYPEOF(temp)))) = 0);
END_ENTITY;

ENTITY material_property_representation
SUBTYPE OF (property_definition_representation);
    dependent_environment : data_environment;
END_ENTITY;

ENTITY measure_representation_item
SUBTYPE OF (representation_item, measure_with_unit);
END_ENTITY;

ENTITY measure_with_unit
SUPERTYPE OF (ONEOF(length_measure_with_unit, mass_measure_with_unit,
time_measure_with_unit, electric_current_measure_with_unit,
thermodynamic_temperature_measure_with_unit,
celsius_temperature_measure_with_unit, amount_of_substance_measure_with_unit,
luminous_intensity_measure_with_unit, plane_angle_measure_with_unit,
solid_angle_measure_with_unit, ratio_measure_with_unit));
    value_component : measure_value;
    unit_component : unit;
WHERE
    WR1:
        valid_units(SELF);
END_ENTITY;

ENTITY mechanical_component_class
SUBTYPE OF (group, characterized_object);
END_ENTITY;

ENTITY mechanical_component_definition
```



```

SUBTYPE OF (product_definition);
END_ENTITY;

ENTITY mechanical_connector_class
SUBTYPE OF (group);
END_ENTITY;

ENTITY mechanical_system
SUBTYPE OF (product_definition);
WHERE
  WR1:
    SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
('PLANT_SPATIAL_CONFIGURATIONS.PLANT' IN
TYPEOF(pdr.relatng_product_definition.formation.of_product)) AND
(pdr.relatng_product_definition.frame_of_reference.name = 'functional
occurrence')))) = 1;
END_ENTITY;

ENTITY name_assignment
ABSTRACT SUPERTYPE;
  assigned_name : label;
DERIVE
  role : object_role := get_role(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'ROLE_ASSOCIATION.ITEM_WITH_ROLE')) <= 1;
END_ENTITY;

ENTITY name_attribute;
  attribute_value : label;
  named_item : name_attribute_select;
END_ENTITY;

ENTITY named_unit
SUPERTYPE OF (ONEOF(si_unit, conversion_based_unit,
context_dependent_unit) ANDOR ONEOF(length_unit, mass_unit, time_unit,
electric_current_unit, thermodynamic_temperature_unit,
amount_of_substance_unit, luminous_intensity_unit, plane_angle_unit,
solid_angle_unit, ratio_unit));
  dimensions : dimensional_exponents;
END_ENTITY;

ENTITY object_role;
  name : label;
  description : OPTIONAL text;
END_ENTITY;

ENTITY offset_curve_2d
SUBTYPE OF (curve);
  basis_curve : curve;
  distance : length_measure;
  self_intersect : LOGICAL;

```

ISO 10303-227:2005(E)

```
WHERE
  WR1:
    basis_curve.dim = 2;
END_ENTITY;

ENTITY offset_curve_3d
SUBTYPE OF (curve);
  basis_curve : curve;
  distance : length_measure;
  self_intersect : LOGICAL;
  ref_direction : direction;
WHERE
  WR1:
    (basis_curve.dim = 3) AND (ref_direction.dim = 3);
END_ENTITY;

ENTITY offset_surface
SUBTYPE OF (surface);
  basis_surface : surface;
  distance : length_measure;
  self_intersect : LOGICAL;
END_ENTITY;

ENTITY one_direction_repeat_factor
SUBTYPE OF (geometric_representation_item);
  repeat_factor : vector;
END_ENTITY;

ENTITY open_shell
SUBTYPE OF (connected_face_set);
END_ENTITY;

ENTITY organization;
  id : OPTIONAL identifier;
  name : label;
  description : OPTIONAL text;
END_ENTITY;

ENTITY organization_assignment
ABSTRACT SUPERTYPE;
  assigned_organization : organization;
  role : organization_role;
END_ENTITY;

ENTITY organization_role;
  name : label;
DERIVE
  description : text := get_description_value(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'DESCRIPTION_ATTRIBUTE.DESCRIBED_ITEM')) <= 1;
END_ENTITY;
```

```

ENTITY organizational_project;
  name : label;
  description : OPTIONAL text;
  responsible_organizations : SET [1:?] OF organization;
DERIVE
  id : identifier := get_id_value(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'ID_ATTRIBUTE.IDENTIFIED_ITEM')) <= 1;
END_ENTITY;

ENTITY oriented_closed_shell
SUBTYPE OF (closed_shell);
  closed_shell_element : closed_shell;
  orientation : BOOLEAN;
DERIVE
  SELF\connected_face_set.cfs_faces : SET [1:?] OF face :=
conditional_reverse(SELF.orientation, SELF.closed_shell_element.cfs_faces);
WHERE
  WR1:
    NOT ('PLANT_SPATIAL_CONFIGURATION.ORIENTED_CLOSED_SHELL' IN
TYPEOF(SELF.closed_shell_element));
END_ENTITY;

ENTITY oriented_edge
SUBTYPE OF (edge);
  edge_element : edge;
  orientation : BOOLEAN;
DERIVE
  SELF\edge.edge_start : vertex := boolean_choose(SELF.orientation,
SELF.edge_element.edge_start, SELF.edge_element.edge_end);
  SELF\edge.edge_end : vertex := boolean_choose(SELF.orientation,
SELF.edge_element.edge_end, SELF.edge_element.edge_start);
WHERE
  WR1:
    NOT ('PLANT_SPATIAL_CONFIGURATION.ORIENTED_EDGE' IN
TYPEOF(SELF.edge_element));
END_ENTITY;

ENTITY oriented_face
SUBTYPE OF (face);
  face_element : face;
  orientation : BOOLEAN;
DERIVE
  SELF\face.bounds : SET [1:?] OF face_bound :=
conditional_reverse(SELF.orientation, SELF.face_element.bounds);
WHERE
  WR1:
    NOT ('PLANT_SPATIAL_CONFIGURATION.ORIENTED_FACE' IN
TYPEOF(SELF.face_element));
END_ENTITY;

ENTITY oriented_open_shell

```

ISO 10303-227:2005(E)

```
SUBTYPE OF (open_shell);
  open_shell_element : open_shell;
  orientation : BOOLEAN;
DERIVE
  SELF\connected_face_set.cfs_faces : SET [1:?] OF face :=
conditional_reverse(SELF.orientation, SELF.open_shell_element.cfs_faces);
WHERE
  WR1:
    NOT ('PLANT_SPATIAL_CONFIGURATION.ORIENTED_OPEN_SHELL' IN
TYPEOF(SELF.open_shell_element));
END_ENTITY;

ENTITY oriented_path
SUBTYPE OF (path);
  path_element : path;
  orientation : BOOLEAN;
DERIVE
  SELF\path.edge_list : LIST [1:?] OF UNIQUE oriented_edge :=
conditional_reverse(SELF.orientation, SELF.path_element.edge_list);
WHERE
  WR1:
    NOT ('PLANT_SPATIAL_CONFIGURATION.ORIENTED_PATH' IN
TYPEOF(SELF.path_element));
END_ENTITY;

ENTITY outer_boundary_curve
SUBTYPE OF (boundary_curve);
END_ENTITY;

ENTITY parabola
SUBTYPE OF (conic);
  focal_dist : length_measure;
WHERE
  WR1:
    focal_dist <> 0.00000;
END_ENTITY;

ENTITY parametric_representation_context
SUBTYPE OF (representation_context);
END_ENTITY;

ENTITY path
SUPERTYPE OF (ONEOF(edge_loop, oriented_path))
SUBTYPE OF (topological_representation_item);
  edge_list : LIST [1:?] OF UNIQUE oriented_edge;
WHERE
  WR1:
    path_head_to_tail(SELF);
END_ENTITY;

ENTITY pcurve
SUBTYPE OF (curve);
  basis_surface : surface;
  reference_to_curve : definitional_representation;
```

```

WHERE
  WR1:
    SIZEOF(reference_to_curve\representation.items) = 1;
  WR2:
    'PLANT_SPATIAL_CONFIGURATION.CURVE' IN
  TYPEOF(reference_to_curve\representation.items[1]);
  WR3:

reference_to_curve\representation.items[1]\geometric_representation_item.dim
= 2;
  END_ENTITY;

ENTITY person;
  id : identifier;
  last_name : OPTIONAL label;
  first_name : OPTIONAL label;
  middle_names : OPTIONAL LIST [1:?] OF label;
  prefix_titles : OPTIONAL LIST [1:?] OF label;
  suffix_titles : OPTIONAL LIST [1:?] OF label;
WHERE
  WR1:
    EXISTS(last_name) OR EXISTS(first_name);
  END_ENTITY;

ENTITY person_and_organization;
  the_person : person;
  the_organization : organization;
DERIVE
  name : label := get_name_value(SELF);
  description : text := get_description_value(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'NAME_ATTRIBUTE.NAMED_ITEM')) <= 1;
  WR2:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'DESCRIPTION_ATTRIBUTE.DESCRIBED_ITEM')) <= 1;
  END_ENTITY;

ENTITY person_and_organization_assignment
ABSTRACT SUPERTYPE;
  assigned_person_and_organization : person_and_organization;
  role : person_and_organization_role;
  END_ENTITY;

ENTITY person_and_organization_role;
  name : label;
DERIVE
  description : text := get_description_value(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'DESCRIPTION_ATTRIBUTE.DESCRIBED_ITEM')) <= 1;
  END_ENTITY;

```

ISO 10303-227:2005(E)

```
ENTITY person_assignment
ABSTRACT SUPERTYPE;
    assigned_person : person;
    role : person_role;
END_ENTITY;

ENTITY person_role;
    name : label;
DERIVE
    description : text := get_description_value(SELF);
WHERE
    WR1:
        SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'DESCRIPTION_ATTRIBUTE.DESCRIBED_ITEM')) <= 1;
    END_ENTITY;

ENTITY pipe_class
SUBTYPE OF (group);
WHERE
    WR1:
        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS') |
('PLANT_SPATIAL_CONFIGURATIONS.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca))) | NOT (SIZEOF(QUERY (it <* aca.items | NOT
('PLANT_SPATIAL_CONFIGURATIONS.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))) =
0))) = 0;
    WR2:
        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS') |
('PLANT_SPATIAL_CONFIGURATIONS.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca))) | NOT (SIZEOF(QUERY (pcd <* QUERY (it <* aca.items |
('PLANT_SPATIAL_CONFIGURATIONS.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it))) |
NOT (SIZEOF(QUERY (acal <* USEDIN(pcd.formation_of_product,
'PLANT_SPATIAL_CONFIGURATIONS.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
class_in_tree(acal.assigned_class, 'pipe')) = 1))) = 0))) = 0;
    END_ENTITY;

ENTITY pipe_closure_fitting_class
SUBTYPE OF (group);
WHERE
    WR1:
        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS') |
('PLANT_SPATIAL_CONFIGURATIONS.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca))) | NOT (SIZEOF(QUERY (it <* aca.items | NOT
('PLANT_SPATIAL_CONFIGURATIONS.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))) =
0))) = 0;
    WR2:
        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS') |
('PLANT_SPATIAL_CONFIGURATIONS.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca))) | NOT (SIZEOF(QUERY (pcd <* QUERY (it <* aca.items |
('PLANT_SPATIAL_CONFIGURATIONS.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it))) |
```

```

NOT (SIZEOF(QUERY (acal <* USEDIN(pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATIONS.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
class_in_tree(acal.assigned_class, 'pipe closure')) = 1))) = 0))) = 0;
  END_ENTITY;

  ENTITY piping_component_class
  SUBTYPE OF (group, characterized_object);
  END_ENTITY;

  ENTITY piping_component_definition
  SUBTYPE OF (product_definition);
  END_ENTITY;

  ENTITY piping_connector_class
  SUBTYPE OF (group);
  END_ENTITY;

  ENTITY piping_spool_definition
  SUBTYPE OF (product_definition);
  WHERE
    WR1:
      SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATING_PRODUCT_DEFINITION')) > 1;
  END_ENTITY;

  ENTITY piping_support_definition
  SUBTYPE OF (product_definition);
  END_ENTITY;

  ENTITY piping_support_fitting_class
  SUBTYPE OF (group);
  WHERE
    WR1:
      SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATIONS.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (it <* aca.items| NOT
('PLANT_SPATIAL_CONFIGURATIONS.PIPING_SUPPORT_DEFINITION' IN TYPEOF(it)))) =
0))) = 0;
    WR2:
      SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATIONS.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (pcd <* QUERY (it <* aca.items|
('PLANT_SPATIAL_CONFIGURATIONS.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))|
NOT (SIZEOF(QUERY (acal <* USEDIN(pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATIONS.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
class_in_tree(acal.assigned_class, 'piping support')) = 1))) = 0))) = 0;
  END_ENTITY;

  ENTITY piping_system
  SUBTYPE OF (product_definition);
  WHERE
    WR1:

```

ISO 10303-227:2005(E)

```
        SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.PLANT' IN
TYPEOF(pdr.relating_product_definition.formation.of_product)) AND
(pdr.relating_product_definition.frame_of_reference.name = 'functional
occurrence')))) = 1;
    END_ENTITY;

    ENTITY placement
    SUPERTYPE OF (ONEOF(axis1_placement, axis2_placement_2d,
axis2_placement_3d))
    SUBTYPE OF (geometric_representation_item);
        location : cartesian_point;
    END_ENTITY;

    ENTITY planar_box
    SUBTYPE OF (planar_extent);
        placement : axis2_placement;
    END_ENTITY;

    ENTITY planar_extent
    SUBTYPE OF (geometric_representation_item);
        size_in_x : length_measure;
        size_in_y : length_measure;
    END_ENTITY;

    ENTITY plane
    SUBTYPE OF (elementary_surface);
    END_ENTITY;

    ENTITY plane_angle_measure_with_unit
    SUBTYPE OF (measure_with_unit);
    WHERE
        WR1:
            'PLANT_SPATIAL_CONFIGURATION.PLANE_ANGLE_UNIT' IN
TYPEOF(SELF\measure_with_unit.unit_component);
    END_ENTITY;

    ENTITY plane_angle_unit
    SUBTYPE OF (named_unit);
    WHERE
        WR1:
            ((((((SELF\named_unit.dimensions.length_exponent = 0.00000) AND
(SELF\named_unit.dimensions.mass_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.time_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.electric_current_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.thermodynamic_temperature_exponent = 0.00000))
AND (SELF\named_unit.dimensions.amount_of_substance_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.luminous_intensity_exponent = 0.00000);
    END_ENTITY;

    ENTITY plant
    SUBTYPE OF (product);
    WHERE
```



```

WR1:
    SIZEOF(QUERY (pscoa <* USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'PLANT_SPATIAL_CONFIGURATION_ORGANIZATION_ASSIGNMENT.ITEMS') |
(pscoa.role.name = 'plant operator')) + SIZEOF(QUERY (pscpaoa <*
USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'PLANT_SPATIAL_CONFIGURATION_PERSON_AND_ORGANIZATION_ASSIGNMENT.' + 'ITEMS') |
(pscpaoa.role.name = 'plant operator')))) <= 1;
WR2:
    SIZEOF(QUERY (pscoa <* USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'PLANT_SPATIAL_CONFIGURATION_ORGANIZATION_ASSIGNMENT.ITEMS') |
(pscoa.role.name = 'plant owner')) + SIZEOF(QUERY (pscpaoa <* USEDIN(SELf,
'PLANT_SPATIAL_CONFIGURATION.' +
'PLANT_SPATIAL_CONFIGURATION_PERSON_AND_ORGANIZATION_ASSIGNMENT.' + 'ITEMS') |
(pscpaoa.role.name = 'plant owner')) + SIZEOF(QUERY (pscpa <* USEDIN(SELf,
'PLANT_SPATIAL_CONFIGURATION.' +
'PLANT_SPATIAL_CONFIGURATION_PERSON_ASSIGNMENT.ITEMS') | (pscpa.role.name =
'plant owner')))) >= 1;
WR3:
    SIZEOF(QUERY (pscoa <* USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'PLANT_SPATIAL_CONFIGURATION_ORGANIZATION_ASSIGNMENT.ITEMS') |
(pscoa\organization_assignment.role.name = 'plant project owner')) +
SIZEOF(QUERY (pscpaoa <* USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'PLANT_SPATIAL_CONFIGURATION_PERSON_AND_ORGANIZATION_ASSIGNMENT.' + 'ITEMS') |
(pscpaoa\person_and_organization_assignment.role.name = 'plant project
owner')))) >= 1;
WR4:
    SIZEOF(QUERY (pdf <* USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_FORMATION.OF_PRODUCT') | NOT (SIZEOF(QUERY (pd <*
USEDIN(pdf, 'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION.FORMATION') |
(pd.frame_of_reference.name = 'functional occurrence')))) <= 1))) = 0;
END_ENTITY;

ENTITY plant_arrangement_definition
SUBTYPE OF (product_definition_with_associated_documents);
WHERE
WR1:
    SIZEOF(QUERY (pdr <* USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.MECHANICAL_SYSTEM' IN
TYPEOF(pdr.relatering_product_definition)))) = 1;
WR2:
    SIZEOF(QUERY (pdr <* USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATERING_PRODUCT_DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_SEGMENT_DEFINITION' IN
TYPEOF(pdr.related_product_definition)))) >= 1;
WR3:
    NOT (SIZEOF(QUERY (pd <* USEDIN(SELf,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
(SIZEOF(USEDIN(pd, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')) >= 1))) = 0) OR
(SIZEOF(QUERY (pd <* USEDIN(SELf,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') | NOT
(SIZEOF(QUERY (pdr <* USEDIN(pd, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') | (SIZEOF(QUERY (rep <*

```

ISO 10303-227:2005(E)

```
USEDIN(pdr.used_representation.context_of_items,
'PLANT_SPATIAL_CONFIGURATION.REPRESENTATION.CONTEXT_OF_ITEMS') | (SIZEOF(QUERY
(prop_def_rep <* USEDIN(rep, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.USED_REPRESENTATION') | (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.SITE',
'PLANT_SPATIAL_CONFIGURATION.SITE_BUILDING' ] *
TYPEOF(prop_def_rep.definition)) = 1) OR ('PLANT_SPATIAL_CONFIGURATION.PLANT'
IN TYPEOF(prop_def_rep.definition.definition.formation.of_product)))) >= 1)))
>= 1))) >= 1))) = 0);
WR4:
    SELF.frame_of_reference.name = 'functional definition';
WR5:
    SIZEOF(QUERY (pds <* QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pd))) | NOT
(SIZEOF(QUERY (sa <* USEDIN(pds,
'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT.OF_SHAPE') |
('PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_SEGMENT_TERMINATION' IN
TYPEOF(sa)) AND (sa.description = 'mechanical arrangement termination')) <=
2))) = 0;
    END_ENTITY;

ENTITY plant_arrangement_segment_definition
SUBTYPE OF (product_definition);
WHERE
    WR1:
        SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_DEFINITION' IN
TYPEOF(pdr.relating_product_definition)))) >= 1;
    WR2:
        SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.SHAPE_DEFINITION' IN TYPEOF(pd)))) >= 1;
    WR3:
        SELF.frame_of_reference\application_context_element.name =
'functional definition';
    WR4:
        SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') | NOT
(SIZEOF(QUERY (pdr <* USEDIN(pd, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'arrangement segment characteristics')) =
1))) = 0;
    WR5:
        SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') | NOT
(SIZEOF(QUERY (lsc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'arrangement segment characteristics')) | NOT
(SIZEOF(lsc.used_representation.items) >= 2)))) = 0))) = 0;
    WR6:
```

```

        SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (lsc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'arrangement segment characteristics'))| NOT
(SIZEOF(QUERY (it <* lsc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'design pressure')))) = 1))) = 0))) = 0;

```

WR7:

```

        SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (lsc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'arrangement segment characteristics'))| NOT
(SIZEOF(QUERY (it <* lsc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'design speed')))) = 1))) = 0))) = 0;

```

WR8:

```

        SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (lsc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'line segment characteristics'))| NOT
(SIZEOF(QUERY (it <* lsc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
('PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ])) = 2) AND (it.name = 'design
temperature')))) = 1))) = 0))) = 0;

```

WR9:

```

        SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (lsc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'arrangement segment characteristics'))| NOT
(SIZEOF(QUERY (it <* lsc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'design torque')))) = 1))) = 0))) = 0;

```

WR10:

```

        SIZEOF(QUERY (pds <* QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pd)))| NOT
(SIZEOF(QUERY (sa <* USEDIN(pds,
'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT.OF_SHAPE')|
('PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_SEGMENT_TERMINATION' IN
TYPEOF(sa)))))) = 2))) = 0;

```

END_ENTITY;

```

ENTITY plant_arrangement_segment_termination
SUBTYPE OF (shape_aspect);
WHERE

```

ISO 10303-227:2005(E)

```
WR1:
    (SELF.description = 'mechanical arrangement segment termination')
AND ('PLANT_SPATIAL_CONFIGURATIONS.PLANT_ARRANGEMENT_SEGMENT_DEFINITION' IN
TYPEOF(SELF.of_shape.definition)) XOR (((SELF.description = 'mechanical
arrangement termination') AND
('PLANT_SPATIAL_CONFIGURATIONS.PRODUCT_DEFINITION_RELATIONSHIP' IN
TYPEOF(SELF.of_shape.definition))) AND
('PLANT_SPATIAL_CONFIGURATIONS.PLANT_ARRANGEMENT_SEGMENT_DEFINITION' IN
TYPEOF(SELF.of_shape.definition.related_product_definition))) AND
('PLANT_SPATIAL_CONFIGURATIONS.PLANT_ARRANGEMENT_DEFINITION' IN
TYPEOF(SELF.of_shape.definition.relying_product_definition));

WR2:
    SIZEOF(QUERY (sar <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'SHAPE_ASPECT_RELATIONSHIP.RELATING_SHAPE_ASPECT') + USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'SHAPE_ASPECT_RELATIONSHIP.RELATED_SHAPE_ASPECT') | NOT (SIZEOF(TYPEOF(sar) *
[ 'PLANT_SPATIAL_CONFIGURATIONS.ARRANGEMENT_BRANCH_CONNECTION',
'PLANT_SPATIAL_CONFIGURATIONS.ARRANGEMENT_PLANT_ITEM_CONNECTION',
'PLANT_SPATIAL_CONFIGURATIONS.ARRANGEMENT_TERMINATION_CONNECTION' ]) = 1))) =
0;

WR3:
    (SIZEOF(QUERY (sar <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'SHAPE_ASPECT_RELATIONSHIP.RELATED_SHAPE_ASPECT') | (SIZEOF(TYPEOF(sar) * [
'PLANT_SPATIAL_CONFIGURATIONS.ARRANGEMENT_BRANCH_CONNECTION',
'PLANT_SPATIAL_CONFIGURATIONS.ARRANGEMENT_TERMINATION_CONNECTION' ]) = 1))) =
1) OR (SIZEOF(QUERY (sar <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'SHAPE_ASPECT_RELATIONSHIP.RELATING_SHAPE_ASPECT') | NOT
('PLANT_SPATIAL_CONFIGURATIONS.ARRANGEMENT_PLANT_ITEM_CONNECTION' IN
TYPEOF(sar)))) = 0);
    END_ENTITY;

ENTITY plant_csg_shape_representation
SUBTYPE OF (shape_representation);
WHERE
    WR1:
        SIZEOF(QUERY (item <* SELF.items | NOT (SIZEOF([
'PLANT_SPATIAL_CONFIGURATIONS.CSG_SOLID',
'PLANT_SPATIAL_CONFIGURATIONS.EXTRUDED_AREA_SOLID',
'PLANT_SPATIAL_CONFIGURATIONS.REVOLVED_AREA_SOLID',
'PLANT_SPATIAL_CONFIGURATIONS.AXIS2_PLACEMENT_3D',
'PLANT_SPATIAL_CONFIGURATIONS.MAPPED_ITEM' ] * TYPEOF(item)) = 1))) = 0;
    WR2:
        SIZEOF(QUERY (item <* SELF.items | (SIZEOF([
'PLANT_SPATIAL_CONFIGURATIONS.CSG_SOLID',
'PLANT_SPATIAL_CONFIGURATIONS.EXTRUDED_AREA_SOLID',
'PLANT_SPATIAL_CONFIGURATIONS.REVOLVED_AREA_SOLID',
'PLANT_SPATIAL_CONFIGURATIONS.MAPPED_ITEM' ] * TYPEOF(item)) = 1))) >= 1;
    WR3:
        SIZEOF(QUERY (item <* SELF.items |
('PLANT_SPATIAL_CONFIGURATIONS.CSG_SOLID' IN TYPEOF(item)) AND NOT
valid_advanced_csg_tree(item\csg_solid.tree_root_expression))) = 0;
    WR4:
        SIZEOF(QUERY (mi <* QUERY (item <* SELF.items |
('PLANT_SPATIAL_CONFIGURATIONS.MAPPED_ITEM' IN TYPEOF(item))) | NOT
```

```

('PLANT_SPATIAL_CONFIGURATIONS.' + 'PLANT_CSG_SHAPE_REPRESENTATION' IN
TYPEOF(mi\mapped_item.mapping_source.mapped_representation))) = 0;
  END_ENTITY;

ENTITY plant_design_csg_primitive
SUBTYPE OF (shape_representation, solid_model);
WHERE
  WR1:
    SELF.context_of_items.coordinate_space_dimension = 3;
  WR2:
    SELF\representation.name = SELF\representation_item.name;
  WR3:
    SELF\representation.name IN [ 'hemisphere', 'rectangle to ellipse',
'trimmed sphere', 'trimmed pyramid' ];
  WR4:
    NOT (SELF\representation.name = 'hemisphere') OR (SIZEOF(SELF.items)
= 2);
  WR5:
    NOT (SELF\representation.name = 'hemisphere') OR (SIZEOF(QUERY (it
<* SELF.items| (it.name = 'position') AND
('PLANT_SPATIAL_CONFIGURATIONS.AXIS2_PLACEMENT_3D' IN TYPEOF(it)))) = 1);
  WR6:
    NOT (SELF\representation.name = 'hemisphere') OR (SIZEOF(QUERY (it
<* SELF.items| (it.name = 'radius') AND (SIZEOF([
'PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2)))
= 1);
  WR7:
    NOT (SELF\representation.name = 'rectangle to ellipse') OR
(SIZEOF(SELF.items) = 8);
  WR8:
    NOT (SELF\representation.name = 'rectangle to ellipse') OR
(SIZEOF(QUERY (it <* SELF.items| (it.name = 'position') AND
('PLANT_SPATIAL_CONFIGURATIONS.AXIS2_PLACEMENT_3D' IN TYPEOF(it)))) = 1);
  WR9:
    NOT (SELF\representation.name = 'rectangle to ellipse') OR
(SIZEOF(QUERY (it <* SELF.items| ((it.name = 'x size') AND (SIZEOF([
'PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2))
AND ('PLANT_SPATIAL_CONFIGURATIONS.POSITIVE_LENGTH_MEASURE' IN
TYPEOF(it\measure_with_unit.value_component)))) = 1);
  WR10:
    NOT (SELF\representation.name = 'rectangle to ellipse') OR
(SIZEOF(QUERY (it <* SELF.items| ((it.name = 'y size') AND (SIZEOF([
'PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2))
AND ('PLANT_SPATIAL_CONFIGURATIONS.POSITIVE_LENGTH_MEASURE' IN
TYPEOF(it\measure_with_unit.value_component)))) = 1);
  WR11:
    NOT (SELF\representation.name = 'rectangle to ellipse') OR
(SIZEOF(QUERY (it <* SELF.items| ((it.name = 'height') AND (SIZEOF([
'PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2))

```

ISO 10303-227:2005(E)

```
AND ('PLANT_SPATIAL_CONFIGURATION.POSITIVE_LENGTH_MEASURE' IN  
TYPEOF(it\measure_with_unit.value_component))) = 1);
```

WR12:

```
NOT (SELF\representation.name = 'rectangle to ellipse') OR  
(SIZEOF(QUERY (it <* SELF.items| (it.name = 'x offset') AND (SIZEOF([  
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',  
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2)))  
= 1);
```

WR13:

```
NOT (SELF\representation.name = 'rectangle to ellipse') OR  
(SIZEOF(QUERY (it <* SELF.items| (it.name = 'y offset') AND (SIZEOF([  
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',  
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2)))  
= 1);
```

WR14:

```
NOT (SELF\representation.name = 'rectangle to ellipse') OR  
(SIZEOF(QUERY (it <* SELF.items| (it.name = 'semi axis 1') AND (SIZEOF([  
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',  
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2)))  
= 1);
```

WR15:

```
NOT (SELF\representation.name = 'rectangle to ellipse') OR  
(SIZEOF(QUERY (it <* SELF.items| (it.name = 'semi axis 2') AND (SIZEOF([  
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',  
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2)))  
= 1);
```

WR16:

```
NOT (SELF\representation.name = 'trimmed sphere') OR  
(SIZEOF(SELF.items) = 3);
```

WR17:

```
NOT (SELF\representation.name = 'trimmed sphere') OR (SIZEOF(QUERY  
(it <* SELF.items| (it.name = 'base sphere') AND  
('PLANT_SPATIAL_CONFIGURATION.SPHERE' IN TYPEOF(it)))) = 1);
```

WR18:

```
NOT (SELF\representation.name = 'trimmed sphere') OR (SIZEOF(QUERY  
(it <* SELF.items| (it.name = 'cutting plane normal direction') AND  
('PLANT_SPATIAL_CONFIGURATION.DIRECTION' IN TYPEOF(it)))) = 1);
```

WR19:

```
NOT (SELF\representation.name = 'trimmed sphere') OR (SIZEOF(QUERY  
(it <* SELF.items| (it.name = 'height') AND (SIZEOF([  
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',  
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2)))  
= 1);
```

WR20:

```
NOT (SELF\representation.name = 'trimmed sphere') OR (SIZEOF(QUERY  
(ht <* QUERY (it <* SELF.items| (it.name = 'height') AND (SIZEOF([  
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',  
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2))|  
NOT (SIZEOF(QUERY (sphre <* QUERY (it <* SELF.items| (it.name = 'base  
sphere') AND ('PLANT_SPATIAL_CONFIGURATION.SPHERE' IN TYPEOF(it)))| NOT ((-  
sphre.radius < ht.value_component) AND (ht.value_component < sphre.radius))))  
= 0))) = 0);
```

WR21:

```

        NOT (SELF\representation.name = 'trimmed pyramid') OR
(SIZEOF(SELF.items) = 8);
    WR22:
        NOT (SELF\representation.name = 'trimmed pyramid') OR (SIZEOF(QUERY
(it <* SELF.items| (it.name = 'base position') AND
('PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_3D' IN TYPEOF(it)))) = 1);
    WR23:
        NOT (SELF\representation.name = 'trimmed pyramid') OR (SIZEOF(QUERY
(it <* SELF.items| (it.name = 'base length') AND (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2)))
= 1);
    WR24:
        NOT (SELF\representation.name = 'trimmed pyramid') OR (SIZEOF(QUERY
(it <* SELF.items| (it.name = 'base width') AND (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2)))
= 1);
    WR25:
        NOT (SELF\representation.name = 'trimmed pyramid') OR (SIZEOF(QUERY
(it <* SELF.items| (it.name = 'height') AND (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2)))
= 1);
    WR26:
        NOT (SELF\representation.name = 'trimmed pyramid') OR (SIZEOF(QUERY
(it <* SELF.items| (it.name = 'top centre x') AND (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2)))
= 1);
    WR27:
        NOT (SELF\representation.name = 'trimmed pyramid') OR (SIZEOF(QUERY
(it <* SELF.items| (it.name = 'top centre y') AND (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2)))
= 1);
    WR28:
        NOT (SELF\representation.name = 'trimmed pyramid') OR (SIZEOF(QUERY
(it <* SELF.items| (it.name = 'top length') AND (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2)))
= 1);
    WR29:
        NOT (SELF\representation.name = 'trimmed pyramid') OR (SIZEOF(QUERY
(it <* SELF.items| (it.name = 'top width') AND (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ] * TYPEOF(it)) = 2)))
= 1);
    END_ENTITY;

    ENTITY plant_item_connection
    SUBTYPE OF (shape_aspect, shape_aspect_relationship);
    WHERE
        WR1:

```

ISO 10303-227:2005(E)

```
'PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTOR' IN
TYPEOF(SELF\shape_aspect_relationship.relying_shape_aspect);
WR2:
'PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTOR' IN
TYPEOF(SELF\shape_aspect_relationship.related_shape_aspect);
WR3:

SELF\shape_aspect.of_shape\property_definition.definition\product_definition.
frame_of_reference\application_context_element.name IN [ 'functional
occurrence', 'physical occurrence', 'functional definition', 'physical
definition' ];
WR4:

SELF\shape_aspect_relationship.relying_shape_aspect.of_shape\property_defini
tion.definition\product_definition.frame_of_reference\application_context_ele
ment.name =
SELF\shape_aspect_relationship.related_shape_aspect.of_shape\property_definit
ion.definition\product_definition.frame_of_reference\application_context_elem
ent.name;
WR5:
SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')) >= 1;
WR6:
SIZEOF(QUERY (pscca <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')| NOT (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.CONNECTION_FUNCTIONAL_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTION_MOTION_CLASS' ] *
TYPEOF(pscca.assigned_class)) >= 1))) = 0;
WR7:
SIZEOF(QUERY (pdr <* USEDIN(SELF.of_shape.definition,
'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_RELATIONSHIP.' +
'RELATED_PRODUCT_DEFINITION')| (pdr.name = 'support usage connection')))) <=
1;
END_ENTITY;

ENTITY plant_item_connector
SUBTYPE OF (shape_aspect);
WHERE
WR1:

SELF\shape_aspect.of_shape\property_definition.definition\product_definition.
frame_of_reference\application_context_element.name IN [ 'functional
definition', 'physical definition', 'functional occurrence', 'physical
occurrence' ];
WR2:
SIZEOF(QUERY (pic <* bag_to_set(USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'SHAPE_ASPECT_RELATIONSHIP.RELATED_SHAPE_ASPECT')) + bag_to_set(USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'SHAPE_ASPECT_RELATIONSHIP.RELATING_SHAPE_ASPECT'))|
('PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTION' IN TYPEOF(pic)))) <= 1;
WR3:
NOT (SIZEOF(QUERY (aca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
```



```
(SIZEOF(TYPEOF(aca.assigned_class) * [
'PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.MECHANICAL_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS' ]) = 1))) >= 1) OR
(NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') | (pd.name =
'service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
(pd.name = 'service characteristics')) | NOT (SIZEOF(QUERY (pdr <* USEDIN(sc,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'design service characteristics')) = 1))) =
0));
```

WR4:

```
(NOT (SIZEOF(QUERY (aca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
(SIZEOF(TYPEOF(aca.assigned_class) * [
'PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS' ]) = 1))) >= 1) OR NOT
(SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') | (pd.name =
'service characteristics')) >= 1)) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
(pd.name = 'service characteristics')) | NOT (SIZEOF(QUERY (dsc <* QUERY (pdr
<* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'design service characteristics')) |
(SIZEOF(dsc.used_representation.items) >= 2))) = 1))) = 0);
```

WR5:

```
NOT (SIZEOF(QUERY (aca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
(SIZEOF(TYPEOF(aca.assigned_class) * [
'PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS' ]) = 1))) >= 1) OR
(NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') | (pd.name =
'service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
(pd.name = 'service characteristics')) | NOT (SIZEOF(QUERY (dsc <* QUERY (pdr
<* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'design service characteristics')) | (1 <=
SIZEOF(QUERY (it <* dsc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name IN [ 'pressure', 'minimum pressure', 'maximum pressure' ])))) AND
(SIZEOF(QUERY (it <* dsc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name IN [ 'pressure', 'minimum pressure', 'maximum pressure' ])))) <= 2)))
= 1))) = 0));
```

WR6:

```
NOT (SIZEOF(QUERY (aca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS') |
(SIZEOF(TYPEOF(aca.assigned_class) * [
'PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
```

ISO 10303-227:2005(E)

```
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS' ]) = 1))) >= 1) OR
(NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| (pd.name =
'service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
(pd.name = 'service characteristics'))| NOT (SIZEOF(QUERY (dsc <* QUERY (pdr
<* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'design service characteristics'))|
(SIZEOF(QUERY (it <* dsc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'pressure')) <= 1))) = 1))) = 0));
```

WR7:

```
NOT (SIZEOF(QUERY (aca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
(SIZEOF(TYPEOF(aca.assigned_class) * [
'PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS' ]) = 1))) >= 1) OR
(NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| (pd.name =
'service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
(pd.name = 'service characteristics'))| NOT (SIZEOF(QUERY (dsc <* QUERY (pdr
<* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'design service characteristics'))|
(SIZEOF(QUERY (it <* dsc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'minimum pressure')) <= 1))) = 1))) = 0));
```

WR8:

```
NOT (SIZEOF(QUERY (aca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
(SIZEOF(TYPEOF(aca.assigned_class) * [
'PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS' ]) = 1))) >= 1) OR
(NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| (pd.name =
'service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
(pd.name = 'service characteristics'))| NOT (SIZEOF(QUERY (dsc <* QUERY (pdr
<* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'design service characteristics'))|
(SIZEOF(QUERY (it <* dsc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'maximum pressure')) <= 1))) = 1))) = 0));
```

WR9:

```
NOT (SIZEOF(QUERY (aca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
(SIZEOF(TYPEOF(aca.assigned_class) * [
'PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS' ]) = 1))) >= 1) OR
(NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| (pd.name =
```

```
'service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
(pd.name = 'service characteristics'))| NOT (SIZEOF(QUERY (dsc <* QUERY (pdr
<* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'design service characteristics'))| (1 <=
SIZEOF(QUERY (it <* dsc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
('PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ])) = 2) AND (it.name IN [
'temperature', 'minimum temperature', 'maximum temperature' ]))) AND
(SIZEOF(QUERY (it <* dsc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
('PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ])) = 2) AND (it.name IN [
'temperature', 'minimum temperature', 'maximum temperature' ]))) <= 2))) =
1))) = 0));
```

WR10:

```
NOT (SIZEOF(QUERY (aca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
(SIZEOF(TYPEOF(aca.assigned_class) * [
'PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS' ])) = 1))) >= 1) OR
(NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| (pd.name =
'service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
(pd.name = 'service characteristics'))| NOT (SIZEOF(QUERY (dsc <* QUERY (pdr
<* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'design service characteristics'))|
(SIZEOF(QUERY (it <* dsc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
('PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ])) = 2) AND (it.name =
'temperature')) <= 1))) = 1))) = 0));
```

WR11:

```
NOT (SIZEOF(QUERY (aca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
(SIZEOF(TYPEOF(aca.assigned_class) * [
'PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS' ])) = 1))) >= 1) OR
(NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| (pd.name =
'service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
(pd.name = 'service characteristics'))| NOT (SIZEOF(QUERY (dsc <* QUERY (pdr
<* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'design service characteristics'))|
(SIZEOF(QUERY (it <* dsc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
('PLANT_SPATIAL_CONFIGURATION.' +
```

ISO 10303-227:2005(E)

```
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ]) = 2) AND (it.name =
'minimum temperature')) (<= 1))) = 1))) = 0));
  WR12:
    NOT (SIZEOF(QUERY (aca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
(SIZEOF(TYPEOF(aca.assigned_class) * [
'PLANT_SPATIAL_CONFIGURATION.PIPING_CONNECTOR_CLASS',
'PLANT_SPATIAL_CONFIGURATION.CONNECTOR_END_TYPE_CLASS' ]) = 1))) >= 1) OR
(NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| (pd.name =
'service characteristics')) >= 1) OR (SIZEOF(QUERY (sc <* QUERY (pd <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')|
(pd.name = 'service characteristics'))| NOT (SIZEOF(QUERY (dsc <* QUERY (pdr
<* USEDIN(sc, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'design service characteristics'))|
(SIZEOF(QUERY (it <* dsc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
('PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ]) = 2) AND (it.name =
'maximum temperature')) (<= 1))) = 1))) = 0));
  WR13:
    NOT
    (SELF\shape_aspect.of_shape\property_definition.definition\product_definition
.frame_of_reference\application_context_element.name IN [ 'functional
definition', 'functional occurrence' ]) OR (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATION.SHAPE_REPRESENTATION' IN
TYPEOF(pdr.used_representation)))) = 0);
  END_ENTITY;

  ENTITY plant_item_interference
  SUBTYPE OF (product_definition_relationship);
  END_ENTITY;

  ENTITY plant_item_route
  SUBTYPE OF (product_definition_shape);
  WHERE
  WR1:

SELF\property_definition.definition\product_definition.frame_of_reference\app
lication_context_element.name = 'physical occurrence';
  WR2:
    (SIZEOF(TYPEOF(SELF\property_definition.definition) * [
'PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_DEFINITION',
'PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_DEFINITION' ]) = 1) XOR
(SIZEOF(TYPEOF(SELF\property_definition.definition) * [
'PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_DEFINITION',
'PLANT_SPATIAL_CONFIGURATION.PLANT_ARRANGEMENT_SEGMENT_DEFINITION' ]) = 1);
  END_ENTITY;

  ENTITY plant_item_weight_representation
  SUBTYPE OF (property_definition_representation);
```

```

WHERE
  WR1:
    SELF.used_representation.name = 'item weight';
  WR2:
    SIZEOF(SELF.used_representation.items) >= 2;
  WR3:
    SIZEOF(QUERY (it <* SELF.used_representation.items| (it.name IN [
'weight value', 'maximum weight value', 'minimum weight value' ]) AND NOT
(SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.QUALIFIED_REPRESENTATION_ITEM' ]) = 2))) = 0;
  WR4:
    SIZEOF(QUERY (it <* SELF.used_representation.items|
('PLANT_SPATIAL_CONFIGURATIONS.GEOMETRIC_REPRESENTATION_ITEM' IN TYPEOF(it))
AND (it.name = 'centre of gravity')))) = 1;
  WR5:
    (1 <= SIZEOF(QUERY (it <* SELF.used_representation.items| (it.name
IN [ 'weight value', 'maximum weight value', 'minimum weight value' ])))) AND
(SIZEOF(QUERY (it <* SELF.used_representation.items| (it.name IN [ 'weight
value', 'maximum weight value', 'minimum weight value' ])))) <= 2);
  WR6:
    SIZEOF(QUERY (it <*
SELF\property_definition_representation.used_representation.items| (it.name
IN [ 'maximum weight value', 'minimum weight value' ]) AND NOT (SIZEOF(QUERY
(tq <* QUERY (qual <* it\qualified_representation_item.qualifiers|
('PLANT_SPATIAL_CONFIGURATIONS.TYPE_QUALIFIER' IN TYPEOF(qual))))| (tq.name =
'operating')))) = 1))) = 0;
  END_ENTITY;

ENTITY plant_line_definition
  SUBTYPE OF (product_definition_with_associated_documents);
  WHERE
    WR1:
      SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')|
('PLANT_SPATIAL_CONFIGURATIONS.PIPING_SYSTEM' IN
TYPEOF(pdr.relating_product_definition)))) = 1;
    WR2:
      SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATING_PRODUCT_DEFINITION')|
('PLANT_SPATIAL_CONFIGURATIONS.PLANT_LINE_SEGMENT_DEFINITION' IN
TYPEOF(pdr.related_product_definition)))) >= 1;
    WR3:
      NOT (SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION')|
(SIZEOF(USEDIN(pd, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')) >= 1))) = 0) OR
(SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (pdr <* USEDIN(pd, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')| (SIZEOF(QUERY (rep <*
USEDIN(pdr.used_representation.context_of_items,
'PLANT_SPATIAL_CONFIGURATIONS.REPRESENTATION.CONTEXT_OF_ITEMS')| (SIZEOF(QUERY
(prop_def_rep <* USEDIN(rep, 'PLANT_SPATIAL_CONFIGURATIONS.' +

```

ISO 10303-227:2005(E)

```
'PROPERTY_DEFINITION_REPRESENTATION.USED_REPRESENTATION')| (SIZEOF([
'PLANT_SPATIAL_CONFIGURATIONSITE',
'PLANT_SPATIAL_CONFIGURATIONSITE_BUILDING' ] *
TYPEOF(prop_def_rep.definition)) = 1) OR ('PLANT_SPATIAL_CONFIGURATIONS.PLANT'
IN TYPEOF(prop_def_rep.definition.definition.formation.of_product)))) >= 1)))
>= 1))) >= 1))) = 0);
    WR4:
        SELF.frame_of_reference.name = 'functional definition';
    WR5:
        SIZEOF(QUERY (pds <* QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATIONS.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pd)))| NOT
(SIZEOF(QUERY (sa <* USEDIN(pds,
'PLANT_SPATIAL_CONFIGURATIONS.SHAPE_ASPECT.OF_SHAPE')|
('PLANT_SPATIAL_CONFIGURATIONS.PLANT_LINE_SEGMENT_TERMINATION' IN TYPEOF(sa))
AND (sa.description = 'piping line termination')) <= 2))) = 0;
    END_ENTITY;

ENTITY plant_line_segment_definition
SUBTYPE OF (product_definition);
WHERE
    WR1:
        SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')|
('PLANT_SPATIAL_CONFIGURATIONS.PLANT_LINE_DEFINITION' IN
TYPEOF(pdr.relating_product_definition)))) >= 1;
    WR2:
        SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATIONS.SHAPE_DEFINITION' IN TYPEOF(pd)))) >= 1;
    WR3:
        SELF.frame_of_reference\application_context_element.name =
'functional definition';
    WR4:
        SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (pdr <* USEDIN(pd, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'line segment characteristics')) = 1))) = 0;
    WR5:
        SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (lsc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'line segment characteristics'))| NOT
(SIZEOF(lsc.used_representation.items) >= 2))) = 0))) = 0;
    WR6:
        SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (lsc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'line segment characteristics'))| NOT
```

```
(SIZEOF(QUERY (it <* lsc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'design pressure')))) = 1))) = 0))) = 0;
```

WR7:

```
SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (lsc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'line segment characteristics'))| NOT
(SIZEOF(QUERY (it <* lsc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
('PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT' ])) = 2) AND (it.name = 'design
temperature')))) = 1))) = 0))) = 0;
```

WR8:

```
SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (lsc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'line segment characteristics'))| NOT
(SIZEOF(QUERY (it <* lsc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ])) = 2) AND (it.name =
'elevation')))) <= 1))) = 0))) = 0;
```

WR9:

```
SIZEOF(QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (lsc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'line segment characteristics'))| NOT
(SIZEOF(QUERY (it <* lsc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'corrosion allowance')))) <= 1))) = 0))) = 0;
```

WR10:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'segment insulation')))) >= 1) OR (SIZEOF(QUERY (si <* QUERY (pdr <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'segment insulation'))| NOT (SIZEOF(QUERY (pd <* USEDIN(si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (pds <* QUERY (pdr <* USEDIN(pd, 'PLANT_SPATIAL_CONFIGURATION.'
+ 'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pdr))|
(pds.used_representation.name = 'segment insulation characteristics')))) =
1))) = 0))) = 0);
```

WR11:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
```

ISO 10303-227:2005(E)

```
'segment insulation')) >= 1) OR (SIZEOF(QUERY (si <* QUERY (pdr <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'segment insulation'))| NOT (SIZEOF(QUERY (pd <* USEDIN(si,
'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN(pd,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATIONS.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pdr)))|
(pds.used_representation.name = 'segment insulation characteristics'))|
(SIZEOF(sic.used_representation.items) >= 1))) = 1))) = 0))) = 0);
```

WR12:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'segment insulation')) >= 1) OR (SIZEOF(QUERY (si <* QUERY (pdr <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'segment insulation'))| NOT (SIZEOF(QUERY (pd <* USEDIN(si,
'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN(pd,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATIONS.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pdr)))|
(pds.used_representation.name = 'segment insulation characteristics'))| (1 <=
SIZEOF(QUERY (it <* sic.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.LENGTH_MEASURE_WITH_UNIT' ])) = 2) AND (it.name
IN [ 'thickness', 'minimum thickness', 'maximum thickness' ]))) AND
(SIZEOF(QUERY (it <* sic.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.LENGTH_MEASURE_WITH_UNIT' ])) = 2) AND (it.name
IN [ 'thickness', 'minimum thickness', 'maximum thickness' ]))) <= 2))) =
1))) = 0))) = 0);
```

WR13:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'segment insulation')) >= 1) OR (SIZEOF(QUERY (si <* QUERY (pdr <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'segment insulation'))| NOT (SIZEOF(QUERY (pd <* USEDIN(si,
'PLANT_SPATIAL_CONFIGURATIONS.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN(pd,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATIONS.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pdr)))|
(pds.used_representation.name = 'segment insulation characteristics'))|
(SIZEOF(QUERY (it <* sic.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.LENGTH_MEASURE_WITH_UNIT' ])) = 2) AND (it.name =
'thickness')) <= 1))) = 1))) = 0))) = 0);
```

WR14:


```

NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'segment insulation')) >= 1) OR (SIZEOF(QUERY (si <* QUERY (pdr <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'segment insulation'))| NOT (SIZEOF(QUERY (pd <* USEDIN(si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN(pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pdr)))|
(pds.used_representation.name = 'segment insulation characteristics'))|
(SIZEOF(QUERY (it <* sic.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ])) = 2) AND (it.name =
'minimum thickness')) <= 1))) = 1))) = 0))) = 0);

```

WR15:

```

NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'segment insulation')) >= 1) OR (SIZEOF(QUERY (si <* QUERY (pdr <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'segment insulation'))| NOT (SIZEOF(QUERY (pd <* USEDIN(si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN(pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pdr)))|
(pds.used_representation.name = 'segment insulation characteristics'))|
(SIZEOF(QUERY (it <* sic.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE_WITH_UNIT' ])) = 2) AND (it.name =
'maximum thickness')) <= 1))) = 1))) = 0))) = 0);

```

WR16:

```

NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'segment insulation')) >= 1) OR (SIZEOF(QUERY (si <* QUERY (pdr <*
USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')| (pdr.name =
'segment insulation'))| NOT (SIZEOF(QUERY (pd <* USEDIN(si,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION')| NOT
(SIZEOF(QUERY (sic <* QUERY (pds <* QUERY (pdr <* USEDIN(pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pdr)))|
(pds.used_representation.name = 'segment insulation characteristics'))|
(SIZEOF(QUERY (it <* sic.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.DESCRPTIVE_REPRESENTATION_ITEM' IN TYPEOF(it))
AND (it.name = 'boundaries')) <= 1))) = 1))) = 0))) = 0);

```

WR17:

ISO 10303-227:2005(E)

```
        SIZEOF(QUERY (pds <* QUERY (pd <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION.DEFINITION') |
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN TYPEOF(pd))) | NOT
(SIZEOF(QUERY (sa <* USEDIN(pds,
'PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT.OF_SHAPE') |
('PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_TERMINATION' IN
TYPEOF(sa)))) = 2))) = 0;
        END_ENTITY;

        ENTITY plant_line_segment_termination
        SUBTYPE OF (shape_aspect);
        WHERE
            WR1:
                (SELF.description = 'piping line segment termination') AND
                ('PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_DEFINITION' IN
                TYPEOF(SELF.of_shape.definition)) XOR (((SELF.description = 'piping line
                termination') AND
                ('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_RELATIONSHIP' IN
                TYPEOF(SELF.of_shape.definition))) AND
                ('PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_SEGMENT_DEFINITION' IN
                TYPEOF(SELF.of_shape.definition.related_product_definition))) AND
                ('PLANT_SPATIAL_CONFIGURATION.PLANT_LINE_DEFINITION' IN
                TYPEOF(SELF.of_shape.definition.relying_product_definition));
            WR2:
                SIZEOF(QUERY (sar <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
                'SHAPE_ASPECT_RELATIONSHIP.RELATING_SHAPE_ASPECT') + USEDIN(SELF,
                'PLANT_SPATIAL_CONFIGURATION.' +
                'SHAPE_ASPECT_RELATIONSHIP.RELATED_SHAPE_ASPECT') | NOT (SIZEOF(TYPEOF(sar) *
                [ 'PLANT_SPATIAL_CONFIGURATION.LINE_BRANCH_CONNECTION',
                'PLANT_SPATIAL_CONFIGURATION.LINE_PLANT_ITEM_CONNECTION',
                'PLANT_SPATIAL_CONFIGURATION.LINE_TERMINATION_CONNECTION' ]) = 1))) = 0;
            WR3:
                (SIZEOF(QUERY (sar <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
                'SHAPE_ASPECT_RELATIONSHIP.RELATED_SHAPE_ASPECT') | (SIZEOF(TYPEOF(sar) * [
                'PLANT_SPATIAL_CONFIGURATION.LINE_BRANCH_CONNECTION',
                'PLANT_SPATIAL_CONFIGURATION.LINE_TERMINATION_CONNECTION' ]) = 1))) = 1) OR
                (SIZEOF(QUERY (sar <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
                'SHAPE_ASPECT_RELATIONSHIP.RELATING_SHAPE_ASPECT') | NOT
                ('PLANT_SPATIAL_CONFIGURATION.LINE_PLANT_ITEM_CONNECTION' IN TYPEOF(sar)))) =
                0);
        END_ENTITY;

        ENTITY plant_spatial_configuration_change_assignment
        SUBTYPE OF (action_assignment);
        items : SET [1:?] OF change_item;
        WHERE
            WR1:
                'PLANT_SPATIAL_CONFIGURATION.CHANGE_ACTION' IN
                TYPEOF(SELF.assigned_action);
        END_ENTITY;

        ENTITY plant_spatial_configuration_organization_assignment
        SUBTYPE OF (organization_assignment);
        items : SET [1:?] OF plant_spatial_configuration_organization_item;
```

```

WHERE
  WR1:
    plant_spatial_configuration_organization_correlation(SELf);
END_ENTITY;

ENTITY plant_spatial_configuration_person_and_organization_assignment
SUBTYPE OF (person_and_organization_assignment);
  items : SET [1:?] OF
plant_spatial_configuration_person_and_organization_item;
WHERE
  WR1:

plant_spatial_configuration_person_and_organization_correlation(SELf);
END_ENTITY;

ENTITY plant_spatial_configuration_person_assignment
SUBTYPE OF (person_assignment);
  items : SET [1:?] OF plant_spatial_configuration_person_item;
WHERE
  WR1:
    plant_spatial_configuration_person_correlation(SELf);
END_ENTITY;

ENTITY point
SUPERTYPE OF (ONEOF(cartesian_point, point_on_curve, point_on_surface,
point_replica, degenerate_pcurve))
SUBTYPE OF (geometric_representation_item);
END_ENTITY;

ENTITY point_on_curve
SUBTYPE OF (point);
  basis_curve : curve;
  point_parameter : parameter_value;
END_ENTITY;

ENTITY point_on_surface
SUBTYPE OF (point);
  basis_surface : surface;
  point_parameter_u : parameter_value;
  point_parameter_v : parameter_value;
END_ENTITY;

ENTITY point_replica
SUBTYPE OF (point);
  parent_pt : point;
  transformation : cartesian_transformation_operator;
WHERE
  WR1:
    transformation.dim = parent_pt.dim;
  WR2:
    acyclic_point_replica(SELf, parent_pt);
END_ENTITY;

ENTITY point_style;

```

ISO 10303-227:2005(E)

```
    name : label;
    marker : marker_select;
    marker_size : size_select;
    marker_colour : colour;
END_ENTITY;
```

```
ENTITY poly_loop
SUBTYPE OF (loop, geometric_representation_item);
    polygon : LIST [3:?] OF UNIQUE cartesian_point;
END_ENTITY;
```

```
ENTITY polyline
SUBTYPE OF (bounded_curve);
    points : LIST [2:?] OF cartesian_point;
END_ENTITY;
```

```
ENTITY pre_defined_colour
SUBTYPE OF (pre_defined_item, colour);
END_ENTITY;
```

```
ENTITY pre_defined_curve_font
SUBTYPE OF (pre_defined_item);
END_ENTITY;
```

```
ENTITY pre_defined_item;
    name : label;
END_ENTITY;
```

```
ENTITY pre_defined_text_font
SUBTYPE OF (pre_defined_item);
END_ENTITY;
```

```
ENTITY precision_qualifier;
    precision_value : INTEGER;
END_ENTITY;
```

```
ENTITY presentation_area
SUBTYPE OF (presentation_representation);
WHERE
    WR1:
        (SIZEOF(QUERY (ais <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'AREA_IN_SET.AREA') | (SIZEOF(USEDIN(ais, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRESENTATION_SIZE.UNIT')) = 1))) > 0) OR (SIZEOF(USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' + 'PRESENTATION_SIZE.UNIT')) = 1);
END_ENTITY;
```

```
ENTITY presentation_layer_assignment;
    name : label;
    description : text;
    assigned_items : SET [1:?] OF layered_item;
END_ENTITY;
```

```
ENTITY presentation_layer_usage;
    assignment : presentation_layer_assignment;
```

```

    presentation : presentation_representation;
UNIQUE
    UR1 : assignment, presentation;
END_ENTITY;

ENTITY presentation_representation
SUBTYPE OF (representation);
WHERE
    WR1:

SELF\representation.context_of_items\geometric_representation_context.coordinate_space_dimension = 2;
    WR2:
        'PLANT_SPATIAL_CONFIGURATIONS.GEOMETRIC_REPRESENTATION_CONTEXT' IN
TYPEOF(SELF\representation.context_of_items);
    END_ENTITY;

ENTITY presentation_representation_relationship
SUBTYPE OF (representation_relationship_with_transformation);
WHERE
    WR1:
        'PLANT_SPATIAL_CONFIGURATIONS.PRESENTATION_REPRESENTATION' IN
TYPEOF(SELF\representation_relationship.rep_1);
    WR2:
        'PLANT_SPATIAL_CONFIGURATIONS.PRESENTATION_REPRESENTATION' IN
TYPEOF(SELF\representation_relationship.rep_2);
    WR3:
        acyclic_presentation_representation_relationship(SELF, [
SELF\representation_relationship.rep_2 ]);
    WR4:
        NOT (('PLANT_SPATIAL_CONFIGURATIONS.PRESENTATION_AREA' IN
TYPEOF(SELF\representation_relationship.rep_1)) AND NOT (SIZEOF([
('PLANT_SPATIAL_CONFIGURATIONS.' + 'PRODUCT_DATA_REPRESENTATION_VIEW'),
('PLANT_SPATIAL_CONFIGURATIONS.' + 'VIEW_DEPENDENT_ANNOTATION_REPRESENTATION')
] * TYPEOF(SELF\representation_relationship.rep_2)) = 0));
    WR5:
        NOT (('PLANT_SPATIAL_CONFIGURATIONS.PRESENTATION_VIEW' IN
TYPEOF(SELF\representation_relationship.rep_1)) AND NOT (SIZEOF([
('PLANT_SPATIAL_CONFIGURATIONS.' + 'PRESENTATION_AREA'),
('PLANT_SPATIAL_CONFIGURATIONS.' + 'PRESENTATION_VIEW'),
('PLANT_SPATIAL_CONFIGURATIONS.' + 'AREA_DEPENDENT_ANNOTATION_REPRESENTATION')
] * TYPEOF(SELF\representation_relationship.rep_2)) = 0));
    WR6:
        NOT ('PLANT_SPATIAL_CONFIGURATIONS.PRESENTATION_VIEW' IN
TYPEOF(SELF\representation_relationship.rep_2)) XOR
('PLANT_SPATIAL_CONFIGURATIONS.PRESENTATION_AREA' IN
TYPEOF(SELF\representation_relationship.rep_1));
    WR7:
        NOT ('PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DATA_REPRESENTATION_VIEW' IN
TYPEOF(SELF\representation_relationship.rep_1) +
TYPEOF(SELF\representation_relationship.rep_2)) XOR
('PLANT_SPATIAL_CONFIGURATIONS.PRESENTATION_VIEW' IN
TYPEOF(SELF\representation_relationship.rep_1)) AND

```

ISO 10303-227:2005(E)

```
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DATA_REPRESENTATION_VIEW' IN
TYPEOF(SELF\representation_relationship.rep_2));
    WR8:
        'PLANT_SPATIAL_CONFIGURATION.GRAPHICAL_TRANSFORMATION' IN
TYPEOF(SELF\representation_relationship_with_transformation.transformation_op
erator);
    END_ENTITY;

ENTITY presentation_scaled_placement
SUBTYPE OF (geometric_representation_item);
    placement : axis2_placement;
    scaling : positive_ratio_measure;
END_ENTITY;

ENTITY presentation_set;
INVERSE
    areas : SET [1:?] OF area_in_set FOR in_set;
END_ENTITY;

ENTITY presentation_size;
    unit : presentation_size_assignment_select;
    size : planar_box;
WHERE
    WR1:
        ('PLANT_SPATIAL_CONFIGURATION.PRESENTATION_REPRESENTATION' IN
TYPEOF(SELF.unit)) AND item_in_context(SELF.size,
SELF.unit\representation.context_of_items) OR
        ('PLANT_SPATIAL_CONFIGURATION.AREA_IN_SET' IN TYPEOF(SELF.unit)) AND
        (SIZEOF(QUERY (ais <* SELF.unit\area_in_set.in_set.areas| NOT
item_in_context(SELF.size, ais.area\representation.context_of_items))) = 0);
    END_ENTITY;

ENTITY presentation_style_assignment;
    styles : SET [1:?] OF presentation_style_select;
WHERE
    WR1:
        SIZEOF(QUERY (style1 <* SELF.styles| NOT (SIZEOF(QUERY (style2 <*
SELF.styles - style1| NOT ((TYPEOF(style1) <> TYPEOF(style2)) OR (SIZEOF([
('PLANT_SPATIAL_CONFIGURATION.' + 'SURFACE_STYLE_USAGE'),
('PLANT_SPATIAL_CONFIGURATION.' + 'EXTERNALLY_DEFINED_STYLE') ] *
TYPEOF(style1)) = 1)))) = 0))) = 0;
    WR2:
        SIZEOF(QUERY (style1 <* SELF.styles|
('PLANT_SPATIAL_CONFIGURATION.SURFACE_STYLE_USAGE' IN TYPEOF(style1)))) <= 2;
    END_ENTITY;

ENTITY presentation_style_by_context
SUBTYPE OF (presentation_style_assignment);
    style_context : style_context_select;
END_ENTITY;

ENTITY presentation_view
SUBTYPE OF (presentation_representation);
END_ENTITY;
```

```

ENTITY presentation_with_association
SUBTYPE OF (presentation_representation);
WHERE
  WR1:
    SIZEOF(SELF\representation.items) = 1;
  WR2:
    SIZEOF(QUERY (pir <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PRESENTED_ITEM_REPRESENTATION.PRESENTATION')| NOT
('PLANT_SPATIAL_CONFIGURATION.PRESENTED_ITEM_WITH_ASSOCIATION' IN
TYPEOF(pir.item)))) = 0;
  WR3:
    SIZEOF(QUERY (it <* SELF.items| NOT (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.ANNOTATION_SYMBOL_OCCURRENCE',
'PLANT_SPATIAL_CONFIGURATION.ANNOTATION_TEXT_OCCURRENCE',
'PLANT_SPATIAL_CONFIGURATION.ANNOTATION_CURVE_OCCURRENCE',
'PLANT_SPATIAL_CONFIGURATION.ANNOTATION_POINT_OCCURRENCE' ] * TYPEOF(it)) =
1))) = 0;
END_ENTITY;

ENTITY presented_item
ABSTRACT SUPERTYPE;
END_ENTITY;

ENTITY presented_item_association
SUBTYPE OF (presented_item);
  items : SET [1:?] OF presented_item_select;
END_ENTITY;

ENTITY presented_item_representation;
  presentation : presentation_representation_select;
  item : presented_item;
END_ENTITY;

ENTITY presented_item_with_association
SUBTYPE OF (presented_item);
  items : SET [1:?] OF associated_item;
WHERE
  WR1:
    SIZEOF(QUERY (pir <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PRESENTED_ITEM_REPRESENTATION.ITEM')| NOT
('PLANT_SPATIAL_CONFIGURATION.PRESENTATION_WITH_ASSOCIATION' IN
TYPEOF(pir.presentation)))) = 0;
END_ENTITY;

ENTITY process_capability
SUBTYPE OF (property_definition);
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.PLANT' IN
TYPEOF(SELF.definition\product_definition.formation.of_product);
  WR2:
    SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.PROPERTY_DEFINITION_REPRESENTATION.' +

```

ISO 10303-227:2005(E)

```
'DEFINITION')| (pdr.used_representation.name = 'production capacity') AND NOT
(SIZEOF(QUERY (it <* pdr.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.DESCRPTIVE_REPRESENTATION_ITEM' IN TYPEOF(it))
AND (it.name = 'production type')) = 1))) = 0;
END_ENTITY;

ENTITY product;
  id : identifier;
  name : label;
  description : OPTIONAL text;
  frame_of_reference : SET [1:?] OF product_context;
END_ENTITY;

ENTITY product_context
SUBTYPE OF (application_context_element);
  discipline_type : label;
END_ENTITY;

ENTITY product_data_representation_view
SUBTYPE OF (presentation_representation);
WHERE
  WR1:
    SIZEOF(QUERY (item <* SELF\representation.items| NOT (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.CAMERA_IMAGE',
'PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT' ] * TYPEOF(item)) = 1))) = 0;
  WR2:
    SIZEOF(QUERY (item <* SELF\representation.items|
('PLANT_SPATIAL_CONFIGURATION.CAMERA_IMAGE' IN TYPEOF(item)))) >= 1;
END_ENTITY;

ENTITY product_definition;
  id : identifier;
  description : OPTIONAL text;
  formation : product_definition_formation;
  frame_of_reference : product_definition_context;
DERIVE
  name : label := get_name_value(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'NAME_ATTRIBUTE.NAMED_ITEM')) <= 1;
END_ENTITY;

ENTITY product_definition_context
SUBTYPE OF (application_context_element);
  life_cycle_stage : label;
END_ENTITY;

ENTITY product_definition_formation;
  id : identifier;
  description : OPTIONAL text;
  of_product : product;
UNIQUE
  UR1 : id, of_product;
```



```

END_ENTITY;

ENTITY product_definition_formation_relationship;
  id : identifier;
  name : label;
  description : OPTIONAL text;
  relating_product_definition_formation : product_definition_formation;
  related_product_definition_formation : product_definition_formation;
END_ENTITY;

ENTITY product_definition_formation_with_specified_source
SUBTYPE OF (product_definition_formation);
  make_or_buy : source;
END_ENTITY;

ENTITY product_definition_relationship;
  id : identifier;
  name : label;
  description : OPTIONAL text;
  relating_product_definition : product_definition;
  related_product_definition : product_definition;
END_ENTITY;

ENTITY product_definition_shape
SUBTYPE OF (property_definition);
UNIQUE
  UR1 : SELF\property_definition.definition;
WHERE
  WR1 :
    SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.CHARACTERIZED_PRODUCT_DEFINITION',
'PLANT_SPATIAL_CONFIGURATION.CHARACTERIZED_OBJECT' ] *
TYPEOF(SELF\property_definition.definition)) > 0;
END_ENTITY;

ENTITY product_definition_substitute;
  description : OPTIONAL text;
  context_relationship : product_definition_relationship;
  substitute_definition : product_definition;
DERIVE
  name : label := get_name_value(SELF);
WHERE
  WR1 :
    context_relationship.related_product_definition :<>:
substitute_definition;
  WR2 :
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'NAME_ATTRIBUTE.NAMED_ITEM')) <= 1;
END_ENTITY;

ENTITY product_definition_usage
SUPERTYPE OF (ONEOF(make_from_usage_option, assembly_component_usage))
SUBTYPE OF (product_definition_relationship);
UNIQUE

```

ISO 10303-227:2005(E)

```
    UR1 : SELF\product_definition_relationship.id,
SELF\product_definition_relationship.relying_product_definition,
SELF\product_definition_relationship.related_product_definition;
  WHERE
    WR1:
      acyclic_product_definition_relationship(SELF, [
SELF\product_definition_relationship.related_product_definition ],
'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_USAGE');
  END_ENTITY;

ENTITY product_definition_with_associated_documents
SUBTYPE OF (product_definition);
  documentation_ids : SET [1:?] OF document;
END_ENTITY;

ENTITY product_material_composition_relationship
SUBTYPE OF (product_definition_relationship);
  class : label;
  constituent_amount : SET [1:?] OF measure_with_unit;
  composition_basis : label;
  determination_method : text;
END_ENTITY;

ENTITY property_definition;
  name : label;
  description : OPTIONAL text;
  definition : characterized_definition;
DERIVE
  id : identifier := get_id_value(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'ID_ATTRIBUTE.IDENTIFIED_ITEM')) <= 1;
  END_ENTITY;

ENTITY property_definition_relationship;
  name : label;
  description : text;
  relating_property_definition : property_definition;
  related_property_definition : property_definition;
END_ENTITY;

ENTITY property_definition_representation;
  definition : represented_definition;
  used_representation : representation;
DERIVE
  description : text := get_description_value(SELF);
  name : label := get_name_value(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'DESCRIPTION_ATTRIBUTE.DESCRIBED_ITEM')) <= 1;
  WR2:
```

```

        SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'NAME_ATTRIBUTE.NAMED_ITEM')) <= 1;
    END_ENTITY;

    ENTITY purchase_assignment
    SUBTYPE OF (action_assignment);
        items : SET [1:?] OF purchase_item;
    END_ENTITY;

    ENTITY qualified_representation_item
    SUBTYPE OF (representation_item);
        qualifiers : SET [1:?] OF value_qualifier;
    WHERE
        WR1:
            SIZEOF(QUERY (temp <* qualifiers|
('PLANT_SPATIAL_CONFIGURATION.PRECISION_QUALIFIER' IN TYPEOF(temp)))) < 2;
    END_ENTITY;

    ENTITY quasi_uniform_curve
    SUBTYPE OF (b_spline_curve);
    END_ENTITY;

    ENTITY quasi_uniform_surface
    SUBTYPE OF (b_spline_surface);
    END_ENTITY;

    ENTITY ratio_measure_with_unit
    SUBTYPE OF (measure_with_unit);
    WHERE
        WR1:
            'PLANT_SPATIAL_CONFIGURATION.RATIO_UNIT' IN
    TYPEOF(SELF\measure_with_unit.unit_component);
    END_ENTITY;

    ENTITY ratio_unit
    SUBTYPE OF (named_unit);
    WHERE
        WR1:
            ((((((SELF\named_unit.dimensions.length_exponent = 0.00000) AND
(SELF\named_unit.dimensions.mass_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.time_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.electric_current_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.thermodynamic_temperature_exponent = 0.00000))
    AND (SELF\named_unit.dimensions.amount_of_substance_exponent = 0.00000)) AND
    (SELF\named_unit.dimensions.luminous_intensity_exponent = 0.00000);
    END_ENTITY;

    ENTITY rational_b_spline_curve
    SUBTYPE OF (b_spline_curve);
        weights_data : LIST [2:?] OF REAL;
    DERIVE
        weights : ARRAY [0:upper_index_on_control_points] OF REAL :=
list_to_array(weights_data, 0, upper_index_on_control_points);
    WHERE

```

ISO 10303-227:2005(E)

```
    WR1:
        SIZEOF(weights_data) =
SIZEOF(SELF\b_spline_curve.control_points_list);
    WR2:
        curve_weights_positive(SELF);
END_ENTITY;

ENTITY rational_b_spline_surface
SUBTYPE OF (b_spline_surface);
    weights_data : LIST [2:?] OF LIST [2:?] OF REAL;
DERIVE
    weights : ARRAY [0:u_upper] OF ARRAY [0:v_upper] OF REAL :=
make_array_of_array(weights_data, 0, u_upper, 0, v_upper);
WHERE
    WR1:
        (SIZEOF(weights_data) =
SIZEOF(SELF\b_spline_surface.control_points_list)) AND
        (SIZEOF(weights_data[1]) =
SIZEOF(SELF\b_spline_surface.control_points_list[1]));
    WR2:
        surface_weights_positive(SELF);
END_ENTITY;

ENTITY rectangular_composite_surface
SUBTYPE OF (bounded_surface);
    segments : LIST [1:?] OF LIST [1:?] OF surface_patch;
DERIVE
    n_u : INTEGER := SIZEOF(segments);
    n_v : INTEGER := SIZEOF(segments[1]);
WHERE
    WR1:
        SIZEOF(QUERY (s <* segments | (n_v <> SIZEOF(s)))) = 0;
    WR2:
        constraints_rectangular_composite_surface(SELF);
END_ENTITY;

ENTITY rectangular_pyramid
SUBTYPE OF (geometric_representation_item);
    position : axis2_placement_3d;
    xlength : positive_length_measure;
    ylength : positive_length_measure;
    height : positive_length_measure;
END_ENTITY;

ENTITY rectangular_trimmed_surface
SUBTYPE OF (bounded_surface);
    basis_surface : surface;
    u1 : parameter_value;
    u2 : parameter_value;
    v1 : parameter_value;
    v2 : parameter_value;
    usense : BOOLEAN;
    vsense : BOOLEAN;
WHERE
```

```

WR1:
    u1 <> u2;
WR2:
    v1 <> v2;
WR3:
    (('PLANT_SPATIAL_CONFIGURATION.ELEMENTARY_SURFACE' IN
TYPEOF(basis_surface)) AND NOT ('PLANT_SPATIAL_CONFIGURATION.PLANE' IN
TYPEOF(basis_surface)) OR
('PLANT_SPATIAL_CONFIGURATION.SURFACE_OF_REVOLUTION' IN
TYPEOF(basis_surface))) OR (usense = (u2 > u1));
WR4:
    (('PLANT_SPATIAL_CONFIGURATION.SPHERICAL_SURFACE' IN
TYPEOF(basis_surface)) OR ('PLANT_SPATIAL_CONFIGURATION.TOROIDAL_SURFACE' IN
TYPEOF(basis_surface))) OR (vsense = (v2 > v1));
    END_ENTITY;

ENTITY reducer_fitting_class
SUBTYPE OF (group);
WHERE
    WR1:
        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (it <* aca.items| NOT
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))) =
0))) = 0;
    WR2:
        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (pcd <* QUERY (it <* aca.items|
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))|
NOT (SIZEOF(QUERY (acal <* USEDIN(pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
class_in_tree(acal.assigned_class, 'reducer')) = 1))) = 0))) = 0;
        END_ENTITY;

ENTITY reference_geometry
SUBTYPE OF (derived_shape_aspect);
WHERE
    WR1:
        SIZEOF(QUERY (pd <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION.DEFINITION')| NOT (SIZEOF(USEDIN(pd,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')) >= 1))) = 0;
        END_ENTITY;

ENTITY reinforcing_component_definition
SUBTYPE OF (product_definition);
END_ENTITY;

ENTITY reparametrised_composite_curve_segment
SUBTYPE OF (composite_curve_segment);
    param_length : parameter_value;

```

ISO 10303-227:2005(E)

```
WHERE
  WR1:
    param_length > 0.00000;
END_ENTITY;

ENTITY representation;
  name : label;
  items : SET [1:?] OF representation_item;
  context_of_items : representation_context;
DERIVE
  id : identifier := get_id_value(SELF);
  description : text := get_description_value(SELF);
WHERE
  WR1:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'ID_ATTRIBUTE.IDENTIFIED_ITEM')) <= 1;
  WR2:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'DESCRIPTION_ATTRIBUTE.DESCRIBED_ITEM')) <= 1;
END_ENTITY;

ENTITY representation_context;
  context_identifier : identifier;
  context_type : text;
INVERSE
  representations_in_context : SET [1:?] OF representation FOR
context_of_items;
END_ENTITY;

ENTITY representation_item;
  name : label;
WHERE
  WR1:
    SIZEOF(using_representations(SELF)) > 0;
END_ENTITY;

ENTITY representation_item_relationship;
  name : label;
  description : OPTIONAL text;
  relating_representation_item : representation_item;
  related_representation_item : representation_item;
END_ENTITY;

ENTITY representation_map;
  mapping_origin : representation_item;
  mapped_representation : representation;
INVERSE
  map_usage : SET [1:?] OF mapped_item FOR mapping_source;
WHERE
  WR1:
    item_in_context(SELF.mapping_origin,
SELF.mapped_representation.context_of_items);
END_ENTITY;
```

```

ENTITY representation_relationship;
  name : label;
  description : OPTIONAL text;
  rep_1 : representation;
  rep_2 : representation;
END_ENTITY;

ENTITY representation_relationship_with_transformation
SUBTYPE OF (representation_relationship);
  transformation_operator : transformation;
WHERE
  WR1:
    SELF\representation_relationship.rep_1.context_of_items :<>:
SELF\representation_relationship.rep_2.context_of_items;
END_ENTITY;

ENTITY required_material_property
SUBTYPE OF (material_property);
WHERE
  WR1:
    (SIZEOF(TYPEOF(SELF\property_definition.definition) * [
'PLANT_SPATIAL_CONFIGURATIONS.PLANT_ITEM_CONNECTOR',
('PLANT_SPATIAL_CONFIGURATIONS.' + 'EXTERNALLY_DEFINED_PLANT_ITEM_DEFINITION')
]) = 1) OR ('PLANT_SPATIAL_CONFIGURATIONS.PRODUCT_DEFINITION' IN
TYPEOF(SELF.definition)) AND (SIZEOF(QUERY (pc <*
SELF\property_definition.definition\product_definition.formation.of_product.f
rame_of_reference| (pc.discipline_type = 'process plant')))) = 1);
  WR2:
    SIZEOF(QUERY (ra <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATED_PROPERTY_DEFINITION')| (pdr.name =
'requirement allocation'))| ('PLANT_SPATIAL_CONFIGURATIONS.MATERIAL_PROPERTY'
IN TYPEOF(ra.relying_property_definition)))) >= 1;
END_ENTITY;

ENTITY reserved_space
SUBTYPE OF (shape_aspect);
WHERE
  WR1:
    SELF\shape_aspect.of_shape\property_definition.definition\product_definition.
frame_of_reference\application_context_element.name = 'physical occurrence';
END_ENTITY;

ENTITY revolved_area_solid
SUBTYPE OF (swept_area_solid);
  axis : axis1_placement;
  angle : plane_angle_measure;
DERIVE
  axis_line : line := representation_item('') ||
geometric_representation_item() || curve() || line(axis.location,
representation_item('') || geometric_representation_item() || vector(axis.z,
1.00000));
END_ENTITY;

```

ISO 10303-227:2005(E)

```
ENTITY revolved_face_solid
SUBTYPE OF (swept_face_solid);
  axis : axis1_placement;
  angle : plane_angle_measure;
DERIVE
  axis_line : line := representation_item('') ||
geometric_representation_item() || curve() || line(axis.location,
representation_item('') || geometric_representation_item() || vector(axis.z,
1.00000));
END_ENTITY;

ENTITY right_angular_wedge
SUBTYPE OF (geometric_representation_item);
  position : axis2_placement_3d;
  x : positive_length_measure;
  y : positive_length_measure;
  z : positive_length_measure;
  ltx : length_measure;
WHERE
  WR1:
    (0.00000 <= ltx) AND (ltx < x);
END_ENTITY;

ENTITY right_circular_cone
SUBTYPE OF (geometric_representation_item);
  position : axis1_placement;
  height : positive_length_measure;
  radius : length_measure;
  semi_angle : plane_angle_measure;
WHERE
  WR1:
    radius >= 0.00000;
END_ENTITY;

ENTITY right_circular_cylinder
SUBTYPE OF (geometric_representation_item);
  position : axis1_placement;
  height : positive_length_measure;
  radius : positive_length_measure;
END_ENTITY;

ENTITY role_association;
  role : object_role;
  item_with_role : role_select;
END_ENTITY;

ENTITY seam_curve
SUBTYPE OF (surface_curve);
WHERE
  WR1:
    SIZEOF(SELF\surface_curve.associated_geometry) = 2;
  WR2:
```



```

        associated_surface(SELf\surface_curve.associated_geometry[1]) =
associated_surface(SELf\surface_curve.associated_geometry[2]);
    WR3:
        'PLANT_SPATIAL_CONFIGURATION.PCURVE' IN
TYPEOF(SELf\surface_curve.associated_geometry[1]);
    WR4:
        'PLANT_SPATIAL_CONFIGURATION.PCURVE' IN
TYPEOF(SELf\surface_curve.associated_geometry[2]);
    END_ENTITY;

ENTITY serial_numbered_effectivity
SUBTYPE OF (effectivity);
    effectivity_start_id : identifier;
    effectivity_end_id : OPTIONAL identifier;
END_ENTITY;

ENTITY shape_aspect;
    name : label;
    description : OPTIONAL text;
    of_shape : product_definition_shape;
    product_definitional : LOGICAL;
DERIVE
    id : identifier := get_id_value(SELf);
WHERE
    WR1:
        SIZEOF(USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'ID_ATTRIBUTE.IDENTIFIED_ITEM')) <= 1;
    END_ENTITY;

ENTITY shape_aspect_deriving_relationship
SUBTYPE OF (shape_aspect_relationship);
WHERE
    WR1:
        'PLANT_SPATIAL_CONFIGURATION.DERIVED_SHAPE_ASPECT' IN
TYPEOF(SELf\shape_aspect_relationship.relatng_shape_aspect);
    END_ENTITY;

ENTITY shape_aspect_relationship;
    name : label;
    description : OPTIONAL text;
    relating_shape_aspect : shape_aspect;
    related_shape_aspect : shape_aspect;
DERIVE
    id : identifier := get_id_value(SELf);
WHERE
    WR1:
        SIZEOF(USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'ID_ATTRIBUTE.IDENTIFIED_ITEM')) <= 1;
    END_ENTITY;

ENTITY shape_definition_representation
SUBTYPE OF (property_definition_representation);
WHERE
    WR1:

```

ISO 10303-227:2005(E)

```
        ('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION_SHAPE' IN
TYPEOF(SELF.definition)) OR ('PLANT_SPATIAL_CONFIGURATION.SHAPE_DEFINITION'
IN TYPEOF(SELF.definition.definition));
    WR2:
        'PLANT_SPATIAL_CONFIGURATION.SHAPE_REPRESENTATION' IN
TYPEOF(SELF.used_representation);
    END_ENTITY;

    ENTITY shape_dimension_representation
    SUBTYPE OF (shape_representation);
    WHERE
        WR1:
            SIZEOF(QUERY (temp <* SELF\representation.items| NOT
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(temp))))
= 0;
        WR2:
            SIZEOF(SELF\representation.items) <= 3;
        WR3:
            SIZEOF(QUERY (pos_mri <* QUERY (real_mri <*
SELF\representation.items| ('REAL' IN
TYPEOF(real_mri\measure_with_unit.value_component)))| NOT
(pos_mri\measure_with_unit.value_component > 0.00000))) = 0;
    END_ENTITY;

    ENTITY shape_representation
    SUBTYPE OF (representation);
    END_ENTITY;

    ENTITY shell_based_wireframe_model
    SUBTYPE OF (geometric_representation_item);
        sbwm_boundary : SET [1:?] OF shell;
    WHERE
        WR1:
            constraints_geometry_shell_based_wireframe_model(SELF);
    END_ENTITY;

    ENTITY si_unit
    SUBTYPE OF (named_unit);
        prefix : OPTIONAL si_prefix;
        name : si_unit_name;
    DERIVE
        SELF\named_unit.dimensions : dimensional_exponents :=
dimensions_for_si_unit(name);
    END_ENTITY;

    ENTITY site
    SUBTYPE OF (characterized_object, property_definition);
    WHERE
        WR1:
            'PLANT_SPATIAL_CONFIGURATION.PLANT' IN
TYPEOF(SELF\property_definition.definition\product_definition.formation.of_pr
oduct);
    END_ENTITY;
```

```

ENTITY site_building
SUBTYPE OF (property_definition);
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.SITE' IN TYPEOF(SELF.definition);
  WR2:
    SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'building number') AND (SIZEOF(QUERY (it <*
pdr.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.DESCRPTIVE_REPRESENTATION_ITEM' IN
TYPEOF(it)))) = 1))) = 1);
  WR3:
    SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')| (SIZEOF(QUERY (it <*
pdr.used_representation.items| ((SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_2D',
'PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_3D' ] * TYPEOF(it)) = 1) AND
(it.name = 'building orientation')) AND (it.location.name = 'building
location')) = 1))) <= 1;
  END_ENTITY;

ENTITY site_feature
SUBTYPE OF (property_definition);
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.SITE' IN TYPEOF(SELF.definition);
  WR2:
    SIZEOF(USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')) = 3;
  WR3:
    SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')| (SIZEOF(QUERY (it <*
pdr.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.DESCRPTIVE_REPRESENTATION_ITEM' IN TYPEOF(it))
AND (it.name = 'site feature type')) = 1))) = 1;
  WR4:
    SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')| (SIZEOF(QUERY (it <*
pdr.used_representation.items| ((SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_2D',
'PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT_3D' ] * TYPEOF(it)) = 1) AND
(it.name = 'feature orientation')) AND (it.location.name = 'feature
location')) = 1))) = 1;
  WR5:
    SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')| (SIZEOF(QUERY (it <*
pdr.used_representation.items|
(('PLANT_SPATIAL_CONFIGURATION.DESCRPTIVE_REPRESENTATION_ITEM' IN
TYPEOF(pdr.used_representation)) AND (it.name = 'origin type')) AND
(it.description IN [ 'man made', 'natural' ]))) = 1))) = 1;
  END_ENTITY;

ENTITY site_representation

```

ISO 10303-227:2005(E)

```
SUBTYPE OF (shape_representation);
WHERE
  WR1:
    SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.USED_REPRESENTATION')| NOT
('PLANT_SPATIAL_CONFIGURATION.SITE' IN TYPEOF(pdr.definition.definition)))) =
0;
  WR2:
    SIZEOF(QUERY (item <* SELF.items| NOT (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.CONNECTED_FACE_SET',
'PLANT_SPATIAL_CONFIGURATION.GEOMETRIC_CURVE_SET' ] * TYPEOF(item)) = 1))) =
1;
  WR3:
    SIZEOF(QUERY (cfs <* QUERY (item <* SELF.items|
('PLANT_SPATIAL_CONFIGURATION.CONNECTED_FACE_SET' IN TYPEOF(item)))| NOT
(SIZEOF(QUERY (fcs <* cfs\connected_face_set.cfs_faces| NOT (SIZEOF(QUERY
(bnds <* fcs.bounds| NOT ('PLANT_SPATIAL_CONFIGURATION.POLY_LOOP' IN
TYPEOF(bnds.bound)))) = 0))) = 0))) = 0;
  WR4:
    SIZEOF(QUERY (cfs <* QUERY (item <* SELF.items|
('PLANT_SPATIAL_CONFIGURATION.CONNECTED_FACE_SET' IN TYPEOF(item)))| NOT
(SIZEOF(QUERY (fcs <* cfs\connected_face_set.cfs_faces| NOT (SIZEOF(QUERY
(bnds <* fcs.bounds| NOT (SIZEOF(bnds.bound\poly_loop.polygon) = 3))) = 0)))
= 0))) = 0;
  WR5:
    SIZEOF(QUERY (gcs <* QUERY (item <* SELF.items|
('PLANT_SPATIAL_CONFIGURATION.GEOMETRIC_CURVE_SET' IN TYPEOF(item)))| NOT
(SIZEOF(QUERY (el <* gcs\geometric_set.elements| NOT (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.CARTESIAN_POINT',
'PLANT_SPATIAL_CONFIGURATION.POLYLINE' ] * TYPEOF(el)) = 1))) = 0))) = 0;
  WR6:
    SIZEOF(QUERY (gcs <* QUERY (item <* SELF.items|
('PLANT_SPATIAL_CONFIGURATION.GEOMETRIC_CURVE_SET' IN TYPEOF(item)))| NOT
(SIZEOF(QUERY (el <* gcs\geometric_set.elements|
('PLANT_SPATIAL_CONFIGURATION.CARTESIAN_POINT' IN TYPEOF(el)))) >= 1))) = 0;
  WR7:
    SIZEOF(QUERY (gcs <* QUERY (item <* SELF.items|
('PLANT_SPATIAL_CONFIGURATION.GEOMETRIC_CURVE_SET' IN TYPEOF(item)))| NOT
(SIZEOF(QUERY (pline <* QUERY (el <* gcs\geometric_set.elements|
('PLANT_SPATIAL_CONFIGURATION.POLYLINE' IN TYPEOF(el)))| NOT (SIZEOF(QUERY
(pline_pt <* pline\polyline.points| NOT (pline_pt IN
gcs\geometric_set.elements)))) = 0))) = 0))) = 0;
END_ENTITY;

ENTITY sited_plant
SUBTYPE OF (property_definition);
UNIQUE
  UR1 : SELF\property_definition.definition;
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION' IN
TYPEOF(SELF.definition);
  WR2:
    SELF.definition.frame_of_reference.name = 'physical occurrence';
```

```

END_ENTITY;

ENTITY solid_angle_measure_with_unit
SUBTYPE OF (measure_with_unit);
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.SOLID_ANGLE_UNIT' IN
TYPEOF(SELF\measure_with_unit.unit_component);
END_ENTITY;

ENTITY solid_angle_unit
SUBTYPE OF (named_unit);
WHERE
  WR1:
    ((((((SELF\named_unit.dimensions.length_exponent = 0.00000) AND
(SELF\named_unit.dimensions.mass_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.time_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.electric_current_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.thermodynamic_temperature_exponent = 0.00000))
AND (SELF\named_unit.dimensions.amount_of_substance_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.luminous_intensity_exponent = 0.00000);
END_ENTITY;

ENTITY solid_model
SUPERTYPE OF (ONEOF(csg_solid, manifold_solid_brep, swept_face_solid,
swept_area_solid))
SUBTYPE OF (geometric_representation_item);
END_ENTITY;

ENTITY spacer_fitting_class
SUBTYPE OF (group);
WHERE
  WR1:
    SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (it <* aca.items| NOT
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))) =
0))) = 0;
  WR2:
    SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (pcd <* QUERY (it <* aca.items|
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))|
NOT (SIZEOF(QUERY (acal <* USEDIN(pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
class_in_tree(acal.assigned_class, 'spacer')) = 1))) = 0))) = 0;
END_ENTITY;

ENTITY specialty_item_class
SUBTYPE OF (group);
END_ENTITY;

```

ISO 10303-227:2005(E)

```
ENTITY sphere
SUBTYPE OF (geometric_representation_item);
    radius : positive_length_measure;
    centre : point;
END_ENTITY;

ENTITY spherical_surface
SUBTYPE OF (elementary_surface);
    radius : positive_length_measure;
END_ENTITY;

ENTITY stream_design_case
SUBTYPE OF (property_definition, characterized_object);
WHERE
    WR1:
        SIZEOF(QUERY (pd <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION.DEFINITION')|
('PLANT_SPATIAL_CONFIGURATION.STREAM_PHASE' IN TYPEOF(pd)))) >= 1;
    WR2:
        SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'stream flow characteristics')) = 1;
    WR3:
        SIZEOF(QUERY (sfc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'stream flow characteristics'))| NOT
(SIZEOF(sfc.used_representation.items) >= 2))) = 0;
    WR4:
        SIZEOF(QUERY (sfc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'stream flow characteristics'))| NOT ((1 <=
SIZEOF(QUERY (it <* sfc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name IN [ 'flow rate', 'minimum flow rate', 'maximum flow rate' ])))) AND
(SIZEOF(QUERY (it <* sfc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name IN [ 'flow rate', 'minimum flow rate', 'maximum flow rate' ])))) <=
2)))) = 0;
    WR5:
        SIZEOF(QUERY (sfc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'stream flow characteristics'))| NOT
(SIZEOF(QUERY (it <* sfc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'flow rate')) <= 1))) = 0;
    WR6:
        SIZEOF(QUERY (sfc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'stream flow characteristics'))| NOT
(SIZEOF(QUERY (it <* sfc.used_representation.items|
```

```
( 'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'minimum flow rate')) <= 1))) = 0;
```

```
WR7:
```

```
SIZEOF(QUERY (sfc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'stream flow characteristics'))| NOT
(SIZEOF(QUERY (it <* sfc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'maximum flow rate')) <= 1)))) = 0;
```

```
WR8:
```

```
SIZEOF(QUERY (sfc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'stream flow characteristics'))| NOT ((1 <=
SIZEOF(QUERY (it <* sfc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name IN [ 'pressure', 'minimum pressure', 'maximum pressure' ])))) AND
(SIZEOF(QUERY (it <* sfc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name IN [ 'pressure', 'minimum pressure', 'maximum pressure' ])))) <=
2)))) = 0;
```

```
WR9:
```

```
SIZEOF(QUERY (sfc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'stream flow characteristics'))| NOT
(SIZEOF(QUERY (it <* sfc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'pressure')) <= 1)))) = 0;
```

```
WR10:
```

```
SIZEOF(QUERY (sfc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'stream flow characteristics'))| NOT
(SIZEOF(QUERY (it <* sfc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'minimum pressure')) <= 1)))) = 0;
```

```
WR11:
```

```
SIZEOF(QUERY (sfc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'stream flow characteristics'))| NOT
(SIZEOF(QUERY (it <* sfc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'maximum pressure')) <= 1)))) = 0;
```

```
WR12:
```

```
SIZEOF(QUERY (sfc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'stream flow characteristics'))| NOT
(SIZEOF(QUERY (it <* sfc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.DESCRPTIVE_REPRESENTATION_ITEM' IN TYPEOF(it))
AND (it.name = 'stream data reference')) <= 1)))) = 0;
```

ISO 10303-227:2005(E)

WR13:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics')))) >= 1) OR
(SIZEOF(QUERY (sc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics'))| NOT
(SIZEOF(QUERY (pdr <* USEDIN(sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'service operating characteristics')))) = 1)))
= 0);
```

WR14:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics')))) >= 1) OR
(SIZEOF(QUERY (sc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics'))| NOT
(SIZEOF(QUERY (soc <* QUERY (pdr <* USEDIN(sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'service operating characteristics'))| NOT
(SIZEOF(soc.used_representation.items) >= 3))) = 0))) = 0);
```

WR15:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics')))) >= 1) OR
(SIZEOF(QUERY (sc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics'))| NOT
(SIZEOF(QUERY (soc <* QUERY (pdr <* USEDIN(sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'service operating characteristics'))| (1 <=
SIZEOF(QUERY (it <* soc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
('PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ])) = 2) AND (it.name IN [
'temperature', 'minimum temperature', 'maximum temperature' ])))) AND
(SIZEOF(QUERY (it <* soc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
('PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ])) = 2) AND (it.name IN [
'temperature', 'minimum temperature', 'maximum temperature' ])))) <= 2)))) =
1))) = 0);
```

WR16:


```

NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics')) >= 1) OR
(SIZEOF(QUERY (sc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics'))| NOT
(SIZEOF(QUERY (soc <* QUERY (pdr <* USEDIN(sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'service operating characteristics'))|
(SIZEOF(QUERY (it <* soc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
('PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ])) = 2) AND (it.name =
'temperature')) <= 1))) = 1))) = 0);

```

WR17:

```

NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics')) >= 1) OR
(SIZEOF(QUERY (sc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics'))| NOT
(SIZEOF(QUERY (soc <* QUERY (pdr <* USEDIN(sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'service operating characteristics'))|
(SIZEOF(QUERY (it <* soc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
('PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ])) = 2) AND (it.name =
'minimum temperature')) <= 1))) = 1))) = 0);

```

WR18:

```

NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics')) >= 1) OR
(SIZEOF(QUERY (sc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics'))| NOT
(SIZEOF(QUERY (soc <* QUERY (pdr <* USEDIN(sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'service operating characteristics'))|
(SIZEOF(QUERY (it <* soc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
('PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT') ])) = 2) AND (it.name =
'maximum temperature')) <= 1))) = 1))) = 0);

```

WR19:

ISO 10303-227:2005(E)

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics')) >= 1) OR
(SIZEOF(QUERY (sc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics'))| NOT
(SIZEOF(QUERY (soc <* QUERY (pdr <* USEDIN(sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'service operating characteristics'))| (1 <=
SIZEOF(QUERY (it <* soc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name IN [ 'pressure', 'minimum pressure', 'maximum pressure' ])))) AND
(SIZEOF(QUERY (it <* soc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name IN [ 'pressure', 'minimum pressure', 'maximum pressure' ])))) <= 2)))
= 1))) = 0);
```

WR20:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics')) >= 1) OR
(SIZEOF(QUERY (sc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics'))| NOT
(SIZEOF(QUERY (soc <* QUERY (pdr <* USEDIN(sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'service operating characteristics'))|
(SIZEOF(QUERY (it <* soc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'pressure')) <= 1))) = 1))) = 0);
```

WR21:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics')) >= 1) OR
(SIZEOF(QUERY (sc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics'))| NOT
(SIZEOF(QUERY (soc <* QUERY (pdr <* USEDIN(sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'service operating characteristics'))|
(SIZEOF(QUERY (it <* soc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'minimum pressure')) <= 1))) = 1))) = 0);
```

WR22:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
```

```
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics')) >= 1) OR
(SIZEOF(QUERY (sc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics'))| NOT
(SIZEOF(QUERY (soc <* QUERY (pdr <* USEDIN(sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'service operating characteristics'))|
(SIZEOF(QUERY (it <* soc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'maximum pressure')) <= 1))) = 1))) = 0);
```

WR23:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics')) >= 1) OR
(SIZEOF(QUERY (sc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics'))| NOT
(SIZEOF(QUERY (soc <* QUERY (pdr <* USEDIN(sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'service operating characteristics'))| (1 <=
SIZEOF(QUERY (it <* soc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.TIME_MEASURE_WITH_UNIT' ])) = 2) AND (it.name IN
[ 'duration', 'minimum duration', 'maximum duration' ]))) AND (SIZEOF(QUERY
(it <* soc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.TIME_MEASURE_WITH_UNIT' ])) = 2) AND (it.name IN
[ 'duration', 'minimum duration', 'maximum duration' ]))) <= 2))) = 1))) =
0);
```

WR24:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics')) >= 1) OR
(SIZEOF(QUERY (sc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics'))| NOT
(SIZEOF(QUERY (soc <* QUERY (pdr <* USEDIN(sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATIONS.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'service operating characteristics'))|
(SIZEOF(QUERY (it <* soc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATIONS.TIME_MEASURE_WITH_UNIT' ])) = 2) AND (it.name =
'duration')) <= 1))) = 1))) = 0);
```

WR25:

ISO 10303-227:2005(E)

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics')) >= 1) OR
(SIZEOF(QUERY (sc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics'))| NOT
(SIZEOF(QUERY (soc <* QUERY (pdr <* USEDIN(sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'service operating characteristics'))|
(SIZEOF(QUERY (it <* soc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.TIME_MEASURE_WITH_UNIT' ]) = 2) AND (it.name =
'minimum duration')) <= 1))) = 1))) = 0);
```

WR26:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics')) >= 1) OR
(SIZEOF(QUERY (sc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics'))| NOT
(SIZEOF(QUERY (soc <* QUERY (pdr <* USEDIN(sc.related_property_definition,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'service operating characteristics'))|
(SIZEOF(QUERY (it <* soc.used_representation.items| (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.TIME_MEASURE_WITH_UNIT' ]) = 2) AND (it.name =
'maximum duration')) <= 1))) = 1))) = 0);
```

WR27:

```
NOT (SIZEOF(QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics')) >= 1) OR
(SIZEOF(QUERY (sc <* QUERY (pdr <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_RELATIONSHIP.RELATING_PROPERTY_DEFINITION')|
(pdr.related_property_definition.name = 'service characteristics'))| NOT
('PLANT_SPATIAL_CONFIGURATION.PLANT_ITEM_CONNECTOR' IN
TYPEOF(sc.related_property_definition.definition)))) = 0);
```

END_ENTITY;

```
ENTITY stream_phase
SUBTYPE OF (property_definition);
WHERE
```

WR1:

```
'PLANT_SPATIAL_CONFIGURATION.STREAM_DESIGN_CASE' IN
TYPEOF(SELF.definition);
```

WR2:

```

        SIZEOF(QUERY (pdr <* USEDIN(SELf, 'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'stream phase characteristics')) = 1;
    WR3:
        SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELf,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'stream phase characteristics')) | NOT
(SIZEOF(spc.used_representation.items) >= 5))) = 0;
    WR4:
        SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELf,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'stream phase characteristics')) | NOT
(SIZEOF(QUERY (it <* spc.used_representation.items | (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.RATIO_MEASURE_WITH_UNIT' ]) = 2) AND (it.name =
'constituent mole fraction')) = 1))) = 0;
    WR5:
        SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELf,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'stream phase characteristics')) | NOT
(SIZEOF(QUERY (it <* spc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.DESCRPTIVE_REPRESENTATION_ITEM' IN TYPEOF(it))
AND (it.name = 'constituents')) = 1))) = 0;
    WR6:
        SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELf,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'stream phase characteristics')) | NOT
(SIZEOF(QUERY (it <* spc.used_representation.items |
('PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'phase density')) = 1))) = 0;
    WR7:
        SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELf,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'stream phase characteristics')) | NOT
(SIZEOF(QUERY (it <* spc.used_representation.items | (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
'PLANT_SPATIAL_CONFIGURATION.RATIO_MEASURE_WITH_UNIT' ]) = 2) AND (it.name =
'phase fraction')) = 1))) = 0;
    WR8:
        SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELf,
'PLANT_SPATIAL_CONFIGURATION.' +
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |
(pdr.used_representation.name = 'stream phase characteristics')) | NOT ((1 <=
SIZEOF(QUERY (it <* spc.used_representation.items | (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',
('PLANT_SPATIAL_CONFIGURATION.' +
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT' ]) = 2) AND (it.name IN [
'temperature', 'minimum temperature', 'maximum temperature' ])))) AND
(SIZEOF(QUERY (it <* spc.used_representation.items | (SIZEOF(TYPEOF(it) * [

```

ISO 10303-227:2005(E)

```
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',  
( 'PLANT_SPATIAL_CONFIGURATION.' +  
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT' ) ] = 2) AND (it.name IN [  
'temperature', 'minimum temperature', 'maximum temperature' ])) <= 2))) =  
0;
```

WR9:

```
SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELF,  
'PLANT_SPATIAL_CONFIGURATION.' +  
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |  
(pdr.used_representation.name = 'stream phase characteristics')) | NOT  
(SIZEOF(QUERY (it <* spc.used_representation.items | (SIZEOF(TYPEOF(it) * [  
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',  
( 'PLANT_SPATIAL_CONFIGURATION.' +  
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT' ) ] = 2) AND (it.name =  
'temperature')) <= 1))) = 0;
```

WR10:

```
SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELF,  
'PLANT_SPATIAL_CONFIGURATION.' +  
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |  
(pdr.used_representation.name = 'stream phase characteristics')) | NOT  
(SIZEOF(QUERY (it <* spc.used_representation.items | (SIZEOF(TYPEOF(it) * [  
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',  
( 'PLANT_SPATIAL_CONFIGURATION.' +  
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT' ) ] = 2) AND (it.name =  
'minimum temperature')) <= 1))) = 0;
```

WR11:

```
SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELF,  
'PLANT_SPATIAL_CONFIGURATION.' +  
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |  
(pdr.used_representation.name = 'stream phase characteristics')) | NOT  
(SIZEOF(QUERY (it <* spc.used_representation.items | (SIZEOF(TYPEOF(it) * [  
'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM',  
( 'PLANT_SPATIAL_CONFIGURATION.' +  
'THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT' ) ] = 2) AND (it.name =  
'maximum temperature')) <= 1))) = 0;
```

WR12:

```
SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELF,  
'PLANT_SPATIAL_CONFIGURATION.' +  
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |  
(pdr.used_representation.name = 'stream phase characteristics')) | NOT  
(SIZEOF(QUERY (it <* spc.used_representation.items |  
( 'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND  
(it.name = 'specific gravity')) <= 1))) = 0;
```

WR13:

```
SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELF,  
'PLANT_SPATIAL_CONFIGURATION.' +  
'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION') |  
(pdr.used_representation.name = 'stream phase characteristics')) | NOT  
(SIZEOF(QUERY (it <* spc.used_representation.items |  
( 'PLANT_SPATIAL_CONFIGURATION.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND  
(it.name = 'surface tension')) <= 1))) = 0;
```

WR14:

```
SIZEOF(QUERY (spc <* QUERY (pdr <* USEDIN(SELF,  
'PLANT_SPATIAL_CONFIGURATION.' +
```

```

'PROPERTY_DEFINITION_REPRESENTATION.DEFINITION')|
(pdr.used_representation.name = 'stream phase characteristics'))| NOT
(SIZEOF(QUERY (it <* spc.used_representation.items|
('PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name = 'viscosity')))) <= 1))) = 0;
  END_ENTITY;

ENTITY structural_load_connector_class
  SUBTYPE OF (group);
  END_ENTITY;

ENTITY structural_system
  SUBTYPE OF (product_definition);
  WHERE
    WR1:
      SIZEOF(QUERY (pdr <* USEDIN(SELF, 'PLANT_SPATIAL_CONFIGURATIONS.' +
'PRODUCT_DEFINITION_RELATIONSHIP.RELATED_PRODUCT_DEFINITION')|
('PLANT_SPATIAL_CONFIGURATIONS.PLANT' IN
TYPEOF(pdr.relatng_product_definition.formation_of_product)) AND
(pdr.relatng_product_definition.frame_of_reference.name = 'functional
occurrence')))) = 1;
  END_ENTITY;

ENTITY styled_item
  SUBTYPE OF (representation_item);
  styles : SET [1:?] OF presentation_style_assignment;
  item : representation_item;
  WHERE
    WR1:
      (SIZEOF(SELF.styles) = 1) XOR (SIZEOF(QUERY (pres_style <*
SELF.styles| NOT ('PLANT_SPATIAL_CONFIGURATIONS.' +
'PRESENTATION_STYLE_BY_CONTEXT' IN TYPEOF(pres_style)))) = 0);
  END_ENTITY;

ENTITY support_constraint_representation
  SUBTYPE OF (representation);
  WHERE
    WR1:
      SIZEOF(SELF.items) >= 3;
    WR2:
      SIZEOF(QUERY (it <* SELF.items|
('PLANT_SPATIAL_CONFIGURATIONS.MEASURE_REPRESENTATION_ITEM' IN TYPEOF(it)) AND
(it.name IN [ 'negative x', 'positive x', 'negative y', 'positive y',
'negative z', 'positive z', 'negative x rotation', 'positive x rotation',
'negative y rotation', 'positive y rotation', 'negative z rotation',
'positive z rotation' ]))) = 1;
    WR3:
      SIZEOF(QUERY (it <* SELF.items|
('PLANT_SPATIAL_CONFIGURATIONS.RATIO_MEASURE_WITH_UNIT' IN TYPEOF(it)))) = 1;
    WR4:
      SIZEOF(QUERY (it <* SELF.items|
('PLANT_SPATIAL_CONFIGURATIONS.DESCRPTIVE_REPRESENTATION_ITEM' IN
TYPEOF(it)))) = 1;
  END_ENTITY;

```

ISO 10303-227:2005(E)

```
ENTITY surface
  SUPERTYPE OF (ONEOF(elementary_surface, swept_surface, bounded_surface,
offset_surface, surface_replica))
  SUBTYPE OF (geometric_representation_item);
  END_ENTITY;

ENTITY surface_curve
  SUPERTYPE OF (ONEOF(intersection_curve, seam_curve) ANDOR
bounded_surface_curve)
  SUBTYPE OF (curve);
  curve_3d : curve;
  associated_geometry : LIST [1:2] OF pcurve_or_surface;
  master_representation : preferred_surface_curve_representation;
  DERIVE
    basis_surface : SET [1:2] OF surface := get_basis_surface(SELF);
  WHERE
    WR1:
      curve_3d.dim = 3;
    WR2:
      ('PLANT_SPATIAL_CONFIGURATION.PCURVE' IN
TYPEOF(associated_geometry[1])) OR (master_representation <> pcurve_s1);
    WR3:
      ('PLANT_SPATIAL_CONFIGURATION.PCURVE' IN
TYPEOF(associated_geometry[2])) OR (master_representation <> pcurve_s2);
    WR4:
      NOT ('PLANT_SPATIAL_CONFIGURATION.PCURVE' IN TYPEOF(curve_3d));
  END_ENTITY;

ENTITY surface_of_linear_extrusion
  SUBTYPE OF (swept_surface);
  extrusion_axis : vector;
  END_ENTITY;

ENTITY surface_of_revolution
  SUBTYPE OF (swept_surface);
  axis_position : axis1_placement;
  DERIVE
    axis_line : line := representation_item('') ||
geometric_representation_item() || curve() || line(axis_position.location,
representation_item('') || geometric_representation_item() ||
vector(axis_position.z, 1.00000));
  END_ENTITY;

ENTITY surface_patch
  SUBTYPE OF (founded_item);
  parent_surface : bounded_surface;
  u_transition : transition_code;
  v_transition : transition_code;
  u_sense : BOOLEAN;
  v_sense : BOOLEAN;
  INVERSE
    using_surfaces : BAG [1:?] OF rectangular_composite_surface FOR
segments;
```



```

WHERE
  WR1:
    NOT ('PLANT_SPATIAL_CONFIGURATION.CURVE_BOUNDED_SURFACE' IN
TYPEOF(parent_surface));
  END_ENTITY;

ENTITY surface_replica
SUBTYPE OF (surface);
  parent_surface : surface;
  transformation : cartesian_transformation_operator_3d;
WHERE
  WR1:
    acyclic_surface_replica(SELF, parent_surface);
  END_ENTITY;

ENTITY swage_fitting_class
SUBTYPE OF (group);
WHERE
  WR1:
    SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (it <* aca.items| NOT
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))) =
0))) = 0;
  WR2:
    SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (pcd <* QUERY (it <* aca.items|
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))|
NOT (SIZEOF(QUERY (acal <* USEDIN(pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
class_in_tree(aca.assigned_class, 'swage')) = 1))) = 0))) = 0;
  END_ENTITY;

ENTITY swept_area_solid
SUPERTYPE OF (ONEOF(revolved_area_solid, extruded_area_solid))
SUBTYPE OF (solid_model);
  swept_area : curve_bounded_surface;
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.PLANE' IN
TYPEOF(swept_area.basis_surface);
  END_ENTITY;

ENTITY swept_face_solid
SUPERTYPE OF (ONEOF(extruded_face_solid, revolved_face_solid))
SUBTYPE OF (solid_model);
  swept_face : face_surface;
WHERE
  WR1:
    'PLANT_SPATIAL_CONFIGURATION.PLANE' IN
TYPEOF(swept_face.face_geometry);

```

ISO 10303-227:2005(E)

```
END_ENTITY;

ENTITY swept_surface
  SUPERTYPE OF (ONEOF(surface_of_linear_extrusion, surface_of_revolution))
  SUBTYPE OF (surface);
  swept_curve : curve;
END_ENTITY;

ENTITY symbol_colour;
  colour_of_symbol : colour;
END_ENTITY;

ENTITY symbol_representation
  SUBTYPE OF (representation);
END_ENTITY;

ENTITY symbol_representation_map
  SUBTYPE OF (representation_map);
  WHERE
    WR1:
      'PLANT_SPATIAL_CONFIGURATION.SYMBOL_REPRESENTATION' IN
    TYPEOF(SELF\representation_map.mapped_representation);
    WR2:
      'PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT' IN
    TYPEOF(SELF\representation_map.mapping_origin);
  END_ENTITY;

ENTITY symbol_representation_relationship
  SUBTYPE OF (representation_relationship_with_transformation);
  WHERE
    WR1:
      acyclic_symbol_representation_relationship(SELF, [
    SELF\representation_relationship.rep_2 ]);
    WR2:
      'PLANT_SPATIAL_CONFIGURATION.SYMBOL_REPRESENTATION' IN
    TYPEOF(SELF\representation_relationship.rep_1);
    WR3:
      'PLANT_SPATIAL_CONFIGURATION.SYMBOL_REPRESENTATION' IN
    TYPEOF(SELF\representation_relationship.rep_2);
  END_ENTITY;

ENTITY symbol_style;
  name : label;
  style_of_symbol : symbol_style_select;
END_ENTITY;

ENTITY symbol_target
  SUBTYPE OF (geometric_representation_item);
  placement : axis2_placement;
  x_scale : positive_ratio_measure;
  y_scale : positive_ratio_measure;
END_ENTITY;

ENTITY symmetric_shape_aspect
```

```

SUBTYPE OF (shape_aspect);
INVERSE
    basis_relationships : SET [1:?] OF shape_aspect_relationship FOR
relating_shape_aspect;
WHERE
    WR1:
        SIZEOF(QUERY (x <* SELF\symmetric_shape_aspect.basis_relationships|
('PLANT_SPATIAL_CONFIGURATION.CENTRE_OF_SYMMETRY' IN
TYPEOF(x\shape_aspect_relationship.related_shape_aspect)))) >= 1;
    END_ENTITY;

ENTITY system_class
SUBTYPE OF (group);
WHERE
    WR1:
        SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (it <* aca.items| NOT (SIZEOF(TYPEOF(it) * [
'PLANT_SPATIAL_CONFIGURATION.CABLEWAY_SYSTEM',
'PLANT_SPATIAL_CONFIGURATION.DUCTING_SYSTEM',
'PLANT_SPATIAL_CONFIGURATION.ELECTRICAL_SYSTEM',
'PLANT_SPATIAL_CONFIGURATION.INSTRUMENTATION_AND_CONTROL_SYSTEM',
'PLANT_SPATIAL_CONFIGURATION.MECHANICAL_SYSTEM',
'PLANT_SPATIAL_CONFIGURATION.PIPING_SYSTEM',
'PLANT_SPATIAL_CONFIGURATION.STRUCTURAL_SYSTEM' ]) = 1))) = 0))) = 0;
    END_ENTITY;

ENTITY system_space
SUBTYPE OF (product_definition_shape);
WHERE
    WR1:
        SIZEOF(TYPEOF(SELF.definition) * [
'PLANT_SPATIAL_CONFIGURATION.ELECTRICAL_SYSTEM',
'PLANT_SPATIAL_CONFIGURATION.DUCTING_SYSTEM', ('PLANT_SPATIAL_CONFIGURATION.'
+ 'INSTRUMENTATION_AND_CONTROL_SYSTEM'),
'PLANT_SPATIAL_CONFIGURATION.MECHANICAL_SYSTEM',
'PLANT_SPATIAL_CONFIGURATION.PIPING_SYSTEM',
'PLANT_SPATIAL_CONFIGURATION.STRUCTURAL_SYSTEM' ]) = 1;
    END_ENTITY;

ENTITY text_literal
SUBTYPE OF (geometric_representation_item);
    literal : presentable_text;
    placement : axis2_placement;
    alignment : text_alignment;
    path : text_path;
    font : font_select;
END_ENTITY;

ENTITY text_literal_with_associated_curves
SUBTYPE OF (text_literal);
    associated_curves : SET [1:?] OF curve;
END_ENTITY;

```

ISO 10303-227:2005(E)

```
ENTITY text_literal_with_blanking_box
SUBTYPE OF (text_literal);
    blanking : planar_box;
END_ENTITY;

ENTITY text_literal_with_delineation
SUBTYPE OF (text_literal);
    delineation : text_delineation;
END_ENTITY;

ENTITY text_literal_with_extent
SUBTYPE OF (text_literal);
    extent : planar_extent;
END_ENTITY;

ENTITY text_string_representation
SUBTYPE OF (representation);
WHERE
    WR1:
        SIZEOF(QUERY (item <* SELF\representation.items| (SIZEOF([
'PLANT_SPATIAL_CONFIGURATIONS.TEXT_LITERAL',
'PLANT_SPATIAL_CONFIGURATIONS.ANNOTATION_TEXT',
'PLANT_SPATIAL_CONFIGURATIONS.ANNOTATION_TEXT_CHARACTER',
'PLANT_SPATIAL_CONFIGURATIONS.DEFINED_CHARACTER_GLYPH',
'PLANT_SPATIAL_CONFIGURATIONS.COMPOSITE_TEXT',
'PLANT_SPATIAL_CONFIGURATIONS.AXIS2_PLACEMENT' ] * TYPEOF(item)) = 0))) = 0;
    WR2:
        SIZEOF(QUERY (item <* SELF\representation.items| NOT (SIZEOF([
'PLANT_SPATIAL_CONFIGURATIONS.TEXT_LITERAL',
'PLANT_SPATIAL_CONFIGURATIONS.ANNOTATION_TEXT',
'PLANT_SPATIAL_CONFIGURATIONS.ANNOTATION_TEXT_CHARACTER',
'PLANT_SPATIAL_CONFIGURATIONS.DEFINED_CHARACTER_GLYPH',
'PLANT_SPATIAL_CONFIGURATIONS.COMPOSITE_TEXT' ] * TYPEOF(item)) = 0))) >= 1;
    WR3:
        SIZEOF(QUERY (a2p <* QUERY (item <* SELF\representation.items|
('PLANT_SPATIAL_CONFIGURATIONS.AXIS2_PLACEMENT' IN TYPEOF(item)))| NOT
((SIZEOF(QUERY (at <* QUERY (item <* SELF\representation.items|
('PLANT_SPATIAL_CONFIGURATIONS.' + 'ANNOTATION_TEXT' IN TYPEOF(item)))|
(at\mapped_item.mapping_target ::= a2p))) >= 1) OR (SIZEOF(QUERY (atc <*
QUERY (item <* SELF\representation.items| ('PLANT_SPATIAL_CONFIGURATIONS.' +
'ANNOTATION_TEXT_CHARACTER' IN TYPEOF(item)))|
(atc\mapped_item.mapping_target ::= a2p))) >= 1)))) = 0;
    END_ENTITY;

ENTITY text_style;
    name : label;
    character_appearance : character_style_select;
END_ENTITY;

ENTITY text_style_for_defined_font;
    text_colour : colour;
END_ENTITY;
```

```

ENTITY text_style_with_box_characteristics
SUBTYPE OF (text_style);
    characteristics : SET [1:4] OF box_characteristic_select;
WHERE
    WR1:
        SIZEOF(QUERY (c1 <* SELF.characteristics| (SIZEOF(QUERY (c2 <*
SELF.characteristics - c1| (TYPEOF(c1) = TYPEOF(c2)))) > 0))) = 0;
END_ENTITY;

ENTITY text_style_with_mirror
SUBTYPE OF (text_style);
    mirror_placement : axis2_placement;
END_ENTITY;

ENTITY thermodynamic_temperature_measure_with_unit
SUBTYPE OF (measure_with_unit);
WHERE
    WR1:
        'PLANT_SPATIAL_CONFIGURATION.THERMODYNAMIC_TEMPERATURE_UNIT' IN
TYPEOF(SELF\measure_with_unit.unit_component);
END_ENTITY;

ENTITY thermodynamic_temperature_unit
SUBTYPE OF (named_unit);
WHERE
    WR1:
        ((((((SELF\named_unit.dimensions.length_exponent = 0.00000) AND
(SELF\named_unit.dimensions.mass_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.time_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.electric_current_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.thermodynamic_temperature_exponent = 1.00000))
AND (SELF\named_unit.dimensions.amount_of_substance_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.luminous_intensity_exponent = 0.00000);
END_ENTITY;

ENTITY time_measure_with_unit
SUBTYPE OF (measure_with_unit);
WHERE
    WR1:
        'PLANT_SPATIAL_CONFIGURATION.TIME_UNIT' IN
TYPEOF(SELF\measure_with_unit.unit_component);
END_ENTITY;

ENTITY time_unit
SUBTYPE OF (named_unit);
WHERE
    WR1:
        ((((((SELF\named_unit.dimensions.length_exponent = 0.00000) AND
(SELF\named_unit.dimensions.mass_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.time_exponent = 1.00000)) AND
(SELF\named_unit.dimensions.electric_current_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.thermodynamic_temperature_exponent = 0.00000))
AND (SELF\named_unit.dimensions.amount_of_substance_exponent = 0.00000)) AND
(SELF\named_unit.dimensions.luminous_intensity_exponent = 0.00000);

```

ISO 10303-227:2005(E)

END_ENTITY;

ENTITY topological_representation_item
SUPERTYPE OF (ONEOF(vertex, edge, face_bound, face, vertex_shell,
wire_shell, connected_face_set, loop ANDOR path))
SUBTYPE OF (representation_item);
END_ENTITY;

ENTITY toroidal_surface
SUBTYPE OF (elementary_surface);
 major_radius : positive_length_measure;
 minor_radius : positive_length_measure;
END_ENTITY;

ENTITY torus
SUBTYPE OF (geometric_representation_item);
 position : axis1_placement;
 major_radius : positive_length_measure;
 minor_radius : positive_length_measure;
WHERE
 WR1:
 major_radius > minor_radius;
END_ENTITY;

ENTITY trimmed_curve
SUBTYPE OF (bounded_curve);
 basis_curve : curve;
 trim_1 : SET [1:2] OF trimming_select;
 trim_2 : SET [1:2] OF trimming_select;
 sense_agreement : BOOLEAN;
 master_representation : trimming_preference;
WHERE
 WR1:
 (HIINDEX(trim_1) = 1) OR (TYPEOF(trim_1[1]) <> TYPEOF(trim_1[2]));
 WR2:
 (HIINDEX(trim_2) = 1) OR (TYPEOF(trim_2[1]) <> TYPEOF(trim_2[2]));
END_ENTITY;

ENTITY two_direction_repeat_factor
SUBTYPE OF (one_direction_repeat_factor);
 second_repeat_factor : vector;
END_ENTITY;

ENTITY type_qualifier;
 name : label;
END_ENTITY;

ENTITY uncertainty_measure_with_unit
SUBTYPE OF (measure_with_unit);
 name : label;
 description : OPTIONAL text;
WHERE
 WR1:
 valid_measure_value(SELFF\measure_with_unit.value_component);

```

END_ENTITY;

ENTITY uniform_curve
SUBTYPE OF (b_spline_curve);
END_ENTITY;

ENTITY uniform_surface
SUBTYPE OF (b_spline_surface);
END_ENTITY;

ENTITY valve_class
SUBTYPE OF (group);
WHERE
  WR1:
    SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (it <* aca.items| NOT
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it))) =
0))) = 0;
  WR2:
    SIZEOF(QUERY (aca <* QUERY (ca <* USEDIN(SELF,
'PLANT_SPATIAL_CONFIGURATION.CLASSIFICATION_ASSIGNMENT.' + 'ASSIGNED_CLASS')|
('PLANT_SPATIAL_CONFIGURATION.APPLIED_CLASSIFICATION_ASSIGNMENT' IN
TYPEOF(ca)))| NOT (SIZEOF(QUERY (pcd <* QUERY (it <* aca.items|
('PLANT_SPATIAL_CONFIGURATION.PIPING_COMPONENT_DEFINITION' IN TYPEOF(it)))|
NOT (SIZEOF(QUERY (acal <* USEDIN(pcd.formation.of_product,
'PLANT_SPATIAL_CONFIGURATION.' + 'APPLIED_CLASSIFICATION_ASSIGNMENT.ITEMS')|
class_in_tree(acal.assigned_class, 'valve')) = 1))) = 0))) = 0;
END_ENTITY;

ENTITY vector
SUBTYPE OF (geometric_representation_item);
  orientation : direction;
  magnitude : length_measure;
WHERE
  WR1:
    magnitude >= 0.00000;
END_ENTITY;

ENTITY versioned_action_request;
  id : identifier;
  version : label;
  purpose : text;
  description : OPTIONAL text;
END_ENTITY;

ENTITY vertex
SUBTYPE OF (topological_representation_item);
END_ENTITY;

ENTITY vertex_loop
SUBTYPE OF (loop);
  loop_vertex : vertex;

```

ISO 10303-227:2005(E)

```
END_ENTITY;

ENTITY vertex_point
SUBTYPE OF (vertex, geometric_representation_item);
    vertex_geometry : point;
END_ENTITY;

ENTITY vertex_shell
SUBTYPE OF (topological_representation_item);
    vertex_shell_extent : vertex_loop;
END_ENTITY;

ENTITY view_dependent_annotation_representation
SUBTYPE OF (presentation_representation);
WHERE
    WR1:
        SIZEOF(QUERY (item <* SELF\representation.items| NOT (SIZEOF([
('PLANT_SPATIAL_CONFIGURATION.' + 'ANNOTATION_OCCURRENCE'),
'PLANT_SPATIAL_CONFIGURATION.AXIS2_PLACEMENT' ] * TYPEOF(item)) = 1))) = 0;
    WR2:
        SIZEOF(QUERY (item <* SELF\representation.items|
('PLANT_SPATIAL_CONFIGURATION.ANNOTATION_OCCURRENCE' IN TYPEOF(item)))) >= 1;
END_ENTITY;

ENTITY wire_shell
SUBTYPE OF (topological_representation_item);
    wire_shell_extent : SET [1:?] OF loop;
WHERE
    WR1:
        NOT mixed_loop_type_set(wire_shell_extent);
END_ENTITY;
(* *****
Functions in the schema plant_spatial_configuration
***** *)
FUNCTION acyclic_curve_replica
    (rep : curve_replica;
    parent : curve ) : BOOLEAN;
    IF NOT ('PLANT_SPATIAL_CONFIGURATION.CURVE_REPLICA' IN TYPEOF(parent))
THEN
    RETURN (TRUE);
END_IF;
    IF parent ::= rep THEN
    RETURN (FALSE);
    ELSE
    RETURN (acyclic_curve_replica(rep,
parent\curve_replica.parent_curve));
    END_IF;
END_FUNCTION;

FUNCTION acyclic_mapped_representation
    (parent_set : SET OF representation;
    children_set : SET OF representation_item ) : BOOLEAN;
LOCAL
    x : SET OF representation_item;
```



```

    y : SET OF representation_item;
  END_LOCAL;
  x := QUERY (z <* children_set |
'PLANT_SPATIAL_CONFIGURATION.MAPPED_ITEM' IN TYPEOF(z));
  IF SIZEOF(x) > 0 THEN
    REPEAT i := 1 TO HIINDEX(x);
      IF x[i]\mapped_item.mapping_source.mapped_representation IN
parent_set THEN
        RETURN (FALSE);
      END_IF;
      IF NOT acyclic_mapped_representation((parent_set +
x[i]\mapped_item.mapping_source.mapped_representation),
x[i]\mapped_item.mapping_source.mapped_representation.items) THEN
        RETURN (FALSE);
      END_IF;
    END_REPEAT;
  END_IF;
  x := children_set - x;
  IF SIZEOF(x) > 0 THEN
    REPEAT i := 1 TO HIINDEX(x);
      y := QUERY (z <* bag_to_set(USEDIN(x[i], '')) |
'PLANT_SPATIAL_CONFIGURATION.REPRESENTATION_ITEM' IN TYPEOF(z));
      IF NOT acyclic_mapped_representation(parent_set, y) THEN
        RETURN (FALSE);
      END_IF;
    END_REPEAT;
  END_IF;
  RETURN (TRUE);
END_FUNCTION;

FUNCTION acyclic_point_replica
(rep : point_replica;
parent : point ) : BOOLEAN;
IF NOT ('PLANT_SPATIAL_CONFIGURATION.POINT_REPLICA' IN TYPEOF(parent))
THEN
  RETURN (TRUE);
END_IF;
IF parent ::= rep THEN
  RETURN (FALSE);
ELSE
  RETURN (acyclic_point_replica(rep, parent\point_replica.parent_pt));
END_IF;
END_FUNCTION;

FUNCTION acyclic_presentation_representation_relationship
(relation : presentation_representation_relationship;
children : SET OF presentation_representation ) : BOOLEAN;
LOCAL
x : SET OF presentation_representation_relationship;
local_children : SET OF presentation_representation;
END_LOCAL;
REPEAT i := 1 TO HIINDEX(children);
  IF relation\presentation_relationship.rep_1 ::= children[i] THEN
    RETURN (FALSE);
  
```

ISO 10303-227:2005(E)

```
        END_IF;
    END_REPEAT;
    x := bag_to_set(USEDIN(relation\representation_relationship.rep_1,
'PLANT_SPATIAL_CONFIGURATION.' + 'REPRESENTATION_RELATIONSHIP.REP_2'));
    local_children := children +
relation\representation_relationship.rep_1;
    IF SIZEOF(x) > 0 THEN
        REPEAT i := 1 TO HIINDEX(x);
            IF NOT acyclic_presentation_representation_relationship(x[i],
local_children) THEN
                RETURN (FALSE);
            END_IF;
        END_REPEAT;
    END_IF;
    RETURN (TRUE);
END_FUNCTION;
(* *****
Rules in the schema plant_spatial_configuration
***** *)
    RULE application_context_requires_ap_definition FOR (application_context,
application_protocol_definition );
    WHERE
        WR1:
            SIZEOF(QUERY (ac <* application_context | NOT (SIZEOF(QUERY (apd <*
application_protocol_definition | (ac ::= apd.application) AND
(apd.application_interpreted_model_schema_name =
'plant_spatial_configuration')) = 1))) = 0;
        END_RULE;

    RULE approval_requires_approval_date_time FOR (approval_date_time,
approval );
    WHERE
        WR1:
            SIZEOF(QUERY (app <* approval | NOT (SIZEOF(QUERY (adt <*
approval_date_time | (app ::= adt.dated_approval))) = 1))) = 0;
        END_RULE;

    RULE approval_requires_approval_person_organization FOR
(approval_person_organization, approval );
    WHERE
        WR1:
            SIZEOF(QUERY (app <* approval | NOT (SIZEOF(QUERY (apo <*
approval_person_organization | (app ::= apo.authorized_approval))) = 1))) = 0;
        END_RULE;

    RULE change_action_requires_date FOR (change_action,
applied_date_assignment );
    WHERE
        WR1:
            SIZEOF(QUERY (ca <* change_action | NOT (SIZEOF(QUERY (pscda <*
applied_date_assignment | (ca IN pscda.items))) = 1))) = 0;
        END_RULE;
```

```

RULE change_item_requires_creation_date FOR
(plant_spatial_configuration_change_assignment, applied_date_assignment );
WHERE
  WR1:
    SIZEOF(QUERY (pscca <*
plant_spatial_configuration_change_assignment| NOT (SIZEOF(QUERY (ch_it <*
pscca.items| NOT (SIZEOF(QUERY (pscda <* applied_date_assignment| NOT (ch_it
IN pscda.items) OR (pscda.role.name = 'creation date')))) = 1))) = 0))) = 0;
  END_RULE;

RULE change_item_requires_id FOR
(plant_spatial_configuration_change_assignment, change_item_id_assignment );
WHERE
  WR1:
    SIZEOF(QUERY (pscca <*
plant_spatial_configuration_change_assignment| NOT (SIZEOF(QUERY (ch_it <*
pscca.items| NOT (SIZEOF(QUERY (ciia <* change_item_id_assignment| (ch_it IN
ciia.items))) = 1))) = 0))) = 0;
  END_RULE;

RULE change_life_cycle_stage_usage_requires_approval FOR
(versioned_action_request, applied_approval_assignment );
WHERE
  WR1:
    SIZEOF(QUERY (vareq <* versioned_action_request| NOT (SIZEOF(QUERY
(pscaa <* applied_approval_assignment| (vareq IN pscaa.items))) = 1))) = 0;
  END_RULE;

RULE change_life_cycle_stage_usage_requires_stage FOR
(versioned_action_request, action_request_status );
WHERE
  WR1:
    SIZEOF(QUERY (vareq <* versioned_action_request| NOT (SIZEOF(QUERY
(ars <* action_request_status| (vareq ::= ars.assigned_request))) = 1))) = 0;
  END_RULE;

RULE compatible_dimension FOR (cartesian_point, direction,
representation_context, geometric_representation_context );
WHERE
  WR1:
    SIZEOF(QUERY (x <* cartesian_point| (SIZEOF(QUERY (y <*
geometric_representation_context| item_in_context(x, y) AND
(HIINDEX(x.coordinates) <> y.coordinate_space_dimension))) > 0))) = 0;
  WR2:
    SIZEOF(QUERY (x <* direction| (SIZEOF(QUERY (y <*
geometric_representation_context| item_in_context(x, y) AND
(HIINDEX(x.direction_ratios) <> y.coordinate_space_dimension))) > 0))) = 0;
  END_RULE;

RULE dependent_instantiable_application_context FOR (application_context
);
WHERE
  WR1:

```

ISO 10303-227:2005(E)

```
        SIZEOF(QUERY (ac <* application_context| NOT (SIZEOF(USEDIN(ac, ''))
>= 1))) = 0;
    END_RULE;

    RULE dependent_instantiable_product_context FOR (product_context );
    WHERE
        WR1:
            SIZEOF(QUERY (pc <* product_context| NOT (SIZEOF(USEDIN(pc, '')) >=
1))) = 0;
    END_RULE;

    RULE dependent_instantiable_product_definition_context FOR
(product_definition_context );
    WHERE
        WR1:
            SIZEOF(QUERY (pdc <* product_definition_context| NOT
(SIZEOF(USEDIN(pdc, '')) >= 1))) = 0;
    END_RULE;

    RULE description_attribute_limited_usage FOR (description_attribute );
    WHERE
        WR1: SIZEOF (QUERY (da <* description_attribute |
            NOT (da.attribute_value IN [ 'target entity name', 'target schema
name' ]))) = 0;
        WR2: SIZEOF (QUERY (da <* description_attribute |
            NOT (SIZEOF(TYPEOF(da.described_item) * [
'PLANT_SPATIAL_CONFIGURATION.EXTERNAL_SOURCE' ])) = 1))) = 0;
    END_RULE;

    RULE drawing_sheets_not_nested FOR
(presentation_representation_relationship );
    WHERE
        WR1:
            SIZEOF(QUERY (p_r_r <* presentation_representation_relationship|
('PLANT_SPATIAL_CONFIGURATION.DRAWING_SHEET_REVISION' IN TYPEOF(p_r_r.rep_1))
AND ('PLANT_SPATIAL_CONFIGURATION.DRAWING_SHEET_REVISION' IN
TYPEOF(p_r_r.rep_2)))) = 0;
    END_RULE;

    RULE mandatory_entity_type_for_external_schema_context FOR
(external_source );
    WHERE
        WR1:
            SIZEOF(QUERY (tsn <* QUERY (es <* external_source| (es.description =
'target schema name'))| NOT (SIZEOF(QUERY (esr <* USEDIN(tsn,
'PLANT_SPATIAL_CONFIGURATION.EXTERNAL_SOURCE_RELATIONSHIP.' +
'RELATING_SOURCE'))| NOT (esr.related_source.description = 'target entity
name')))) = 0))) = 0;
        WR2:
            SIZEOF(QUERY (tsn <* QUERY (es <* external_source| (es.description =
'target entity name'))| NOT (SIZEOF(QUERY (esr <* USEDIN(tsn,
'PLANT_SPATIAL_CONFIGURATION.EXTERNAL_SOURCE_RELATIONSHIP.' +
'RELATED_SOURCE'))| NOT (esr.relatng_source.description = 'target schema
name')))) = 0))) = 0;
```

```

END_RULE;

RULE product_context_discipline_type_constraint FOR (product_context );
WHERE
  WR1:
    SIZEOF(QUERY (pc <* product_context| NOT (pc.discipline_type =
'process plant')))) = 0;
END_RULE;

RULE product_definition_context_name_constraint FOR
(product_definition_context );
WHERE
  WR1:
    SIZEOF(QUERY (pdc <* product_definition_context| NOT (pdc.name IN [
'functional definition', 'physical definition', 'functional occurrence',
'physical occurrence', 'catalogue definition', 'fabrication assembly',
'material' ]))) = 0;
END_RULE;

RULE product_definition_usage_constraint FOR (product_definition );
WHERE
  WR1:
    SIZEOF(QUERY (pd <* product_definition| (pd.frame_of_reference.name
= 'physical occurrence') AND NOT (SIZEOF(QUERY (pdr <* USEDIN(pd,
'PLANT_SPATIAL_CONFIGURATIONS.PRODUCT_DEFINITION_RELATIONSHIP.' +
'RELATED_PRODUCT_DEFINITION')| (SIZEOF(TYPEOF(pdr) * [
'PLANT_SPATIAL_CONFIGURATIONS.PRODUCT_DEFINITION_USAGE',
'PLANT_SPATIAL_CONFIGURATIONS.MAKE_FROM_USAGE_OPTION',
'PLANT_SPATIAL_CONFIGURATIONS.ASSEMBLY_COMPONENT_USAGE' ] ) = 1))) <= 1))) = 0;
END_RULE;

RULE subtype_exclusive_characterized_object FOR (characterized_object );
WHERE
  WR1:
    SIZEOF(QUERY (co <* characterized_object| NOT (SIZEOF([
'PLANT_SPATIAL_CONFIGURATIONS.PIPING_COMPONENT_CLASS',
'PLANT_SPATIAL_CONFIGURATIONS.SITE',
'PLANT_SPATIAL_CONFIGURATIONS.STREAM_DESIGN_CASE' ] * TYPEOF(co)) <= 1))) = 0;
END_RULE;

RULE subtype_mandatory_externally_defined_item FOR
(externally_defined_item );
WHERE
  WR1:
    SIZEOF(QUERY (edi <* externally_defined_item| NOT (SIZEOF([
'PLANT_SPATIAL_CONFIGURATIONS.CATALOGUE_CONNECTOR',
'PLANT_SPATIAL_CONFIGURATIONS.EXTERNALLY_DEFINED_CLASS',
'PLANT_SPATIAL_CONFIGURATIONS.EXTERNALLY_DEFINED_PLANT_ITEM_DEFINITION',
'PLANT_SPATIAL_CONFIGURATIONS.EXTERNALLY_DEFINED_DOCUMENT' ] * TYPEOF(edi)) =
1))) = 0;
END_RULE;

RULE subtype_mandatory_pre_defined_item FOR (pre_defined_item );
WHERE

```

ISO 10303-227:2005(E)

```
WR1:
    SIZEOF(QUERY (pdi <* pre_defined_item| NOT
('PLANT_SPATIAL_CONFIGURATIONS.KNOWN_SOURCE' IN TYPEOF(pdi)))) = 0;
END_RULE;

RULE subtype_mandatory_shape_representation FOR (shape_representation );
WHERE
    WR1:
        SIZEOF(QUERY (sr <* shape_representation| NOT (SIZEOF([
('PLANT_SPATIAL_CONFIGURATIONS.' + 'PLANT_CSG_SHAPE_REPRESENTATION'),
'PLANT_SPATIAL_CONFIGURATIONS.HYBRID_SHAPE_REPRESENTATION',
'PLANT_SPATIAL_CONFIGURATIONS.SHAPE_DIMENSION_REPRESENTATION',
('PLANT_SPATIAL_CONFIGURATIONS.' + 'SITE_REPRESENTATION'),
'PLANT_SPATIAL_CONFIGURATIONS.PLANT_DESIGN_CSG_PRIMITIVE' ] * TYPEOF(sr)) =
1)))) = 0;
    END_RULE;

RULE symbol_representation_rule FOR
(presentation_representation_relationship );
WHERE
    WR1:
        SIZEOF(QUERY (each_1 <* presentation_representation_relationship|
NOT ('PLANT_SPATIAL_CONFIGURATIONS.' + 'SYMBOL_REPRESENTATION_RELATIONSHIP' IN
TYPEOF(each_1)) AND (SIZEOF(QUERY (each_2 <* [
each_1\representation_relationship.rep_1,
each_1\representation_relationship.rep_2 ]|
('PLANT_SPATIAL_CONFIGURATIONS.SYMBOL_REPRESENTATION' IN TYPEOF(each_2)))) >
0)))) = 0;
    END_RULE;

RULE value_for_application_context FOR (application_context );
WHERE
    WR1:
        SIZEOF(QUERY (ac <* application_context| NOT (ac.application =
'plant spatial configuration')))) = 0;
    END_RULE;

RULE version2_p41_object_role_selection FOR (role_association );
WHERE
    WR1:
        SIZEOF(QUERY (ra <* role_association| NOT
('PLANT_SPATIAL_CONFIGURATIONS.' +
'PLANT_SPATIAL_CONFIGURATIONS_CHANGE_ASSIGNMENT' IN
TYPEOF(ra.item_with_role)))) = 0;
    END_RULE;

RULE version2_p41_uninstantiable_basic_attributes FOR (id_attribute,
name_attribute );
WHERE
    WR1:
        SIZEOF(bag_to_set(id_attribute)) = 0;
    WR2:
        SIZEOF(bag_to_set(name_attribute)) = 0;
    END_RULE;
```

```

FUNCTION acyclic_product_definition_relationship
  (relation : product_definition_relationship;
   relatives : SET [1:?] OF product_definition;
   specific_relation : STRING ) : BOOLEAN;
LOCAL
  x : SET OF product_definition_relationship;
END_LOCAL;
  IF relation.relating_product_definition IN relatives THEN
    RETURN (FALSE);
  END_IF;
  x := QUERY (pd <*
bag_to_set(USEDIN(relation.relating_product_definition,
'PLANT_SPATIAL_CONFIGURATION.' + 'PRODUCT_DEFINITION_RELATIONSHIP.' +
'RELATED_PRODUCT_DEFINITION')) | specific_relation IN TYPEOF(pd));
  REPEAT i := 1 TO HIINDEX(x);
    IF NOT acyclic_product_definition_relationship(x[i], (relatives +
relation.relating_product_definition), specific_relation) THEN
      RETURN (FALSE);
    END_IF;
  END_REPEAT;
  RETURN (TRUE);
END_FUNCTION;

FUNCTION acyclic_set_replica
  (rep : geometric_set_replica;
   parent : geometric_set ) : BOOLEAN;
  IF NOT ('PLANT_SPATIAL_CONFIGURATION.GEOMETRIC_SET_REPLICA' IN
TYPEOF(parent)) THEN
    RETURN (TRUE);
  END_IF;
  IF parent ::= rep THEN
    RETURN (FALSE);
  ELSE
    RETURN (acyclic_set_replica(rep,
parent\geometric_set_replica.parent_set));
  END_IF;
END_FUNCTION;

FUNCTION acyclic_surface_replica
  (rep : surface_replica;
   parent : surface ) : BOOLEAN;
  IF NOT ('PLANT_SPATIAL_CONFIGURATION.SURFACE_REPLICA' IN
TYPEOF(parent)) THEN
    RETURN (TRUE);
  END_IF;
  IF parent ::= rep THEN
    RETURN (FALSE);
  ELSE
    RETURN (acyclic_surface_replica(rep,
parent\surface_replica.parent_surface));
  END_IF;
END_FUNCTION;

FUNCTION acyclic_symbol_representation_relationship

```

ISO 10303-227:2005(E)

```
(relation : symbol_representation_relationship;
 children : SET OF symbol_representation ) : BOOLEAN;
LOCAL
  x : SET OF symbol_representation_relationship;
  local_children : SET OF symbol_representation;
END_LOCAL;
REPEAT i := 1 TO HIINDEX(children);
  IF relation\representation_relationship.rep_1 ::= children[i] THEN
    RETURN (FALSE);
  END_IF;
END_REPEAT;
x := bag_to_set(USEDIN(relation\representation_relationship.rep_1,
'PLANT_SPATIAL_CONFIGURATION.' + 'REPRESENTATION_RELATIONSHIP.' + 'REP_2'));
local_children := children +
relation\representation_relationship.rep_1;
IF SIZEOF(x) > 0 THEN
  REPEAT i := 1 TO HIINDEX(x);
    IF NOT acyclic_symbol_representation_relationship(x[i],
local_children) THEN
      RETURN (FALSE);
    END_IF;
  END_REPEAT;
END_IF;
RETURN (TRUE);
END_FUNCTION;

FUNCTION applied_identification_correlation
  (aia : applied_identification_assignment ) : BOOLEAN;
LOCAL
  i_role : STRING;
END_LOCAL;
i_role := aia\identification_assignment.role.name;
CASE i_role OF
  'global unambiguous identifier' :
    IF SIZEOF(aia.items) <> SIZEOF(QUERY (x <* aia.items|
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION' IN TYPEOF(x)))) THEN
      RETURN (FALSE);
    END_IF;
  'stock code' :
    IF SIZEOF(aia.items) <> SIZEOF(QUERY (x <* aia.items|
('PLANT_SPATIAL_CONFIGURATION.PRODUCT_DEFINITION' IN TYPEOF(x)))) THEN
      RETURN (FALSE);
    END_IF;
  'weld id' :
    IF SIZEOF(aia.items) <> SIZEOF(QUERY (x <* aia.items|
('PLANT_SPATIAL_CONFIGURATION.MATERIAL_PROPERTY' IN TYPEOF(x)))) THEN
      RETURN (FALSE);
    END_IF;
  'connecting portion id' :
    IF SIZEOF(aia.items) <> SIZEOF(QUERY (x <* aia.items|
('PLANT_SPATIAL_CONFIGURATION.MATERIAL_PROPERTY' IN TYPEOF(x)))) THEN
      RETURN (FALSE);
    END_IF;
  'analysis data point id' :
```



```

        IF SIZEOF(aia.items) <> SIZEOF(QUERY (x < * aia.items |
('PLANT_SPATIAL_CONFIGURATION.SHAPE_ASPECT' IN TYPEOF(x)))) THEN
            RETURN (FALSE);
        END_IF;
        'document version id' :
        IF SIZEOF(aia.items) <> SIZEOF(QUERY (x < * aia.items |
('PLANT_SPATIAL_CONFIGURATION.DOCUMENT' IN TYPEOF(x)))) THEN
            RETURN (FALSE);
        END_IF;
    OTHERWISE :
        RETURN (TRUE);
    END_CASE;
    RETURN (TRUE);
END_FUNCTION;

FUNCTION associated_surface
    (arg : pcurve_or_surface ) : surface;
LOCAL
    surf : surface;
END_LOCAL;
    IF 'PLANT_SPATIAL_CONFIGURATION.PCURVE' IN TYPEOF(arg) THEN
        surf := arg.basis_surface;
    ELSE
        surf := arg;
    END_IF;
    RETURN (surf);
END_FUNCTION;

FUNCTION bag_to_set
    (the_bag : BAG OF GENERIC : intype ) : SET OF GENERIC : intype;
LOCAL
    the_set : SET OF GENERIC : intype := [];
    i : INTEGER;
END_LOCAL;
    IF SIZEOF(the_bag) > 0 THEN
        REPEAT i := 1 TO HIINDEX(the_bag) BY 1;
            the_set := the_set + the_bag[i];
        END_REPEAT;
    END_IF;
    RETURN (the_set);
END_FUNCTION;

FUNCTION base_axis
    (dim : INTEGER;
    axis1 : direction;
    axis2 : direction;
    axis3 : direction ) : LIST [2:3] OF direction;
LOCAL
    u : LIST [2:3] OF direction;
    factor : REAL;
    d1 : direction;
    d2 : direction;
END_LOCAL;
    IF dim = 3 THEN

```

ISO 10303-227:2005(E)

```

    d1 := NVL(normalise(axis3), dummy_gri || direction([ 0.00000,
0.00000, 1.00000 ]));
    d2 := first_proj_axis(d1, axis1);
    u := [ d2, second_proj_axis(d1, d2, axis2), d1 ];
ELSE
  IF EXISTS(axis1) THEN
    d1 := normalise(axis1);
    u := [ d1, orthogonal_complement(d1) ];
    IF EXISTS(axis2) THEN
      factor := dot_product(axis2, u[2]);
      IF factor < 0.00000 THEN
        u[2].direction_ratios[1] := -u[2].direction_ratios[1];
        u[2].direction_ratios[2] := -u[2].direction_ratios[2];
      END_IF;
    END_IF;
  ELSE
    IF EXISTS(axis2) THEN
      d1 := normalise(axis2);
      u := [ orthogonal_complement(d1), d1 ];
      u[1].direction_ratios[1] := -u[1].direction_ratios[1];
      u[1].direction_ratios[2] := -u[1].direction_ratios[2];
    ELSE
      u := [ dummy_gri || direction([ 1.00000, 0.00000 ]), dummy_gri
|| direction([ 0.00000, 1.00000 ] ) ];
    END_IF;
  END_IF;
END_IF;
RETURN (u);
END_FUNCTION;

FUNCTION boolean_choose
  (b : BOOLEAN;
  choicel : GENERIC : item;
  choice2 : GENERIC : item ) : GENERIC : item;
  IF b THEN
    RETURN (choicel);
  ELSE
    RETURN (choice2);
  END_IF;
END_FUNCTION;

FUNCTION build_2axes
  (ref_direction : direction ) : LIST [2:2] OF direction;
  LOCAL
    d : direction := NVL(normalise(ref_direction), dummy_gri || direction([
1.00000, 0.00000 ]));
  END_LOCAL;
  RETURN ([ d, orthogonal_complement(d) ]);
END_FUNCTION;

FUNCTION build_axes
  (axis : direction;
  ref_direction : direction ) : LIST [3:3] OF direction;
  LOCAL
```

```

    d1 : direction;
    d2 : direction;
END_LOCAL;
    d1 := NVL(normalise(axis), dummy_gri || direction([ 0.00000, 0.00000,
1.00000 ]));
    d2 := first_proj_axis(d1, ref_direction);
    RETURN ([ d2, normalise(cross_product(d1, d2)).orientation, d1 ]);
END_FUNCTION;

FUNCTION build_transformed_set(tr: cartesian_transformation_operator;
    gset : geometric_set) : SET [0:?] OF geometric_set_select;
LOCAL
    s      : SET [1:?] OF geometric_set_select := gset.elements;
    trset  : SET [0:?] OF geometric_set_select := [];
END_LOCAL;
REPEAT j := 1 TO SIZEOF(s);
    IF ('GEOMETRY_SCHEMA.CURVE' IN TYPEOF(s[j])) THEN
        trset := trset + dummy_gri || curve() || curve_replica(s[j],tr); ELSE
    IF ('GEOMETRY_SCHEMA.POINT' IN TYPEOF(s[j])) THEN
        trset := trset + dummy_gri || point() || point_replica(s[j],tr);
    ELSE
        IF ('GEOMETRY_SCHEMA.SURFACE' IN TYPEOF(s[j])) THEN
            trset := trset + dummy_gri || surface() || surface_replica(s[j],
                tr || cartesian_transformation_operator_3d (?));
        END_IF;
    END_IF;
END_REPEAT;
RETURN(trset);
END_FUNCTION;

FUNCTION class_in_tree
    (class : group;
    val : STRING ) : BOOLEAN;
IF class.name = val THEN
    RETURN (TRUE);
ELSE
    RETURN (SIZEOF(QUERY (gr <* USEDIN(class,
'PLANT_SPATIAL_CONFIGURATION.' + 'GROUP_RELATIONSHIP.RELATED_GROUP') |
class_in_tree(gr.relater_group, val))) = 1);
END_IF;
RETURN (FALSE);
END_FUNCTION;

FUNCTION closed_shell_reversed
    (a_shell : closed_shell ) : oriented_closed_shell;
LOCAL
    the_reverse : oriented_closed_shell;
END_LOCAL;
IF 'PLANT_SPATIAL_CONFIGURATION.ORIENTED_CLOSED_SHELL' IN
TYPEOF(a_shell) THEN
    the_reverse := dummy_tri ||
connected_face_set(a_shell\connected_face_set.cfs_faces) || closed_shell() ||

```

ISO 10303-227:2005(E)

```
oriented_closed_shell(a_shell\oriented_closed_shell.closed_shell_element, NOT
a_shell\oriented_closed_shell.orientation);
    ELSE
        the_reverse := dummy_tri ||
connected_face_set(a_shell\connected_face_set.cfs_faces) || closed_shell() ||
oriented_closed_shell(a_shell, FALSE);
    END_IF;
    RETURN (the_reverse);
END_FUNCTION;

FUNCTION conditional_reverse
    (p : BOOLEAN;
    an_item : reversible_topology ) : reversible_topology;
IF p THEN
    RETURN (an_item);
ELSE
    RETURN (topology_reversed(an_item));
END_IF;
END_FUNCTION;

FUNCTION constraints_composite_curve_on_surface
    (c : composite_curve_on_surface ) : BOOLEAN;
LOCAL
    n_segments : INTEGER := SIZEOF(c.segments);
END_LOCAL;
REPEAT k := 1 TO n_segments;
    IF (NOT ('PLANT_SPATIAL_CONFIGURATION.PCURVE' IN
TYPEOF(c\composite_curve.segments[k].parent_curve)) AND NOT
('PLANT_SPATIAL_CONFIGURATION.SURFACE_CURVE' IN
TYPEOF(c\composite_curve.segments[k].parent_curve))) AND NOT
('PLANT_SPATIAL_CONFIGURATION.COMPOSITE_CURVE_ON_SURFACE' IN
TYPEOF(c\composite_curve.segments[k].parent_curve)) THEN
        RETURN (FALSE);
    END_IF;
END_REPEAT;
RETURN (TRUE);
END_FUNCTION;

FUNCTION constraints_geometry_shell_based_wireframe_model
    (m : shell_based_wireframe_model ) : BOOLEAN;
LOCAL
    result : BOOLEAN := TRUE;
END_LOCAL;
REPEAT j := 1 TO SIZEOF(m.sbwm_boundary);
    IF NOT ('PLANT_SPATIAL_CONFIGURATION.WIRE_SHELL' IN
TYPEOF(m.sbwm_boundary[j])) AND NOT
('PLANT_SPATIAL_CONFIGURATION.VERTEX_SHELL' IN TYPEOF(m.sbwm_boundary[j]))
THEN
        result := FALSE;
        RETURN (result);
    END_IF;
END_REPEAT;
RETURN (result);
END_FUNCTION;
```

```

FUNCTION constraints_param_b_spline
  (degree : INTEGER;
   up_knots : INTEGER;
   up_cp : INTEGER;
   knot_mult : LIST OF INTEGER;
   knots : LIST OF parameter_value ) : BOOLEAN;
LOCAL
  result : BOOLEAN := TRUE;
  k : INTEGER;
  sum : INTEGER;
END_LOCAL;
  sum := knot_mult[1];
  REPEAT i := 2 TO up_knots;
    sum := sum + knot_mult[i];
  END_REPEAT;
  IF (((degree < 1) OR (up_knots < 2)) OR (up_cp < degree)) OR (sum <>
degree + up_cp + 2) THEN
    result := FALSE;
    RETURN (result);
  END_IF;
  k := knot_mult[1];
  IF (k < 1) OR (k > degree + 1) THEN
    result := FALSE;
    RETURN (result);
  END_IF;
  REPEAT i := 2 TO up_knots;
    IF (knot_mult[i] < 1) OR (knots[i] <= knots[(i - 1)]) THEN
      result := FALSE;
      RETURN (result);
    END_IF;
    k := knot_mult[i];
    IF (i < up_knots) AND (k > degree) THEN
      result := FALSE;
      RETURN (result);
    END_IF;
    IF (i = up_knots) AND (k > degree + 1) THEN
      result := FALSE;
      RETURN (result);
    END_IF;
  END_REPEAT;
  RETURN (result);
END_FUNCTION;

FUNCTION constraints_rectangular_composite_surface
  (s : rectangular_composite_surface ) : BOOLEAN;
  REPEAT i := 1 TO s.n_u;
    REPEAT j := 1 TO s.n_v;
      IF NOT (('PLANT_SPATIAL_CONFIGURATION.B_SPLINE_SURFACE' IN
TYPEOF(s.segments[i][j].parent_surface)) OR
('PLANT_SPATIAL_CONFIGURATION.RECTANGULAR_TRIMMED_SURFACE' IN
TYPEOF(s.segments[i][j].parent_surface))) THEN
        RETURN (FALSE);
      END_IF;
    END_REPEAT;
  END_REPEAT;
END_FUNCTION;

```

ISO 10303-227:2005(E)

```
        END_REPEAT;
    END_REPEAT;
    REPEAT i := 1 TO s.n_u - 1;
        REPEAT j := 1 TO s.n_v;
            IF s.segments[i][j].u_transition = discontinuous THEN
                RETURN (FALSE);
            END_IF;
        END_REPEAT;
    END_REPEAT;
    REPEAT i := 1 TO s.n_u;
        REPEAT j := 1 TO s.n_v - 1;
            IF s.segments[i][j].v_transition = discontinuous THEN
                RETURN (FALSE);
            END_IF;
        END_REPEAT;
    END_REPEAT;
    RETURN (TRUE);
END_FUNCTION;

FUNCTION cross_product
    (arg1 : direction;
     arg2 : direction ) : vector;
LOCAL
    mag : REAL;
    res : direction;
    v1 : LIST [3:3] OF REAL;
    v2 : LIST [3:3] OF REAL;
    result : vector;
END_LOCAL;
    IF (NOT EXISTS(arg1) OR (arg1.dim = 2)) OR (NOT EXISTS(arg2) OR
(arg2.dim = 2)) THEN
        RETURN (?);
    ELSE
        BEGIN
            v1 := normalise(arg1).direction_ratios;
            v2 := normalise(arg2).direction_ratios;
            res := dummy_gri || direction([ (v1[2] * v2[3] - v1[3] * v2[2]),
(v1[3] * v2[1] - v1[1] * v2[3]), (v1[1] * v2[2] - v1[2] * v2[1]) ]);
            mag := 0.00000;
            REPEAT i := 1 TO 3;
                mag := mag + res.direction_ratios[i] *
res.direction_ratios[i];
            END_REPEAT;
            IF mag > 0.00000 THEN
                result := dummy_gri || vector(res, sqrt(mag));
            ELSE
                result := dummy_gri || vector(arg1, 0.00000);
            END_IF;
            RETURN (result);
        END;
    END_IF;
END_FUNCTION;

FUNCTION curve_weights_positive
```

```

    (b : rational_b_spline_curve ) : BOOLEAN;
LOCAL
    result : BOOLEAN := TRUE;
END_LOCAL;
REPEAT i := 0 TO b.upper_index_on_control_points;
    IF b.weights[i] <= 0.00000 THEN
        result := FALSE;
        RETURN (result);
    END_IF;
END_REPEAT;
RETURN (result);
END_FUNCTION;

FUNCTION derive_dimensional_exponents
    (x : unit ) : dimensional_exponents;
LOCAL
    result : dimensional_exponents := dimensional_exponents(0.00000,
0.00000, 0.00000, 0.00000, 0.00000, 0.00000);
END_LOCAL;
IF 'PLANT_SPATIAL_CONFIGURATION.DERIVED_UNIT' IN TYPEOF(x) THEN
    REPEAT i := LOINDEX(x.elements) TO HIINDEX(x.elements);
        result.length_exponent := result.length_exponent +
x.elements[i].exponent * x.elements[i].unit.dimensions.length_exponent;
        result.mass_exponent := result.mass_exponent +
x.elements[i].exponent * x.elements[i].unit.dimensions.mass_exponent;
        result.time_exponent := result.time_exponent +
x.elements[i].exponent * x.elements[i].unit.dimensions.time_exponent;
        result.electric_current_exponent :=
result.electric_current_exponent + x.elements[i].exponent *
x.elements[i].unit.dimensions.electric_current_exponent;
        result.thermodynamic_temperature_exponent :=
result.thermodynamic_temperature_exponent + x.elements[i].exponent *
x.elements[i].unit.dimensions.thermodynamic_temperature_exponent;
        result.amount_of_substance_exponent :=
result.amount_of_substance_exponent + x.elements[i].exponent *
x.elements[i].unit.dimensions.amount_of_substance_exponent;
        result.luminous_intensity_exponent :=
result.luminous_intensity_exponent + x.elements[i].exponent *
x.elements[i].unit.dimensions.luminous_intensity_exponent;
    END_REPEAT;
ELSE
    result := x.dimensions;
END_IF;
RETURN (result);
END_FUNCTION;

FUNCTION dimension_of
    (item : geometric_representation_item ) : dimension_count;
LOCAL
    x : SET OF representation;
    y : representation_context;
    dim : dimension_count;
END_LOCAL;
IF 'PLANT_SPATIAL_CONFIGURATION.CARTESIAN_POINT' IN TYPEOF(item) THEN

```

ISO 10303-227:2005(E)

```
        dim := SIZEOF(item\cartesian_point.coordinates);
        RETURN (dim);
    END_IF;
    IF 'PLANT_SPATIAL_CONFIGURATION.DIRECTION' IN TYPEOF(item) THEN
        dim := SIZEOF(item\direction.direction_ratios);
        RETURN (dim);
    END_IF;
    IF 'PLANT_SPATIAL_CONFIGURATION.VECTOR' IN TYPEOF(item) THEN
        dim := SIZEOF(item\vector.orientation\direction.direction_ratios);
        RETURN (dim);
    END_IF;
    x := using_representations(item);
    y := x[1].context_of_items;
    dim := y\geometric_representation_context.coordinate_space_dimension;
    RETURN (dim);
END_FUNCTION;

FUNCTION dimensions_for_si_unit
    (n : si_unit_name ) : dimensional_exponents;
CASE n OF
    metre :
        RETURN (dimensional_exponents(1.00000, 0.00000, 0.00000,
0.00000, 0.00000, 0.00000, 0.00000));
    gram :
        RETURN (dimensional_exponents(0.00000, 1.00000, 0.00000,
0.00000, 0.00000, 0.00000, 0.00000));
    second :
        RETURN (dimensional_exponents(0.00000, 0.00000, 1.00000,
0.00000, 0.00000, 0.00000, 0.00000));
    ampere :
        RETURN (dimensional_exponents(0.00000, 0.00000, 0.00000,
1.00000, 0.00000, 0.00000, 0.00000));
    kelvin :
        RETURN (dimensional_exponents(0.00000, 0.00000, 0.00000,
0.00000, 1.00000, 0.00000, 0.00000));
    mole :
        RETURN (dimensional_exponents(0.00000, 0.00000, 0.00000,
0.00000, 0.00000, 1.00000, 0.00000));
    candela :
        RETURN (dimensional_exponents(0.00000, 0.00000, 0.00000,
0.00000, 0.00000, 0.00000, 1.00000));
    radian :
        RETURN (dimensional_exponents(0.00000, 0.00000, 0.00000,
0.00000, 0.00000, 0.00000, 0.00000));
    steradian :
        RETURN (dimensional_exponents(0.00000, 0.00000, 0.00000,
0.00000, 0.00000, 0.00000, 0.00000));
    hertz :
        RETURN (dimensional_exponents(0.00000, 0.00000, -1.00000,
0.00000, 0.00000, 0.00000, 0.00000));
    newton :
        RETURN (dimensional_exponents(1.00000, 1.00000, -2.00000,
0.00000, 0.00000, 0.00000, 0.00000));
    pascal :
```



```

        RETURN (dimensional_exponents(-1.00000, 1.00000, -2.00000,
0.00000, 0.00000, 0.00000, 0.00000));
joule :
        RETURN (dimensional_exponents(2.00000, 1.00000, -2.00000,
0.00000, 0.00000, 0.00000, 0.00000));
watt :
        RETURN (dimensional_exponents(2.00000, 1.00000, -3.00000,
0.00000, 0.00000, 0.00000, 0.00000));
coulomb :
        RETURN (dimensional_exponents(0.00000, 0.00000, 1.00000,
1.00000, 0.00000, 0.00000, 0.00000));
volt :
        RETURN (dimensional_exponents(2.00000, 1.00000, -3.00000, -
1.00000, 0.00000, 0.00000, 0.00000));
farad :
        RETURN (dimensional_exponents(-2.00000, -1.00000, 4.00000,
1.00000, 0.00000, 0.00000, 0.00000));
ohm :
        RETURN (dimensional_exponents(2.00000, 1.00000, -3.00000, -
2.00000, 0.00000, 0.00000, 0.00000));
siemens :
        RETURN (dimensional_exponents(-2.00000, -1.00000, 3.00000,
2.00000, 0.00000, 0.00000, 0.00000));
weber :
        RETURN (dimensional_exponents(2.00000, 1.00000, -2.00000, -
1.00000, 0.00000, 0.00000, 0.00000));
tesla :
        RETURN (dimensional_exponents(0.00000, 1.00000, -2.00000, -
1.00000, 0.00000, 0.00000, 0.00000));
henry :
        RETURN (dimensional_exponents(2.00000, 1.00000, -2.00000, -
2.00000, 0.00000, 0.00000, 0.00000));
degree_Celsius :
        RETURN (dimensional_exponents(0.00000, 0.00000, 0.00000,
0.00000, 1.00000, 0.00000, 0.00000));
lumen :
        RETURN (dimensional_exponents(0.00000, 0.00000, 0.00000,
0.00000, 0.00000, 0.00000, 1.00000));
lux :
        RETURN (dimensional_exponents(-2.00000, 0.00000, 0.00000,
0.00000, 0.00000, 0.00000, 1.00000));
becquerel :
        RETURN (dimensional_exponents(0.00000, 0.00000, -1.00000,
0.00000, 0.00000, 0.00000, 0.00000));
gray :
        RETURN (dimensional_exponents(2.00000, 0.00000, -2.00000,
0.00000, 0.00000, 0.00000, 0.00000));
sievert :
        RETURN (dimensional_exponents(2.00000, 0.00000, -2.00000,
0.00000, 0.00000, 0.00000, 0.00000));
    OTHERWISE :
        RETURN (?);
    END_CASE;
END_FUNCTION;

```

ISO 10303-227:2005(E)

```
FUNCTION dot_product
  (arg1 : direction;
   arg2 : direction ) : REAL;
LOCAL
  scalar : REAL;
  vec1 : direction;
  vec2 : direction;
  ndim : INTEGER;
END_LOCAL;
IF NOT EXISTS(arg1) OR NOT EXISTS(arg2) THEN
  scalar := ?;
ELSE
  IF arg1.dim <> arg2.dim THEN
    scalar := ?;
  ELSE
    BEGIN
      vec1 := normalise(arg1);
      vec2 := normalise(arg2);
      ndim := arg1.dim;
      scalar := 0.00000;
      REPEAT i := 1 TO ndim;
        scalar := scalar + vec1.direction_ratios[i] *
vec2.direction_ratios[i];
      END_REPEAT;
    END;
  END_IF;
  RETURN (scalar);
END_FUNCTION;

FUNCTION edge_reversed
  (an_edge : edge ) : oriented_edge;
LOCAL
  the_reverse : oriented_edge;
END_LOCAL;
IF 'PLANT_SPATIAL_CONFIGURATION.ORIENTED_EDGE' IN TYPEOF(an_edge) THEN
  the_reverse := dummy_tri || edge(an_edge.edge_end,
an_edge.edge_start) || oriented_edge(an_edge\oriented_edge.edge_element, NOT
an_edge\oriented_edge.orientation);
ELSE
  the_reverse := dummy_tri || edge(an_edge.edge_end,
an_edge.edge_start) || oriented_edge(an_edge, FALSE);
END_IF;
RETURN (the_reverse);
END_FUNCTION;

FUNCTION face_bound_reversed
  (a_face_bound : face_bound ) : face_bound;
LOCAL
  the_reverse : face_bound;
END_LOCAL;
IF 'PLANT_SPATIAL_CONFIGURATION.FACE_OUTER_BOUND' IN
TYPEOF(a_face_bound) THEN
```

```

        the_reverse := dummy_tri ||
face_bound(a_face_bound\face_bound.bound, NOT
a_face_bound\face_bound.orientation) || face_outer_bound();
    ELSE
        the_reverse := dummy_tri || face_bound(a_face_bound.bound, NOT
a_face_bound.orientation);
    END_IF;
    RETURN (the_reverse);
END_FUNCTION;

FUNCTION face_reversed
    (a_face : face ) : oriented_face;
LOCAL
    the_reverse : oriented_face;
END_LOCAL;
    IF 'PLANT_SPATIAL_CONFIGURATION.ORIENTED_FACE' IN TYPEOF(a_face) THEN
        the_reverse := dummy_tri ||
face(set_of_topology_reversed(a_face.bounds)) ||
oriented_face(a_face\oriented_face.face_element, NOT
a_face\oriented_face.orientation);
    ELSE
        the_reverse := dummy_tri ||
face(set_of_topology_reversed(a_face.bounds)) || oriented_face(a_face,
FALSE);
    END_IF;
    RETURN (the_reverse);
END_FUNCTION;

FUNCTION first_proj_axis
    (z_axis : direction;
    arg : direction ) : direction;
LOCAL
    x_axis : direction;
    v : direction;
    z : direction;
    x_vec : vector;
END_LOCAL;
    IF NOT EXISTS(z_axis) THEN
        RETURN (?);
    ELSE
        z := normalise(z_axis);
        IF NOT EXISTS(arg) THEN
            IF z.direction_ratios <> [ 1.00000, 0.00000, 0.00000 ] THEN
                v := dummy_gri || direction([ 1.00000, 0.00000, 0.00000 ]);
            ELSE
                v := dummy_gri || direction([ 0.00000, 1.00000, 0.00000 ]);
            END_IF;
        ELSE
            IF arg.dim <> 3 THEN
                RETURN (?);
            END_IF;
            IF cross_product(arg, z).magnitude = 0.00000 THEN
                RETURN (?);
            ELSE

```

ISO 10303-227:2005(E)

```
        v := normalise(arg);
    END_IF;
END_IF;
x_vec := scalar_times_vector(dot_product(v, z), z);
x_axis := vector_difference(v, x_vec).orientation;
x_axis := normalise(x_axis);
END_IF;
RETURN (x_axis);
END_FUNCTION;

FUNCTION get_basis_surface
    (c : curve_on_surface ) : SET [0:2] OF surface;
LOCAL
    surfs : SET [0:2] OF surface;
    n : INTEGER;
END_LOCAL;
surfs := [];
IF 'PLANT_SPATIAL_CONFIGURATION.PCURVE' IN TYPEOF(c) THEN
    surfs := [ c\pcurve.basis_surface ];
ELSE
    IF 'PLANT_SPATIAL_CONFIGURATION.SURFACE_CURVE' IN TYPEOF(c) THEN
        n := SIZEOF(c\surface_curve.associated_geometry);
        REPEAT i := 1 TO n;
            surfs := surfs +
associated_surface(c\surface_curve.associated_geometry[i]);
        END_REPEAT;
    END_IF;
END_IF;
IF 'PLANT_SPATIAL_CONFIGURATION.COMPOSITE_CURVE_ON_SURFACE' IN
TYPEOF(c) THEN
    n := SIZEOF(c\composite_curve.segments);
    surfs :=
get_basis_surface(c\composite_curve.segments[1].parent_curve);
    IF n > 1 THEN
        REPEAT i := 2 TO n;
            surfs := surfs *
get_basis_surface(c\composite_curve.segments[i].parent_curve);
        END_REPEAT;
    END_IF;
END_IF;
RETURN (surfs);
END_FUNCTION;

FUNCTION get_description_value
    (obj : description_attribute_select ) : text;
LOCAL
    description_bag : BAG OF description_attribute := USEDIN(obj,
'PLANT_SPATIAL_CONFIGURATION.' + 'DESCRIPTION_ATTRIBUTE.' +
'DESCRIBED_ITEM');
END_LOCAL;
IF SIZEOF(description_bag) = 1 THEN
    RETURN (description_bag[1].attribute_value);
ELSE
    RETURN (?);
END_IF;
```

```

    END_IF;
END_FUNCTION;

FUNCTION get_id_value
    (obj : id_attribute_select ) : identifier;
LOCAL
    id_bag : BAG OF id_attribute := USEDIN(obj,
'PLANT_SPATIAL_CONFIGURATION.' + 'ID_ATTRIBUTE.' + 'IDENTIFIED_ITEM');
END_LOCAL;
    IF SIZEOF(id_bag) = 1 THEN
        RETURN (id_bag[1].attribute_value);
    ELSE
        RETURN (?);
    END_IF;
END_FUNCTION;

FUNCTION get_name_value
    (obj : name_attribute_select ) : label;
LOCAL
    name_bag : BAG OF name_attribute := USEDIN(obj,
'PLANT_SPATIAL_CONFIGURATION.' + 'NAME_ATTRIBUTE.' + 'NAMED_ITEM');
END_LOCAL;
    IF SIZEOF(name_bag) = 1 THEN
        RETURN (name_bag[1].attribute_value);
    ELSE
        RETURN (?);
    END_IF;
END_FUNCTION;

FUNCTION get_role
    (obj : role_select ) : object_role;
LOCAL
    role_bag : BAG OF role_association := USEDIN(obj,
'PLANT_SPATIAL_CONFIGURATION.' + 'ROLE_ASSOCIATION.' + 'ITEM_WITH_ROLE');
END_LOCAL;
    IF SIZEOF(role_bag) = 1 THEN
        RETURN (role_bag[1].role);
    ELSE
        RETURN (?);
    END_IF;
END_FUNCTION;

FUNCTION item_in_context
    (item : representation_item;
    cntxt : representation_context ) : BOOLEAN;
LOCAL
    y : BAG OF representation_item;
END_LOCAL;
    IF SIZEOF(USEDIN(item,
'PLANT_SPATIAL_CONFIGURATION.REPRESENTATION.ITEMS') *
cntxt.representations_in_context) > 0 THEN
        RETURN (TRUE);
    ELSE

```

ISO 10303-227:2005(E)

```

    y := QUERY (z <* USEDIN(item, '' )|
'PLANT_SPATIAL_CONFIGURATION.REPRESENTATION_ITEM' IN TYPEOF(z));
    IF SIZEOF(y) > 0 THEN
        REPEAT i := 1 TO HIINDEX(y);
            IF item_in_context(y[i], cntxt) THEN
                RETURN (TRUE);
            END_IF;
        END_REPEAT;
    END_IF;
    RETURN (FALSE);
END_FUNCTION;

FUNCTION leap_year
    (year : year_number ) : BOOLEAN;
    IF (year MOD 4 = 0) AND (year MOD 100 <> 0) OR (year MOD 400 = 0) THEN
        RETURN (TRUE);
    ELSE
        RETURN (FALSE);
    END_IF;
END_FUNCTION;

FUNCTION list_face_loops
    (f : face ) : LIST [0:?] OF loop;
LOCAL
    loops : LIST [0:?] OF loop := [];
END_LOCAL;
    REPEAT i := 1 TO SIZEOF(f.bounds);
        loops := loops + f.bounds[i].bound;
    END_REPEAT;
    RETURN (loops);
END_FUNCTION;

FUNCTION list_of_topology_reversed
    (a_list : list_of_reversible_topology_item ) :
list_of_reversible_topology_item;
LOCAL
    the_reverse : list_of_reversible_topology_item;
END_LOCAL;
    the_reverse := [];
    REPEAT i := 1 TO SIZEOF(a_list);
        the_reverse := topology_reversed(a_list[i]) + the_reverse;
    END_REPEAT;
    RETURN (the_reverse);
END_FUNCTION;

FUNCTION list_to_array
    (lis : LIST [0:?] OF GENERIC : T;
    low : INTEGER;
    u : INTEGER ) : ARRAY OF GENERIC : T;
LOCAL
    n : INTEGER;
    res : ARRAY [low:u] OF GENERIC : T;
END_LOCAL;
```

```

n := SIZEOF(lis);
IF n <> u - low + 1 THEN
  RETURN (?);
ELSE
  res := [ lis[1] ];
  REPEAT i := 2 TO n;
    res[(low + i - 1)] := lis[i];
  END_REPEAT;
  RETURN (res);
END_IF;
END_FUNCTION;

FUNCTION list_to_set
  (l : LIST [0:?] OF GENERIC : T ) : SET OF GENERIC : T;
LOCAL
  s : SET OF GENERIC : T := [];
END_LOCAL;
REPEAT i := 1 TO SIZEOF(l);
  s := s + l[i];
END_REPEAT;
RETURN (s);
END_FUNCTION;

FUNCTION make_array_of_array
  (lis : LIST [1:?] OF LIST [1:?] OF GENERIC : T;
  low1 : INTEGER;
  u1 : INTEGER;
  low2 : INTEGER;
  u2 : INTEGER ) : ARRAY OF ARRAY OF GENERIC : T;
LOCAL
  res : ARRAY [low1:u1] OF ARRAY [low2:u2] OF GENERIC : T;
END_LOCAL;
IF u1 - low1 + 1 <> SIZEOF(lis) THEN
  RETURN (?);
END_IF;
IF u2 - low2 + 1 <> SIZEOF(lis[1]) THEN
  RETURN (?);
END_IF;
res := [ list_to_array(lis[1], low2, u2) ];
REPEAT i := 2 TO HIINDEX(lis);
  IF u2 - low2 + 1 <> SIZEOF(lis[i]) THEN
    RETURN (?);
  END_IF;
  res[(low1 + i - 1)] := list_to_array(lis[i], low2, u2);
END_REPEAT;
RETURN (res);
END_FUNCTION;

FUNCTION mixed_loop_type_set
  (l : SET [0:?] OF loop ) : LOGICAL;
LOCAL
  poly_loop_type : LOGICAL;
END_LOCAL;
IF SIZEOF(l) <= 1 THEN

```

ISO 10303-227:2005(E)

```
        RETURN (FALSE);
    END_IF;
    poly_loop_type := 'PLANT_SPATIAL_CONFIGURATION.POLY_LOOP' IN
    TYPEOF(l[1]);
    REPEAT i := 2 TO SIZEOF(l);
        IF ('PLANT_SPATIAL_CONFIGURATION.POLY_LOOP' IN TYPEOF(l[i])) <>
    poly_loop_type THEN
            RETURN (TRUE);
        END_IF;
    END_REPEAT;
    RETURN (FALSE);
END_FUNCTION;

FUNCTION normalise
    (arg : vector_or_direction ) : vector_or_direction;
LOCAL
    ndim : INTEGER;
    v : direction;
    result : vector_or_direction;
    vec : vector;
    mag : REAL;
END_LOCAL;
IF NOT EXISTS(arg) THEN
    result := ?;
ELSE
    ndim := arg.dim;
    IF 'PLANT_SPATIAL_CONFIGURATION.VECTOR' IN TYPEOF(arg) THEN
        BEGIN
            v := dummy_gri || direction(arg.orientation.direction_ratios);
            IF arg.magnitude = 0.00000 THEN
                RETURN (?);
            ELSE
                vec := dummy_gri || vector(v, 1.00000);
            END_IF;
        END;
    ELSE
        v := dummy_gri || direction(arg.direction_ratios);
    END_IF;
    mag := 0.00000;
    REPEAT i := 1 TO ndim;
        mag := mag + v.direction_ratios[i] * v.direction_ratios[i];
    END_REPEAT;
    IF mag > 0.00000 THEN
        mag := sqrt(mag);
        REPEAT i := 1 TO ndim;
            v.direction_ratios[i] := v.direction_ratios[i] / mag;
        END_REPEAT;
        IF 'PLANT_SPATIAL_CONFIGURATION.VECTOR' IN TYPEOF(arg) THEN
            vec.orientation := v;
            result := vec;
        ELSE
            result := v;
        END_IF;
    ELSE
        result := v;
    END_IF;
END;
```



```

        RETURN (?);
    END_IF;
END_IF;
RETURN (result);
END_FUNCTION;

FUNCTION open_shell_reversed
    (a_shell : open_shell ) : oriented_open_shell;
LOCAL
    the_reverse : oriented_open_shell;
END_LOCAL;
    IF 'PLANT_SPATIAL_CONFIGURATION.ORIENTED_OPEN_SHELL' IN TYPEOF(a_shell)
THEN
    the_reverse := dummy_tri ||
connected_face_set(a_shell\connected_face_set.cfs_faces) || open_shell() ||
oriented_open_shell(a_shell\oriented_open_shell.open_shell_element, NOT
a_shell\oriented_open_shell.orientation);
    ELSE
    the_reverse := dummy_tri ||
connected_face_set(a_shell\connected_face_set.cfs_faces) || open_shell() ||
oriented_open_shell(a_shell, FALSE);
    END_IF;
    RETURN (the_reverse);
END_FUNCTION;

FUNCTION orthogonal_complement
    (vec : direction ) : direction;
LOCAL
    result : direction;
END_LOCAL;
    IF (vec.dim <> 2) OR NOT EXISTS(vec) THEN
    RETURN (?);
    ELSE
    result := dummy_gri || direction([ -vec.direction_ratios[2],
vec.direction_ratios[1] ]);
    RETURN (result);
    END_IF;
END_FUNCTION;

FUNCTION path_head_to_tail
    (a_path : path ) : BOOLEAN;
LOCAL
    n : INTEGER;
    p : BOOLEAN := TRUE;
END_LOCAL;
    n := SIZEOF(a_path.edge_list);
    REPEAT i := 2 TO n;
        p := p AND (a_path.edge_list[(i - 1)].edge_end ==:
a_path.edge_list[i].edge_start);
    END_REPEAT;
    RETURN (p);
END_FUNCTION;

FUNCTION path_reversed

```

ISO 10303-227:2005(E)

```
(a_path : path ) : oriented_path;
LOCAL
  the_reverse : oriented_path;
END_LOCAL;
  IF 'PLANT_SPATIAL_CONFIGURATION.ORIENTED_PATH' IN TYPEOF(a_path) THEN
    the_reverse := dummy_tri ||
path(list_of_topology_reversed(a_path.edge_list)) ||
oriented_path(a_path\oriented_path.path_element, NOT
a_path\oriented_path.orientation);
  ELSE
    the_reverse := dummy_tri ||
path(list_of_topology_reversed(a_path.edge_list)) || oriented_path(a_path,
FALSE);
  END_IF;
  RETURN (the_reverse);
END_FUNCTION;

FUNCTION plant_spatial_configuration_organization_correlation
  (e : plant_spatial_configuration_organization_assignment ) : BOOLEAN;
LOCAL
  o_role : STRING;
END_LOCAL;
  o_role := e\organization_assignment.role.name;
  CASE o_role OF
    'vendor' :
      IF SIZEOF(e.items) <> SIZEOF(QUERY (x <* e.items| (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.PRODUCT', 'PLANT_SPATIAL_CONFIGURATION.DOCUMENT'
] * TYPEOF(x)) = 1))) THEN
        RETURN (FALSE);
      END_IF;
    'owner' :
      IF SIZEOF(e.items) <> SIZEOF(QUERY (x <* e.items| (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.SITE', 'PLANT_SPATIAL_CONFIGURATION.DOCUMENT' ]
* TYPEOF(x)) = 1))) THEN
        RETURN (FALSE);
      END_IF;
    'plant operator' :
      IF SIZEOF(e.items) <> SIZEOF(QUERY (x <* e.items|
('PLANT_SPATIAL_CONFIGURATION.PLANT' IN TYPEOF(x)))) THEN
        RETURN (FALSE);
      END_IF;
    'plant owner' :
      IF SIZEOF(e.items) <> SIZEOF(QUERY (x <* e.items|
('PLANT_SPATIAL_CONFIGURATION.PLANT' IN TYPEOF(x)))) THEN
        RETURN (FALSE);
      END_IF;
    'project owner' :
      IF SIZEOF(e.items) <> SIZEOF(QUERY (x <* e.items|
('PLANT_SPATIAL_CONFIGURATION.DESIGN_PROJECT' IN TYPEOF(x)))) THEN
        RETURN (FALSE);
      END_IF;
    'assessor' :
```

```

        IF SIZEOF(e.items) <> SIZEOF(QUERY (x <* e.items|
('PLANT_SPATIAL_CONFIGURATION.' + 'PRODUCT_DEFINITION_RELATIONSHIP' IN
TYPEOF(x)))) THEN
            RETURN (FALSE);
        END_IF;
    OTHERWISE :
        RETURN (TRUE);
    END_CASE;
    RETURN (TRUE);
END_FUNCTION;

FUNCTION plant_spatial_configuration_person_and_organization_correlation
    (e : plant_spatial_configuration_person_and_organization_assignment ) :
BOOLEAN;
LOCAL
    po_role : STRING;
END_LOCAL;
    po_role := e\person_and_organization_assignment.role.name;
    CASE po_role OF
        'owner' :
            IF SIZEOF(e.items) <> SIZEOF(QUERY (x <* e.items| (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.SITE', ('PLANT_SPATIAL_CONFIGURATION.' +
'CHANGE_ITEM') ] * TYPEOF(x)) = 1))) THEN
                RETURN (FALSE);
            END_IF;
        'plant owner' :
            IF SIZEOF(e.items) <> SIZEOF(QUERY (x <* e.items|
('PLANT_SPATIAL_CONFIGURATION.PLANT' IN TYPEOF(x)))) THEN
                RETURN (FALSE);
            END_IF;
        'plant operator' :
            IF SIZEOF(e.items) <> SIZEOF(QUERY (x <* e.items|
('PLANT_SPATIAL_CONFIGURATION.PLANT' IN TYPEOF(x)))) THEN
                RETURN (FALSE);
            END_IF;
    OTHERWISE :
        RETURN (TRUE);
    END_CASE;
    RETURN (TRUE);
END_FUNCTION;

FUNCTION plant_spatial_configuration_person_correlation
    (e : plant_spatial_configuration_person_assignment ) : BOOLEAN;
LOCAL
    p_role : STRING;
END_LOCAL;
    p_role := e\person_assignment.role.name;
    CASE p_role OF
        'vendor' :
            IF SIZEOF(e.items) <> SIZEOF(QUERY (x <* e.items|
('PLANT_SPATIAL_CONFIGURATION.DOCUMENT' IN TYPEOF(x)))) THEN
                RETURN (FALSE);
            END_IF;
        'owner' :

```

ISO 10303-227:2005(E)

```
        IF SIZEOF(e.items) <> SIZEOF(QUERY (x <* e.items| (SIZEOF([
'PLANT_SPATIAL_CONFIGURATION.SITE', 'PLANT_SPATIAL_CONFIGURATION.DOCUMENT' ]
* TYPEOF(x)) = 1))) THEN
            RETURN (FALSE);
        END_IF;
    'plant owner' :
        IF SIZEOF(e.items) <> SIZEOF(QUERY (x <* e.items|
('PLANT_SPATIAL_CONFIGURATION.PLANT' IN TYPEOF(x)))) THEN
            RETURN (FALSE);
        END_IF;
    'assessor' :
        IF SIZEOF(e.items) <> SIZEOF(QUERY (x <* e.items|
('PLANT_SPATIAL_CONFIGURATION.' + 'PRODUCT_DEFINITION_RELATIONSHIP' IN
TYPEOF(x)))) THEN
            RETURN (FALSE);
        END_IF;
    OTHERWISE :
        RETURN (TRUE);
    END_CASE;
    RETURN (TRUE);
END_FUNCTION;

FUNCTION scalar_times_vector
    (scalar : REAL;
     vec : vector_or_direction ) : vector;
LOCAL
    v : direction;
    mag : REAL;
    result : vector;
END_LOCAL;
IF NOT EXISTS(scalar) OR NOT EXISTS(vec) THEN
    RETURN (?);
ELSE
    IF 'PLANT_SPATIAL_CONFIGURATION.VECTOR' IN TYPEOF(vec) THEN
        v := dummy_gri || direction(vec.orientation.direction_ratios);
        mag := scalar * vec.magnitude;
    ELSE
        v := dummy_gri || direction(vec.direction_ratios);
        mag := scalar;
    END_IF;
    IF mag < 0.00000 THEN
        REPEAT i := 1 TO SIZEOF(v.direction_ratios);
            v.direction_ratios[i] := -v.direction_ratios[i];
        END_REPEAT;
        mag := -mag;
    END_IF;
    result := dummy_gri || vector(normalise(v), mag);
END_IF;
RETURN (result);
END_FUNCTION;

FUNCTION second_proj_axis
    (z_axis : direction;
     x_axis : direction;
```

```

    arg : direction ) : direction;
LOCAL
    y_axis : vector;
    v : direction;
    temp : vector;
END_LOCAL;
IF NOT EXISTS(arg) THEN
    v := dummy_gri || direction([ 0.00000, 1.00000, 0.00000 ]);
ELSE
    v := arg;
END_IF;
temp := scalar_times_vector(dot_product(v, z_axis), z_axis);
y_axis := vector_difference(v, temp);
temp := scalar_times_vector(dot_product(v, x_axis), x_axis);
y_axis := vector_difference(y_axis, temp);
y_axis := normalise(y_axis);
RETURN (y_axis.orientation);
END_FUNCTION;

FUNCTION set_of_topology_reversed
    (a_set : set_of_reversible_topology_item ) :
set_of_reversible_topology_item;
LOCAL
    the_reverse : set_of_reversible_topology_item;
END_LOCAL;
the_reverse := [];
REPEAT i := 1 TO SIZEOF(a_set);
    the_reverse := the_reverse + topology_reversed(a_set[i]);
END_REPEAT;
RETURN (the_reverse);
END_FUNCTION;

FUNCTION shell_reversed
    (a_shell : shell ) : shell;
IF 'PLANT_SPATIAL_CONFIGURATION.OPEN_SHELL' IN TYPEOF(a_shell) THEN
    RETURN (open_shell_reversed(a_shell));
ELSE
    IF 'PLANT_SPATIAL_CONFIGURATION.CLOSED_SHELL' IN TYPEOF(a_shell)
THEN
        RETURN (closed_shell_reversed(a_shell));
    ELSE
        RETURN (?);
    END_IF;
END_IF;
END_FUNCTION;

FUNCTION surface_weights_positive
    (b : rational_b_spline_surface ) : BOOLEAN;
LOCAL
    result : BOOLEAN := TRUE;
END_LOCAL;
REPEAT i := 0 TO b.u_upper;
    REPEAT j := 0 TO b.v_upper;
        IF b.weights[i][j] <= 0.00000 THEN

```

ISO 10303-227:2005(E)

```
        result := FALSE;
        RETURN (result);
    END_IF;
END_REPEAT;
END_REPEAT;
RETURN (result);
END_FUNCTION;
```

```
FUNCTION topology_reversed
(an_item : reversible_topology ) : reversible_topology;
IF 'PLANT_SPATIAL_CONFIGURATION.EDGE' IN TYPEOF(an_item) THEN
    RETURN (edge_reversed(an_item));
END_IF;
IF 'PLANT_SPATIAL_CONFIGURATION.PATH' IN TYPEOF(an_item) THEN
    RETURN (path_reversed(an_item));
END_IF;
IF 'PLANT_SPATIAL_CONFIGURATION.FACE_BOUND' IN TYPEOF(an_item) THEN
    RETURN (face_bound_reversed(an_item));
END_IF;
IF 'PLANT_SPATIAL_CONFIGURATION.FACE' IN TYPEOF(an_item) THEN
    RETURN (face_reversed(an_item));
END_IF;
IF 'PLANT_SPATIAL_CONFIGURATION.SHELL' IN TYPEOF(an_item) THEN
    RETURN (shell_reversed(an_item));
END_IF;
IF 'SET' IN TYPEOF(an_item) THEN
    RETURN (set_of_topology_reversed(an_item));
END_IF;
IF 'LIST' IN TYPEOF(an_item) THEN
    RETURN (list_of_topology_reversed(an_item));
END_IF;
RETURN (?);
END_FUNCTION;
```

```
FUNCTION using_items
(item : founded_item_select;
 checked_items : SET OF founded_item_select ) : SET OF
founded_item_select;
LOCAL
    new_check_items : SET OF founded_item_select;
    result_items : SET OF founded_item_select;
    next_items : SET OF founded_item_select;
END_LOCAL;
result_items := [];
new_check_items := checked_items + item;
next_items := QUERY (z <* bag_to_set(USEDIN(item, '')) |
('PLANT_SPATIAL_CONFIGURATION.REPRESENTATION_ITEM' IN TYPEOF(z)) OR
('PLANT_SPATIAL_CONFIGURATION.FOUNDED_ITEM' IN TYPEOF(z)));
IF SIZEOF(next_items) > 0 THEN
    REPEAT i := 1 TO HIINDEX(next_items);
        IF NOT (next_items[i] IN new_check_items) THEN
            result_items := result_items + next_items[i] +
using_items(next_items[i], new_check_items);
        END_IF;
    END_REPEAT;
END_FUNCTION;
```

```

        END_REPEAT;
    END_IF;
    RETURN (result_items);
END_FUNCTION;

FUNCTION using_representations
    (item : founded_item_select ) : SET OF representation;
LOCAL
    results : SET OF representation;
    result_bag : BAG OF representation;
    intermediate_items : SET OF founded_item_select;
END_LOCAL;
    results := [];
    result_bag := USEDIN(item,
'PLANT_SPATIAL_CONFIGURATIONS.REPRESENTATION.ITEMS');
    IF SIZEOF(result_bag) > 0 THEN
        REPEAT i := 1 TO HIINDEX(result_bag);
            results := results + result_bag[i];
        END_REPEAT;
    END_IF;
    intermediate_items := using_items(item, []);
    IF SIZEOF(intermediate_items) > 0 THEN
        REPEAT i := 1 TO HIINDEX(intermediate_items);
            result_bag := USEDIN(intermediate_items[i],
'PLANT_SPATIAL_CONFIGURATIONS.REPRESENTATION.ITEMS');
            IF SIZEOF(result_bag) > 0 THEN
                REPEAT j := 1 TO HIINDEX(result_bag);
                    results := results + result_bag[j];
                END_REPEAT;
            END_IF;
        END_REPEAT;
    END_IF;
    RETURN (results);
END_FUNCTION;

FUNCTION valid_advanced_csg_tree
    (tree_element : boolean_operand ) : BOOLEAN;
    IF SIZEOF(TYPEOF(tree_element) * [ 'PLANT_SPATIAL_CONFIGURATIONS.BLOCK',
'PLANT_SPATIAL_CONFIGURATIONS.TORUS',
'PLANT_SPATIAL_CONFIGURATIONS.RIGHT_CIRCULAR_CYLINDER',
'PLANT_SPATIAL_CONFIGURATIONS.SPHERE',
'PLANT_SPATIAL_CONFIGURATIONS.RIGHT_CIRCULAR_CONE',
'PLANT_SPATIAL_CONFIGURATIONS.ECCENTRIC_CONE',
'PLANT_SPATIAL_CONFIGURATIONS.PLANT_DESIGN_CSG_PRIMITIVE',
'PLANT_SPATIAL_CONFIGURATIONS.CYCLIDE_SEGMENT_SOLID',
'PLANT_SPATIAL_CONFIGURATIONS.RECTANGULAR_PYRAMID',
'PLANT_SPATIAL_CONFIGURATIONS.EXTRUDED_AREA_SOLID',
'PLANT_SPATIAL_CONFIGURATIONS.REVOLVED_AREA_SOLID',
'PLANT_SPATIAL_CONFIGURATIONS.HALF_SPACE_SOLID' ]) = 1 THEN
        RETURN (TRUE);
    ELSE
        IF 'PLANT_SPATIAL_CONFIGURATIONS.BOOLEAN_RESULT' IN
TYPEOF(tree_element) THEN

```

ISO 10303-227:2005(E)

```
        IF NOT (tree_element\boolean_result.operator IN [
boolean_operator.union, boolean_operator.difference ]) THEN
            RETURN (FALSE);
        END_IF;
        IF 'PLANT_SPATIAL_CONFIGURATION.HALF_SPACE_SOLID' IN
TYPEOF(tree_element\boolean_result.first_operand) THEN
            IF 'PLANT_SPATIAL_CONFIGURATION.ELEMENTARY_SURFACE' IN
TYPEOF(tree_element\boolean_result.first_operand\half_space_solid.base_surfac
e) THEN
                IF 'PLANT_SPATIAL_CONFIGURATION.HALF_SPACE_SOLID' IN
TYPEOF(tree_element\boolean_result.second_operand) THEN
                    IF 'PLANT_SPATIAL_CONFIGURATION.ELEMENTARY_SURFACE' IN
TYPEOF(tree_element\boolean_result.second_operand\half_space_solid.base_surfa
ce) THEN
                        RETURN (TRUE);
                    ELSE
                        RETURN (FALSE);
                    END_IF;
                ELSE
                    RETURN
(valid_advanced_csg_tree(tree_element\boolean_result.second_operand));
                END_IF;
            ELSE
                RETURN (FALSE);
            END_IF;
        ELSE
            IF 'PLANT_SPATIAL_CONFIGURATION.HALF_SPACE_SOLID' IN
TYPEOF(tree_element\boolean_result.second_operand) THEN
                IF 'PLANT_SPATIAL_CONFIGURATION.ELEMENTARY_SURFACE' IN
TYPEOF(tree_element\boolean_result.second_operand\half_space_solid.base_surfa
ce) THEN
                    RETURN
(valid_advanced_csg_tree(tree_element\boolean_result.first_operand));
                ELSE
                    RETURN (FALSE);
                END_IF;
            ELSE
                RETURN
(valid_advanced_csg_tree(tree_element\boolean_result.first_operand) AND
valid_advanced_csg_tree(tree_element\boolean_result.second_operand));
            END_IF;
        END_IF;
    END_IF;
    RETURN (FALSE);
END_FUNCTION;
```

```
FUNCTION valid_calendar_date
(date : calendar_date ) : LOGICAL;
CASE date.month_component OF
    1 :
        RETURN ((1 <= date.day_component) AND (date.day_component <=
31));
    2 :
```



```

        BEGIN
            IF leap_year(date.year_component) THEN
                RETURN ((1 <= date.day_component) AND
(date.day_component <= 29));
            ELSE
                RETURN ((1 <= date.day_component) AND
(date.day_component <= 28));
            END_IF;
        END;
    3 :
        RETURN ((1 <= date.day_component) AND (date.day_component <=
31));
    4 :
        RETURN ((1 <= date.day_component) AND (date.day_component <=
30));
    5 :
        RETURN ((1 <= date.day_component) AND (date.day_component <=
31));
    6 :
        RETURN ((1 <= date.day_component) AND (date.day_component <=
30));
    7 :
        RETURN ((1 <= date.day_component) AND (date.day_component <=
31));
    8 :
        RETURN ((1 <= date.day_component) AND (date.day_component <=
31));
    9 :
        RETURN ((1 <= date.day_component) AND (date.day_component <=
30));
    10 :
        RETURN ((1 <= date.day_component) AND (date.day_component <=
31));
    11 :
        RETURN ((1 <= date.day_component) AND (date.day_component <=
30));
    12 :
        RETURN ((1 <= date.day_component) AND (date.day_component <=
31));
    END_CASE;
    RETURN (FALSE);
END_FUNCTION;

FUNCTION valid_measure_value
(m : measure_value ) : BOOLEAN;
IF 'REAL' IN TYPEOF(m) THEN
    RETURN (m > 0.00000);
ELSE
    IF 'INTEGER' IN TYPEOF(m) THEN
        RETURN (m > 0);
    ELSE
        RETURN (TRUE);
    END_IF;
END_IF;

```

ISO 10303-227:2005(E)

```
END_FUNCTION;

FUNCTION valid_time
  (time : local_time ) : BOOLEAN;
  IF EXISTS(time.second_component) THEN
    RETURN (EXISTS(time.minute_component));
  ELSE
    RETURN (TRUE);
  END_IF;
END_FUNCTION;

FUNCTION valid_units
  (m : measure_with_unit ) : BOOLEAN;
  IF 'PLANT_SPATIAL_CONFIGURATION.LENGTH_MEASURE' IN
  TYPEOF(m.value_component) THEN
    IF derive_dimensional_exponents(m.unit_component) <>
    dimensional_exponents(1.00000, 0.00000, 0.00000, 0.00000, 0.00000, 0.00000,
    0.00000) THEN
      RETURN (FALSE);
    END_IF;
  END_IF;
  IF 'PLANT_SPATIAL_CONFIGURATION.MASS_MEASURE' IN
  TYPEOF(m.value_component) THEN
    IF derive_dimensional_exponents(m.unit_component) <>
    dimensional_exponents(0.00000, 1.00000, 0.00000, 0.00000, 0.00000, 0.00000,
    0.00000) THEN
      RETURN (FALSE);
    END_IF;
  END_IF;
  IF 'PLANT_SPATIAL_CONFIGURATION.TIME_MEASURE' IN
  TYPEOF(m.value_component) THEN
    IF derive_dimensional_exponents(m.unit_component) <>
    dimensional_exponents(0.00000, 0.00000, 1.00000, 0.00000, 0.00000, 0.00000,
    0.00000) THEN
      RETURN (FALSE);
    END_IF;
  END_IF;
  IF 'PLANT_SPATIAL_CONFIGURATION.ELECTRIC_CURRENT_MEASURE' IN
  TYPEOF(m.value_component) THEN
    IF derive_dimensional_exponents(m.unit_component) <>
    dimensional_exponents(0.00000, 0.00000, 0.00000, 1.00000, 0.00000, 0.00000,
    0.00000) THEN
      RETURN (FALSE);
    END_IF;
  END_IF;
  IF 'PLANT_SPATIAL_CONFIGURATION.THERMODYNAMIC_TEMPERATURE_MEASURE' IN
  TYPEOF(m.value_component) THEN
    IF derive_dimensional_exponents(m.unit_component) <>
    dimensional_exponents(0.00000, 0.00000, 0.00000, 0.00000, 1.00000, 0.00000,
    0.00000) THEN
      RETURN (FALSE);
    END_IF;
  END_IF;
END_FUNCTION;
```

```

        IF 'PLANT_SPATIAL_CONFIGURATION.CELSIUS_TEMPERATURE_MEASURE' IN
        TYPEOF(m.value_component) THEN
            IF derive_dimensional_exponents(m.unit_component) <>
            dimensional_exponents(0.00000, 0.00000, 0.00000, 0.00000, 1.00000, 0.00000,
            0.00000) THEN
                RETURN (FALSE);
            END_IF;
        END_IF;
        IF 'PLANT_SPATIAL_CONFIGURATION.AMOUNT_OF_SUBSTANCE_MEASURE' IN
        TYPEOF(m.value_component) THEN
            IF derive_dimensional_exponents(m.unit_component) <>
            dimensional_exponents(0.00000, 0.00000, 0.00000, 0.00000, 0.00000, 1.00000,
            0.00000) THEN
                RETURN (FALSE);
            END_IF;
        END_IF;
        IF 'PLANT_SPATIAL_CONFIGURATION.LUMINOUS_INTENSITY_MEASURE' IN
        TYPEOF(m.value_component) THEN
            IF derive_dimensional_exponents(m.unit_component) <>
            dimensional_exponents(0.00000, 0.00000, 0.00000, 0.00000, 0.00000, 0.00000,
            1.00000) THEN
                RETURN (FALSE);
            END_IF;
        END_IF;
        IF 'PLANT_SPATIAL_CONFIGURATION.PLANE_ANGLE_MEASURE' IN
        TYPEOF(m.value_component) THEN
            IF derive_dimensional_exponents(m.unit_component) <>
            dimensional_exponents(0.00000, 0.00000, 0.00000, 0.00000, 0.00000, 0.00000,
            0.00000) THEN
                RETURN (FALSE);
            END_IF;
        END_IF;
        IF 'PLANT_SPATIAL_CONFIGURATION.SOLID_ANGLE_MEASURE' IN
        TYPEOF(m.value_component) THEN
            IF derive_dimensional_exponents(m.unit_component) <>
            dimensional_exponents(0.00000, 0.00000, 0.00000, 0.00000, 0.00000, 0.00000,
            0.00000) THEN
                RETURN (FALSE);
            END_IF;
        END_IF;
        IF 'PLANT_SPATIAL_CONFIGURATION.AREA_MEASURE' IN
        TYPEOF(m.value_component) THEN
            IF derive_dimensional_exponents(m.unit_component) <>
            dimensional_exponents(2.00000, 0.00000, 0.00000, 0.00000, 0.00000, 0.00000,
            0.00000) THEN
                RETURN (FALSE);
            END_IF;
        END_IF;
        IF 'PLANT_SPATIAL_CONFIGURATION.VOLUME_MEASURE' IN
        TYPEOF(m.value_component) THEN
            IF derive_dimensional_exponents(m.unit_component) <>
            dimensional_exponents(3.00000, 0.00000, 0.00000, 0.00000, 0.00000, 0.00000,
            0.00000) THEN
                RETURN (FALSE);
            END_IF;
        END_IF;

```

ISO 10303-227:2005(E)

```
        END_IF;
    END_IF;
    IF 'PLANT_SPATIAL_CONFIGURATION.RATIO_MEASURE' IN
    TYPEOF(m.value_component) THEN
        IF derive_dimensional_exponents(m.unit_component) <>
        dimensional_exponents(0.00000, 0.00000, 0.00000, 0.00000, 0.00000, 0.00000,
        0.00000) THEN
            RETURN (FALSE);
        END_IF;
    END_IF;
    IF 'PLANT_SPATIAL_CONFIGURATION.POSITIVE_LENGTH_MEASURE' IN
    TYPEOF(m.value_component) THEN
        IF derive_dimensional_exponents(m.unit_component) <>
        dimensional_exponents(1.00000, 0.00000, 0.00000, 0.00000, 0.00000, 0.00000,
        0.00000) THEN
            RETURN (FALSE);
        END_IF;
    END_IF;
    IF 'PLANT_SPATIAL_CONFIGURATION.POSITIVE_PLANE_ANGLE_MEASURE' IN
    TYPEOF(m.value_component) THEN
        IF derive_dimensional_exponents(m.unit_component) <>
        dimensional_exponents(0.00000, 0.00000, 0.00000, 0.00000, 0.00000, 0.00000,
        0.00000) THEN
            RETURN (FALSE);
        END_IF;
    END_IF;
    RETURN (TRUE);
END_FUNCTION;

FUNCTION vector_difference
    (arg1 : vector_or_direction;
    arg2 : vector_or_direction ) : vector;
LOCAL
    result : vector;
    res : direction;
    vec1 : direction;
    vec2 : direction;
    mag : REAL;
    mag1 : REAL;
    mag2 : REAL;
    ndim : INTEGER;
END_LOCAL;
IF (NOT EXISTS(arg1) OR NOT EXISTS(arg2)) OR (arg1.dim <> arg2.dim)
THEN
    RETURN (?);
ELSE
    BEGIN
        IF 'PLANT_SPATIAL_CONFIGURATION.VECTOR' IN TYPEOF(arg1) THEN
            mag1 := arg1.magnitude;
            vec1 := arg1.orientation;
        ELSE
            mag1 := 1.00000;
            vec1 := arg1;
        END_IF;
    END;
```

```

IF 'PLANT_SPATIAL_CONFIGURATION.VECTOR' IN TYPEOF(arg2) THEN
    mag2 := arg2.magnitude;
    vec2 := arg2.orientation;
ELSE
    mag2 := 1.00000;
    vec2 := arg2;
END_IF;
vec1 := normalise(vec1);
vec2 := normalise(vec2);
ndim := SIZEOF(vec1.direction_ratios);
mag := 0.00000;
res := dummy_gri || direction(vec1.direction_ratios);
REPEAT i := 1 TO ndim;
    res.direction_ratios[i] := mag1 * vec1.direction_ratios[i] +
mag2 * vec2.direction_ratios[i];
    mag := mag + res.direction_ratios[i] *
res.direction_ratios[i];
END_REPEAT;
IF mag > 0.00000 THEN
    result := dummy_gri || vector(res, sqrt(mag));
ELSE
    result := dummy_gri || vector(vec1, 0.00000);
END_IF;
END;
END_IF;
RETURN (result);
END_FUNCTION;

(* ***** *)

END_SCHEMA;

(* ***** *)

```

Annex B
(normative)
AIM short names of entities

Table B.1 provides the short names of entities specified in the AIM of this part of ISO 10303. Requirements on the use of the short names are found in the implementation methods included in ISO 10303.

Table B. 1 — Short names of entities

<u>Entityname</u>	<u>Shortname</u>
ACTION	ACTION
ACTION_ASSIGNMENT	ACTASS
ACTION_DIRECTIVE	ACTDRC
ACTION_METHOD	ACTMTH
ACTION_METHOD_RELATIONSHIP	ACMTRL
ACTION_RELATIONSHIP	ACTRLT
ACTION_REQUEST_ASSIGNMENT	ACRQAS
ACTION_REQUEST_SOLUTION	ACRQSL
ACTION_REQUEST_STATUS	ACRQST
ACTION_STATUS	ACTSTT
ADVANCED_FACE	ADVFC
AMOUNT_OF_SUBSTANCE_MEASURE_WITH_UNIT	AOSMWU
AMOUNT_OF_SUBSTANCE_UNIT	AOSU
ANALYSIS_TRACING_REPRESENTATION	ANTRRP
ANGULAR_LOCATION	ANGLCT
ANNOTATION_CURVE_OCCURRENCE	ANCROC
ANNOTATION_FILL_AREA	ANFLAR
ANNOTATION_FILL_AREA_OCCURRENCE	AFAO
ANNOTATION_OCCURRENCE	ANNOCC
ANNOTATION_OCCURRENCE_RELATIONSHIP	ANOCRL
ANNOTATION_POINT_OCCURRENCE	ANPNOC
ANNOTATION_SYMBOL	ANNSYM
ANNOTATION_SYMBOL_OCCURRENCE	ANSYOC

Table B. 1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
ANNOTATION_TEXT	ANNTXT
ANNOTATION_TEXT_OCCURRENCE	ANTXOC
ANNOTATION_TEXT_WITH_EXTENT	ATWE
APPLICATION_CONTEXT	APPCNT
APPLICATION_CONTEXT_ELEMENT	APCNEL
APPLICATION_PROTOCOL_DEFINITION	APPRDF
APPLIED_ACTION_REQUEST_ASSIGNMENT	AARA
APPLIED_APPROVAL_ASSIGNMENT	APAPAS
APPLIED_CLASSIFICATION_ASSIGNMENT	APCLAS
APPLIED_DATE_AND_TIME_ASSIGNMENT	ADATA
APPLIED_DATE_ASSIGNMENT	APDTAS
APPLIED_DOCUMENT_REFERENCE	APDCRF
APPLIED_DOCUMENT_USAGE_CONSTRAINT_ASSIGNMENT	ADUCA
APPLIED_EFFECTIVITY_ASSIGNMENT	APEFAS
APPLIED_EFFECTIVITY_CONTEXT_ASSIGNMENT	AECA
APPLIED_IDENTIFICATION_ASSIGNMENT	APIDAS
APPROVAL	APPRVL
APPROVAL_ASSIGNMENT	APPASS
APPROVAL_DATE_TIME	APDTTM
APPROVAL_PERSON_ORGANIZATION	APPROR
APPROVAL_ROLE	APPRL
APPROVAL_STATUS	APPSTT
AREA_DEPENDENT_ANNOTATION_REPRESENTATION	ADAR
AREA_IN_SET	ARINST
ARRANGEMENT_BRANCH_CONNECTION	ARBRCN
ARRANGEMENT_LESS_MECHANICAL_SYSTEM	ALMS
ARRANGEMENT_LOAD	ARRLD
ARRANGEMENT_PLANT_ITEM_BRANCH_CONNECTION	APIBC
ARRANGEMENT_PLANT_ITEM_CONNECTION	APIC

Table B. 1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
ARRANGEMENT_TERMINATION_CONNECTION	ARTRCN
ASSEMBLY_COMPONENT_USAGE	ASCMUS
AXIS1_PLACEMENT	AX1PLC
AXIS2_PLACEMENT_2D	A2PL2D
AXIS2_PLACEMENT_3D	A2PL3D
B_SPLINE_CURVE	BSPCR
B_SPLINE_CURVE_WITH_KNOTS	BSCWK
B_SPLINE_SURFACE	BSPSR
B_SPLINE_SURFACE_WITH_KNOTS	BSSWK
BEZIER_CURVE	BZRCRV
BEZIER_SURFACE	BZRSRF
BLANK_FITTING_CLASS	BLFTCL
BLOCK	BLOCK
BOLT_AND_NUT_COMPONENT_CLASS	BANCC
BOLT_AND_NUT_COMPONENT_DEFINITION	BANCD
BOLT_AND_NUT_SET_DEFINITION	BANSD
BOOLEAN_RESULT	BLNRSL
BOUNDARY_CURVE	BNDCR
BOUNDED_CURVE	BNDCRV
BOUNDED_PCURVE	BNDPCR
BOUNDED_SURFACE	BNDSRF
BOUNDED_SURFACE_CURVE	BNSRCR
BREP_WITH_VOIDS	BRWTVD
CABLEWAY_COMPONENT_CLASS	CBCMCL
CABLEWAY_COMPONENT_DEFINITION	CBCMDF
CABLEWAY_CONNECTOR_CLASS	CBCNCL
CABLEWAY_SYSTEM	CBLSYS
CALENDAR_DATE	CLNDT
CAMERA_IMAGE	CMRIMG

Table B. 1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
CAMERA_MODEL	CMRMDL
CAMERA_MODEL_D2	CMMDD2
CAMERA_MODEL_D2_SHAPE_CLIPPING	CMDSC
CAMERA_USAGE	CMRUSG
CARTESIAN_POINT	C RTPNT
CARTESIAN_TRANSFORMATION_OPERATOR	CRTROP
CARTESIAN_TRANSFORMATION_OPERATOR_3D	CTO3
CATALOGUE	CTLG
CATALOGUE_CONNECTOR	CTLCNN
CATALOGUE_ITEM	CTLITM
CELSIUS_TEMPERATURE_MEASURE_WITH_UNIT	CTMWU
CENTRE_OF_SYMMETRY	CNOFSY
CHANGE_ACTION	CHNACT
CHANGE_ITEM_ID_ASSIGNMENT	CIIA
CHANGE_LIFE_CYCLE_STAGE_ASSIGNMENT	CLCSA
CHARACTERIZED_OBJECT	CHROBJ
CIRCLE	CIRCLE
CLAMP_COMPONENT_DEFINITION	CLCMDF
CLAMP_SET_DEFINITION	CLSTDF
CLASSIFICATION_ASSIGNMENT	CLSASS
CLASSIFICATION_ROLE	CLSRL
CLOSED_SHELL	CLSSHL
COLOUR	COLOUR
COLOUR_RGB	CLRRGB
COLOUR_SPECIFICATION	CLRSPC
COMPOSITE_CURVE	CMPCR V
COMPOSITE_CURVE_ON_SURFACE	CCOS
COMPOSITE_CURVE_SEGMENT	CMCRSG
CONIC	CONIC

Table B. 1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
CONICAL_SURFACE	CNCSRF
CONNECTED_FACE_SET	CNFCST
CONNECTION_FUNCTIONAL_CLASS	CNFNCL
CONNECTION_MATERIAL_DEFINITION	CNMTDF
CONNECTION_MOTION_CLASS	CNMTCL
CONNECTION_NODE	CNNND
CONNECTOR_END_TYPE_CLASS	CET0
CONTEXT_DEPENDENT_INVISIBILITY	CNDPIN
CONTEXT_DEPENDENT_UNIT	CNDPUN
CONVERSION_BASED_UNIT	CNBSUN
COORDINATED_UNIVERSAL_TIME_OFFSET	CUTO
CSG_SOLID	CSGSLD
CURVE	CURVE
CURVE_BOUNDED_SURFACE	CRBNSR
CURVE_REPLICA	CRVRPL
CURVE_STYLE	CRVSTY
CURVE_STYLE_FONT	CRSTFN
CURVE_STYLE_FONT_PATTERN	CSFP
CURVE_STYLE_WIDE	CRSTWD
CYCLIDE_SEGMENT_SOLID	CYSGSL
CYLINDRICAL_SURFACE	CYLSRF
DATA_ENVIRONMENT	DTENV
DATE	DATE
DATE_AND_TIME	DTANTM
DATE_AND_TIME_ASSIGNMENT	DATA
DATE_ASSIGNMENT	DTASS
DATE_ROLE	DTRL
DATE_TIME_ROLE	DTMRL
DEFINED_SYMBOL	DFNSYM

Table B. 1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
DEFINITIONAL_REPRESENTATION	DFNRPR
DEGENERATE_PCURVE	DGNPCR
DEGENERATE_TOROIDAL_SURFACE	DGTRSR
DERIVED_SHAPE_ASPECT	DRSHAS
DERIVED_UNIT	DRVUNT
DERIVED_UNIT_ELEMENT	DRUNEL
DESCRIPTION_ATTRIBUTE	DSCATT
DESCRIPTIVE_COLOUR	DSCCLR
DESCRIPTIVE_REPRESENTATION_ITEM	DSRPIT
DESIGN_ARRANGEMENT_PERFORMANCE	DSARPR
DESIGN_PROJECT	DSGPRJ
DESIGN_PROJECT_ASSIGNMENT	DSPRAS
DIMENSIONAL_CHARACTERISTIC_REPRESENTATION	DMCHRP
DIMENSIONAL_EXPONENTS	DMNEXP
DIMENSIONAL_LOCATION	DMNLCT
DIMENSIONAL_SIZE	DMNSZ
DIRECTED_ACTION	DRCACT
DIRECTION	DRCTN
DOCUMENT	DCMNT
DOCUMENT_REFERENCE	DCMRFR
DOCUMENT_RELATIONSHIP	DCMRLT
DOCUMENT_REPRESENTATION_TYPE	DCRPTY
DOCUMENT_TYPE	DCMTYP
DOCUMENT_USAGE_CONSTRAINT	DCUSCN
DOCUMENT_USAGE_CONSTRAINT_ASSIGNMENT	DUCA
DOCUMENT_USAGE_ROLE	DCUSRL
DRAUGHTING_CALLOUT	DRGCLL
DRAUGHTING_CALLOUT_RELATIONSHIP	DRCLRL
DRAWING_DEFINITION	DRWDFN

Table B. 1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
DRAWING_REVISION	DRWRVS
DRAWING_REVISION_SEQUENCE	DRRVSQ
DRAWING_SHEET_REVISION	DRSHRV
DRAWING_SHEET_REVISION_USAGE	DSRU
DUCTING_SYSTEM	DCTSYS
ECCENTRIC_CONE	ECCCN
EDGE	EDGE
EDGE_CURVE	EDGCRV
EDGE_LOOP	EDGLP
EFFECTIVITY	EFFCTV
EFFECTIVITY_ASSIGNMENT	EFFASS
EFFECTIVITY_CONTEXT_ASSIGNMENT	EFC0
EFFECTIVITY_CONTEXT_ROLE	EFCNRL
ELBOW_FITTING_CLASS	ELFTCL
ELECTRIC_CURRENT_MEASURE_WITH_UNIT	ECMWU
ELECTRIC_CURRENT_UNIT	ELCRUN
ELECTRICAL_CONNECTOR_CLASS	ELCNCL
ELECTRICAL_SYSTEM	ELCSYS
ELEMENTARY_SURFACE	ELMSRF
ELLIPSE	ELLPS
ELLIPSOID	ELLPSD
EVALUATED_DEGENERATE_PCURVE	EVDGPC
EXECUTED_ACTION	EXCACT
EXTERNAL_SOURCE	EXTSRC
EXTERNAL_SOURCE_RELATIONSHIP	EXSRRL
EXTERNALLY_DEFINED_CLASS	EXD0
EXTERNALLY_DEFINED_CURVE_FONT	EDCF
EXTERNALLY_DEFINED_DOCUMENT	EXDFDC
EXTERNALLY_DEFINED_HATCH_STYLE	EDHS

Table B.1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
EXTERNALLY_DEFINED_ITEM	EXDFIT
EXTERNALLY_DEFINED_ITEM_RELATIONSHIP	EDIR
EXTERNALLY_DEFINED_PLANT_ITEM_DEFINITION	EDPID
EXTERNALLY_DEFINED_REPRESENTATION_ITEM	EDRI
EXTERNALLY_DEFINED_SYMBOL	EXDFSY
EXTERNALLY_DEFINED_TEXT_FONT	EDTF
EXTERNALLY_DEFINED_TILE_STYLE	EDTS
EXTRUDED_AREA_SOLID	EXARSL
EXTRUDED_FACE_SOLID	EXFCSL
FACE	FACE
FACE_BOUND	FCBND
FACE_OUTER_BOUND	FCOTBN
FACE_SURFACE	FCSRF
FACETED_BREP	FCTBR
FILL_AREA_STYLE	FLARST
FILL_AREA_STYLE_COLOUR	FASC
FILL_AREA_STYLE_HATCHING	FASH
FILL_AREA_STYLE_TILE_SYMBOL_WITH_STYLE	FASTSW
FILL_AREA_STYLE_TILES	FAST
FLANGE_FITTING_CLASS	FLFTCL
FLANGE_FITTING_NECK_TYPE_CLASS	FFNTC
FOUNDED_ITEM	FNDITM
FUNCTIONALLY_DEFINED_TRANSFORMATION	FNDFTR
GEOMETRIC_CURVE_SET	GMCNST
GEOMETRIC_REPRESENTATION_CONTEXT	GMRPCN
GEOMETRIC_REPRESENTATION_ITEM	GMRPIT
GEOMETRIC_SET	GMTST
GEOMETRIC_SET_REPLICA	GMSTRP
GLOBAL_UNCERTAINTY_ASSIGNED_CONTEXT	GC

Table B. 1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
GLOBAL_UNIT_ASSIGNED_CONTEXT	GUAC
GRAPHICAL_TRANSFORMATION	GRPTRN
GROUP	GROUP
GROUP_ASSIGNMENT	GRPASS
GROUP_RELATIONSHIP	GRPRLT
HALF_SPACE_2D	HLSP2D
HALF_SPACE_SOLID	HLSPSL
HEAT_TRACING_REPRESENTATION	HTTRRP
HVAC_BRANCH_CONNECTION	HVBRCN
HVAC_COMPONENT_DEFINITION	HVCMDF
HVAC_CONNECTOR	HVCCNN
HVAC_CROSS_SECTION	HVCRSC
HVAC_FITTING_CLASS	HVFTCL
HVAC_PLANT_ITEM_BRANCH_CONNECTION	HPIBC
HVAC_PLANT_ITEM_CONNECTION	HPIC
HVAC_RUN_DEFINITION	HVRNDF
HVAC_SECTION_DEFINITION	HVSCDF
HVAC_SECTION_TERMINATION	HVSCTR
HVAC_SUPPORT_CLASS	HVSPCL
HVAC_SUPPORT_DEFINITION	HVSPDF
HVAC_SYSTEM	HVCSYS
HVAC_TERMINATION_CONNECTION	HVTRCN
HYBRID_SHAPE_REPRESENTATION	HYSHRP
HYPERBOLA	HYPRBL
ID_ATTRIBUTE	IDATT
IDENTIFICATION_ASSIGNMENT	IDNASS
IDENTIFICATION_ROLE	IDNRL
INLINE_EQUIPMENT	INLEQP
INSTRUMENTATION_AND_CONTROL_SYSTEM	IACS

Table B. 1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
INTERFERING_SHAPE_ELEMENT	INSHEL
INTERSECTION_CURVE	INTCRV
INVISIBILITY	INVSBL
ITEM_DEFINED_TRANSFORMATION	ITDFTR
ITEM_IDENTIFIED_REPRESENTATION_USAGE	IIRU
KNOWN_SOURCE	KNWSRC
LENGTH_MEASURE_WITH_UNIT	LMWU
LENGTH_UNIT	LNGUNT
LINE	LINE
LINE_BRANCH_CONNECTION	LNBRCN
LINE_LESS_PIPING_SYSTEM	LLPS
LINE_PLANT_ITEM_BRANCH_CONNECTION	LPIBC
LINE_PLANT_ITEM_CONNECTION	LPIC
LINE_TERMINATION_CONNECTION	LNTRCN
LOCAL_TIME	LCLTM
LOOP	LOOP
LUMINOUS_INTENSITY_MEASURE_WITH_UNIT	LIMWU
LUMINOUS_INTENSITY_UNIT	LMINUN
MAKE_FROM_USAGE_OPTION	MFUO
MANIFOLD_SOLID_BREP	MNSLBR
MAPPED_ITEM	MPPITM
MASS_MEASURE_WITH_UNIT	MMWU
MASS_UNIT	MSSUNT
MATERIAL_DESIGNATION	MTRDSG
MATERIAL_DESIGNATION_CHARACTERIZATION	MTDSCH
MATERIAL_PROPERTY	MTRPRP
MATERIAL_PROPERTY_REPRESENTATION	MTPRRP
MEASURE_REPRESENTATION_ITEM	MSRPIT
MEASURE_WITH_UNIT	MSWTUN

Table B. 1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
MECHANICAL_COMPONENT_CLASS	MCCMCL
MECHANICAL_COMPONENT_DEFINITION	MCCMDF
MECHANICAL_CONNECTOR_CLASS	MCCNCL
MECHANICAL_SYSTEM	MCHSYS
NAME_ASSIGNMENT	NMASS
NAME_ATTRIBUTE	NMATT
NAMED_UNIT	NMDUNT
OBJECT_ROLE	OBJRL
OFFSET_CURVE_2D	OFCR2D
OFFSET_CURVE_3D	OFCR3D
OFFSET_SURFACE	OFFSRF
ONE_DIRECTION_REPEAT_FACTOR	ODRF
OPEN_SHELL	OPNSHL
ORGANIZATION	ORGNZT
ORGANIZATION_ASSIGNMENT	ORGASS
ORGANIZATION_ROLE	ORGR_L
ORGANIZATIONAL_PROJECT	ORGRPJ
ORIENTED_CLOSED_SHELL	ORCLSH
ORIENTED_EDGE	ORNEDG
ORIENTED_FACE	ORNFC
ORIENTED_OPEN_SHELL	OROPSH
ORIENTED_PATH	ORNPTH
OUTER_BOUNDARY_CURVE	OTBNCR
PARABOLA	PRBL
PARAMETRIC_REPRESENTATION_CONTEXT	PRRPCN
PATH	PATH
PCURVE	PCURVE
PERSON	PERSON
PERSON_AND_ORGANIZATION	PRANOR

Table B. 1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
PERSON_AND_ORGANIZATION_ASSIGNMENT	PAOA
PERSON_AND_ORGANIZATION_ROLE	PAOR
PERSON_ASSIGNMENT	PRSASS
PERSON_ROLE	PRSRL
PIPE_CLASS	PPCLS
PIPE_CLOSURE_FITTING_CLASS	PCFC
PIPING_COMPONENT_CLASS	PPCMCL
PIPING_COMPONENT_DEFINITION	PPCMDF
PIPING_CONNECTOR_CLASS	PPC0
PIPING_SPOOL_DEFINITION	PPSPDF
PIPING_SUPPORT_DEFINITION	PPS0
PIPING_SUPPORT_FITTING_CLASS	PSFC
PIPING_SYSTEM	PPNSYS
PLACEMENT	PLCMNT
PLANAR_BOX	PLNBX
PLANAR_EXTENT	PLNEXT
PLANE	PLANE
PLANE_ANGLE_MEASURE_WITH_UNIT	PAMWU
PLANE_ANGLE_UNIT	PLANUN
PLANT	PLANT
PLANT_ARRANGEMENT_DEFINITION	PLARDF
PLANT_ARRANGEMENT_SEGMENT_DEFINITION	PASD
PLANT_ARRANGEMENT_SEGMENT_TERMINATION	PAST
PLANT_CSG_SHAPE_REPRESENTATION	PCSR
PLANT_DESIGN_CSG_PRIMITIVE	PDCP
PLANT_ITEM_CONNECTION	PLITCN
PLANT_ITEM_CONNECTOR	PLI0
PLANT_ITEM_INTERFERENCE	PLITIN
PLANT_ITEM_ROUTE	PLITRT

Table B. 1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
PLANT_ITEM_WEIGHT_REPRESENTATION	PIWR
PLANT_LINE_DEFINITION	PLLNDF
PLANT_LINE_SEGMENT_DEFINITION	PLSD
PLANT_LINE_SEGMENT_TERMINATION	PLST
PLANT_SPATIAL_CONFIGURATION_CHANGE_ASSIGNMENT	PSCCA
PLANT_SPATIAL_CONFIGURATION_ORGANIZATION_ASSIGNMENT	PSCOA
PLANT_SPATIAL_CONFIGURATION_PERSON_AND_ORGANIZATION _ASSIGNMENT	PSCPAO
PLANT_SPATIAL_CONFIGURATION_PERSON_ASSIGNMENT	PSCPA
POINT	POINT
POINT_ON_CURVE	PNONCR
POINT_ON_SURFACE	PNONSR
POINT_REPLICA	PNTRPL
POINT_STYLE	PNTSTY
POLY_LOOP	PLYLP
POLYLINE	PLYLN
PRE_DEFINED_COLOUR	PRDFCL
PRE_DEFINED_CURVE_FONT	PDCF
PRE_DEFINED_ITEM	PRDFIT
PRE_DEFINED_TEXT_FONT	PDTF
PRECISION_QUALIFIER	PRCQLF
PRESENTATION_AREA	PRSAR
PRESENTATION_LAYER_ASSIGNMENT	PRLYAS
PRESENTATION_LAYER_USAGE	PRLYUS
PRESENTATION_REPRESENTATION	PRSRPR
PRESENTATION_REPRESENTATION_RELATIONSHIP	PRRPRL
PRESENTATION_SCALED_PLACEMENT	PRSCPL
PRESENTATION_SET	PRSST
PRESENTATION_SIZE	PRSSZ

Table B. 1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
PRESENTATION_STYLE_ASSIGNMENT	PRSTAS
PRESENTATION_STYLE_BY_CONTEXT	PSBC
PRESENTATION_VIEW	PRSVW
PRESENTATION_WITH_ASSOCIATION	PRWTAS
PRESENTED_ITEM	PRSITM
PRESENTED_ITEM_ASSOCIATION	PRITAS
PRESENTED_ITEM_REPRESENTATION	PRITRP
PRESENTED_ITEM_WITH_ASSOCIATION	PIWA
PROCESS_CAPABILITY	PRCCPB
PRODUCT	PRDCT
PRODUCT_CONTEXT	PRDCNT
PRODUCT_DATA_REPRESENTATION_VIEW	PDRV
PRODUCT_DEFINITION	PRDDFN
PRODUCT_DEFINITION_CONTEXT	PRDFCN
PRODUCT_DEFINITION_FORMATION	PRDFFR
PRODUCT_DEFINITION_FORMATION_RELATIONSHIP	PDFR
PRODUCT_DEFINITION_FORMATION_WITH_SPECIFIED_SOURCE	PDFWSS
PRODUCT_DEFINITION_RELATIONSHIP	PRDFRL
PRODUCT_DEFINITION_SHAPE	PRDFSH
PRODUCT_DEFINITION_SUBSTITUTE	PRDFSB
PRODUCT_DEFINITION_USAGE	PRDFUS
PRODUCT_DEFINITION_WITH_ASSOCIATED_DOCUMENTS	PDWAD
PRODUCT_MATERIAL_COMPOSITION_RELATIONSHIP	PMCR
PROPERTY_DEFINITION	PRPDFN
PROPERTY_DEFINITION_RELATIONSHIP	PRDFR
PROPERTY_DEFINITION_REPRESENTATION	PRDFRP
PURCHASE_ASSIGNMENT	PRCASS
QUALIFIED_REPRESENTATION_ITEM	QLRPIT
QUASI_UNIFORM_CURVE	QSUNCR

Table B. 1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
QUASI_UNIFORM_SURFACE	QSUNSR
RATIO_MEASURE_WITH_UNIT	RMWU
RATIO_UNIT	RTUNT
RATIONAL_B_SPLINE_CURVE	RBSC
RATIONAL_B_SPLINE_SURFACE	RBSS
RECTANGULAR_COMPOSITE_SURFACE	RCCMSR
RECTANGULAR_PYRAMID	RCTPYR
RECTANGULAR_TRIMMED_SURFACE	RCTRSR
REDUCER_FITTING_CLASS	RDFTCL
REFERENCE_GEOMETRY	RFRGMT
REINFORCING_COMPONENT_DEFINITION	RNCMDF
REPARAMETRISED_COMPOSITE_CURVE_SEGMENT	RCCS
REPRESENTATION	RPRSNT
REPRESENTATION_CONTEXT	RPRCNT
REPRESENTATION_ITEM	RPRITM
REPRESENTATION_ITEM_RELATIONSHIP	RPITRL
REPRESENTATION_MAP	RPRMP
REPRESENTATION_RELATIONSHIP	RPRRLT
REPRESENTATION_RELATIONSHIP_WITH_TRANSFORMATION	RRWT
REQUIRED_MATERIAL_PROPERTY	RQMTPR
RESERVED_SPACE	RSRSPC
REVOLVED_AREA_SOLID	RVARSL
REVOLVED_FACE_SOLID	RVFCSL
RIGHT_ANGULAR_WEDGE	RGANWD
RIGHT_CIRCULAR_CONE	RGCRCN
RIGHT_CIRCULAR_CYLINDER	RGCRCY
ROLE_ASSOCIATION	RLASS
SEAM_CURVE	SMCRV
SERIAL_NUMBERED_EFFECTIVITY	SRNMEF

Table B.1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
SHAPE_ASPECT	SHPASP
SHAPE_ASPECT_DERIVING_RELATIONSHIP	SADR
SHAPE_ASPECT_RELATIONSHIP	SHASRL
SHAPE_DEFINITION_REPRESENTATION	SHDFRP
SHAPE_DIMENSION_REPRESENTATION	SHDMRP
SHAPE_REPRESENTATION	SHPRPR
SHELL_BASED_WIREFRAME_MODEL	SBWM
SI_UNIT	SUNT
SITE	SITE
SITE_BUILDING	STBLD
SITE_FEATURE	STFTR
SITE_REPRESENTATION	STRPR
SITED_PLANT	STDPLN
SOLID_ANGLE_MEASURE_WITH_UNIT	SAMWU
SOLID_ANGLE_UNIT	SLANUN
SOLID_MODEL	SLDMDL
SPACER_FITTING_CLASS	SPFTCL
SPECIALTY_ITEM_CLASS	SPITCL
SPHERE	SPHERE
SPHERICAL_SURFACE	SPHSRF
STREAM_DESIGN_CASE	STDSCS
STREAM_PHASE	STRPHS
STRUCTURAL_LOAD_CONNECTOR_CLASS	SLCC
STRUCTURAL_SYSTEM	STRSYS
STYLED_ITEM	STYITM
SUPPORT_CONSTRAINT_REPRESENTATION	SPCNRP
SURFACE	SRFC
SURFACE_CURVE	SRFCRV
SURFACE_OF_LINEAR_EXTRUSION	SL

Table B. 1 — Short names of entities (continued)

<u>Entityname</u>	<u>Shortname</u>
SURFACE_OF_REVOLUTION	SROFRV
SURFACE_PATCH	SRFPTC
SURFACE_REPLICA	SRFRPL
SWAGE_FITTING_CLASS	SWFTCL
SWEPT_AREA_SOLID	SWARSL
SWEPT_FACE_SOLID	SWFCSL
SWEPT_SURFACE	SWPSRF
SYMBOL_COLOUR	SYMCLR
SYMBOL_REPRESENTATION	SYMRPR
SYMBOL_REPRESENTATION_MAP	SYRPMP
SYMBOL_REPRESENTATION_RELATIONSHIP	SYRPRL
SYMBOL_STYLE	SYMSTY
SYMBOL_TARGET	SYMTRG
SYMMETRIC_SHAPE_ASPECT	SYSHAS
SYSTEM_CLASS	SYSCLS
SYSTEM_SPACE	SYSSPC
TEXT_LITERAL	TXTLTR
TEXT_LITERAL_WITH_ASSOCIATED_CURVES	TLWAC
TEXT_LITERAL_WITH_BLANKING_BOX	TLWBB
TEXT_LITERAL_WITH_DELINEATION	TLWD
TEXT_LITERAL_WITH_EXTENT	TLWE
TEXT_STRING_REPRESENTATION	TXSTRP
TEXT_STYLE	TXTSTY
TEXT_STYLE_FOR_DEFINED_FONT	TSFDF
TEXT_STYLE_WITH_BOX_CHARACTERISTICS	TSWBC
TEXT_STYLE_WITH_MIRROR	TSWM
THERMODYNAMIC_TEMPERATURE_MEASURE_WITH_UNIT	TTMWU
THERMODYNAMIC_TEMPERATURE_UNIT	THTMUN
TIME_MEASURE_WITH_UNIT	TMWU

Table B. 1 — Short names of entities (concluded)

<u>Entityname</u>	<u>Shortname</u>
TIME_UNIT	TMUNT
TOPOLOGICAL_REPRESENTATION_ITEM	TPRPIT
TOROIDAL_SURFACE	TRDSRF
TORUS	TORUS
TRIMMED_CURVE	TRMCRV
TWO_DIRECTION_REPEAT_FACTOR	TDRF
TYPE_QUALIFIER	TYPQLF
UNCERTAINTY_MEASURE_WITH_UNIT	UMWU
UNIFORM_CURVE	UNFCRV
UNIFORM_SURFACE	UNFSRF
VALVE_CLASS	VLVCLS
VECTOR	VECTOR
VERSIONED_ACTION_REQUEST	VRACRQ
VERTEX	VERTEX
VERTEX_LOOP	VRTLP
VERTEX_POINT	VRTPNT
VERTEX_SHELL	VRTSHL
VIEW_DEPENDENT_ANNOTATION_REPRESENTATION	VDAR
WIRE_SHELL	WRSHL

Annex C
(normative)
Implementation method-specific requirements

The implementation method defines what types of exchange behaviour are required with respect to this part of ISO 10303. Conformance to this part of ISO 10303 shall be realized in an exchange structure. The file format shall be encoded according to the syntax and EXPRESS language mapping defined in ISO 10303-21 and the AIM defined in annex A of this part of ISO 10303. The header of the exchange structure shall identify the use of this part of ISO 10303 by the schema name 'plant_spatial_configuration'.

Annex D
(normative)
Protocol Information Conformance Statement (PICS) proforma

This clause lists the optional elements of this part of ISO 10303. An implementation may choose to support any combination of this optional elements. However, certain combinations of options are likely to be implemented together. These combinations are called conformance classes and are described in the subclauses of this annex.

This annex is in the form of a questionnaire. This questionnaire is intended to be filled out by the implementor and may be used in preparation for conformance testing by a testing laboratory. The completed PICS proforma is referred to as a PICS.

Eleven conformance classes are identified in this part of ISO 10303. A conforming implementation shall support at least one conformance class. Each class specifies a subset of the AIM constructs in this part of ISO 10303. These classes are detailed in clause 6 of this part of ISO 10303.

Questions:

1. Please provide an identifier for the product or system for which conformance is claimed:

Product name and current version number: _____

2. Please indicate the implementation method chosen:

— ISO 10303-21 Exchange Structure -- preprocessor

Preprocessor name and current version number: _____

— ISO 10303-21 Exchange Structure -- postprocessor

Postprocessor name and current version number: _____

— ISO 10303-28 Exchange Structure -- preprocessor

Preprocessor name and current version number: _____

— ISO 10303-28 Exchange Structure -- postprocessor

Postprocessor name and current version number: _____

3. If the exchange structure used is ISO 10303-28, please indicate which one was selected.

ISO 10303-28 exchange structure? : _____

4. Please indicate the classes for which conformance is claimed:

— Class 1: _____

ISO 10303-227:2005(E)

— Class 2: _____

— Class 3: _____

— Class 4: _____

— Class 5: _____

— Class 6: _____

— Class 7: _____

— Class 8: _____

— Class 9: _____

— Class 10: _____

— Class 11: _____

Annex E

(normative)

Information object registration

E.1 Document identification

To provide for unambiguous identification of an information object in an open system, the object identifier

{ iso standard 10303 part(227) version(0) }

is assigned to this part of ISO 10303. The meaning of this value is defined in ISO/IEC 8824-1, and is described in ISO 10303-1.

E.2 Schema identification

To provide for unambiguous identification of the schema specifications given in this application protocol `plant_spatial_configuration` in an open information system, object identifiers are assigned as follows:

{ iso standard 10303 part(227) version(0) object(1) plant-spatial-configuration(1) }

is assigned to the `plant_spatial_configuration` expanded schema (see annex A).

{ iso standard 10303 part(227) version(0) object(1) plant-spatial-configuration-schema(2) }

is assigned to the `plant_spatial_configuration` short form schema (see 5.2).

The meaning of these values is defined in ISO/IEC 8824-1, and is described in ISO 10303-1.

Annex F **(informative)** **Application activity model**

The application activity model (AAM) is provided as an aid to understanding the scope and information requirements defined in this application protocol. The model is presented as a set of activity figures that contain the activity diagrams and a set of definitions of the activities and their data.

F.1 Application activity model definitions and abbreviations

The following terms are used in the application activity model. Terms marked with an asterisk are outside the scope of this application protocol.

The definitions given in this annex do not supersede the definitions given in the main body of the text.

The viewpoint of the AAM is the users of plant spatial configuration information, including owner, architect, engineer, and builder.

F.1.1 analyze final plant design (AAM A245): examine all aspects of final design for compliance to performance criteria and generate any necessary changes required to meet these criteria.

F.1.2 as-built documents*: site plans, detailed equipment descriptions, electrical instrumentation diagrams, and P&IDs that record the actual condition of a plant at a specific point in time.

NOTE These documents aid in meeting government documentation and safety requirements. Frequently, they are simply corrections or modifications to existing design documents delivered to construction.

F.1.3 authorization plan*: high level plan, justification, and forecast for design and construction of a plant. The authorization plan describes how funds, people, and resources are to be allocated for the plant project.

NOTE It is a document used internally and is sometimes called a white paper.

F.1.4 automation tools*: the collection of software and hardware tools used to assist the activities involved in the life cycle of a process plant.

F.1.5 basic laws*: those elements of natural and human laws affecting any activity in the life cycle of a process plant.

EXAMPLE These laws include operating rules and guidelines as established by U.S. federal regulatory agencies such as the Occupational Safety and Health Administration (OSHA), the Environmental Protection Agency (EPA), and the Food and Drug Administration (FDA).

F.1.6 bids*: commercial proposal by supplier for provision of equipment, supplies, or services.

F.1.7 calculate heat and mass balance* (A212): calculations performed based on design basis, unit operations, fuel or materials in the process, along with associated chemical properties to optimize plant and operational cost.

F.1.8 capital appropriation*: authorization of funding for capital project or expenditure.

F.1.9 change request: a request made by an user of data to revise the original or current version of something due to errors, omissions, or other reasons, such as new requirements.

NOTE 1 A request is followed by review, analysis, and approval. Change requests are tracked in terms of cost and schedule (a kind of mini-project within project).

NOTE 2 Change requests may be made against a supplier list, process, plant, procedure, and design basis.

NOTE 3 Change request originators include construction and operations.

F.1.10 change request (design): a request made by an user of data to revise the original or current version of the design of something due to errors, omissions, or other reasons.

F.1.11 change request (plant): a request made by an user of data to revise the original or current version of the design of the plant due to errors, omissions, or other reasons.

F.1.12 change request (procedure): a request made by an user of data to revise the original or current version of a procedure due to errors, omissions, or other reasons.

F.1.13 change request (supplier list): a request made by an user of data to revise the original or current version of the supplier's list due to errors, omissions, or other reasons.

F.1.14 chemical properties*: chemical data needed by the process engineer during design.

NOTE This data includes, but is not limited to:

- boiling point;
- critical pressure;
- critical temperature;
- density;
- enthalpy;
- entropy;
- flash point;
- heat of vapourization;
- melting point;
- molecular weight;
- specific heat;
- thermal conductivity;
- viscosity.

ISO 10303-227:2005(E)

F.1.15 codes: widely recognized, accepted, and sometimes legally mandated rules that apply during the life-cycle of the plant. These rules govern life-cycle activities such as design, fabrication, and operation, and characteristics such as safety. Codes are consensus documents and specifications and are sometimes a subset of regulatory requirements.

EXAMPLE The ANSI 31.x series of codes.

NOTE The design basis data specified will guide the code application, i.e., how the code is applied. (ANSI 31.3 allows overpressurizing for short periods of times to accommodate specific design basis scenarios.)

F.1.16 commission plant* (AAM A46): test the functionality of the completed plant prior to operation, develop final operating and maintenance procedures, and obtain final regulatory approval to operate the plant.

F.1.17 commissioned plant*: a plant that has been proven to be operational through commissioning procedures.

F.1.18 commissioning procedures*: step-by-step explanation of start-up actions required to commission the plant.

F.1.19 company requirements: those managerial decisions that place constraints on the operations of the company, that give direction or emphasis on areas for development, or that dictate decisions outside the local decision making paths. The embodiment of policies and regulations that govern the operations of a company.

F.1.20 confirm safety and regulatory compliance (AAM A244): establish that the final design of the plant meets specified safety and regulatory criteria.

F.1.21 construct and commission plant* (AAM A4): the process of building or retrofitting a physical plant, using plans and building materials. The layout drawings and material requirements are used to establish the physical arrangement and to procure the materials required. A plan for erecting the plant is determined from material schedules, heavy equipment schedules, labor schedules, and environmental conditions (such as weather). Temporary erection material (such as scaffolding) is procured as needed. Regulatory requirements and client requirements are used to plan and erect the plant, and for the final testing and certification for operation. The result is a completed plant that meets the testing procedures defined in the project control and approval documentation.

F.1.22 construction design specification*: a contractual document that gives the criteria and standards to be used in the construction of the plant.

EXAMPLE The specification contents include detailed construction drawings, plant layout, equipment lists, isometric models, piping and instrumentation diagrams, specifications for the construction phase of the project, and pre-commissioning, acceptance and approval, and testing procedures.

F.1.23 construction documentation*: all information related to the construction of the process plant.

EXAMPLE Documentation includes as-built reports, equipment certification, nameplate information of installed equipment, operating manuals, testing procedures, field changes, and photographs of as-built units, modules, and plant.

F.1.24 construction plan*: a description of the method(s) to be used for building or fabricating a plant or plant item.

F.1.25 construction services*: constructor activities and abilities to be used to construct the plant.

F.1.26 control and approve activities* (AAM A11): prepare plans, check conformance to plans, and arrange for any corrective actions.

F.1.27 control requirements*: requirements and criteria specified in operating procedures and safety requirements imposed on the mechanisms and systems that monitor and control plant operation.

F.1.28 corporate standards: procedures, instructions, or specifications that may be used in the execution of a plant project and are standardized within an organization. Corporate standards are not project specific, but may be used (and possibly customized) by a variety of projects. Corporate standards are developed over a long period of time as standard, recommended, or best practice.

EXAMPLE Kinds of standards include safety, design, and maintenance.

F.1.29 decommission and dispose of plant* (AAM A6): the activities during which the plant is decommissioned, disassembled, and the site either prepared for a new plant or returned to a state specified by the regulatory agencies. Records of the disposal of toxic and hazardous waste together with the location of any holes and the methodology used to plug them are produced and stored in accordance with approved procedures and guidelines.

F.1.30 decommission plant* (AAM A61): plan and complete the activities required to decommission the plant.

F.1.31 define plant operating philosophy* (AAM A231): ascertain and confirm those plant operating characteristics and activities necessary to achieve the plant owner's operational goals such as methods of production, technology, plant safety, or plant availability. This activity includes selecting types and sequences of unit operations and processing steps so that the plant production objectives can be achieved and specifying alternate or abnormal operating conditions, and procedures such as startup and shutdown.

F.1.32 define procedures, standards, guidelines, specifications, and codes* (AAM A13): specify the engineering policies to be used and determine appropriate procedures, codes, standards, guidelines, and specifications that may apply.

F.1.33 delivery dates*: scheduled date for delivery of procured items to meet or support construction.

F.1.34 deploy component or service* (AAM A35): the process whereby the part or service is delivered and the acquisition agreement is fulfilled.

F.1.35 design basis: a document provided by the plant owner or developed by the architecture, engineering, and construction (AEC) contractors that establishes or defines the information and data that Plant engineering is to be based upon. It consists of guidelines and requirements, corporate standards, codes, references to regulatory agreements, form of deliverables, and plant or production capacity.

EXAMPLE The design basis includes:

ISO 10303-227:2005(E)

- design safety philosophy;
- environmental requirements;
- plant inputs (e.g., fuel, feedstock);
- plant license and permit requirements;
- plant operating requirements;
- plant process requirements;
- plant product or output (type and capacity);
- site parameters (geographical, meteorological, soils, hydrological);
- type of plant.

It also addresses performance objectives for the plant such as:

- capacity;
- engineering quality;
- environmental;
- investment and project economics;
- safety and health;
- schedule;
- product and plant quality;
- product and raw material storage;
- project execution;
- technology.

NOTE 1 Performance objectives usually take the form of a written document owned and maintained by the project team (consisting of members from the business, engineering, construction, and plant site).

NOTE 2 The definition for design basis is from an owner's perspective.

F.1.36 design and engineer plant (AAM A2): the activities required to develop an appropriations request and generate a construction design specification for some modification to an existing process plant or the construction of a new process plant.

NOTE The appropriation request is submitted to company management for approval. Upon approval, the construction design specification is generated.

F.1.37 design strategy*: a description of major steps required to complete enough design to obtain a budget estimate for business calculations as well as to begin the identification of process unknowns that may or may not require piloting. It encompasses building technology, mechanical technology, utility technology, automation technology, schedules, scope, standards and regulations, process definition, control philosophies, costs, benefits and timings, and project approach (for example, architectural engineering, construction management, internal).

F.1.38 disassembled plant*: all equipment items remaining after the disposal of a process plant.

F.1.39 disposal documentation*: all information related to the disposal of the process plant including acceptance and approval procedures used in disposing all hazardous materials, residues, insulation, wiring, piping, vessels, rotating equipment, site cleanup and restoration reports, and photographs.

F.1.40 dispose of plant* (AAM A62): plan and complete the activities required to dispose of the plant.

F.1.41 energy*: all utilities required in the production of useful products through the operation of a process plant.

F.1.42 engineer and design equipment (AAM A223): preliminary sizing of all major pieces of required equipment is made at this time with enough detail to obtain budget quotes.

EXAMPLE This includes equipment such as refrigeration machines, purchase power substations, secondary substations, switch gear, compressors, and boilers, as well as the major process equipment specific to the plant.

F.1.43 engineer and design plant systems (AAM A222): at the conceptual level, this is a preliminary scoping of all major modifications or additions to major plant distribution systems such as steam, compressed air, electrical power, refrigeration, water, firewater, and sewers (storm, process, sanitary). Impact on distribution pipe lines and feeder systems quantity and size are also included. A consideration of system operation in terms of reliability, uptime, planned maintenance, and winter and summer operations are vital to proper planning.

F.1.44 engineering design, construction, and operation changes: changes to the design of the plant arising from errors, omissions, new requirements, or other reasons during plant design, construction, or operation.

F.1.45 environmental impact assessment*: evaluation of project's or plant's affect on the environment.

NOTE A report is usually required by an environmental regulatory agency before construction can begin.

F.1.46 equipment characteristics (functional): describe or specify the functional requirements for the equipment: what it is supposed to do. They are items of information that describe: the service provided to the process by the equipment.

EXAMPLE For a pump, such information might include a descriptive name or title, such as 1502-B Condensate Return Pump B.

F.1.47 equipment characteristics (performance): describe or specify the performance requirements for the equipment: how much it is supposed to do it. They are items of information that describe the effect that equipment has on the process or other operational information.

EXAMPLE For a pump, such information might include flow rate, total developed head, and efficiency.

ISO 10303-227:2005(E)

F.1.48 equipment characteristics (process): a subset of equipment functional data that describe the contribution to the process desired from equipment. Such data is specified prior to the actual selection of specific equipment to fulfill the purpose.

F.1.49 equipment characteristics (required): needed functional, performance, physical, or process attributes of an item that have a name and measurable value.

F.1.50 equipment id: an identifier assigned to a piece of equipment.

F.1.51 equipment list: a list of equipment in the process plant.

EXAMPLE An equipment list is comprised of, but not limited to:

- contract numbers (e.g., purchase, install);
- drawing references (e.g., P&IDs, plant arrangements);
- electrical load and type;
- identifier (e.g., tag);
- location (e.g., building, elevation, area, column row);
- name;
- service requirements (e.g., air, water, structural base, electrical power, control circuitry);
- spare requirements.

NOTE The equipment list may not include all equipment. It does not include miscellaneous equipment and devices (e.g., y-pattern strainers, inline flow meters, instruments) or valves.

F.1.52 erect plant* (AAM A43): utilizing plans, materials, services and labor, build a physical plant that conforms to the detailed design.

NOTE This process begins with the site preparation; grading and primary foundations poured, and temporary roads and rails created. Utility services are provided and temporary warehouses are built.

Major equipment is moved, often in pieces, and installed on foundations with supporting steel. Site permanent buildings are built, as are pipe racks and other permanent steel. Pipe runs and pipe spools are put in place with valves and miscellaneous equipment and welded or joined. Other items such as ducting, electrical, instrumentation are installed.

F.1.53 establish initial process control logic* (AAM A214): document philosophical and operational requirements between instrumentation, equipment and process.

F.1.54 establish plant design basis* (AAM A16): the activity of collecting a complete and consistent set of constraints, requirements, and guidelines for subsequent engineering activities.

NOTE This activity results in the development of the design basis documents. See Design Basis.

F.1.55 evaluate bids and negotiate purchase* (AAM A33): the process whereby bid packages are evaluated, a supplier is selected, and an agreement is entered into for the acquisition of the plant item(s).

F.1.56 finalize layout, arrangement, and spatial design (AAM A242): develop the spatial design of the plant to its final approved-for-construction state utilizing the finalized system design as the primary input.

F.1.57 finalize system design (AAM A241): develop the system design, expressed by flow and control information and equipment performance data, to its final state.

NOTE The resulting design serves as a basis for detailed plant design.

F.1.58 guidelines and requirements: specifications, instructions, and mandates specified by management that shall be followed in the plant project. These guidelines and requirements may be project specific. Guidelines are more generally applicable than requirements, which tend to be specific in terms of what must be done.

NOTE Originators and users of guidelines and requirements are:

- architectural and engineering;
- construction management;
- constructor;
- contractor (basic practices);
- engineering and construction;
- engineering, procurement, and construction;
- owner.

These categories are not mutually exclusive.

F.1.59 heat and mass calculations*: calculations performed based on design basis, unit operations, fuel or materials in the process, along with associated chemical properties to optimize plant and operational cost.

F.1.60 identify and analyze safety requirements and hazards* (AAM A215): review design basis, unit operations, heat and mass balances, materials, identified equipment, control logic and process flow diagrams against federal, state and local regulations, codes and standards to determine compliance and produce an analysis of results.

F.1.61 identify and define unit operations* (AAM 211): incorporate the design basis and owner requirements to define and document the basis for conceptual process design and estimated time and cost expenditures. If the design activity is related to an existing plant, then existing operations are incorporated into the conceptual process design.

ISO 10303-227:2005(E)

F.1.62 identify and size equipment* (AAM A213): identify equipment requirements based on the design basis and unit operations. Sizing of the equipment is based on the heat and mass balance calculations and unit operations.

F.1.63 identify plant performance requirements and establish design strategy (AAM A221): define a quantitative description of the quantity and quality of a product to be produced by the plant in a yearly time period and describe the major steps required to complete enough design to obtain a budget estimate for business calculations as well as to begin the identification of process unknowns.

NOTE Performance requirements are usually stated as units of product per unit time.

EXAMPLE Additional qualifications are typically made regarding the quality of the plant. Examples include time between major shutdowns for continuous processes, percent uptime required, and expected yield.

F.1.64 information databases: those elements of information collections comprising literature references, physical and transport properties, symbology sets, equipment specifications, and equipment costs that assist in the conception, design, construction, operation, and disposal of a process plant.

F.1.65 initial information: any knowledge available at the start of the process to build or modify a process plant.

EXAMPLE This includes information about the site, regulatory agreements, owner requirements, and approved suppliers.

F.1.66 innovation: new ideas and concepts generated internally or through the public domain to solve problems or to enhance the quality of work.

NOTE Some ideas and concepts may become goods, services, and systems that there is a societal requirement for. To some degree, innovation is fundamental to all activities involved with the process, however, particular emphasis is placed on activities that require generation of new ideas and concepts from abstract entities as inputs.

F.1.67 inspection plan*: the description of anticipated activities necessary for surveillance of suppliers, fabricators, and assemblers to verify compliance to contractual specifications, codes, and good practice.

NOTE The plan usually lists the items to be inspected, the place where the inspections are expected to occur, anticipated frequency of inspection and type of activity to be undertaken at each inspection. The reporting procedure for the surveillance results is usually included in the developed inspection plan.

F.1.68 inspection requirements*: requirements imposed by a regulatory agency related to the inspection of the plant during the decommissioning process.

F.1.69 inspection results*: reports that result from inspection and supplier surveillance activities.

F.1.70 layout plant (AAM A224): a general arrangement of the plant in plan view, showing all the major components of the distribution systems affected by the plant and the location of the plant. A general arrangement of all major equipment within the battery limits of the plant is also included.

F.1.71 licensed technologies: patented or proprietary processes or design information purchased or licensed from an outside source, such as a process processor, supplier, or fabricator.

NOTE This technology may range from laboratory synthesis data through unit operation process data to complete, detailed plant designs or equipment items and modules.

F.1.72 line schedule and list: a subset of information presented on the P&ID, and possibly the heat and mass balance, that describes the characteristics of pipelines required for a given process.

NOTE This information is used by the piping designer during the detail design. It is analogous to the equipment list.

F.1.73 maintain plant* (AAM A53): conduct and monitor the activities required to maintain the plant.

F.1.74 maintain suppliers list* (AAM A31): the process whereby a list of accepted or approved suppliers is kept up to date.

F.1.75 manage and plan project* (AAM A1): managing the project requires that sufficient resources be provided to execute the project and check that the execution is done in accordance with the plans and regulations. Planning the project is the activity that establishes a detailed technical plan and a financial plan that are consistent with the engineering, construction, and commissioning activities required to fulfill the project objectives.

F.1.76 manage plant* (AAM A51): direct and administrate the operations, maintenance, and disposal of the plant.

F.1.77 manage, operate, and maintain plant* (AAM A5): the activities required to manage, operate, and maintain the plant safely, efficiently, and according to operating procedures and regulations.

F.1.78 management authorizations and controls*: management authorization, imperatives, directives, and procedures for initiating and executing plant management activities.

F.1.79 obtain agreements with regulatory bodies* (AAM A15): the activity of confirming that the intended design, construction, commissioning, operation, and decommissioning of the proposed project will comply with requirements of the regulatory body. This confirmation is recorded by formal documentation such as written agreements and safety compliance reports.

F.1.80 obtain construction services* (AAM A42): use the construction plan as a requirements list for outside services needed and their schedule. Negotiate contracts and agreements with sub-contractors, equipment suppliers, and labour unions as needed for the erection of the plant. Adjust the schedule of the construction plan to allow for the availability of sub-contractors, equipment and labour.

F.1.81 operate plant* (AAM A52): conduct and monitor the activities required to operate the plant.

F.1.82 operating philosophy*: the plant owner's operational goals.

EXAMPLE Operational goals include methods of production, technology, plant safety, and plant availability.

F.1.83 operating procedures*: documentation that covers many different phases and aspects of plant operation that is necessary to run the plant safely.

F.1.84 optimize for environment* (AAM A236): evaluate the plant design against the applicable environmental regulations (Federal, State, and local) and modify the design where required.

NOTE These regulations influence many of the activities in plant and process design such as operating procedures, plant and process control strategies, specification and design of piping, instrumentation, and equipment, as well as

ISO 10303-227:2005(E)

site selection. Broad regulatory interpretations often mean that conservative measures are incorporated in plant design.

F.1.85 owner requirements: an initial statement of plant requirements provided by the owner.

NOTE Owner requirements are an aggregation of items such as design requirements and client general specifications. The owner requirements may be provided at any level of abstraction from very general to very specific.

F.1.86 perform process plant life-cycle activities (AAM A0): the completion of all tasks involved in the life cycle of a process plant from conception through final disposal.

NOTE 1 These tasks include:

- conception;
- research;
- design;
- construction;
- operation;
- maintenance;
- retrofit;
- disposal.

NOTE 2 Major outputs from the life-cycle activities are contractual documents, regulatory compliance information, data retained beyond the life time of the plant, useful products generated by the operation of the plant, and residual materials remaining in the environment upon completion of the plant life cycle. These residual materials include waste products generated while producing the product(s) and the disassembled plant.

F.1.87 personnel*: the individuals responsible for performing the life-cycle activities of the process plant.

EXAMPLE These individuals include discipline experts, skilled workers, and labourers.

F.1.88 piping and instrumentation diagram (P&ID): a schematic diagram that shows engineering details of the equipment, instruments, pipes, valves, and their connectivity and sequence.

F.1.89 piping and instrumentation diagram (AFD): the process definition is firm. Instrumentation needs to be added.

F.1.90 piping and instrumentation diagram (design): instrumentation details are included. All lines and valves have been sized. All valving, vents and drains are included. Instrumentation and loops are indicated, but final instrumentation may not have been selected.

F.1.91 piping and instrumentation diagram (final): the complete P&ID has been approved for release by engineering for construction and has been stamped by a registered professional engineer. It is a last

version of the design P&ID. It contains all changes that were incorporated during the physical design of the systems. It reflects the plant as it was, or will be, constructed.

F.1.92 piping and instrumentation diagram (preliminary): conveys the flow of the fluids from equipment to equipment in the system. It shows the valves that are used to control the flow. The major fluid containing lines have been sized.

F.1.93 plan and analyze project finances* (AAM A14): the activity of anticipating and estimating the financial resource requirements for a project. This activity establishes the expected financial performance for the project and the project financial plan.

F.1.94 plant: a portion of an installation (or the entire installation) required to operate to produce products.

EXAMPLE Products produced include chemicals, pharmaceuticals, electrical power, petroleum, and similar products.

F.1.95 plant design documentation: all documents related to the process of designing the process plant.

NOTE Plant design documents include the approved design methodologies, basic data describing physical properties and their correlations used in the design, kinetic data and kinetic models used in the design, corrosion data and methodology used in selecting materials of construction, supplier performance data, capital and operating cost estimates, and appropriations requests.

F.1.96 plant items: an item or piece of equipment that may be used as a component of the plant.

F.1.97 plant life-cycle documentation: the collection of all project management, design, contractual, regulatory, and disposal documents produced during the life cycle of a process plant.

NOTE This includes all data retained past the end of the plant life cycle.

F.1.98 plant operation and maintenance documentation*: the collection of documents relating to the operation and maintenance of process plant.

NOTE These documents include operating records and plant data, safety and accident reports, maintenance reports, disposal records for all residual materials generated during the operation of the plant, and economic information related to product sales.

F.1.99 plant performance requirements: a quantitative description of the quantity and quality of a product to be produced by the plant in a yearly time period.

NOTE Performance requirements are usually stated as units of product per unit time. Additional qualifications are made regarding the quality of the Plant, such as time between major shutdowns for continuous processes, percent uptime required, and expected yield.

F.1.100 plant records*: the documentation of information related to plant disposal, restoration, turnover, and regulatory approvals.

F.1.101 pre-commission plant* (AAM A45): resolve any differences between the detailed design and the as-built plant, perform all testing required by regulatory agencies and the client, resolve any problems that were discovered during testing, and obtain regulatory permission to start-up the plant for functional testing.

ISO 10303-227:2005(E)

F.1.102 pre-commissioned plant*: a plant that is completed and ready for check out. Mechanical systems are complete, transfer of ownership and operation remain.

F.1.103 prepare bid packages and solicit bids* (AAM A32): the process whereby the technical and commercial requirements for a plant item are compiled and sent out for pricing by multiple suppliers.

F.1.104 process control logic*: prose or diagrammatic explanation of mechanisms or systems that monitor and control a process.

F.1.105 process control logic (preliminary)*: initial prose or diagrammatic explanation of mechanisms or systems that monitor and control a process developed during conceptual process design.

F.1.106 process flow diagram (PFD): a schematic document describing the equipment units and their interconnections, major process control functions, and major stream characteristics including physical and transport properties, material flows, and energy flows.

F.1.107 procure goods and services* (AAM A3): the process whereby needed plant items, equipment, or services are purchased or acquired.

F.1.108 procured item*: plant item that has been obtained from a supplier for incorporation into the plant.

NOTE States or status of procured items include:

- in_fabrication;
- accepted;
- shipped;
- delivered_to_site.

F.1.109 produce as-built surveys* (AAM A44): the completed plant is given a physical inspection to determine whether the plant conforms to the detailed design. The detail design drawings and other documents are updated to reflect the changes to the plant discovered during the inspection.

F.1.110 produce conceptual plant design (AAM A22): the activity of extending the conceptual process design into a preliminary plant spatial configuration.

F.1.111 produce conceptual process design* (AAM A21): the activity of defining the basic parameters of a plant flow scheme.

F.1.112 produce conceptual safety engineering designs (AAM A225): create designs that specifically address how the major hazards associated with the new plant are to be dealt with to ensure the safety of all personnel working in the plant as well as the general site and surrounding neighborhood population.

NOTE These hazards will have been identified during the preliminary screening reviews to identify chemical, fire and health hazards associated with the specific chemical or mechanical characteristics of the process.

F.1.113 produce construction plans* (AAM A41): using site drawings, layout drawings, and other documents, determine the desired sequence for building the plant that will meet contract budget and schedule. Determine those services that will be needed from sub-contractors for the site preparation, erection, and testing of the plant. Develop detailed erection drawings and schedules for each section of the plant and for temporary structures.

F.1.114 produce final plant design (AAM A24): the activities required to generate a construction design specification from the process plant requirements.

NOTE The activities include designing the mechanical, electrical, and civil engineering systems of the process, designing the detailed instrumentation systems, producing piping and instrumentation diagrams and detailed equipment layout through isometric drawings or three-dimensional computer-aided design (CAD) models.

F.1.115 produce final process design* (AAM A23): integration of conceptual process and plant designs to fully define parameters of a plant flow scheme.

F.1.116 produce process flow diagrams* (AAM A216): production of a schematic showing basic process flow developed from the cumulative results of unit operations, equipment sizing, initial logic and safety requirements along with related chemical properties.

NOTE If a design activity is related to a modification or addition to an existing plant, then the existing plant information is reflected in the developed process flow diagram.

F.1.117 project authorizations and controls*: management authorization, imperatives, directives, and procedures for initiating and executing project activities.

F.1.118 project control and approval documentation: a set of documents that define the standard procedures, standard software modules, or standard forms adopted to ensure that all activities in the project comply with organizational constraints. The documents indicate how all activities are to be implemented and approved and identify all constraints that must be met.

NOTE The constraints include financial limitations, accounting, legal and regulatory restrictions, socio-economic factors, and business practices throughout the plant life cycle.

F.1.119 project financial plan*: document that states how much the plant will cost to construct, how it is to be paid for, and when payments are to be made. It is a general financing and cash flow document.

F.1.120 project-specific documents: procedures, standards, guidelines, specifications, and codes created specifically for the plant project. These documents may call out, add to, modify, or tailor a standard. Portions of these documents are derived from the design basis.

NOTE Project-specific documents evolve through stages like P&IDs and other design documentation.

F.1.121 provide resources* (AAM A12): acquire and deploy personnel, tools, and funding to perform the project activities.

F.1.122 purchase agreement*: contract between two parties to provide a service or item for a designated payment.

F.1.123 qualified construction firms*: list of construction firms that are capable and acceptable to construct the plant.

ISO 10303-227:2005(E)

F.1.124 receive, inspect, and disposition components* (AAM A34): the process of receiving equipment and materials from various suppliers at the process plant, inspecting the equipment and material for compliance to the purchase specification, and either placing the equipment or material in stock, delivering it to construction or maintenance, or returning it to the supplier.

F.1.125 regulatory agreements*: mutual agreement between the owner or operators and regulatory agencies.

F.1.126 regulatory authorizations*: approval from regulatory agencies to initiate activities.

F.1.127 regulatory requirements: federal, state, or local laws, codes, or standards that impact various activities related to the process plant.

NOTE Regulatory requirements may apply to, but are not limited to, permitting, engineering, construction, operations and decommissioning.

F.1.128 request for management approval: a document submitted to management requesting either approval to continue a particular activity of the project or requesting the procedure to use to solve a particular problem.

NOTE Approval requests may, at times, include a request that the company appropriate monies for a particular activity.

F.1.129 residual materials*: all chemicals and equipment, excluding useful products, remaining in the environment at the end of the plant life cycle.

F.1.130 resources*: the technology, people, and tools used to carry out the plant life-cycle activities.

F.1.131 resources (existing)*: currently available technology, people, and tools used to carry out the plant life-cycle activities.

F.1.132 safety and hazardous operations analysis*: the results of the evaluation of the plant design with respect to safety and hazardous operations. Identifies possible causes of faults and their consequences, and recommends remedies.

F.1.133 safety and hazardous operations analysis (preliminary)*: the initial results of the evaluation of the plant design with respect to safety and hazardous operations.

F.1.134 safety compliance reports*: documentation of analyses and evaluations of the plant performed with respect to safety considerations.

F.1.135 safety system specification: job specific document related to plant safety.

NOTE This specification may be developed from applying the design safety philosophy to plant design.

F.1.136 satisfy safety requirements* (AAM A235): perform a formal plant process design, operation, and control review to assess the whether all safety requirements are met.

NOTE Plant safety requirements involve issues such as source terms for spill scenarios, vapour dispersion for combustible and toxic releases, reliability of metallurgy and other materials, component failure rates, operator response and error, fail-safe instrumentation, equipment spacing, number and size of equipment trains, radiation

from fires, relief system design philosophies, deflagration test results, thermal runaways and associated vent sizing, detonations and resulting shock waves.

F.1.137 schedules*: a time-based list of project tasks that describes:

- what is supposed to happen;
- when it is supposed to happen;
- task sequence and dependencies;
- restraints and constraints;
- float;
- critical path.

F.1.138 schematic diagrams*: a physically non-dimensional, 2D graphical representation of the functional design of a system that does not (necessarily) encompass physical information.

EXAMPLE Types of schematic diagrams include:

- PFD;
- P&ID;
- electrical single line;
- motor control;
- control loops;
- HVAC;
- plumbing;
- input output.

NOTE Schematic diagrams evolve through stages like P&IDs and other design documentation.

F.1.139 schematic diagrams (preliminary)*: an initial physically non-dimensional, 2D graphical representation of the functional design of a system that does not (necessarily) encompass physical information developed during conceptual plant design.

F.1.140 site information (existing): information about the physical location where the plant will be constructed and the conditions of any plant on the site (if one exists).

EXAMPLE Site information includes:

- geological data, such as before and after terrain contours, and subterranean structure, and seismic activity;
- meteorological data such as seasonal wind profile, precipitation, snowfall, and ambient temperature;

ISO 10303-227:2005(E)

- road data;
- cadastre (property lines) zones;
- utilities.

NOTE A kind of site information included in the scope of this part of ISO 10303 is verified field dimensions. They are parameters that specify the physical and spatial characteristics of an existing item or component in a plant that have been verified by measurements taken by a second, independent agency. For example, field dimensions provided by the Plant owner for piping tie-in locations (coordinate locations and sizes) are considered as "verified" when duplicated by the AEC representative. If discrepancies are discovered during verification of the field dimensions, the initial and verification measurement processes must be repeated to assure verified dimensions.

NOTE Existing plant conditions are the characteristics of the existing plant(s) relevant to the revamp, retrofit, or expansion Plant project.

F.1.141 societal requirements*: the expressed need or demand by society, on either a local, national, or global scale, for products, services, or processes.

NOTE In some instances, a market study may project the expected demand or price of a product or service required by some element of society.

F.1.142 specifications and standards: consensus or mandated technical descriptions of plant hardware or systems that control the design or construction of a plant.

F.1.143 specify building and plant services (AAM A243): establish utility and other service needs for the building(s) and plant(s) based on owner requirements, final system design, and final spatial design.

F.1.144 specify control requirements* (AAM A234): define instrumentation and control system characteristics required to fulfill requirements for plant operation using the operating procedures and safety requirements.

NOTE Control systems are used to help maintain plant safety, ensure product quality, and to safeguard equipment. These systems are used to control areas such as process reactions, flows, temperatures, pressures, and levels. They operate automatically, or provide indications to plant personnel. Control requirements are generally defined in the operating procedures and specified on the P&ID and in the instrument list.

F.1.145 specify equipment functional characteristics* (AAM A233): define the functional characteristics of each major item of equipment based on confirmed plant operating requirements, process technologies, and process optimization.

EXAMPLE Functional characteristics include equipment type, process stream inputs, outputs, capacities, and conditions, equipment metallurgy, piping and instrumentation, power requirements, and auxiliary systems.

F.1.146 specify piping and instrumentation* (AAM A232): define piping and instrumentation required by the process plant based on the functional requirements for the plant.

NOTE Piping and instrumentation functional requirements are developed based on plant production capacities, process type or technology, control methodology, chemical content of process streams, and equipment layout. Also considered are alternative operating conditions, maintenance requirements, and plant operating and personal safety are issues. The results of this activity are detailed on P&IDs, line lists, equipment lists, and instrument lists.

F.1.147 starting materials*: all necessary equipment components or consumable goods necessary to construct and operate the process plant for the production of useful products.

F.1.148 status: a report of the current state of a task, design, action, or schedule. It is a quality assurance feedback mechanism.

F.1.149 stream data: chemical composition, physical state, and mass quantities of process flows.

F.1.150 supplier documentation: drawings, manuals, calculations, for example received from a company concerning items procured from the company, that provides information concerning design details or performance of the procured items.

NOTE Statuses assigned to supplier documentation include:

— preliminary (in-process design information);

— certified (information from the supplier is warranted to correctly describe the as-delivered functional or physical data);

— released for fabrication or construction.

F.1.151 suppliers list*: a list of companies that provide commodities or services to an organization.

NOTE Kinds or statuses of supplier lists include:

— approved;

— recommended;

— partnered.

F.1.152 system design (preliminary): at the conceptual level, this is an initial definition and representation of the physical components or items of the system.

F.1.153 system layout (preliminary): at the conceptual level, this is an initial definition and representation of the spatial configuration or arrangement of the system, showing all the major components of the system.

F.1.154 system layout and design: the definition and representation of the physical components or items and spatial configuration of the system in sufficient detail to support construction.

NOTE 1 This definition results from the use of the system design basis, P&IDs, specifications, and other documentation or information.

NOTE 2 The definition of the term "system" is broader than common usage, e.g., it encompasses structural systems.

NOTE 3 System layout and designs can be viewed or categorized according to the following breakdowns:

— evolutionary phase

a) Initial;

ISO 10303-227:2005(E)

b) Design;

c) Final.

— system type

a) Piping;

b) HVAC;

c) Electrical;

d) Instrumentation and Control;

e) Structural and Civil;

f) Architecture;

g) Safety.

— functional views

a) Conceptual arrangement;

b) Spatial information;

c) Schematic diagram;

d) Piping and instrumentation diagram (includes piping connectivity and sequencing).

EXAMPLE The final HVAC spatial information system design and layout will specify the definition, physical dimensions, location coordinates, and characteristics for all HVAC components that occupy space in the Plant. Only those physical dimensions, location coordinates, and characteristics required to specify the spatial instance of each component are included in this definition.

F.1.155 system layout and design (preliminary): the initial definition and representation of the physical components or items and spatial configuration of the system.

F.1.156 time and cost estimate*: projected or forecasted cost and length of time to design, produce, or procure a plant item, obtain a service, or achieve some goal.

F.1.157 unit operations*: design basis and owner requirements that define the basis for conceptual process design.

F.1.158 useful products*: the materials or energy generated through the operation of the process plant that are sold to customers for a profit.

F.2 Application activity model diagrams

The application activity model diagrams are given in figures F.2 through F.23. The graphical form of the application activity model is presented in the IDEF0 activity modelling format. Activities and data flows that are out of scope are marked with asterisks.

Figure F.1 describes the basic notation used in IDEF0 modelling. Each activity may be decomposed to provide more detail. If an activity has been decomposed, a separate diagram is included.


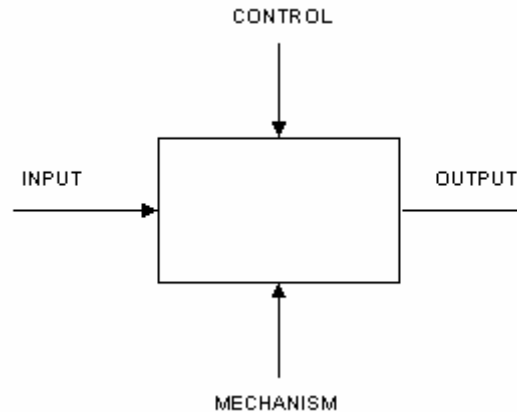


Figure F.1 — IDEF0 basic notation

As with any IDEF0 model, the AAM is dependent on a particular viewpoint and purpose. The purpose of the AAM is to describe the exchange of process plant spatial configuration information and design, fabrication, and maintenance information for process plant piping systems.

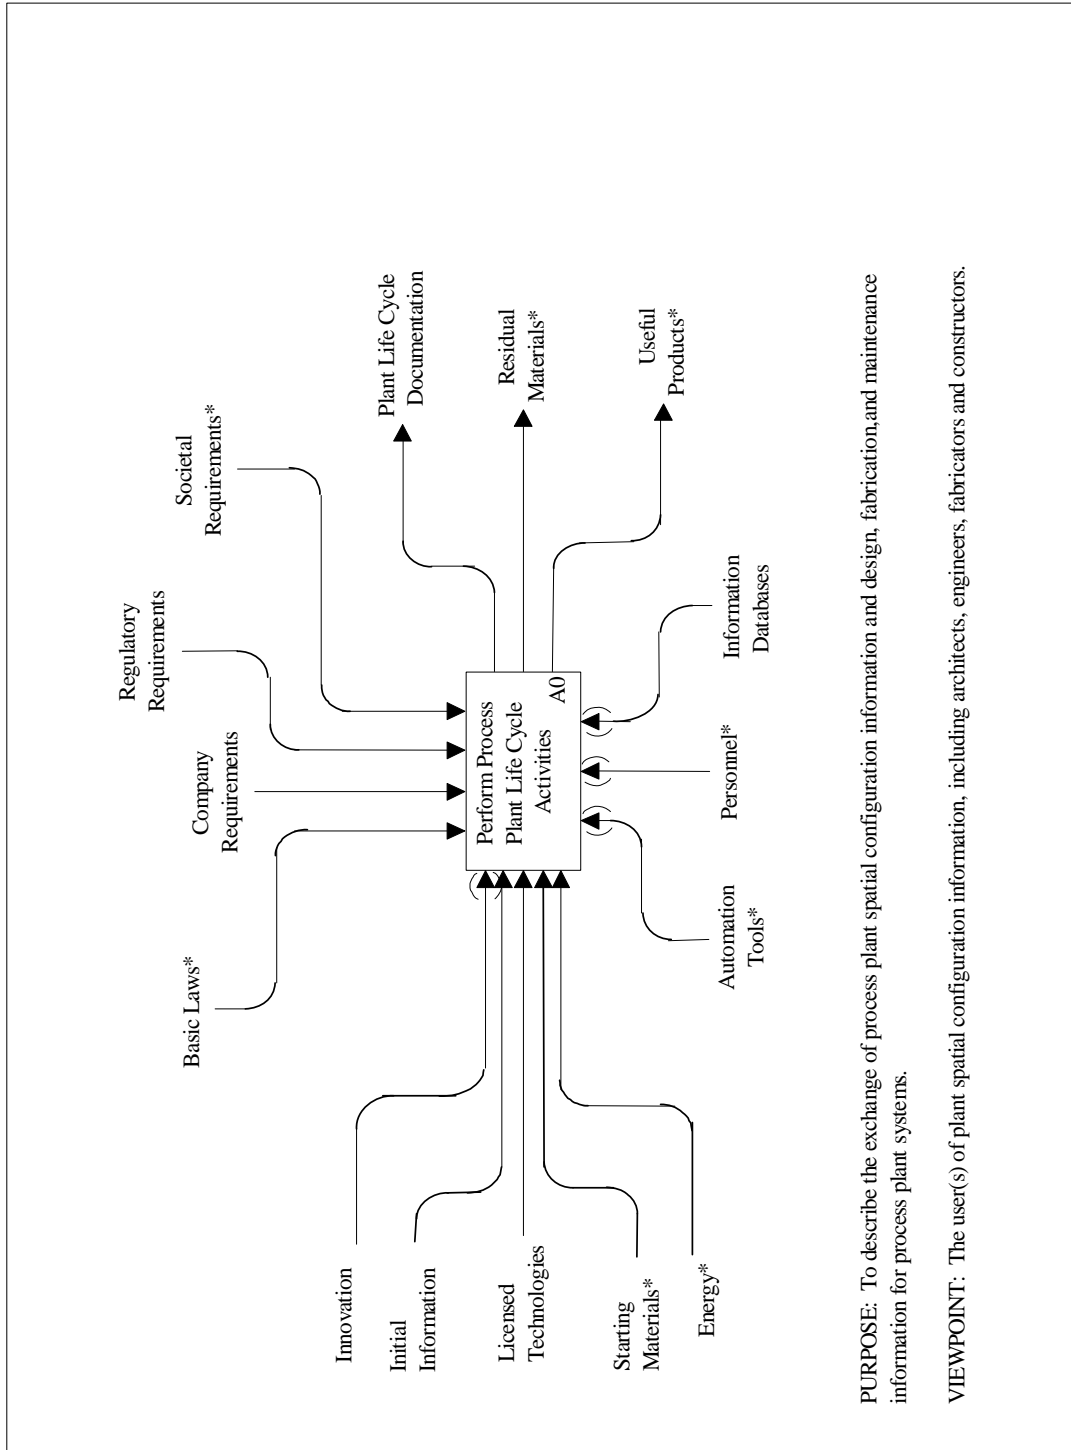

PURPOSE: To describe the exchange of process plant spatial configuration information and design, fabrication, and maintenance information for process plant systems.

VIEWPOINT: The user(s) of plant spatial configuration information, including architects, engineers, fabricators and constructors.

Figure F.2 — A-0: Process plants

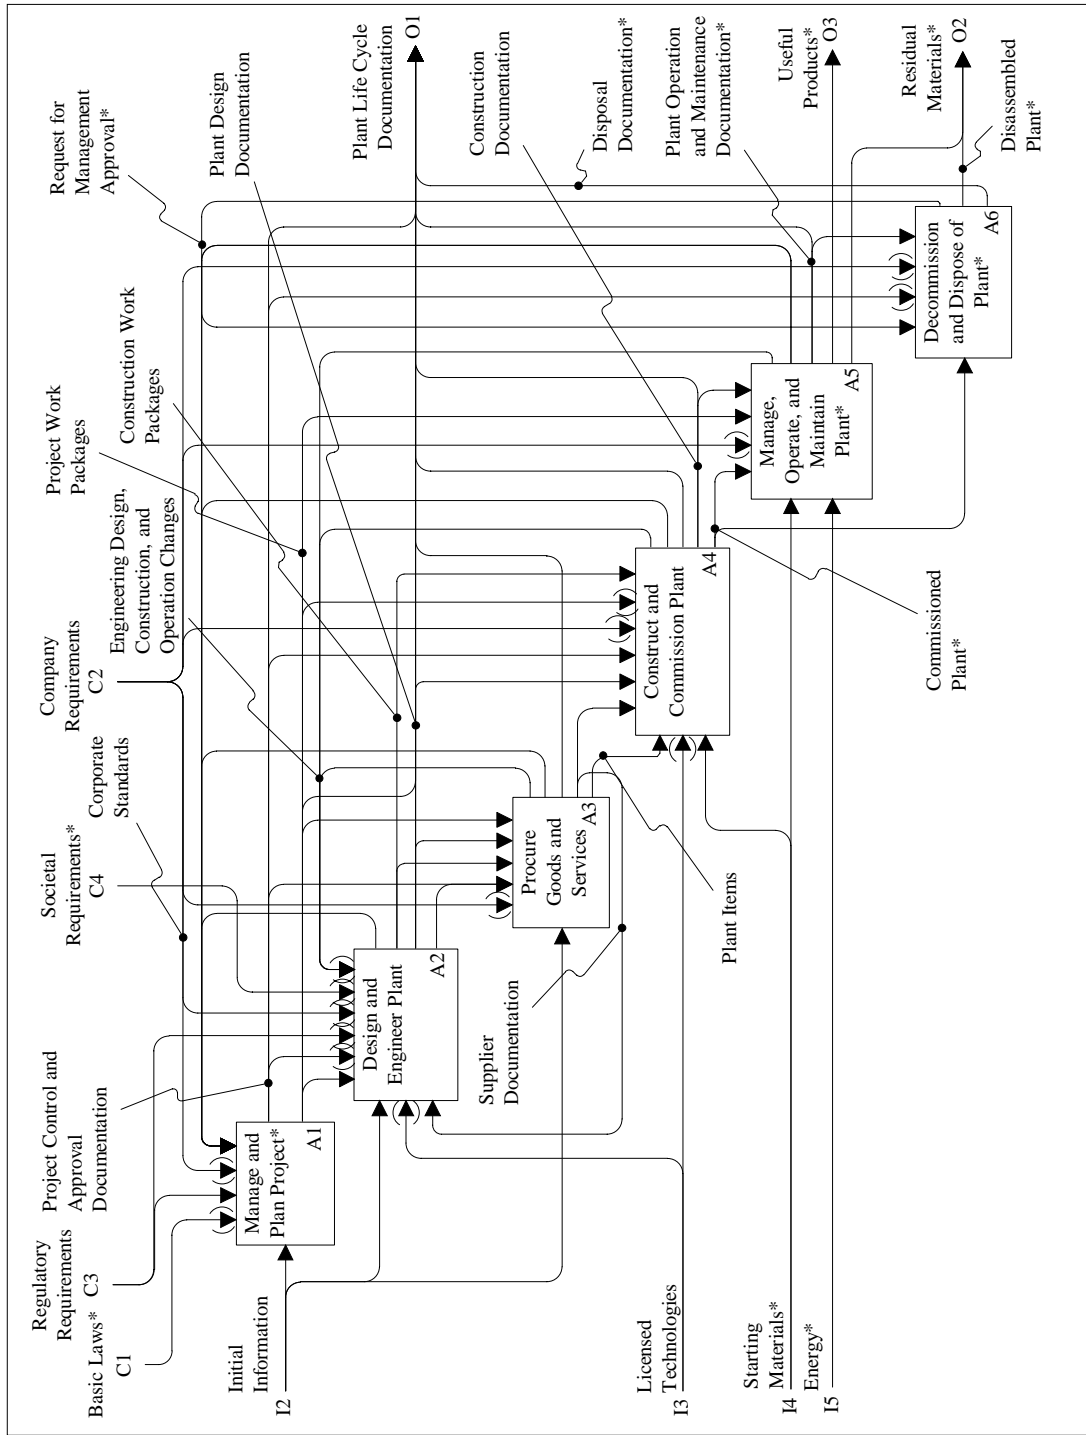


Figure F.3 — A0: Perform process plant life-cycle activities

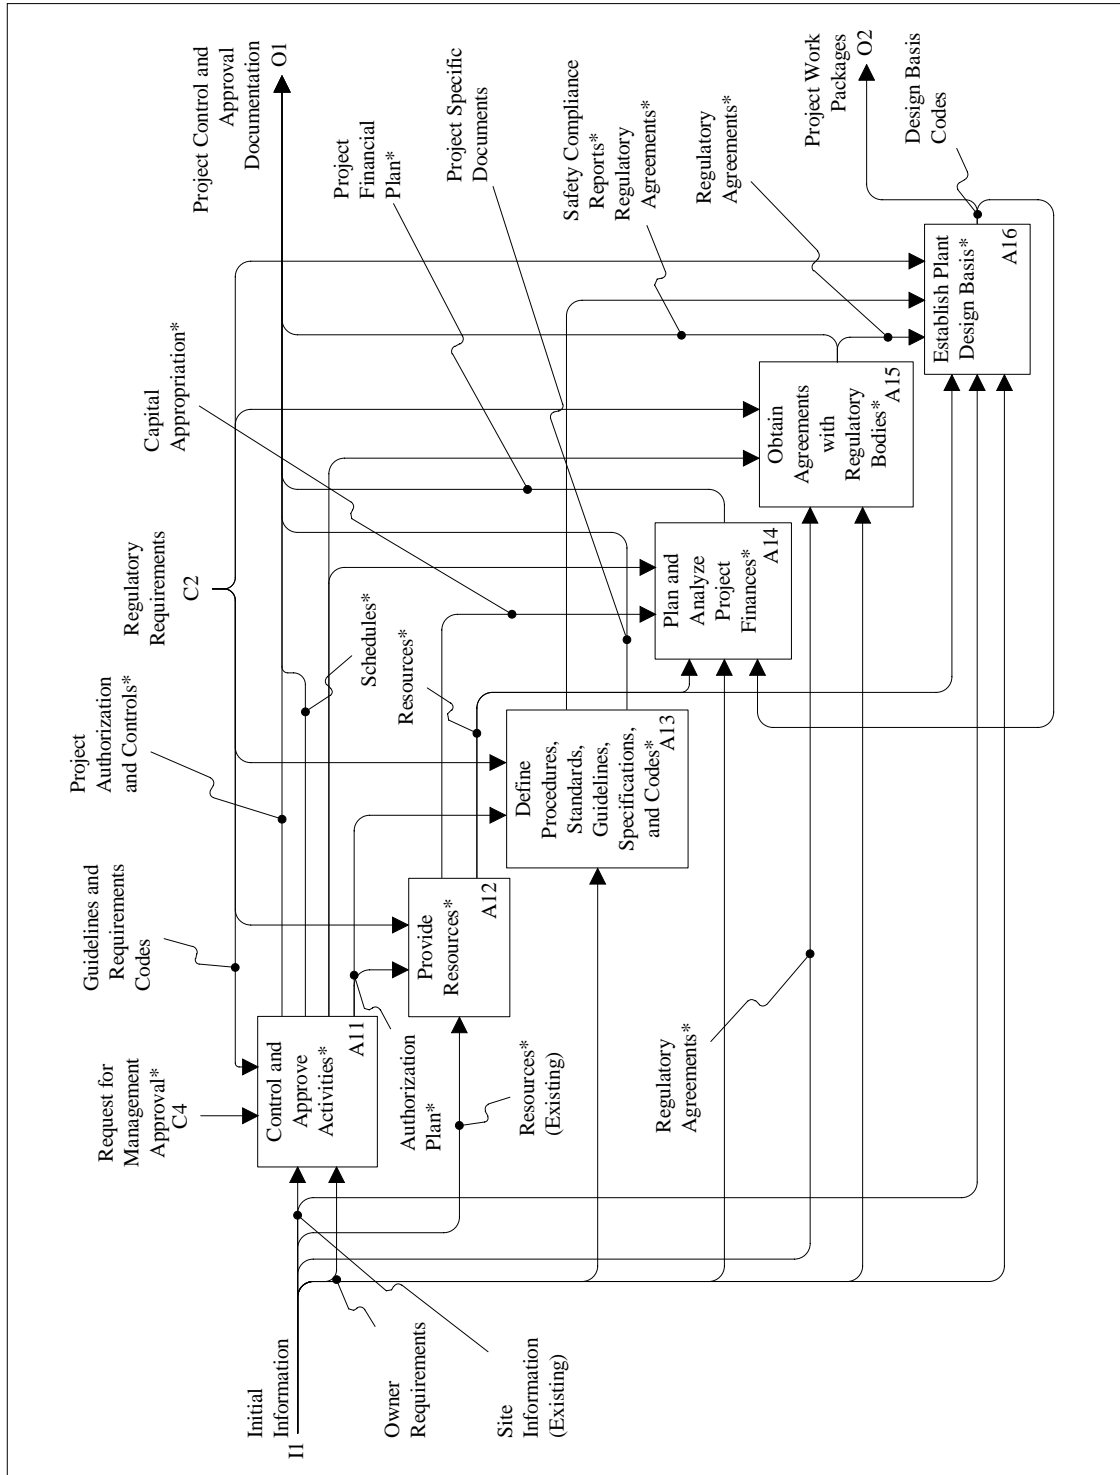


Figure F.4 — A1: Manage and plan project

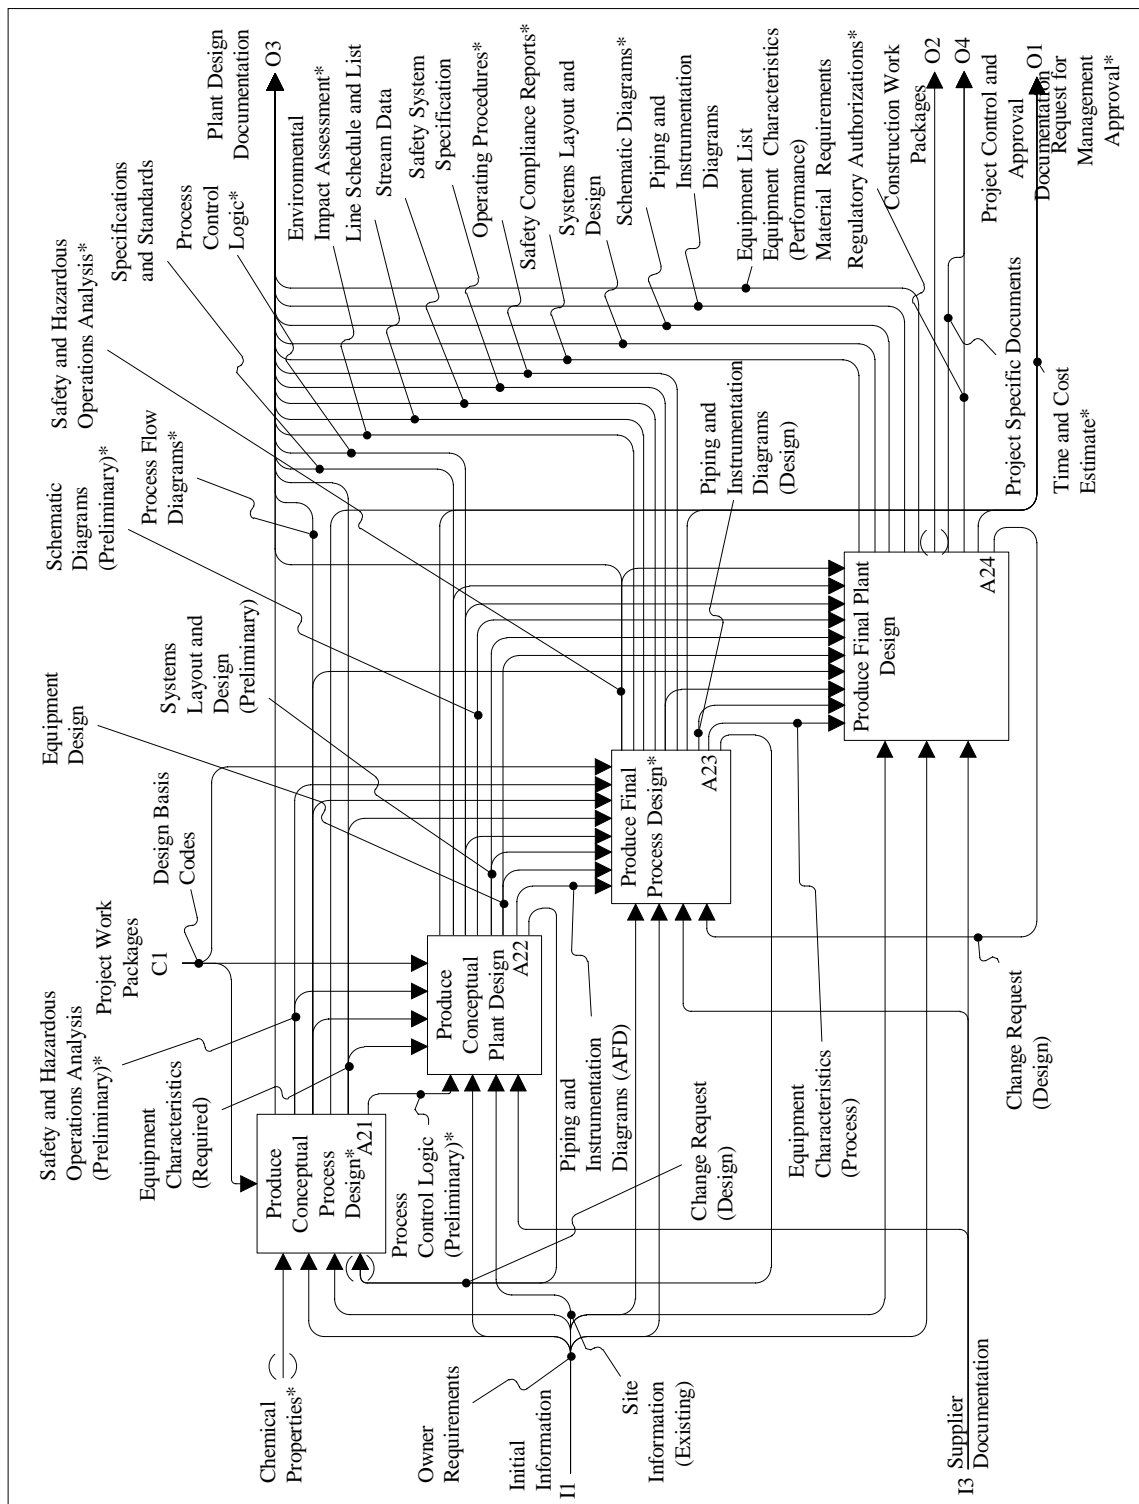


Figure F.5 — A2: Design and engineer plant

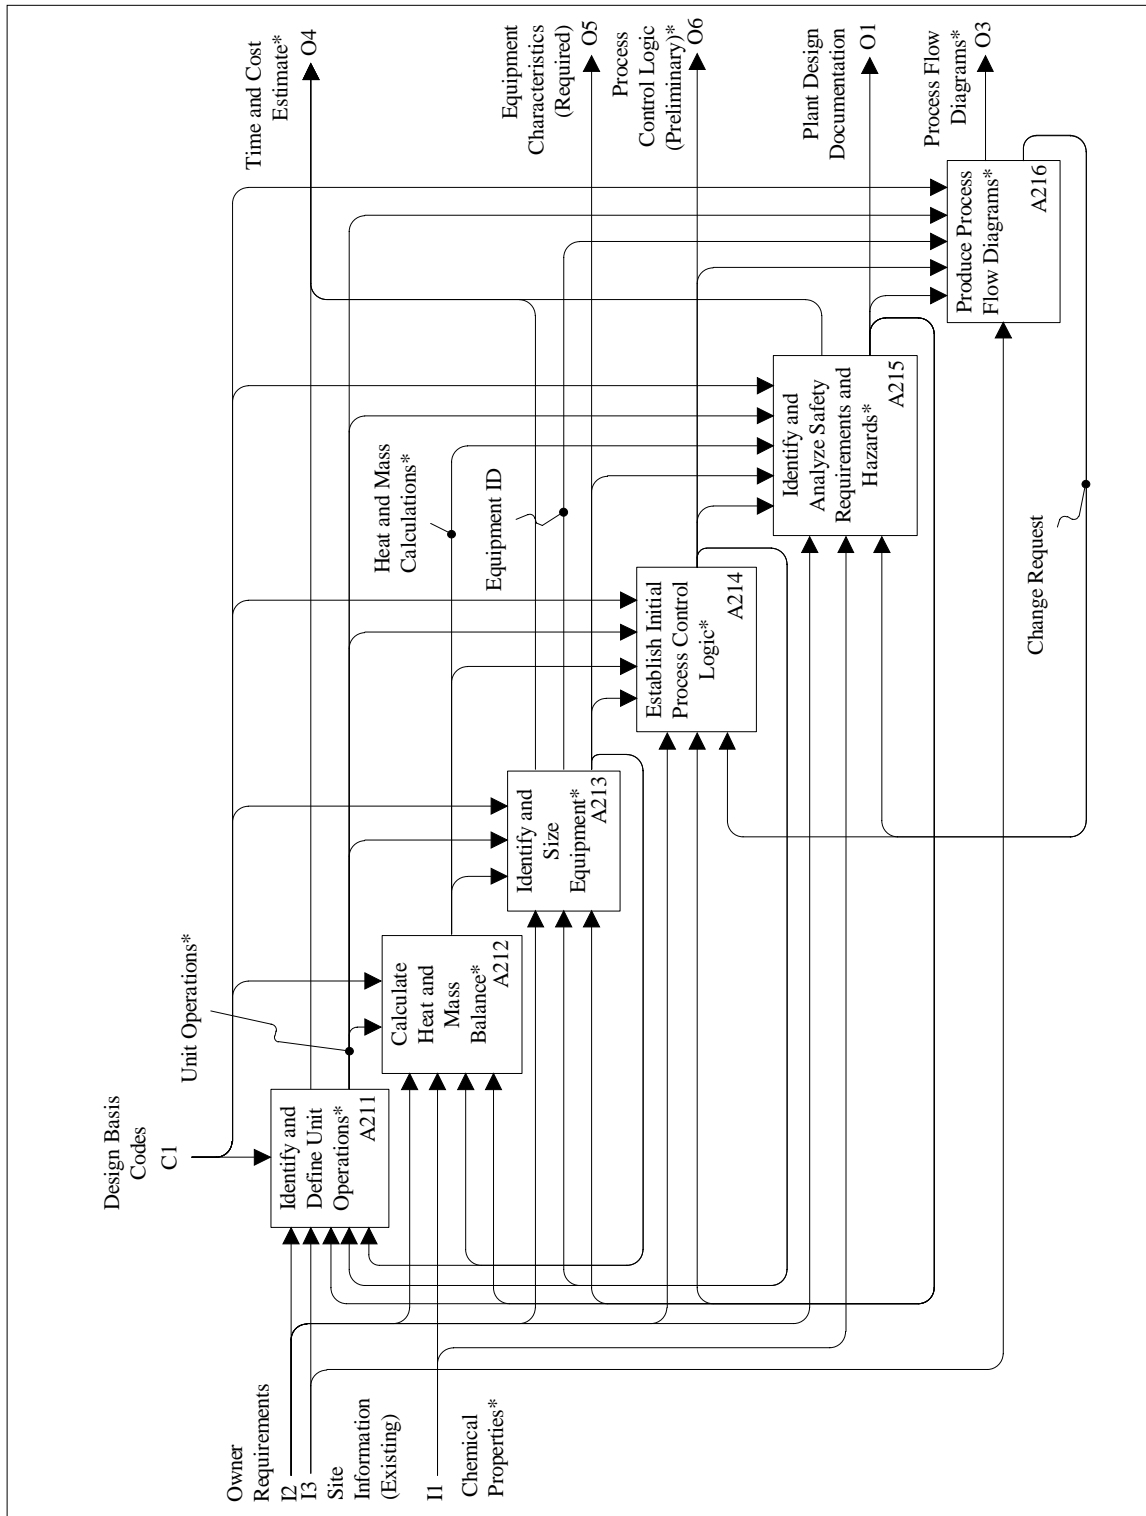


Figure F.6 — A21: Produce conceptual process design

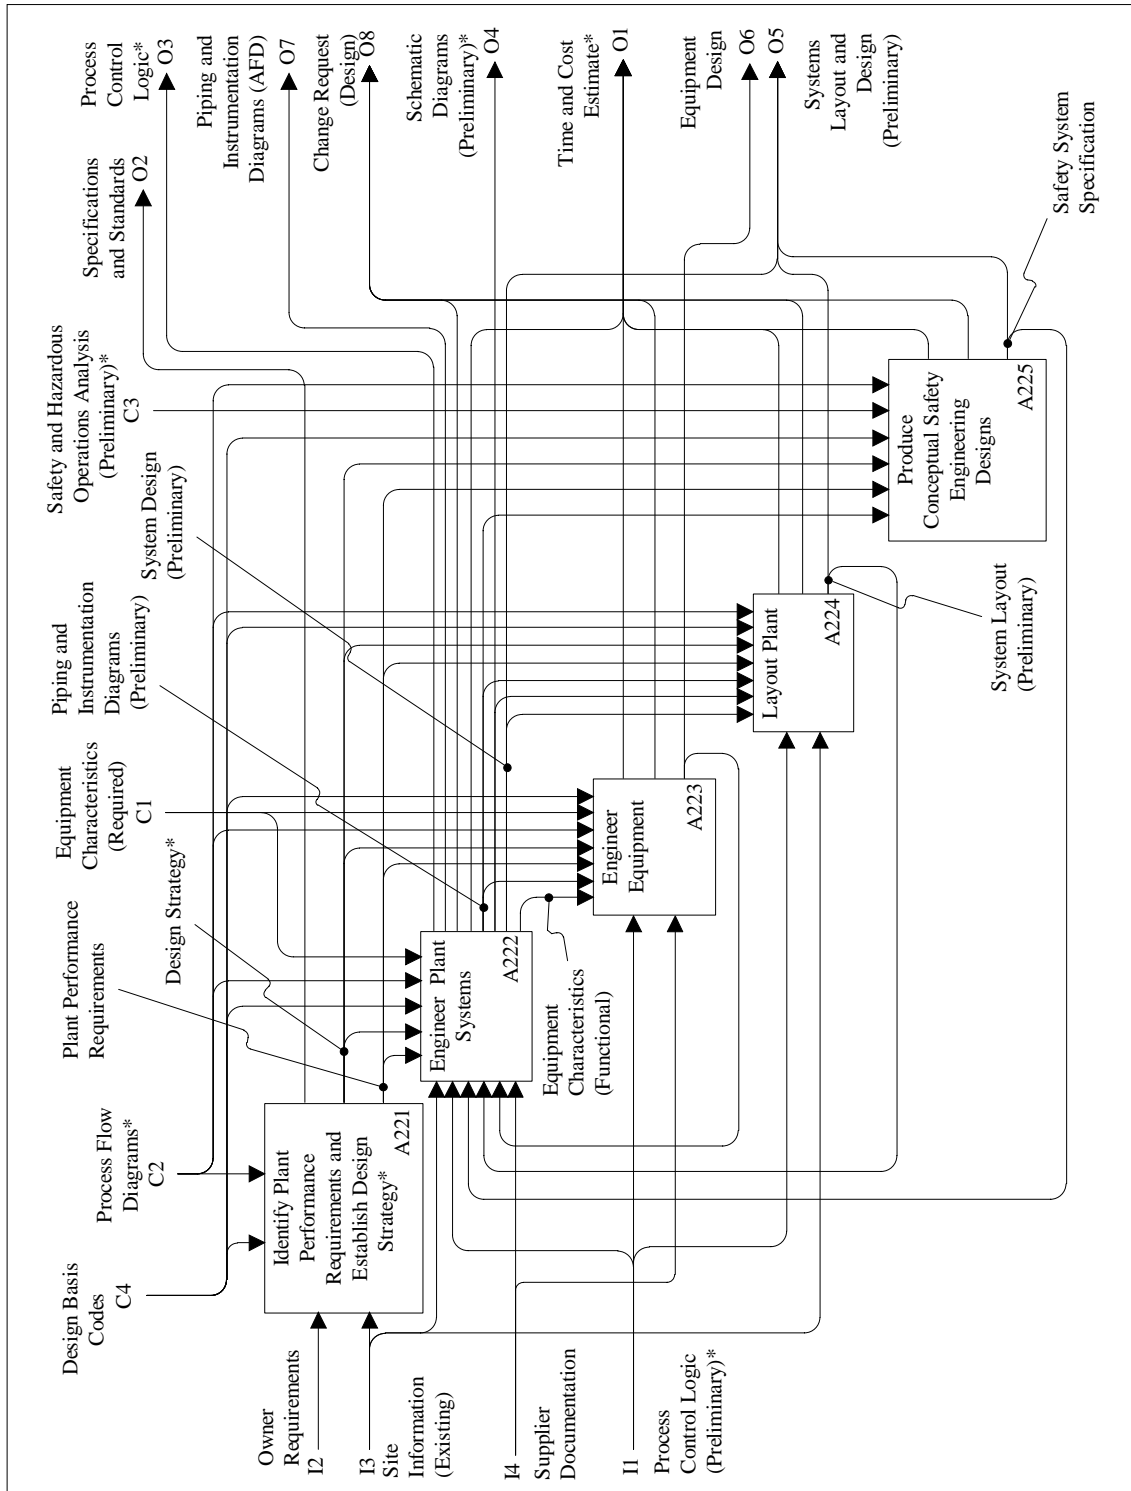


Figure F.7 — A22: Produce conceptual plant design

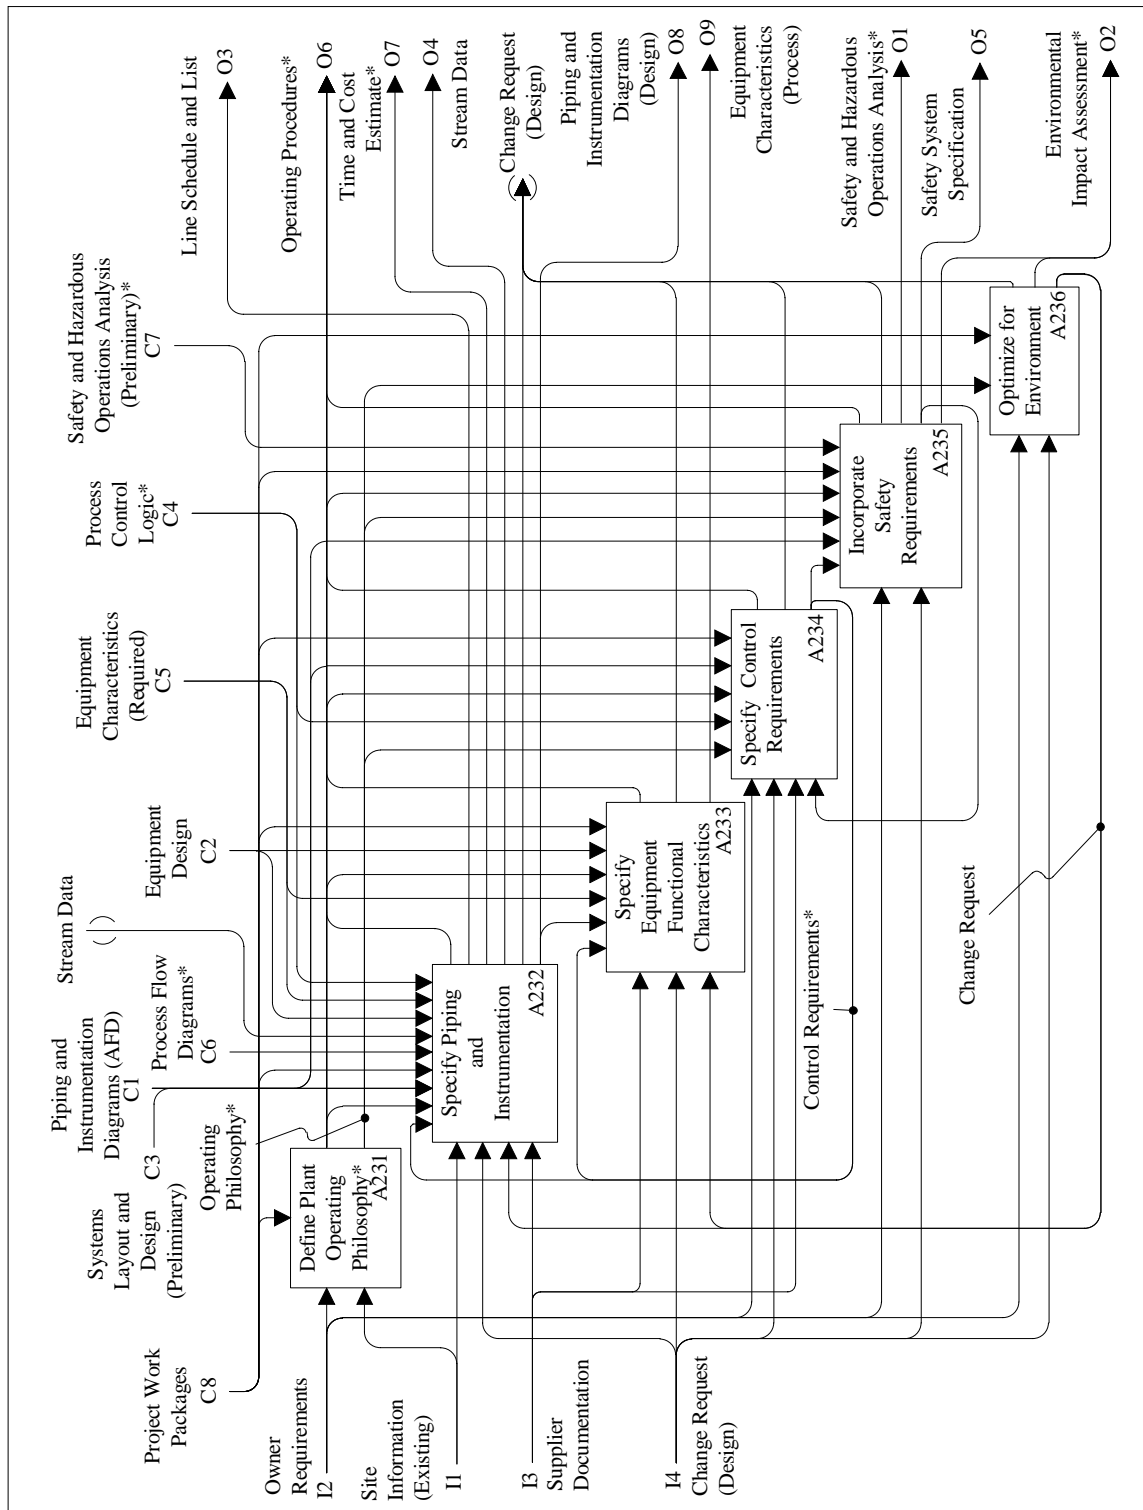


Figure F.8 — A23: Produce final process design

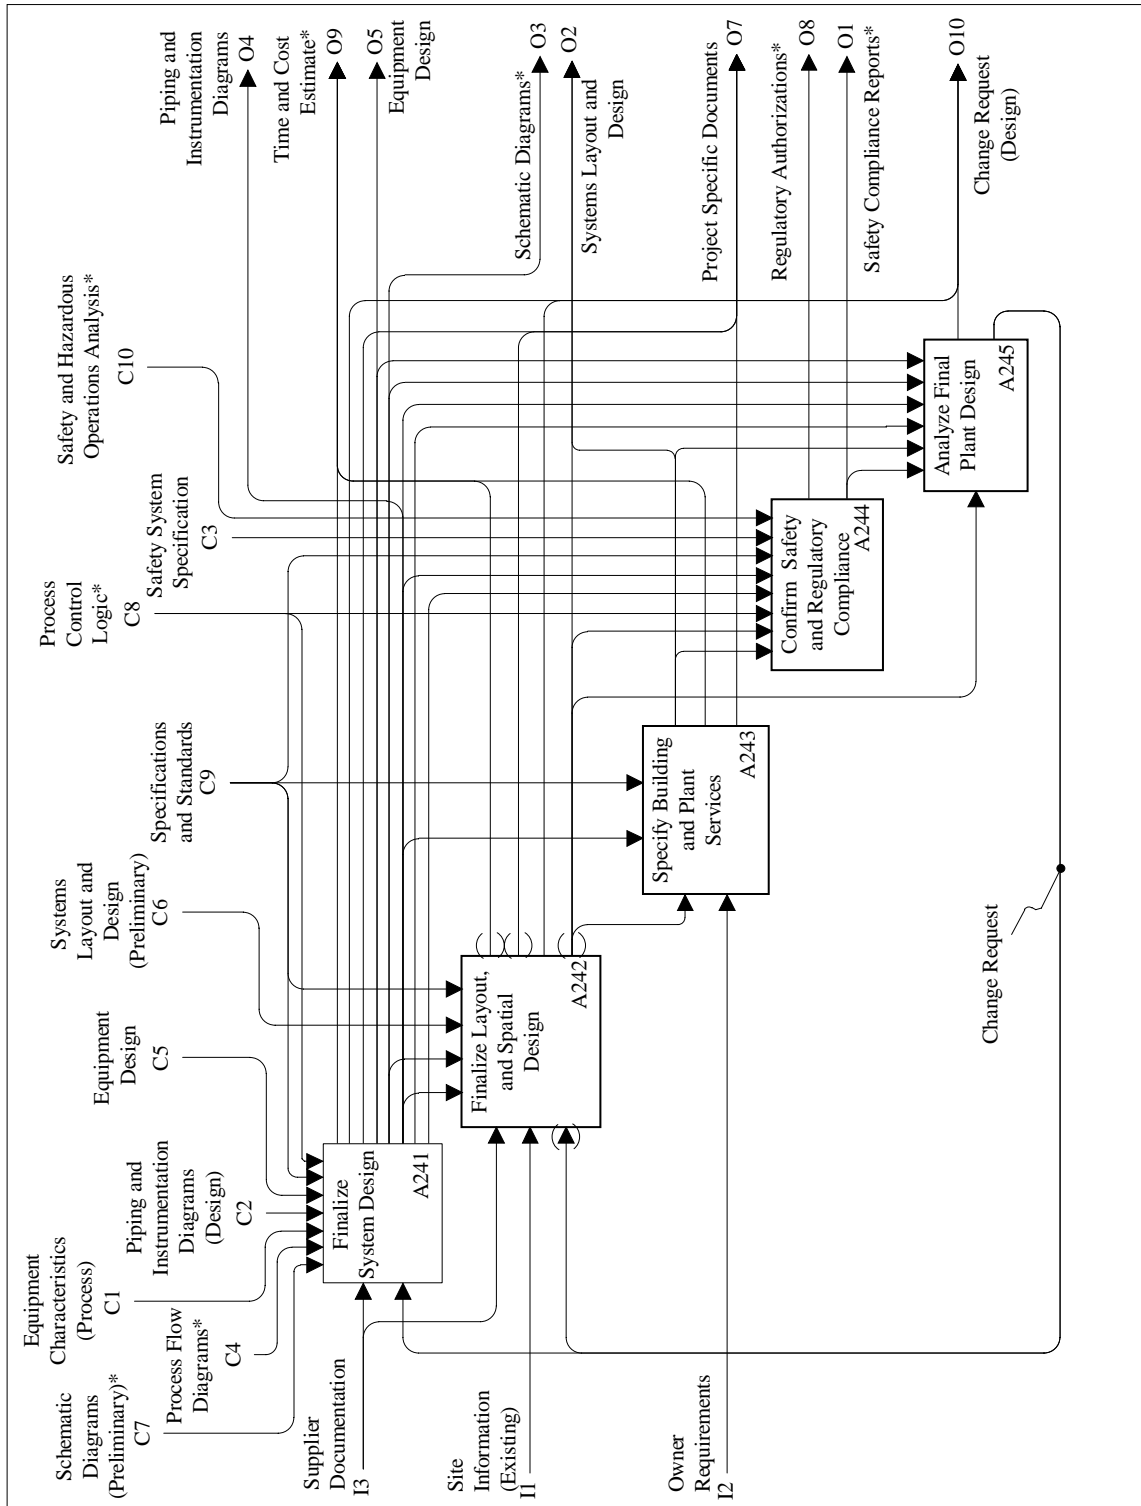


Figure F.9 — A24: Produce final plant design

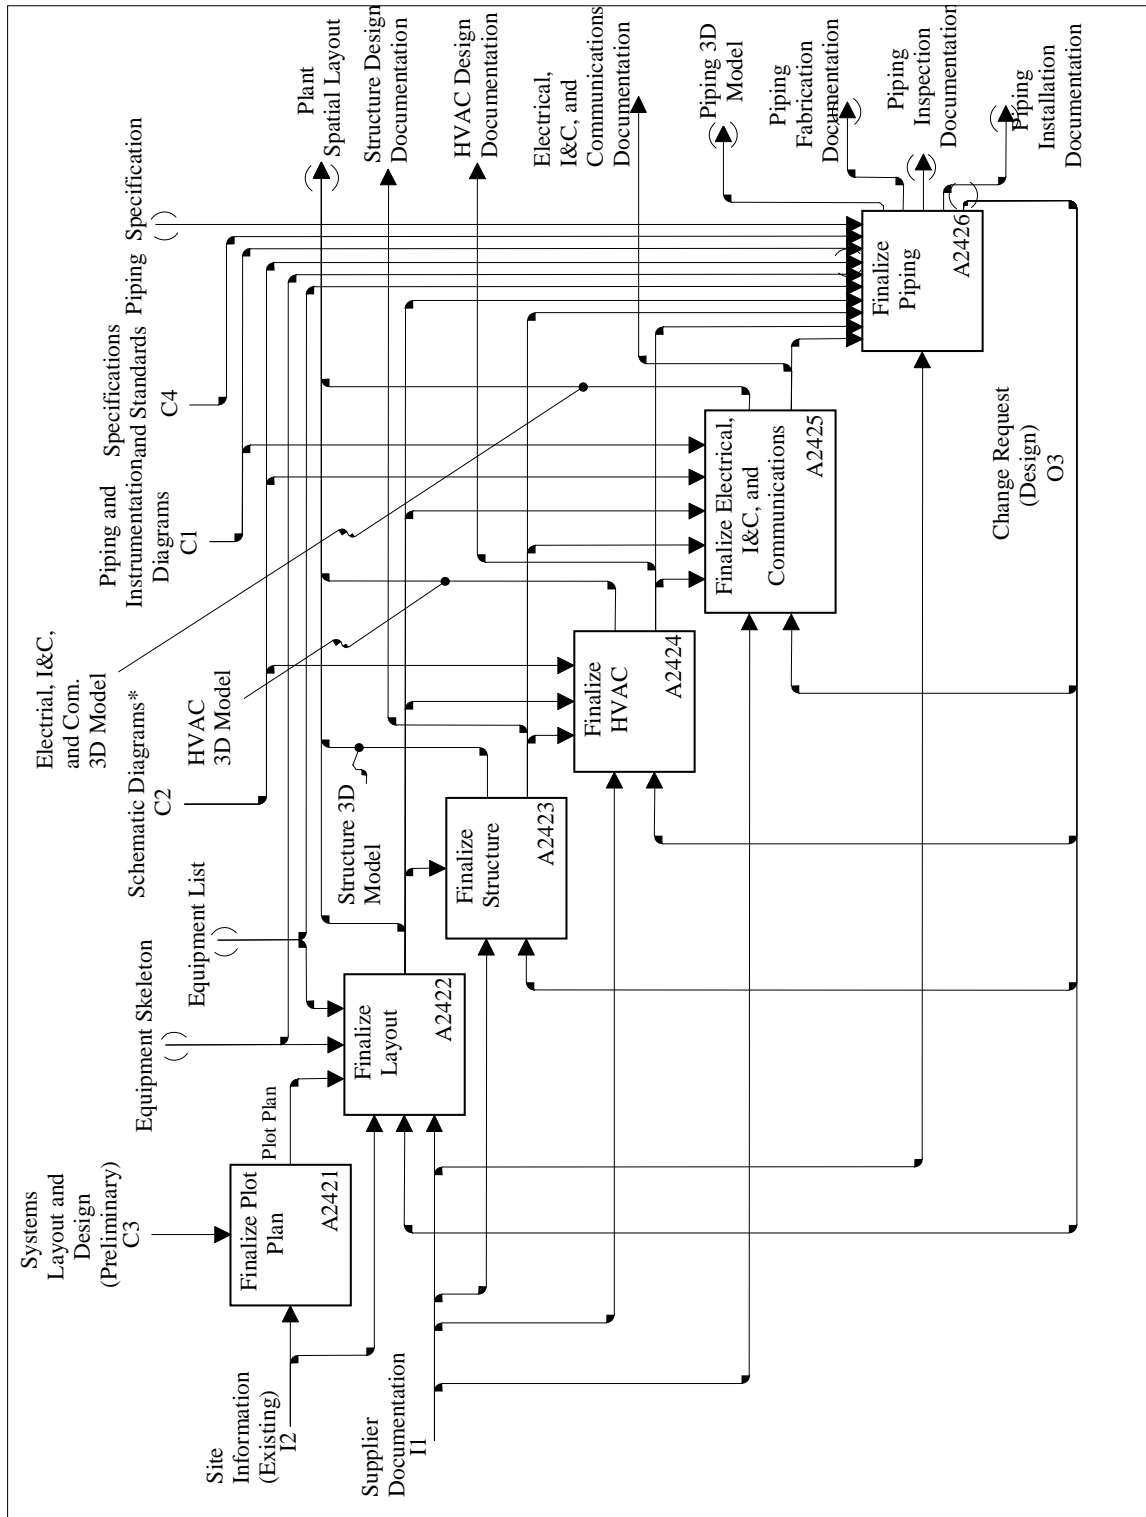


Figure F.10 — A242: Finalize layout and spatial design

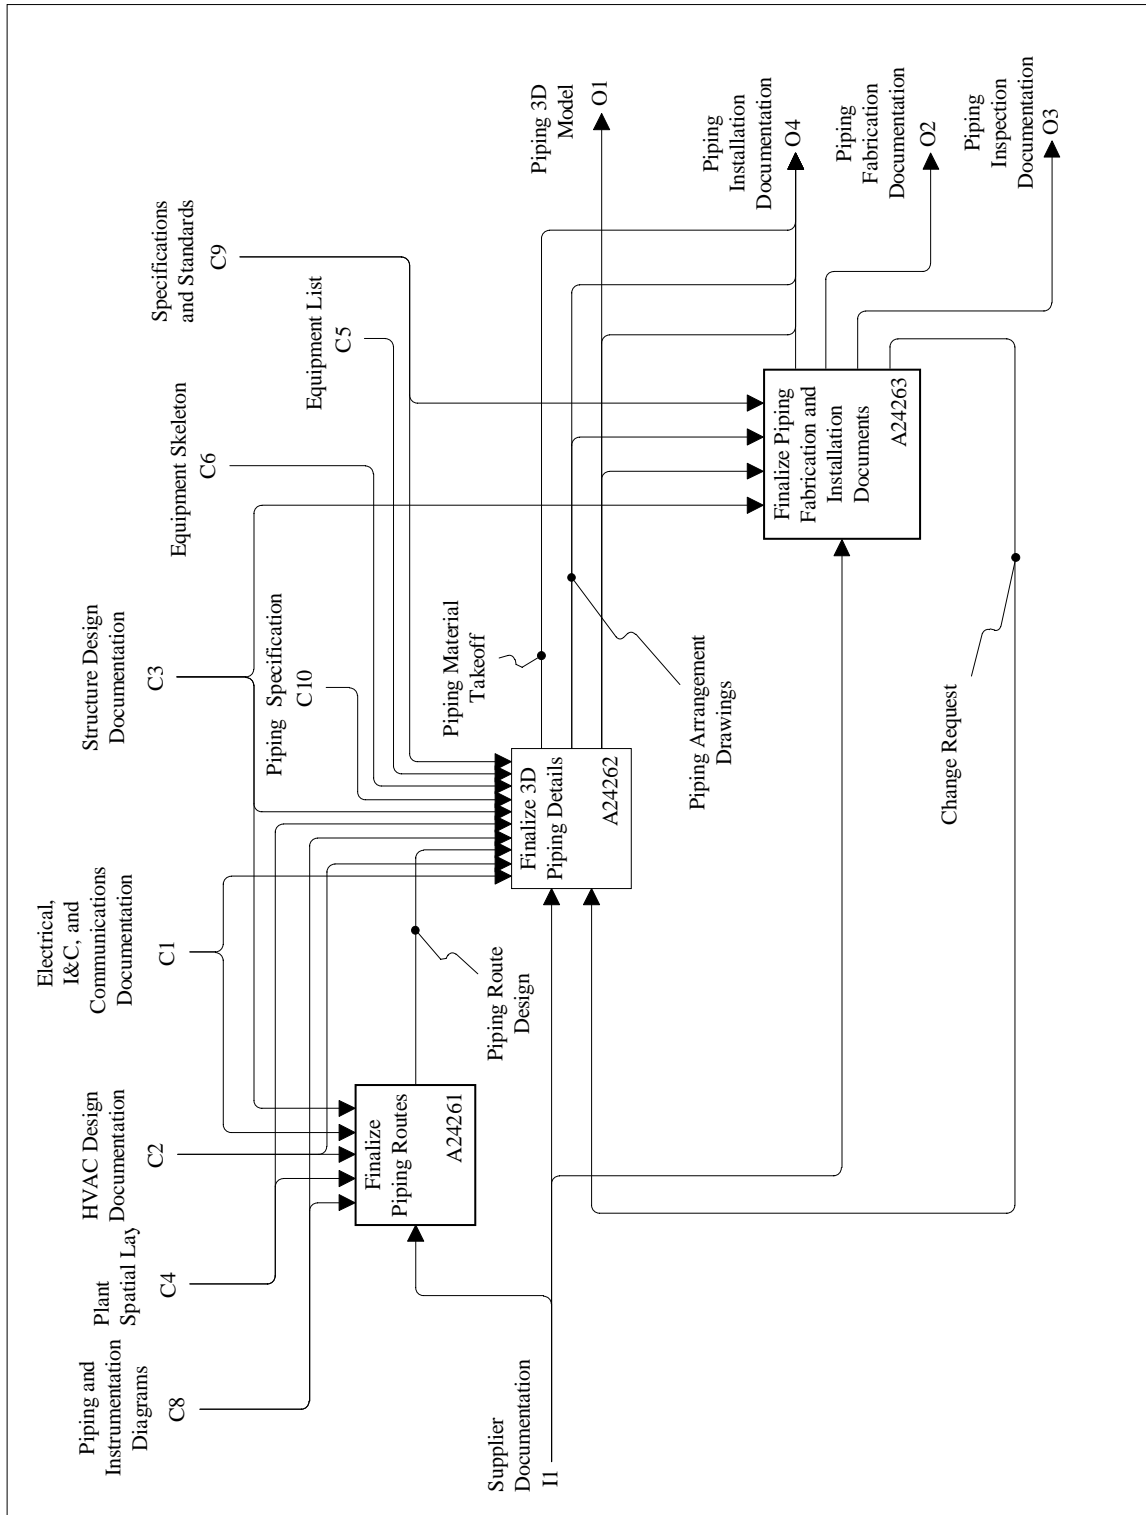


Figure F.11 — A2426: Finalize piping

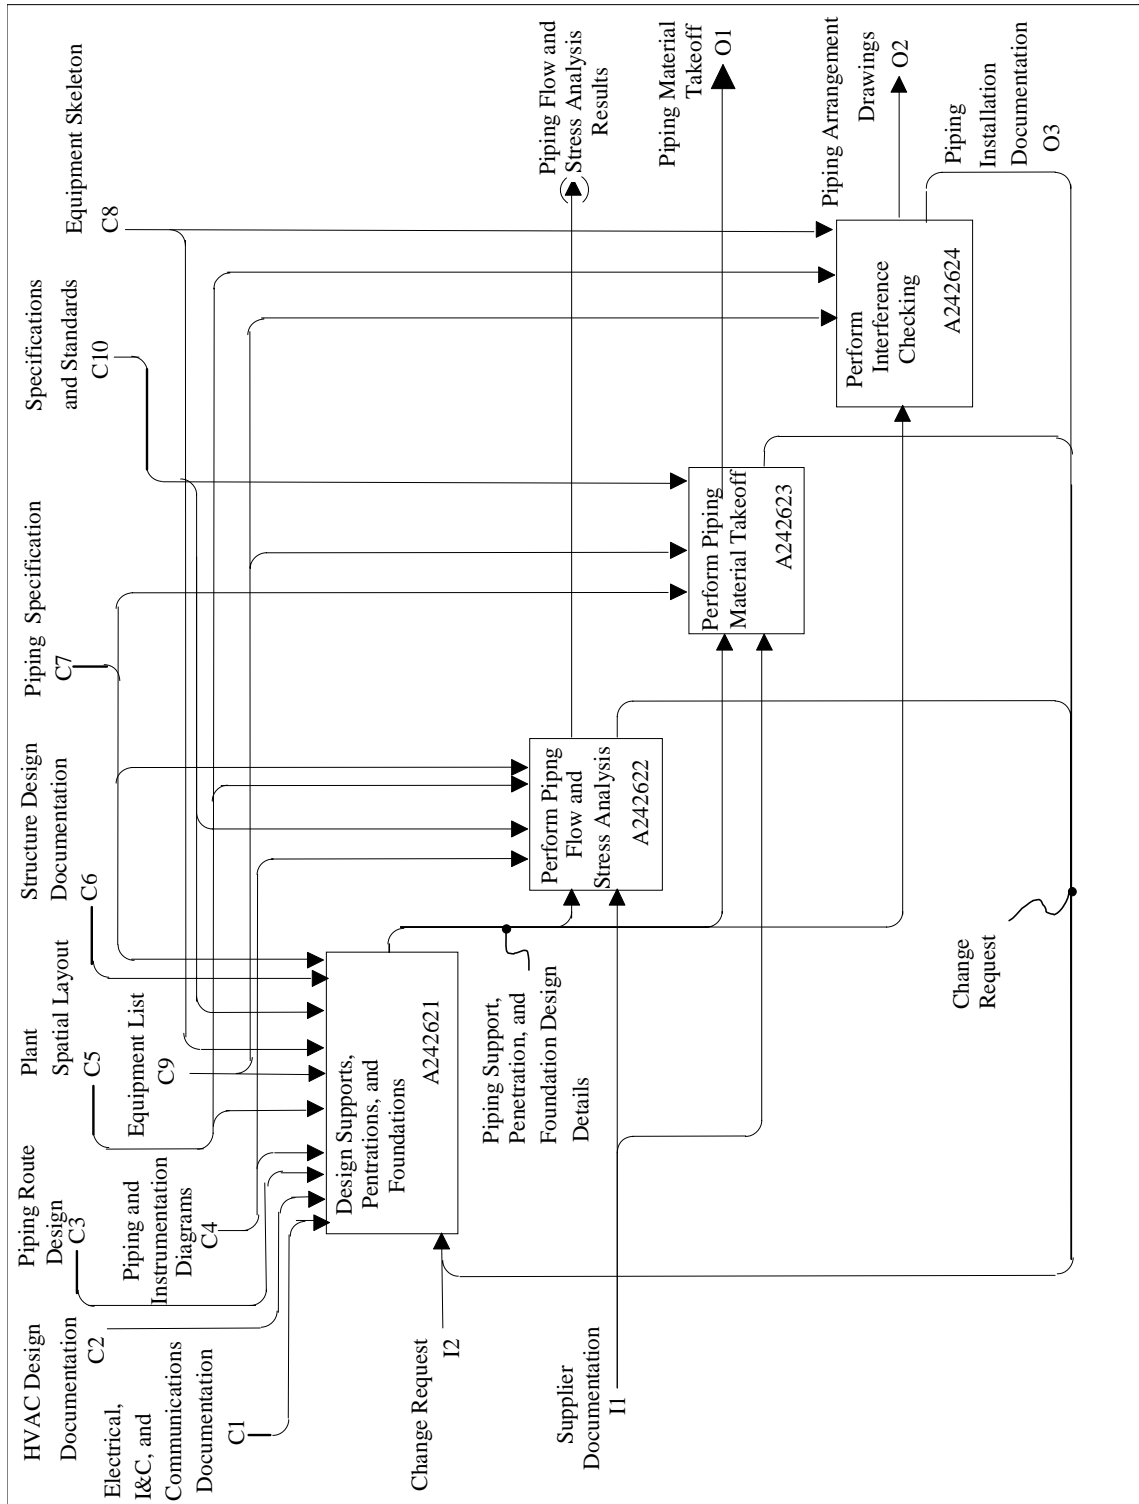


Figure F.12 — A24262: Finalize 3D piping details

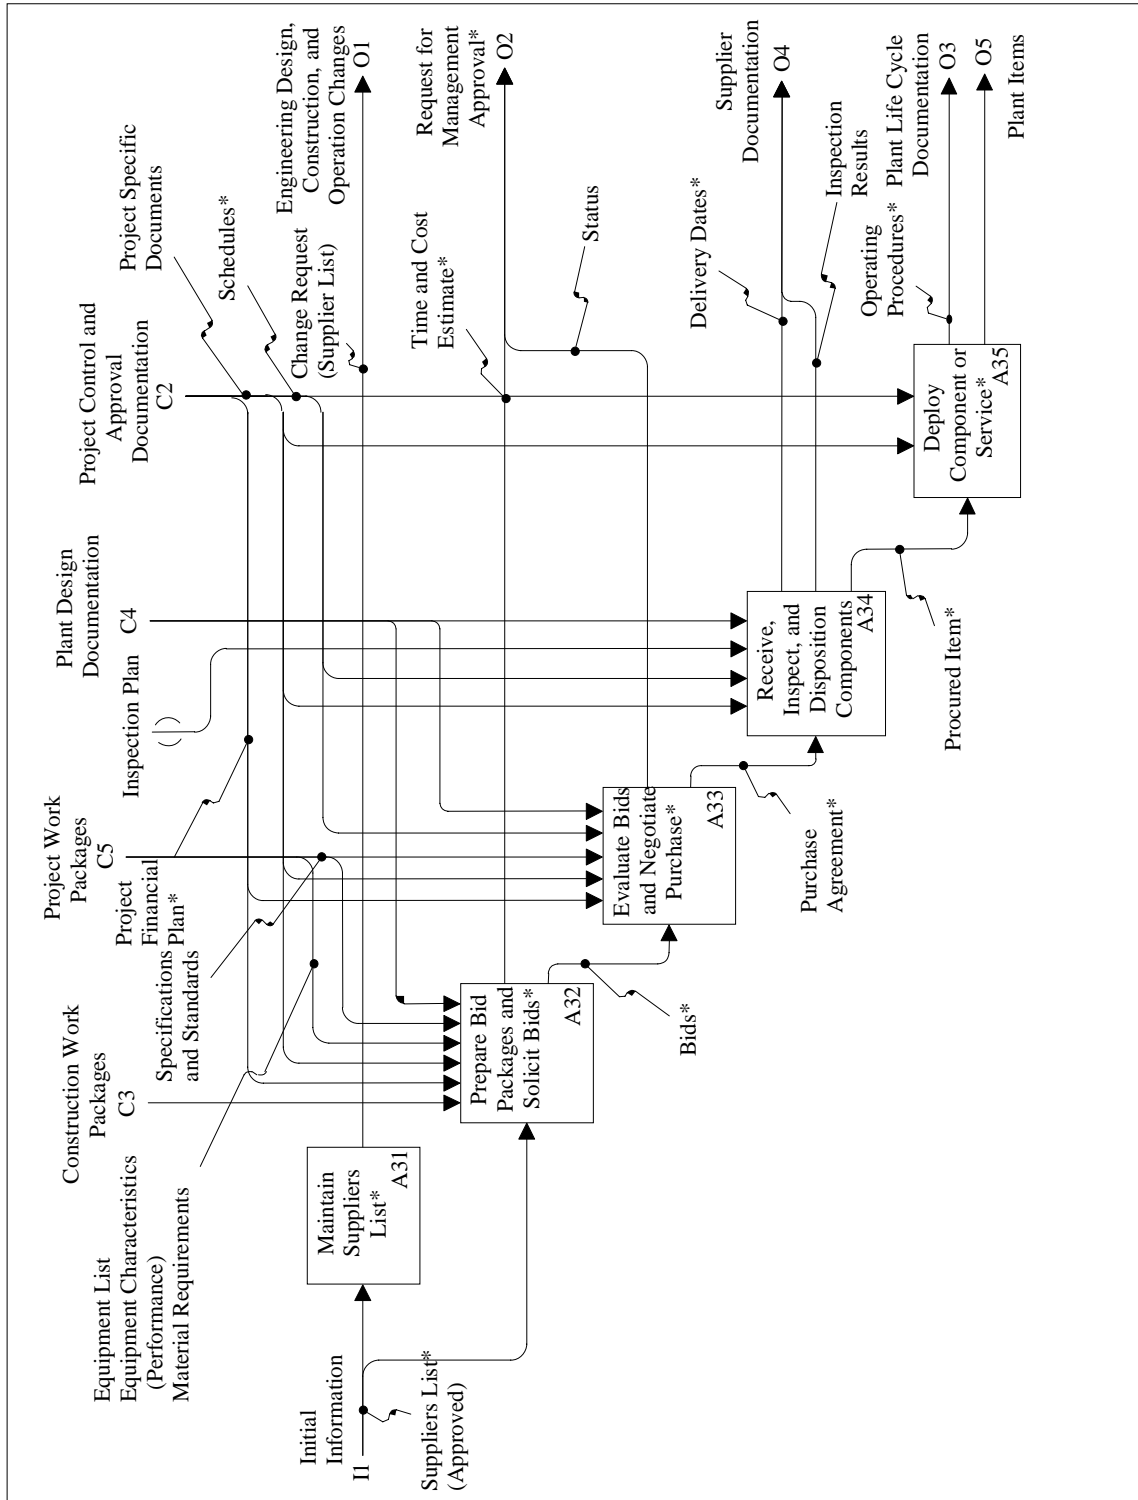


Figure F.13 — A3: Procure goods and services

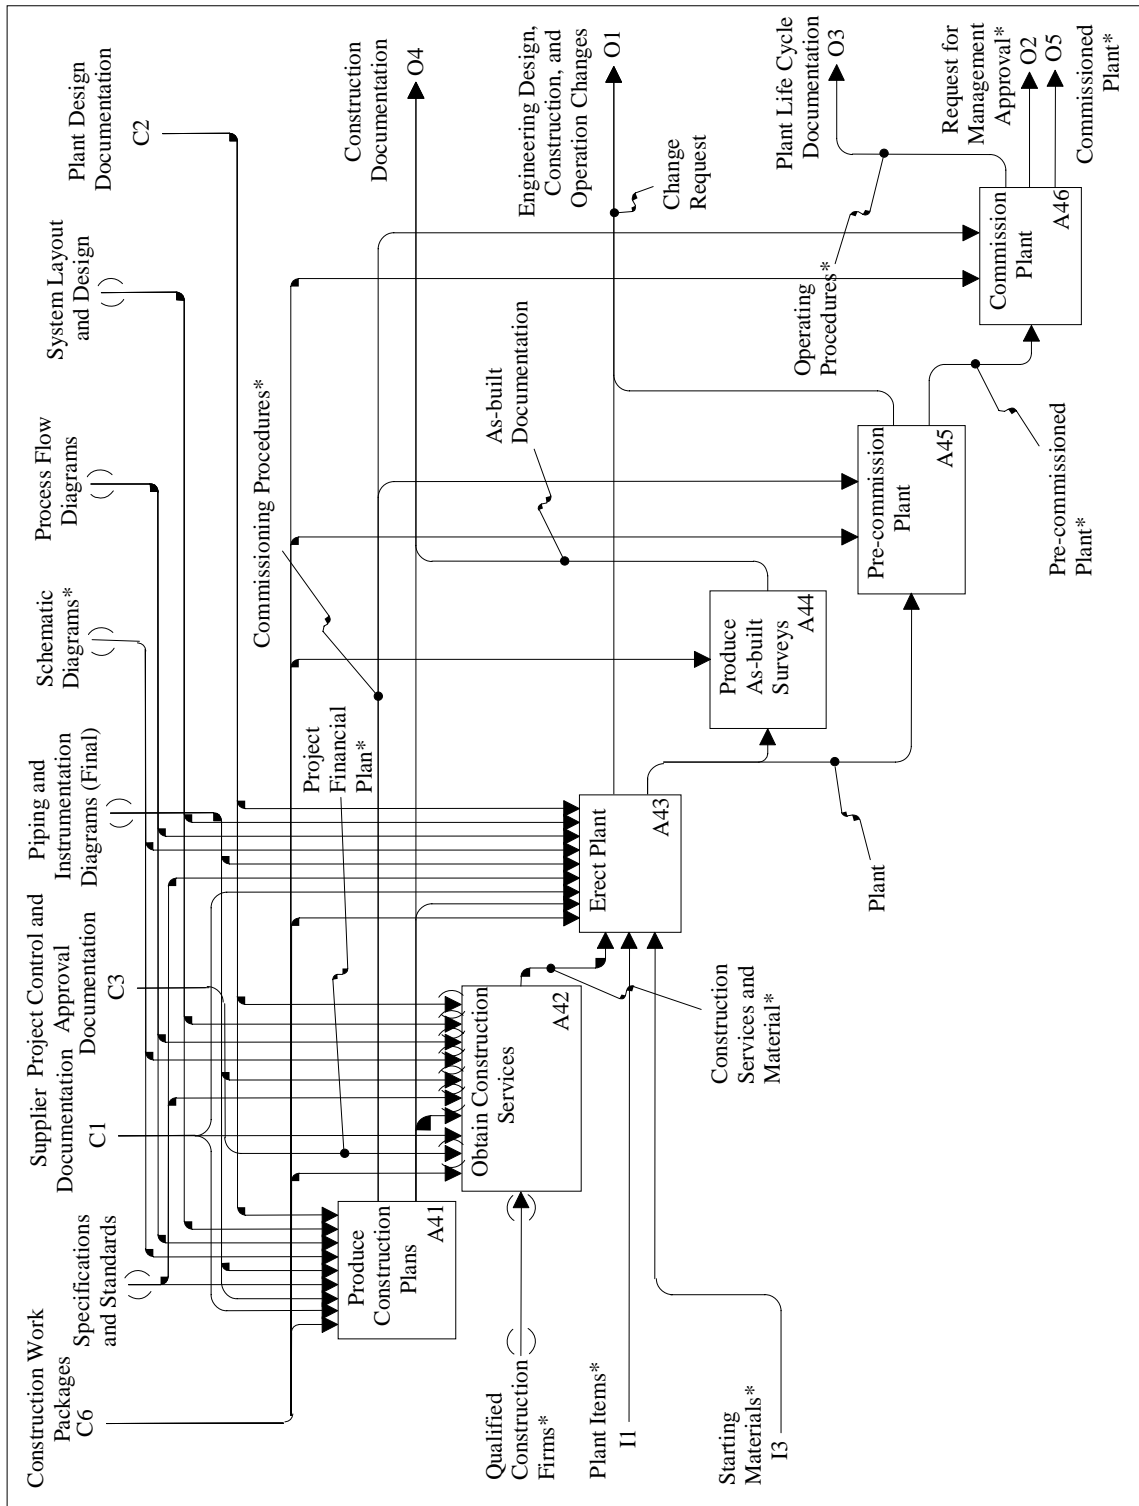


Figure F.14 — A4: Construct and commission plant

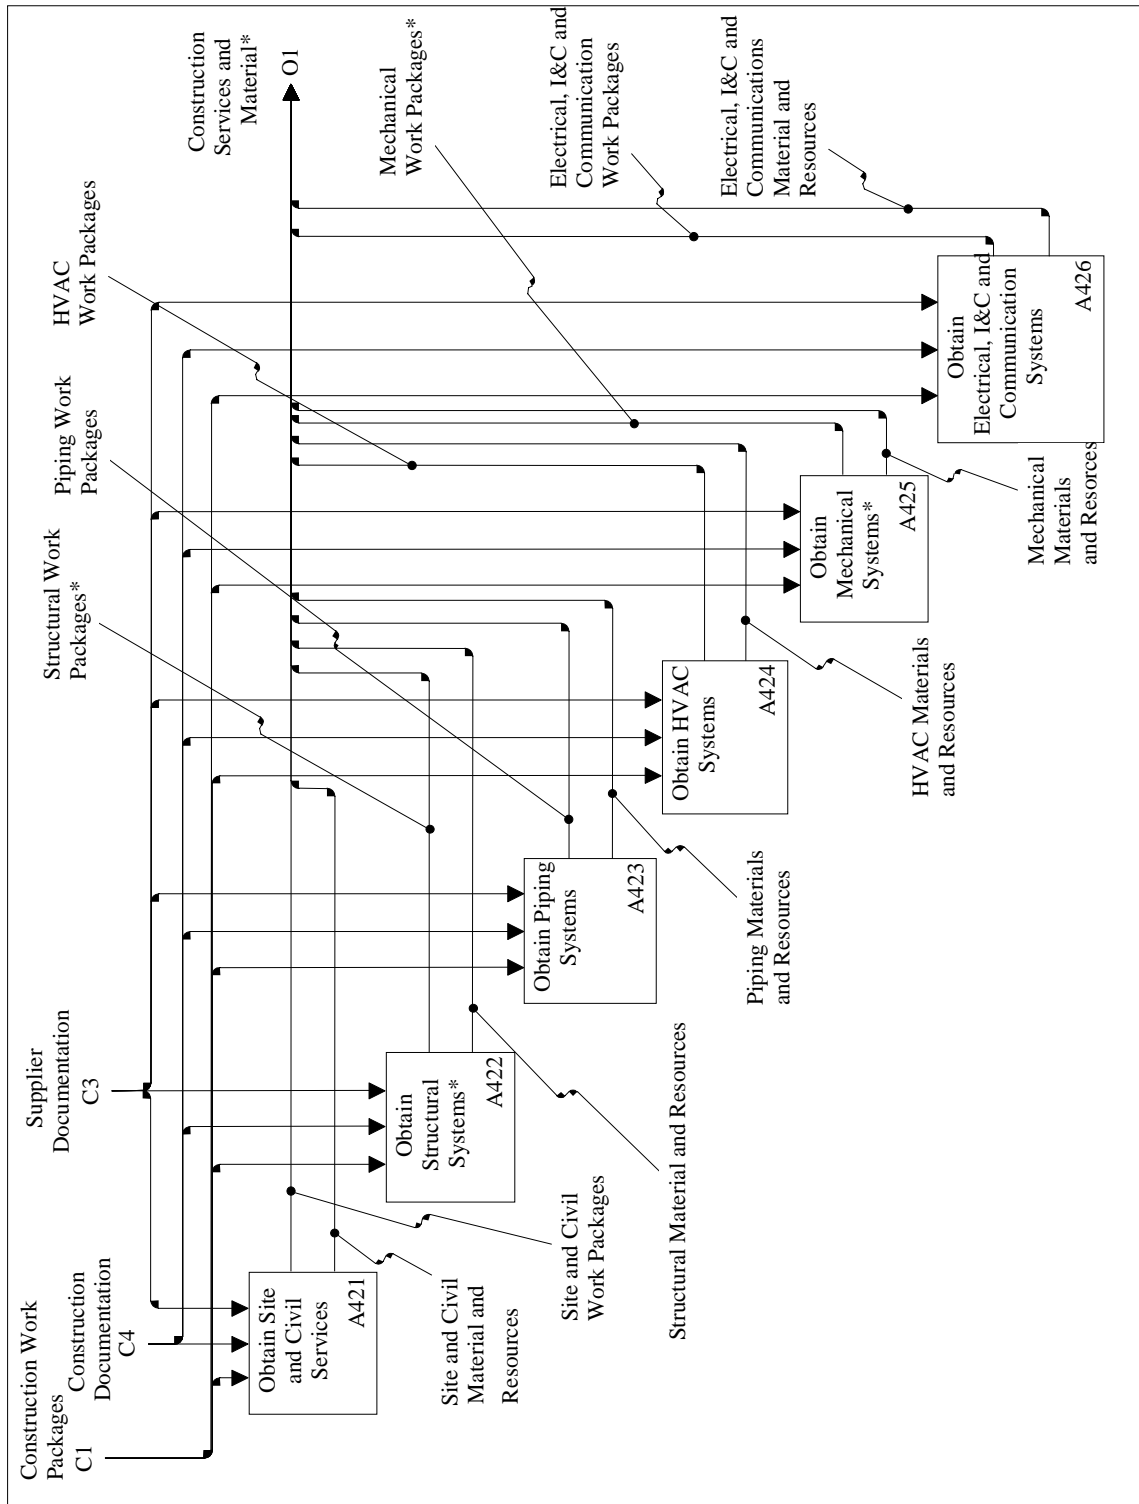


Figure F.15 — A42: Obtain construction services

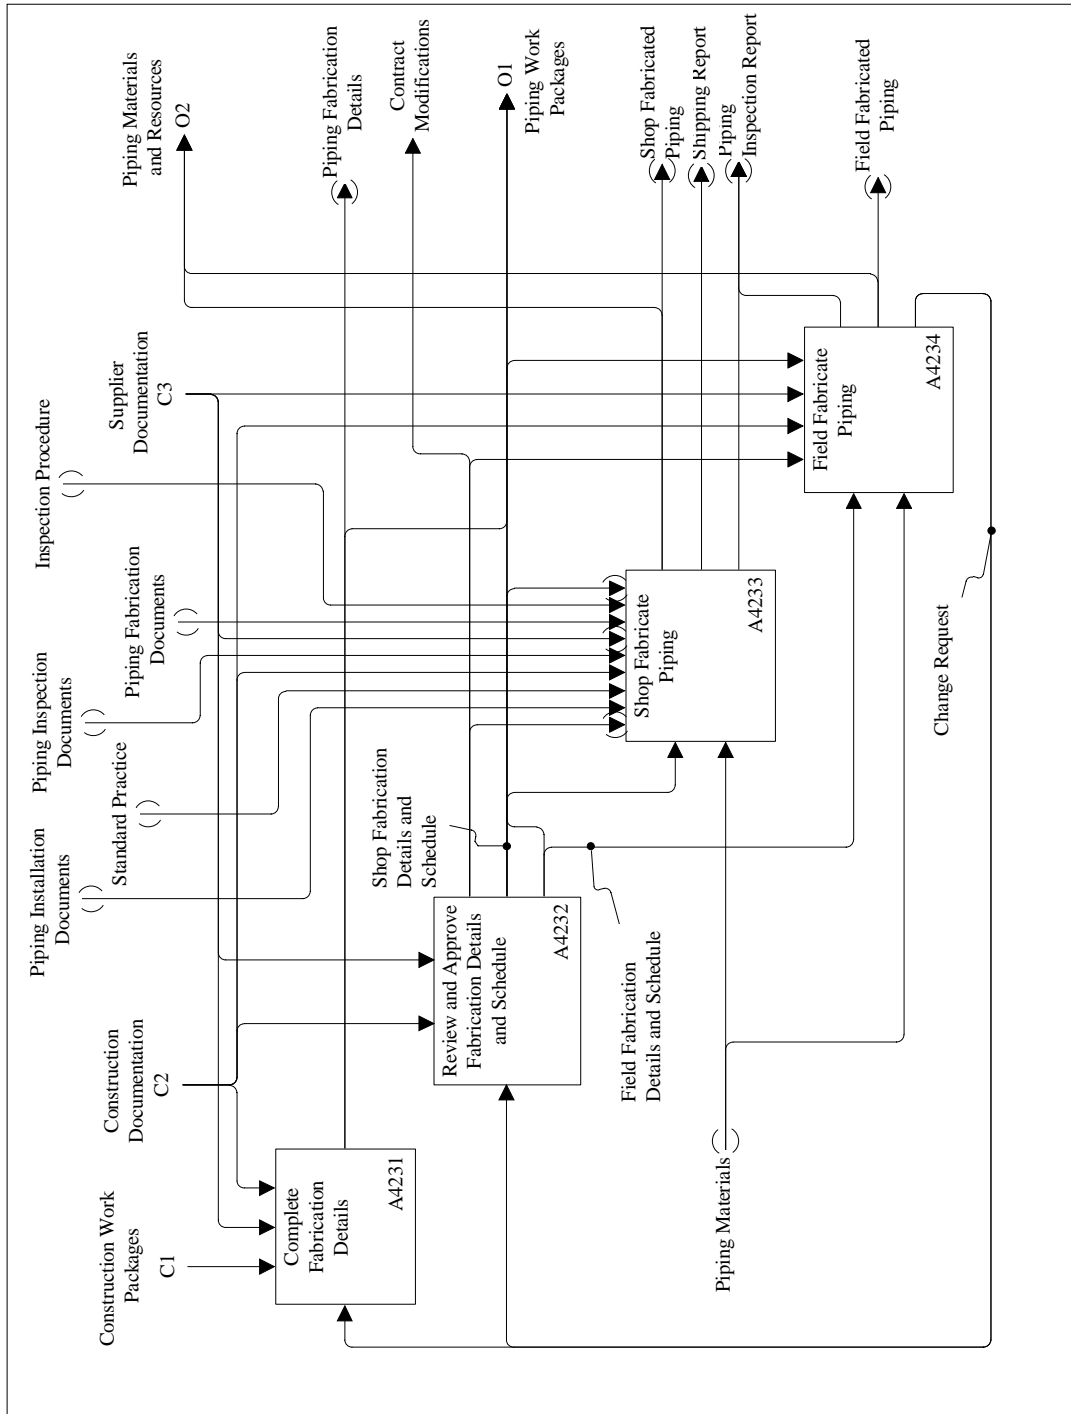


Figure F.16 — A423: Obtain piping systems

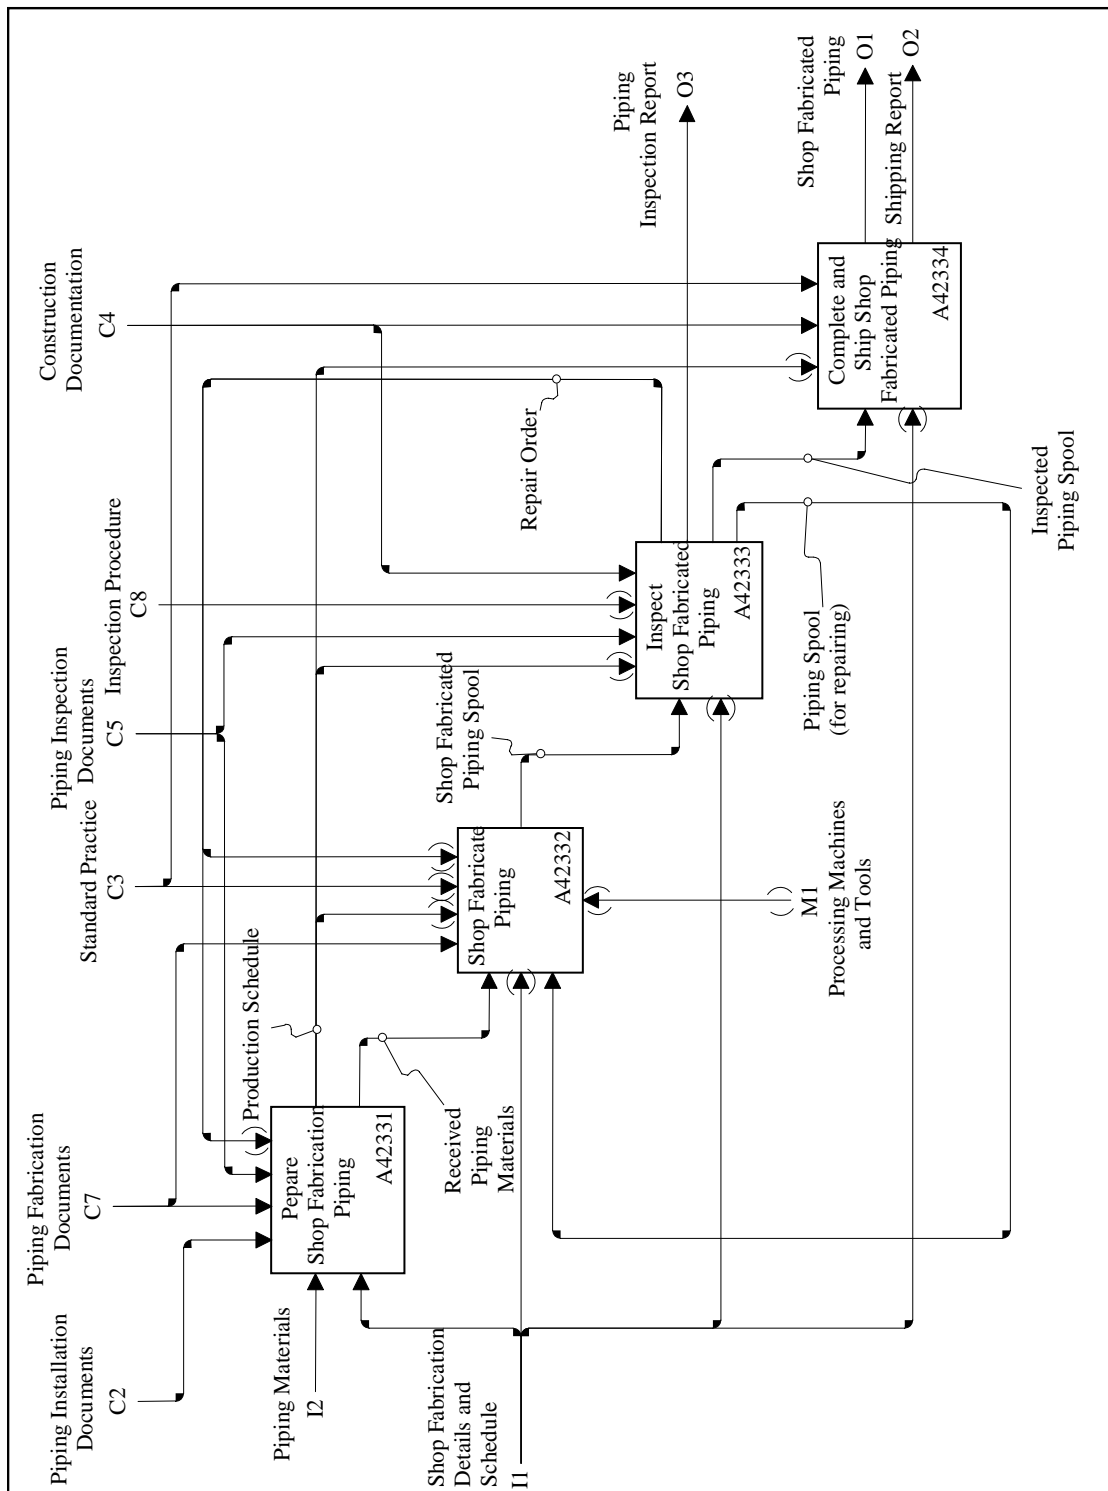


Figure F.17 — A4233: Shop fabricate piping

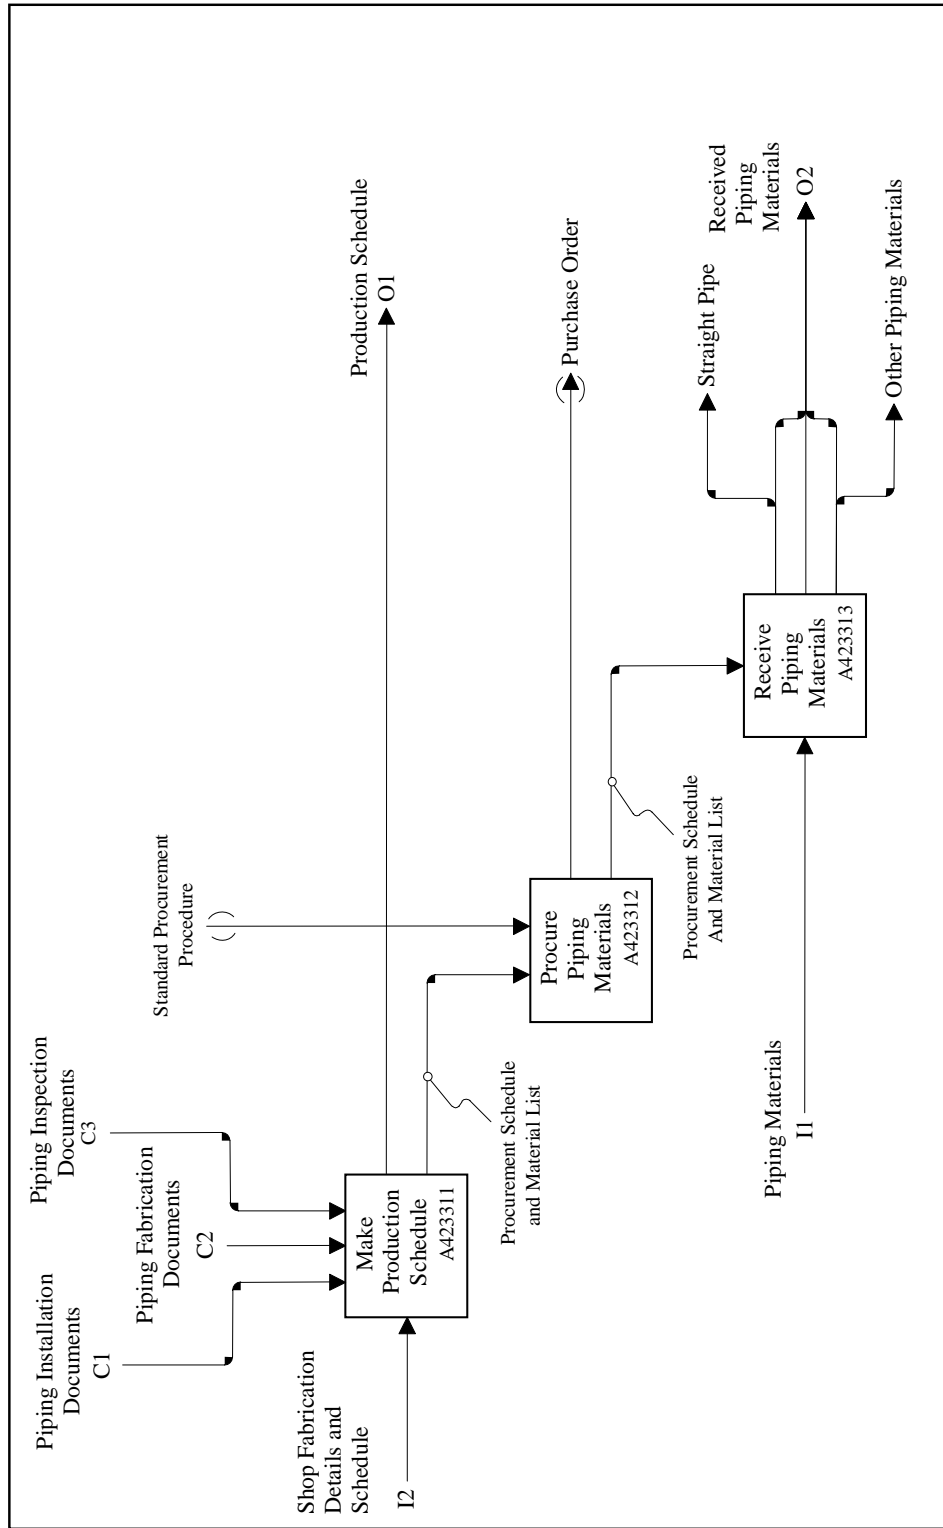


Figure F.18 — A42331: Prepare shop fabrication piping

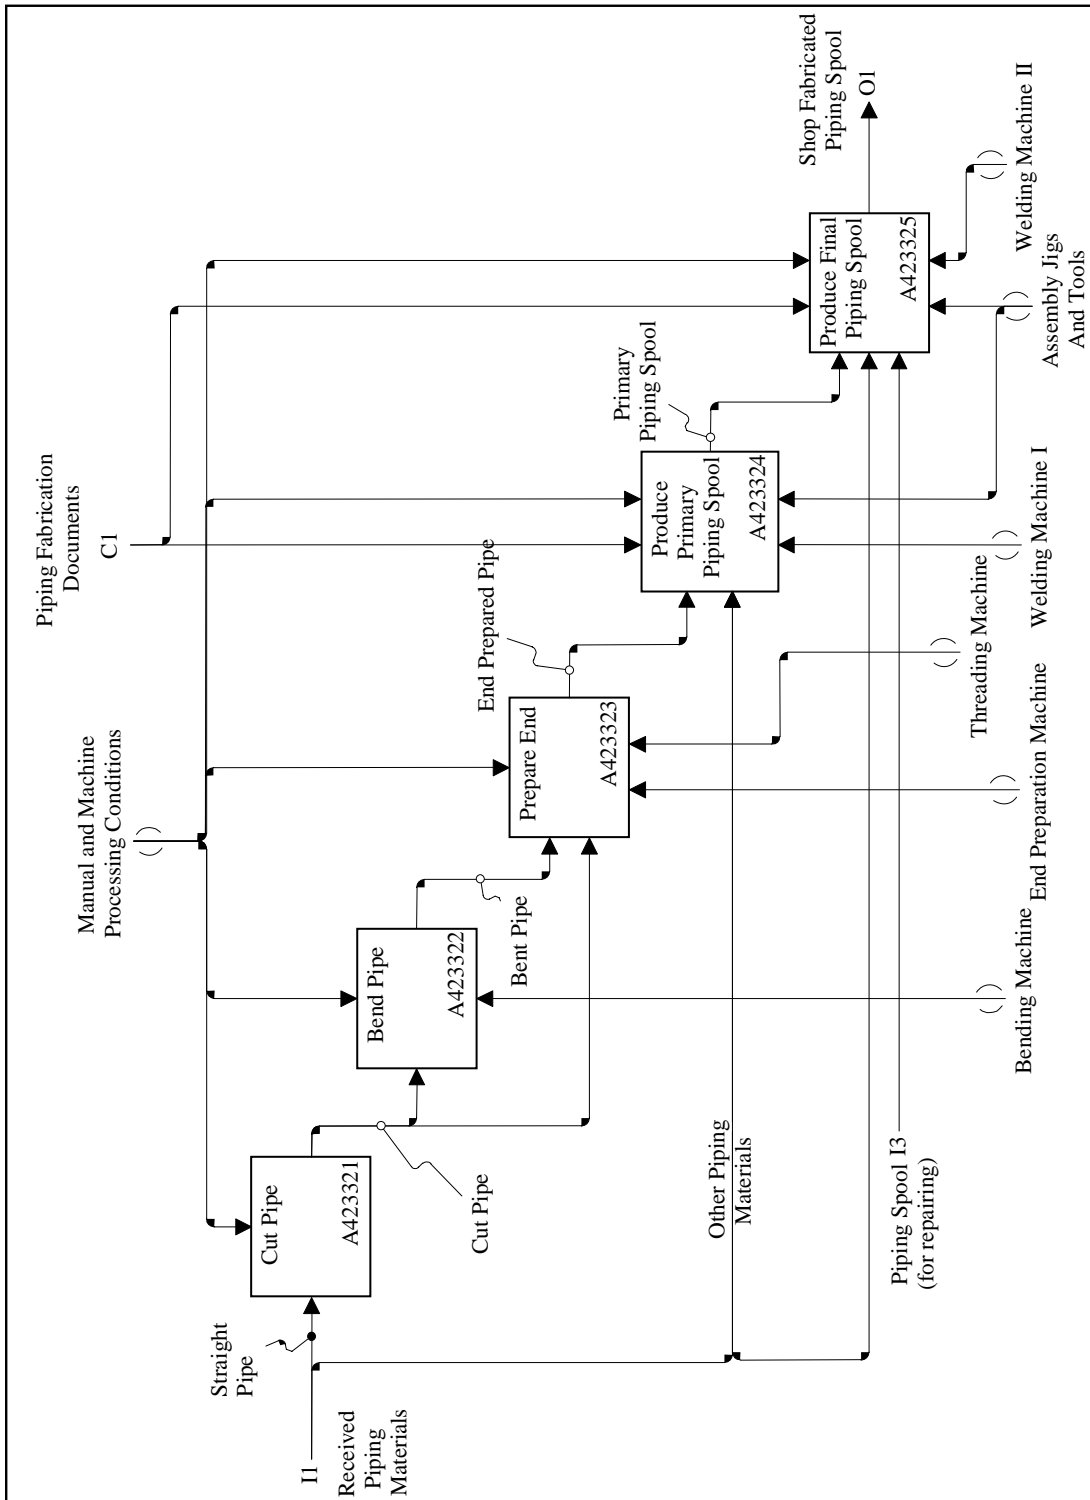


Figure F.19 — A42332: Shop fabricate piping

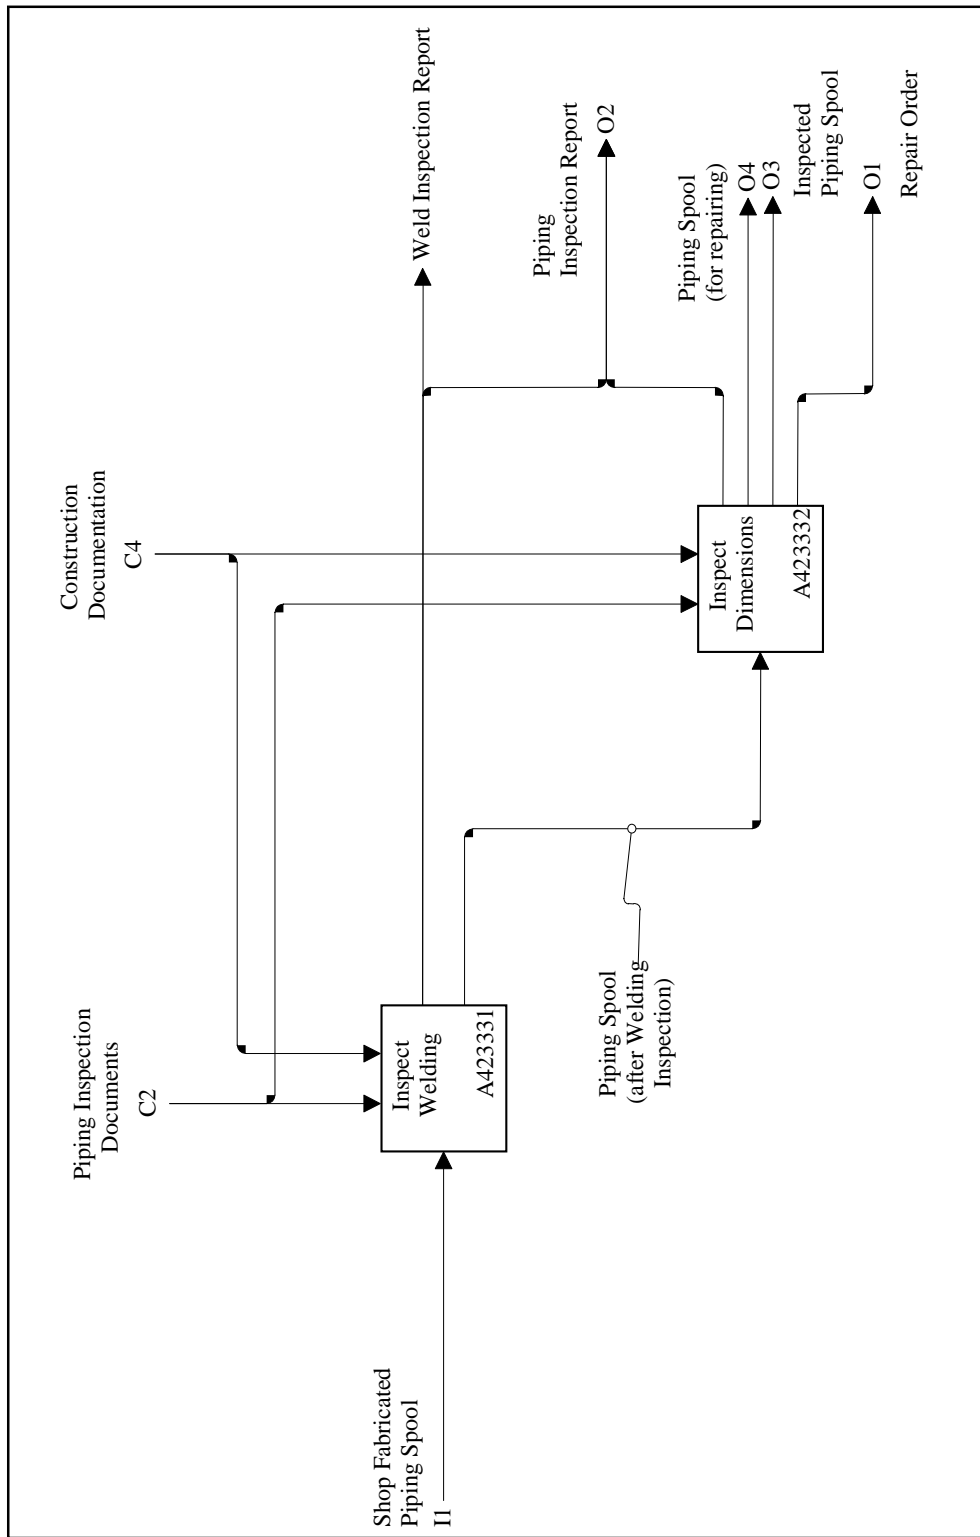


Figure F.20 — A42333: Inspect shop fabricated piping

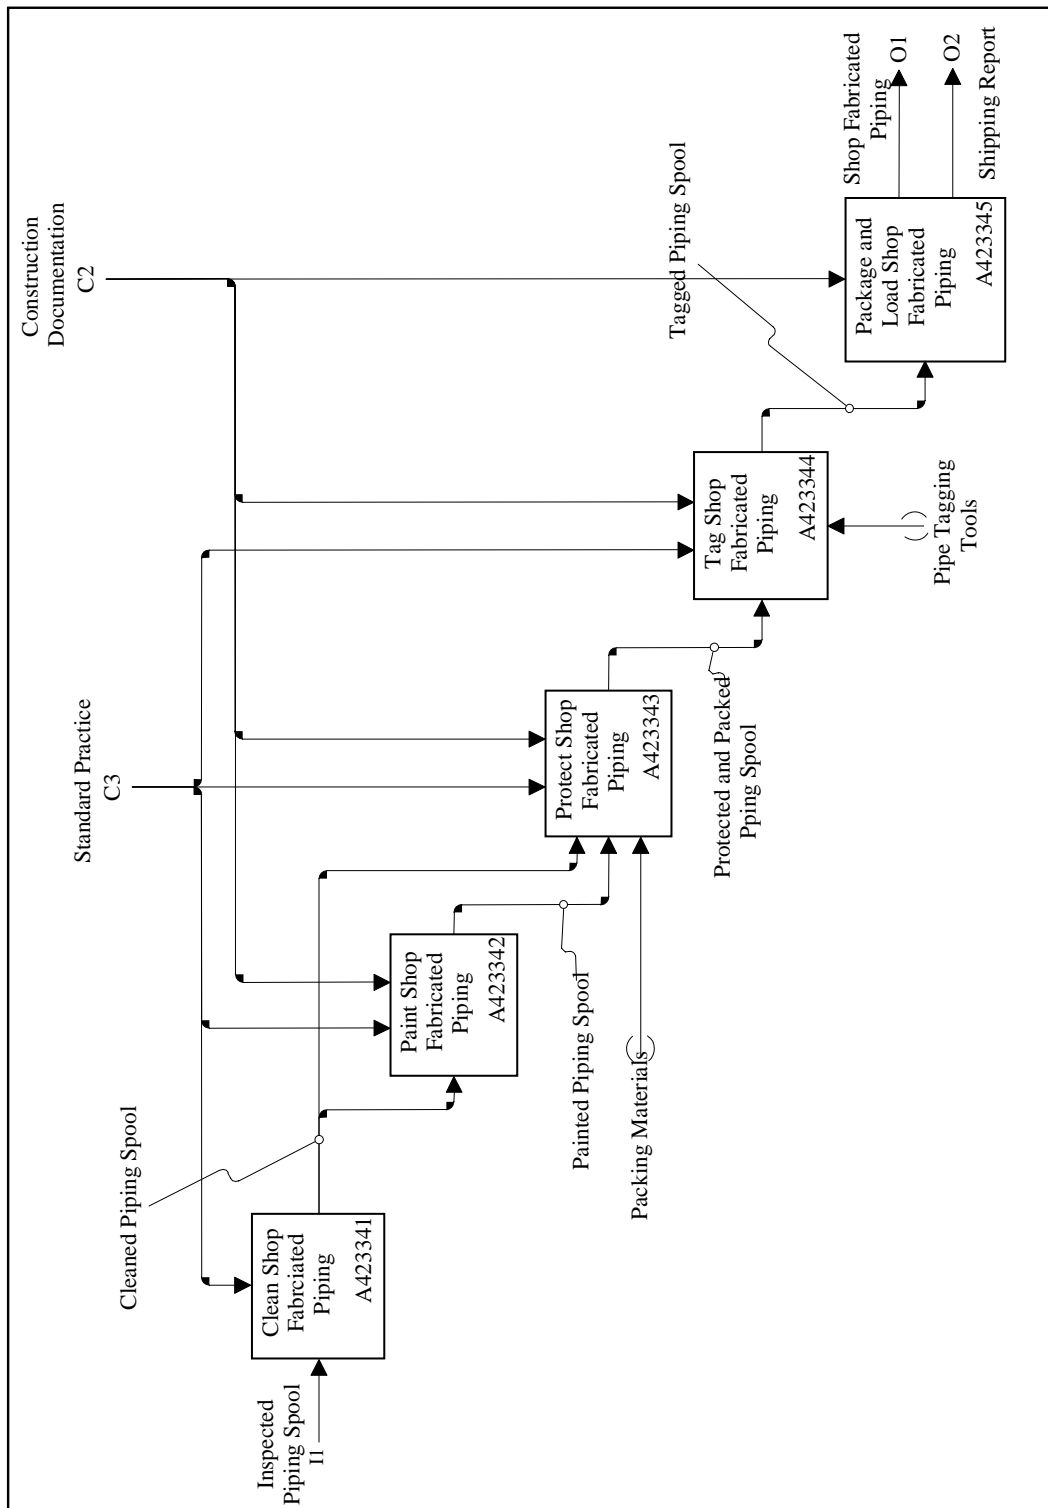


Figure F.21 — A42334: Complete and ship shop fabricated piping

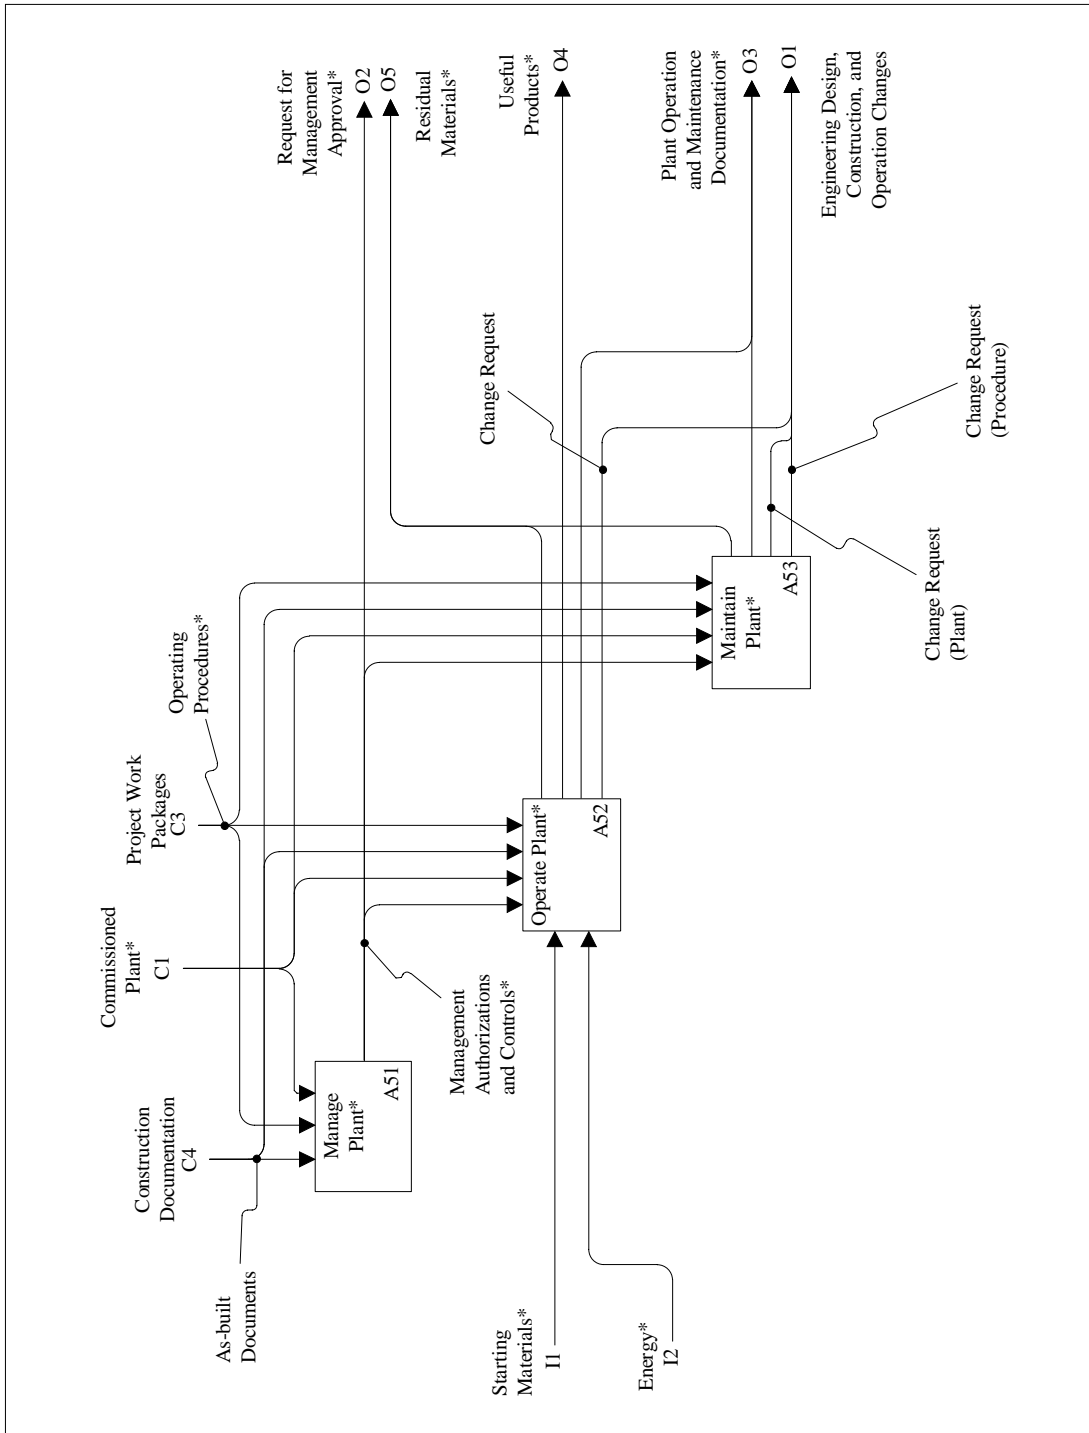


Figure F.22 — A5: Manage, operate, and maintain plant

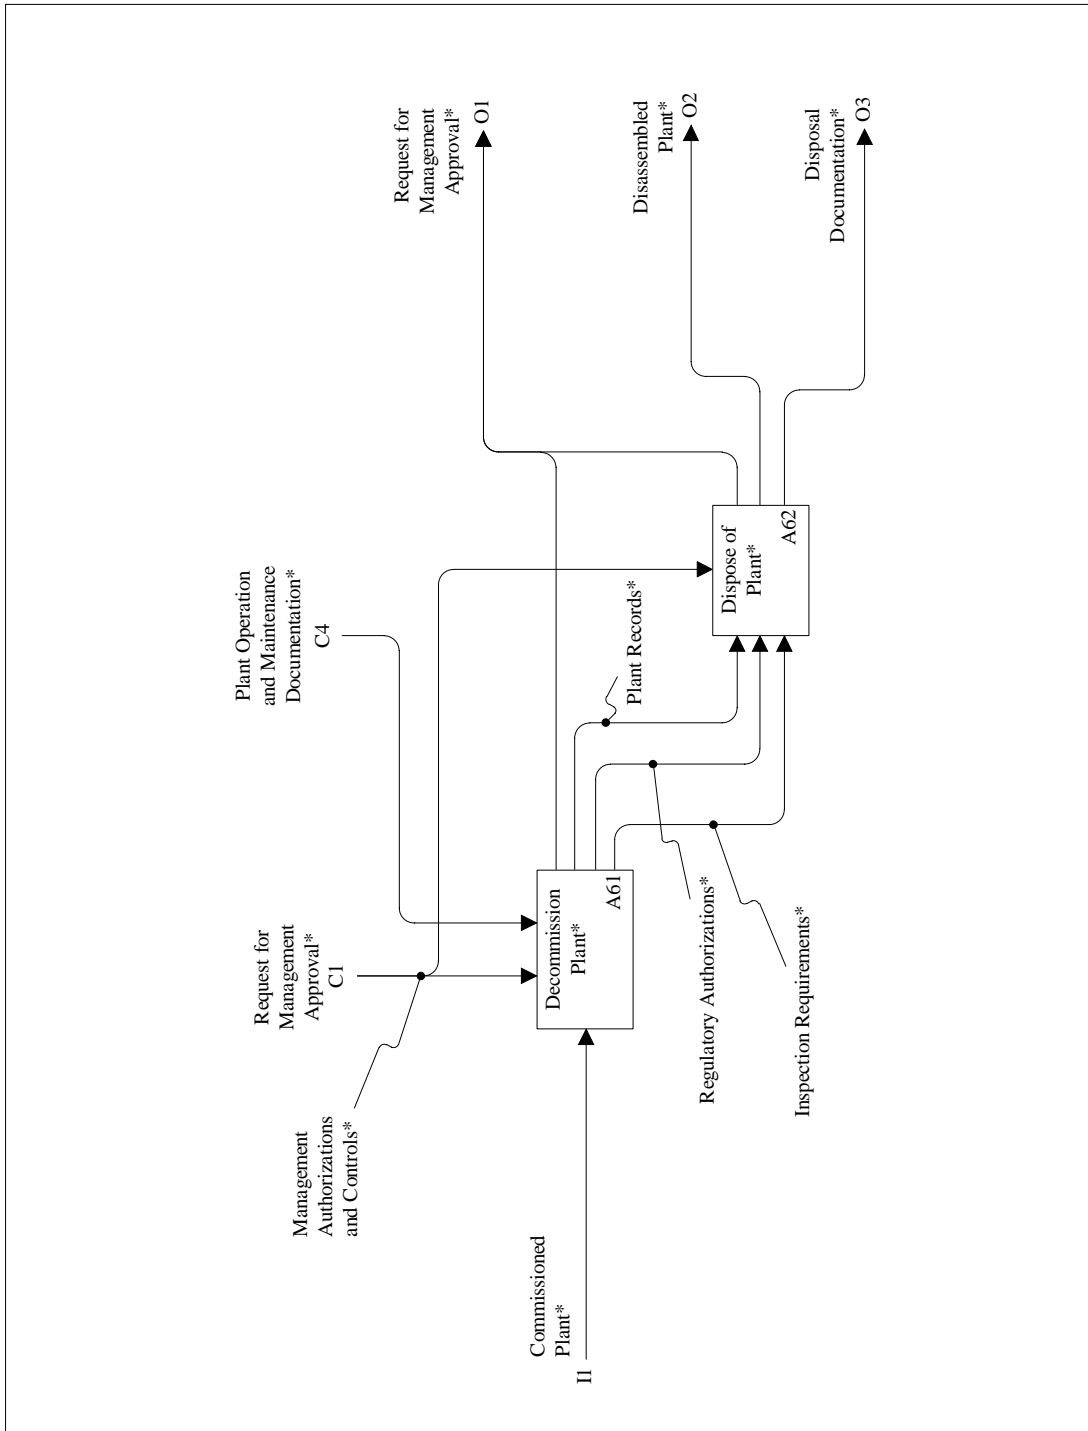


Figure F.23 — A6: Decommission and dispose of plant

F.3 AAM/ARM Correspondence

An analysis of the correspondence between the in-scope data flows of the AAM and the ARM has been completed. This analysis mapped the in-scope inputs, controls, outputs, or mechanisms (ICOMs) identified in this annex to the ARM UoFs and entities identified in clause 4.1 and clause 4.2, respectively. The AAM ICOMs and their corresponding ARM UoFs and entities are shown in Table F.1. The results of this analysis indicated that all of the in-scope ICOMs were covered by one or more ARM entities.

Table F.1 — AAM ICOM to ARM UoF/entity mapping		
AAM ICOM	ARM UoF	ARM Entity
Change Request Change Request (Design) Change Request (Plant) Change Request (Procedure) Change Request (Supplier List)	Change_information	All entities in the UoF
Equipment Characteristics (Functional) Equipment Characteristics (Performance) Equipment Characteristics (Process) Equipment Characteristics (Required) Equipment List Equipment ID	Equipment_characterization	All entities in the UoF
	Piping_component_- characterization	All entities in the UoF
Codes Corporate Standards Design Basis Guidelines and Requirements Owner Requirements Project-specific Documents Regulatory Requirements Safety System Specification Specifications and Standards	Connector	Piping_connector Piping_connector_- service_characteristic
	Equipment_characterization	Equipment
	Piping_component_- characterization	Piping_size_description Pressure_class Schedule
	Piping_system_functional_- characterization	Piping_specification Piping_system Piping_system_line Stream_design_case

Table F.1 — AAM ICOM to ARM UoF/entity mapping - (continued)		
AAM ICOM	ARM UoF	ARM Entity
	Plant_characterization	Piping_system
	Plant_item_characterization	Construction_material Design_project Functional_design_view Material_specification_selection Physical_design_view Piping_system_component Required_material_description Specification_item_family Structural_component
Line Schedule and List	Piping_system_functional_- characterization	Line_piping_system_component_- assignment Piping_system_line
Material Requirements	Plant_item_characterization	Material_specification_selection Material_specification_subset_reference
Plant	Plant_characterization	Plant
Plant Items	Plant_item_characterization	Plant_item
Plant Performance Requirements	Plant_characterization	Functional_plant Plant Plant_process_capability
Site Information (Existing)	Site_characterization	Site
Status	Change_information Shape	Change Plant_item_interference_status
Stream Data	Piping_system_functional_- characterization	Stream_design_case Stream_phase
System Design (Preliminary) System Layout System Layout and Design System Layout and Design (Preliminary)	Piping_system_functional_- characterization	All entities in the UoF
	Plant_characterization	All entities in the UoF
	Plant_item_characterization	All entities in the UoF
	Site_characterization	All entities in the UoF
Supplier Data	Equipment_characterization Plant_item_characterization	Equipment Catalogue_definition Catalogue_item

The analysis also indicated that the scope of the AP described by the ARM is more refined than that of the AAM in that not all of the entities defined in the ARM map back to an AAM ICOM. A listing of the ARM entities is provided in Table 4 of the *Application Protocol 227 Validation Report Version 1.1* [11]. This listing shows whether an ARM entity is related to an AAM ICOM, and if not, what UoF it is part of. The results of this review show that the all the ARM entities that are not mapped from an AAM ICOM are related to connections between items (connection and connector UoFs), item representation (shape_-representation and wireframe_geometry UoFs), or item shape (shape UoF).

Annex G (informative) Application reference model

This annex provides the application reference model for this part of ISO 10303 and is given in figures G.2 through G.43. The application reference model is a graphical representation of the structure and constraints of the application objects specified in clause 4. The graphical form of the application reference model is presented in IDEF1X. The application reference model is independent from any implementation method. The diagrams use the IDEF1X graphical notation [2].

Extensions to the IDEF1X notation are used within the ARM diagrams through the use of symbols to denote off-page connectors. The symbols for the off-page connectors and their usage are drawn from the EXPRESS-G graphical modeling language and have the same meaning. Figure G.1 illustrates how off-page connectors are used to link relationships on different pages.

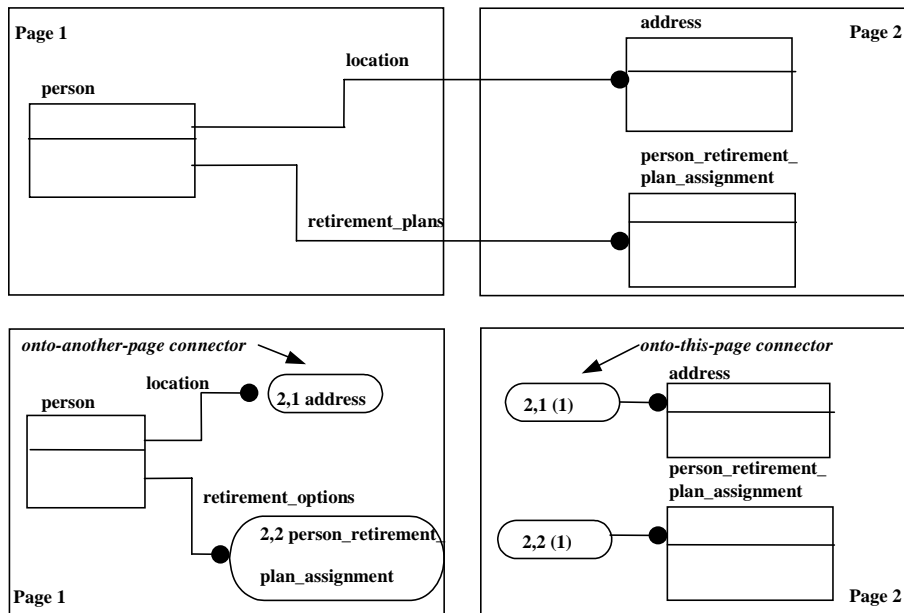


Figure G.1 — Off-page connectors

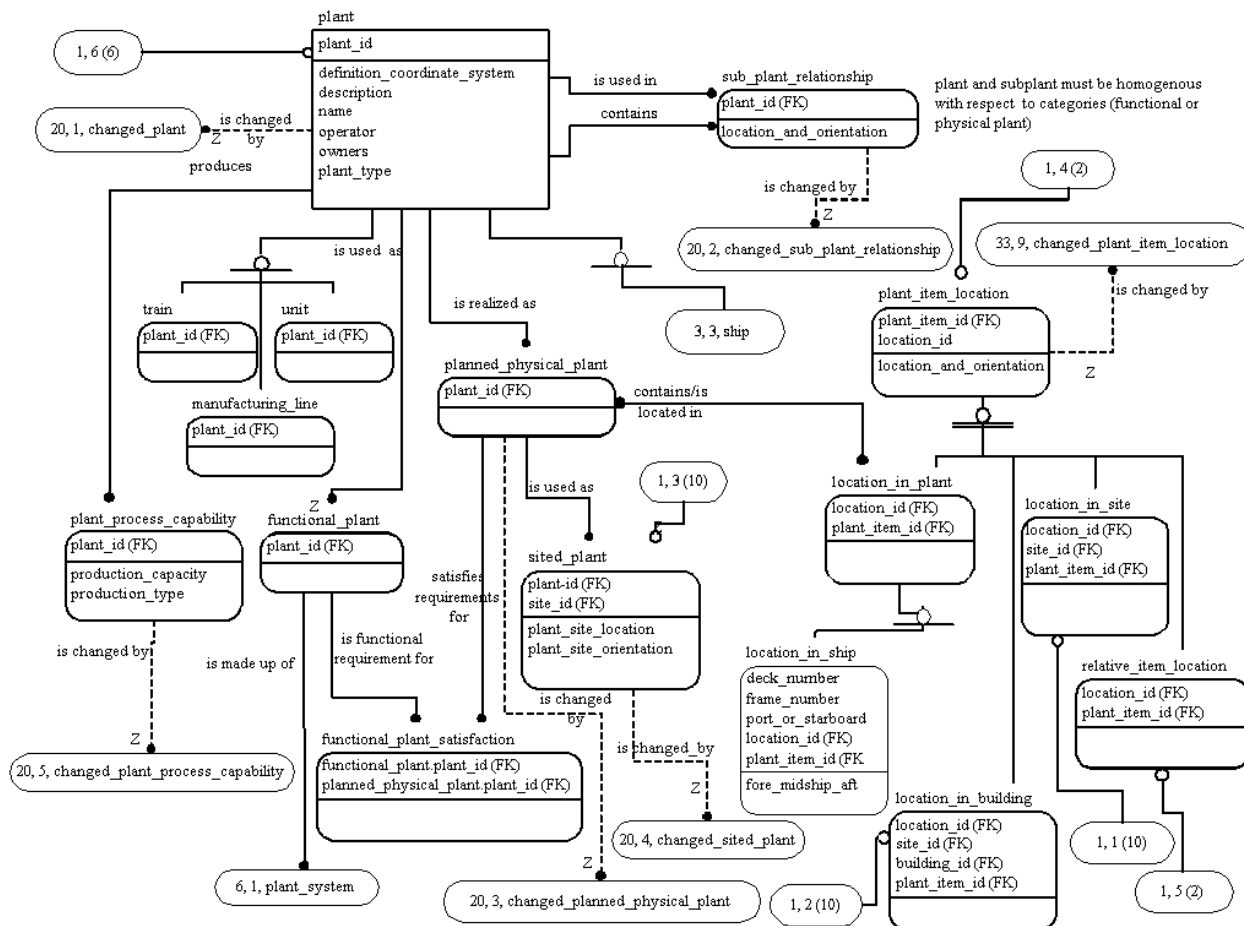


Figure G.2 — ARM diagram 1 of 47

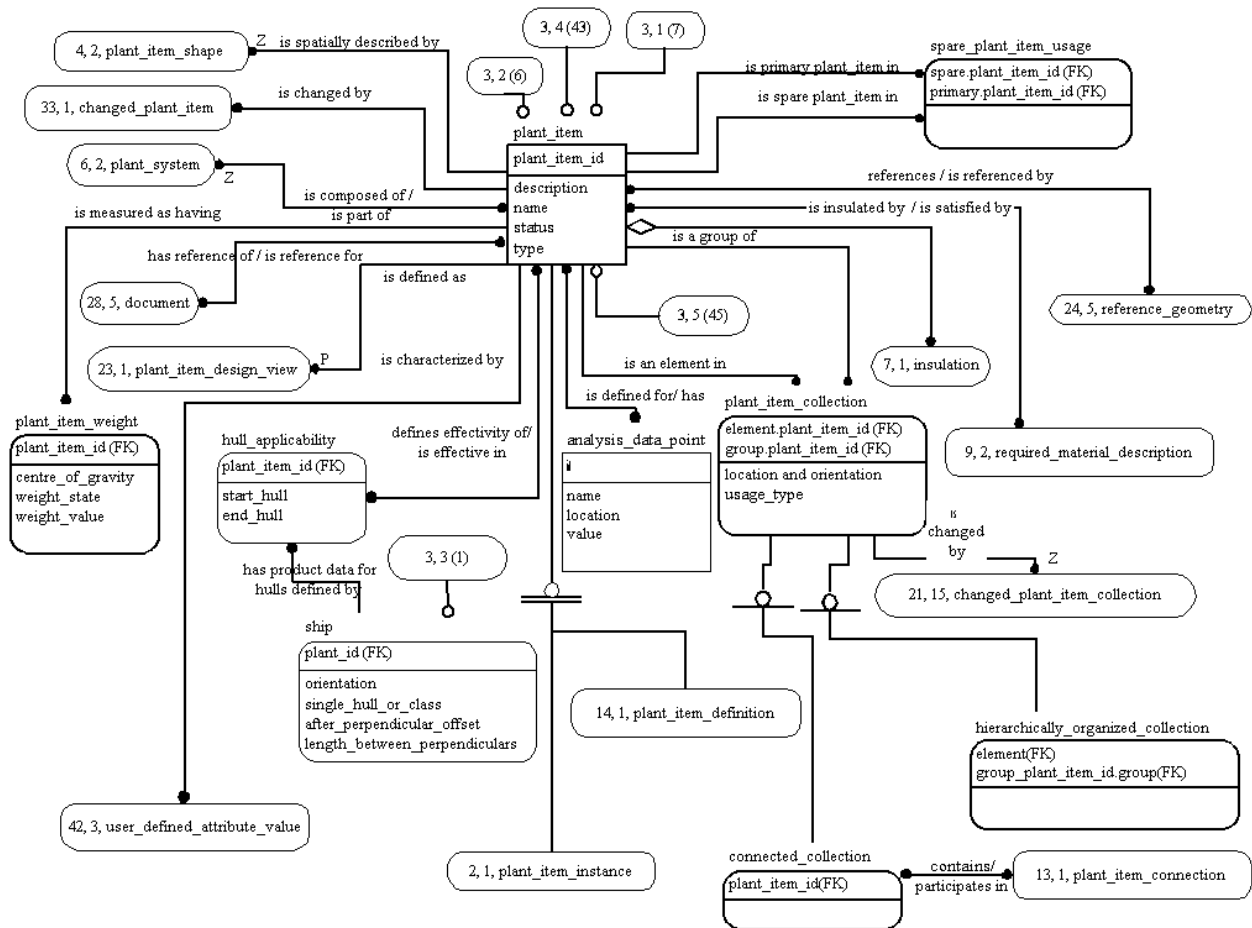


Figure G.4 — ARM diagram 3 of 47

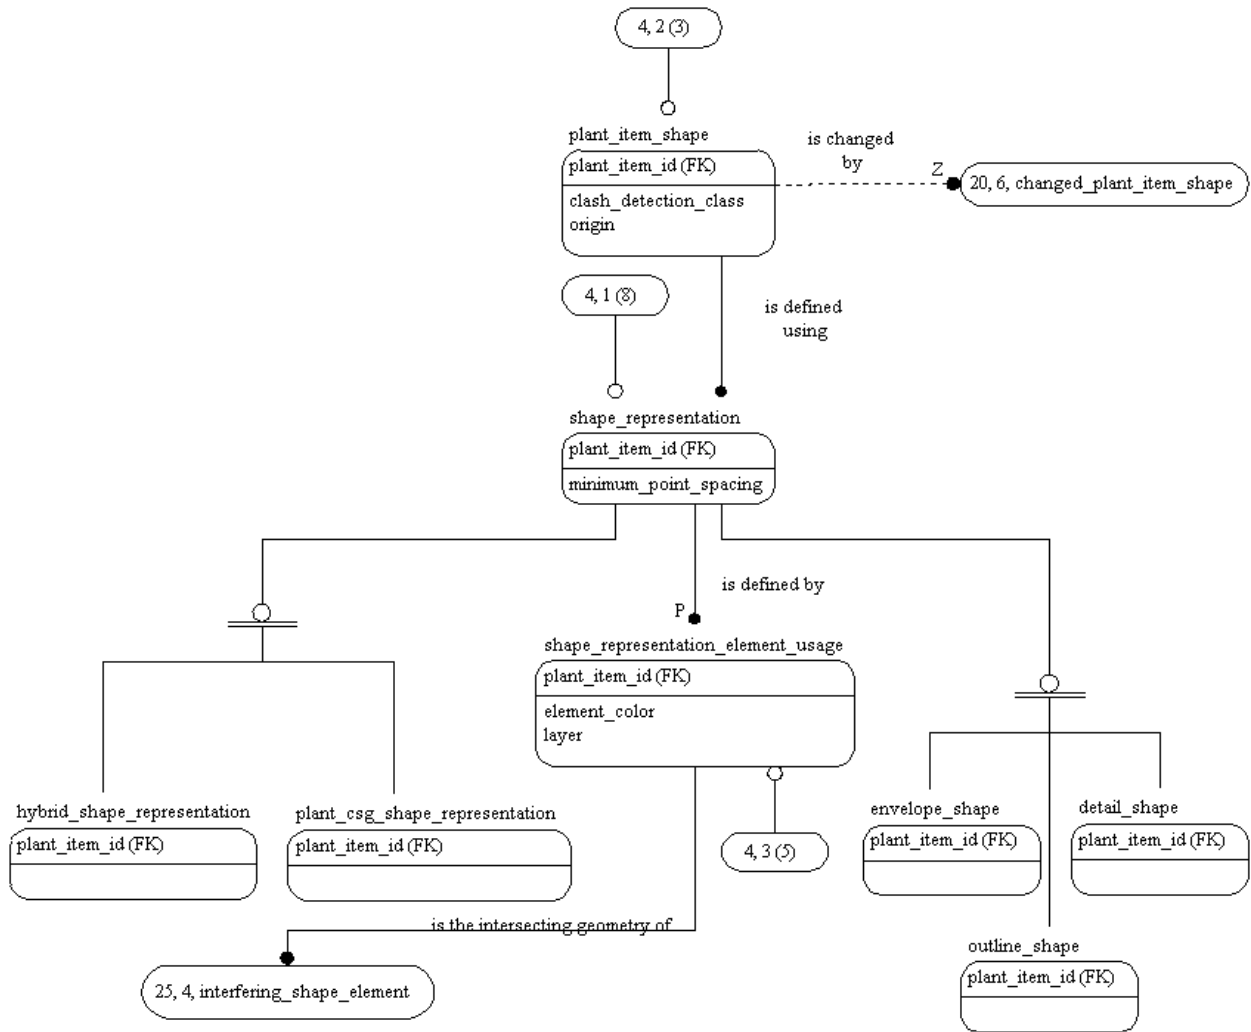


Figure G.5 — ARM diagram 4 of 47

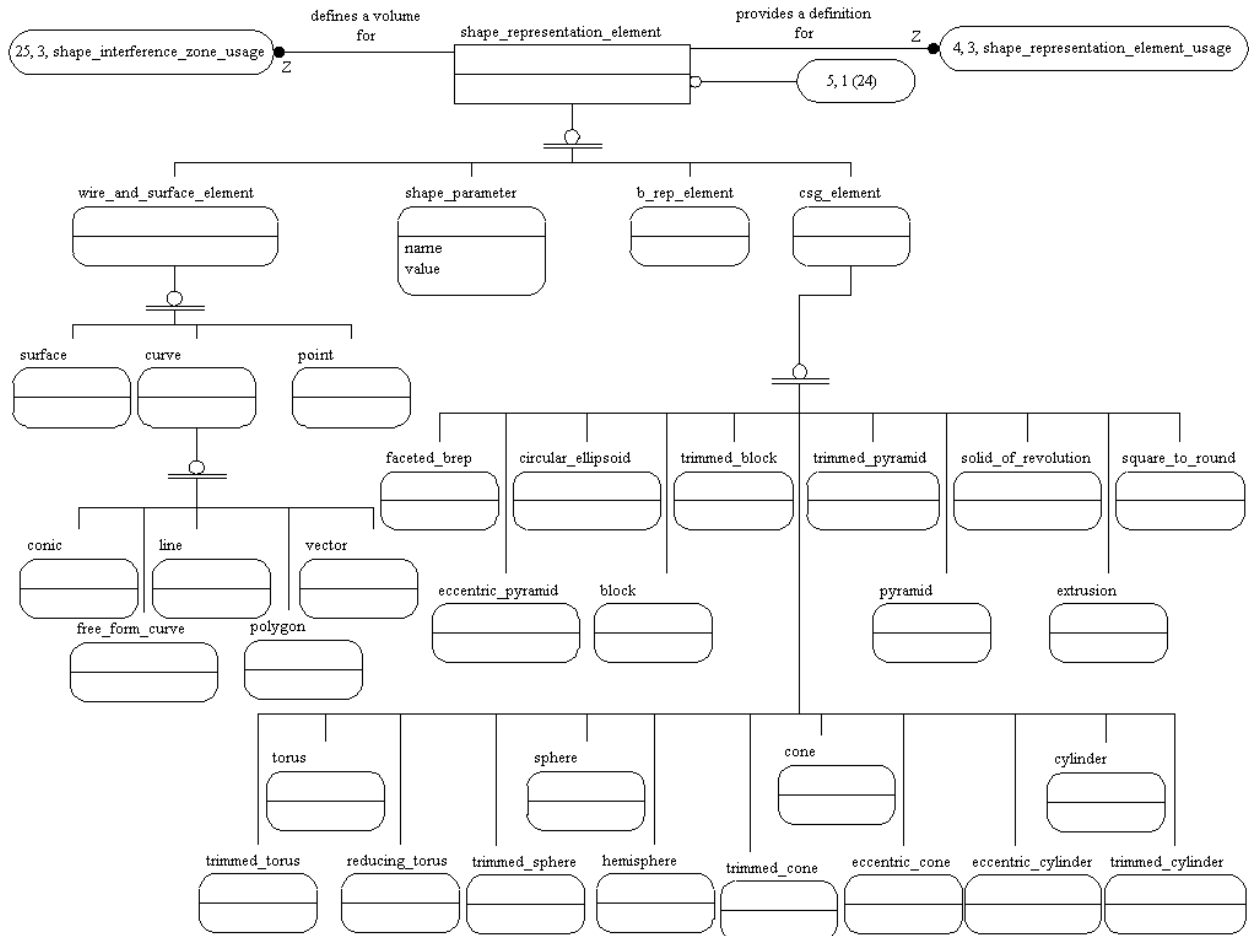


Figure G.6 — ARM diagram 5 of 47

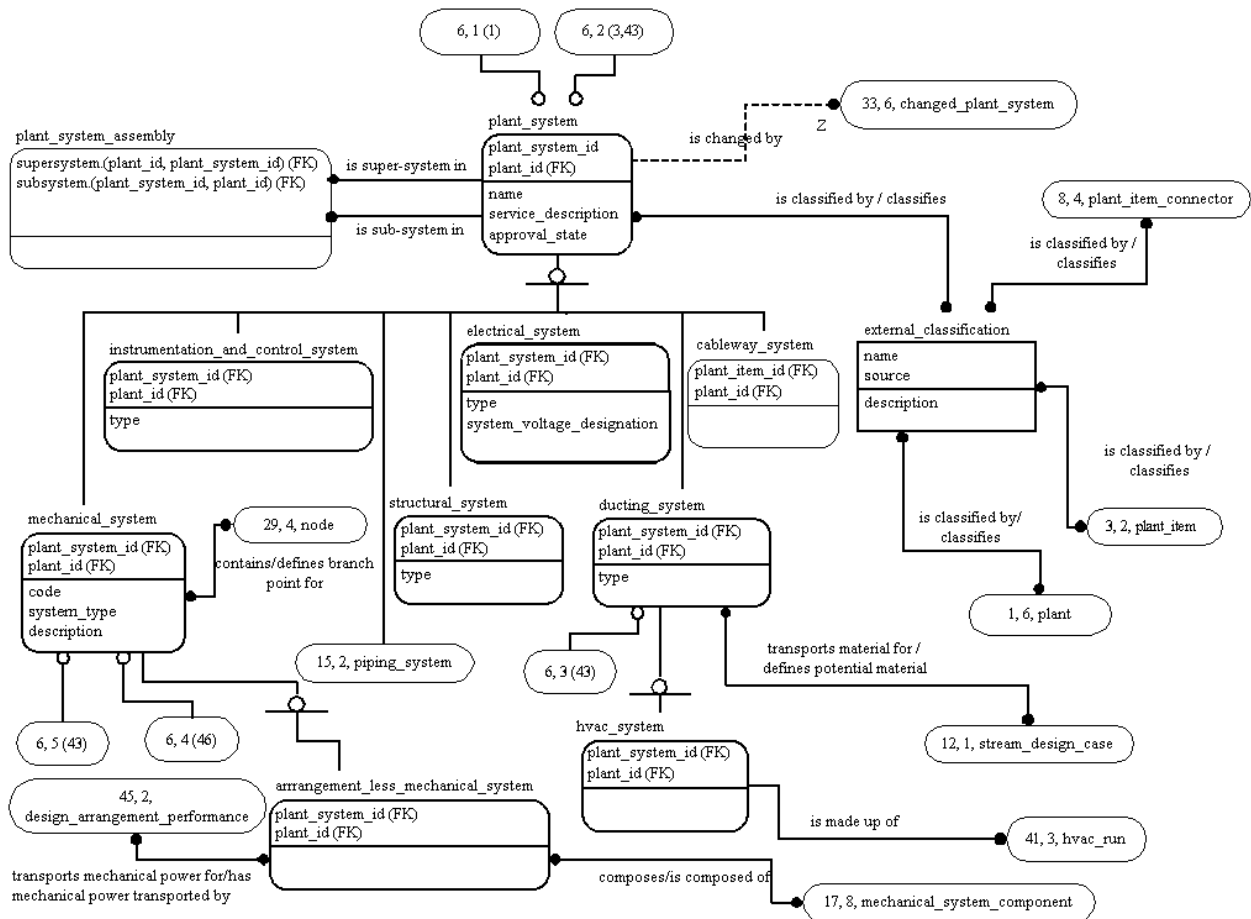


Figure G.7 — ARM diagram 6 of 47

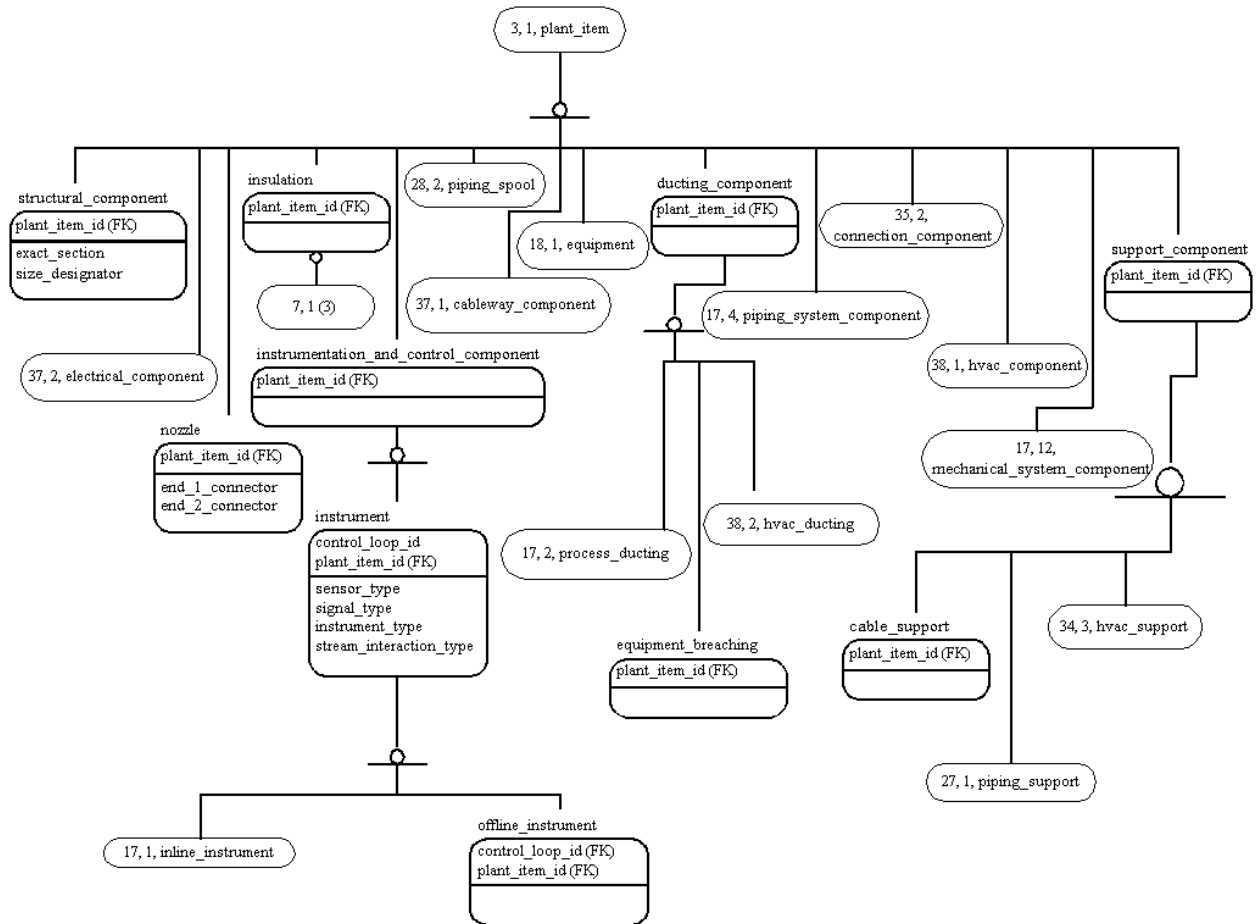


Figure G.8 — ARM diagram 7 of 47

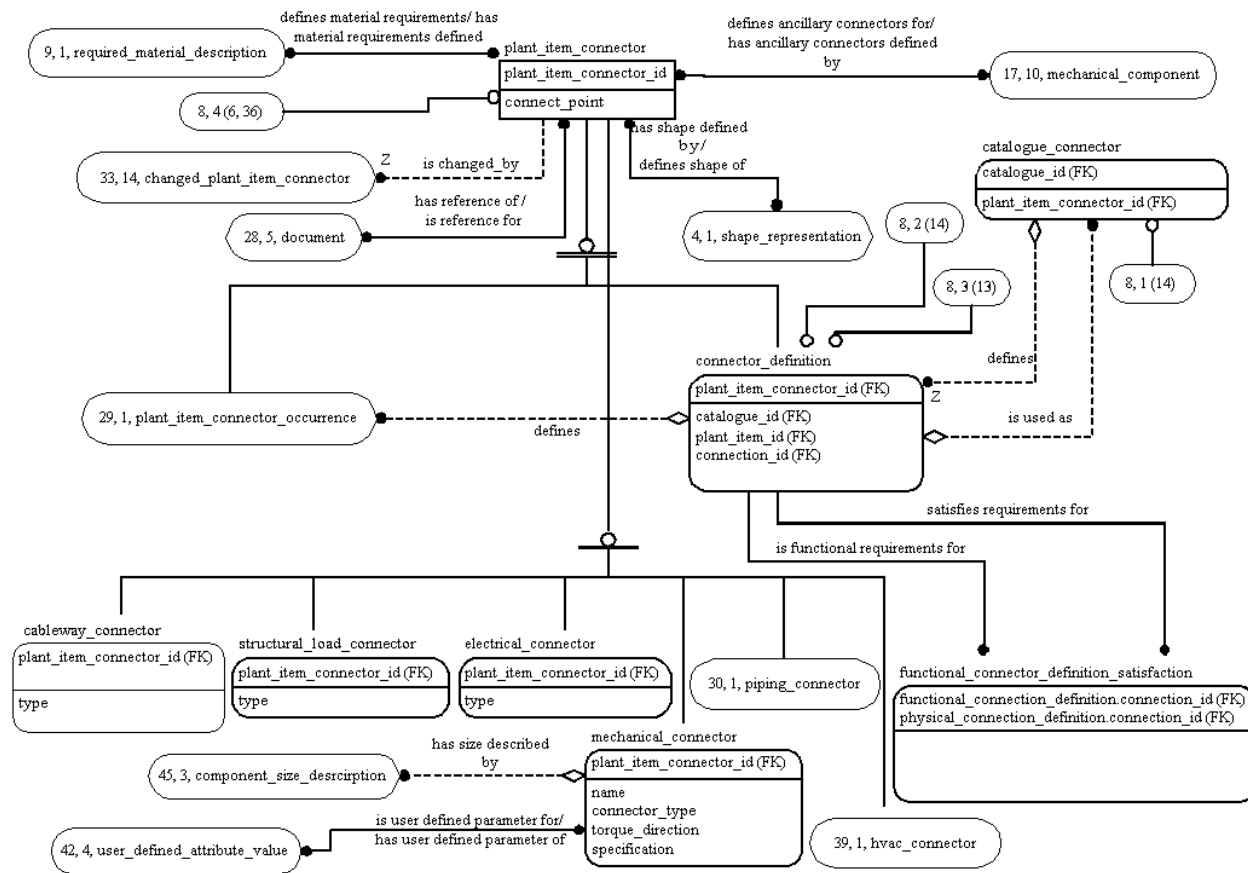


Figure G.9 — ARM diagram 8 of 47

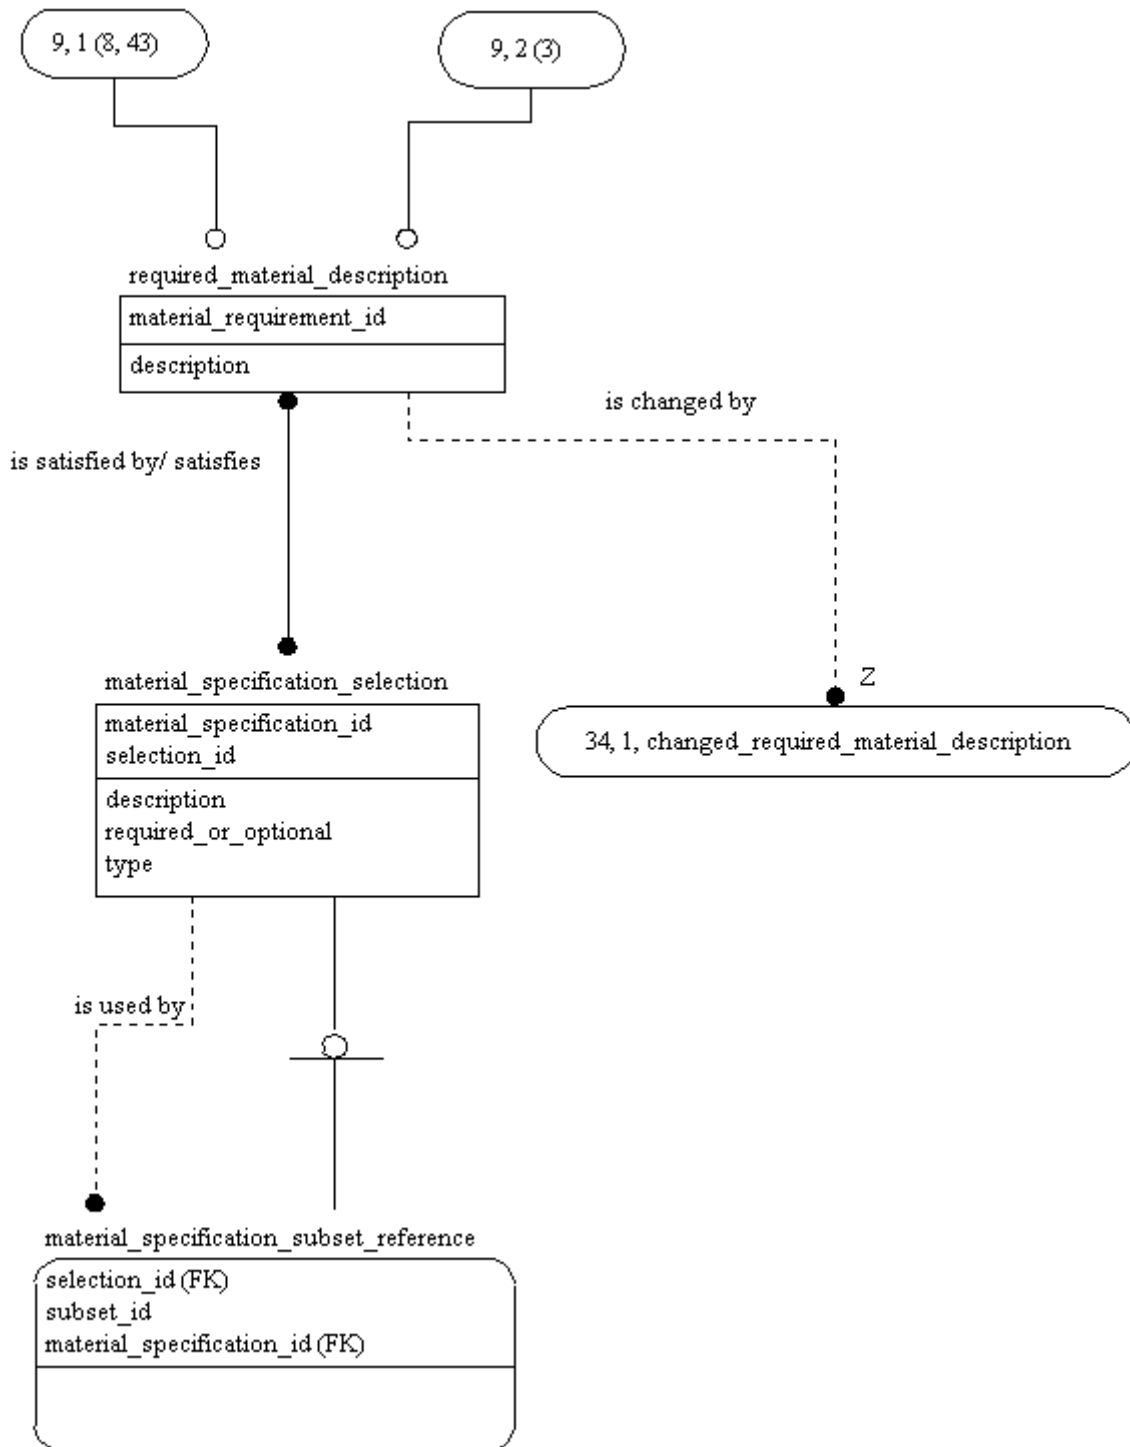


Figure G.10 — ARM diagram 9 of 47

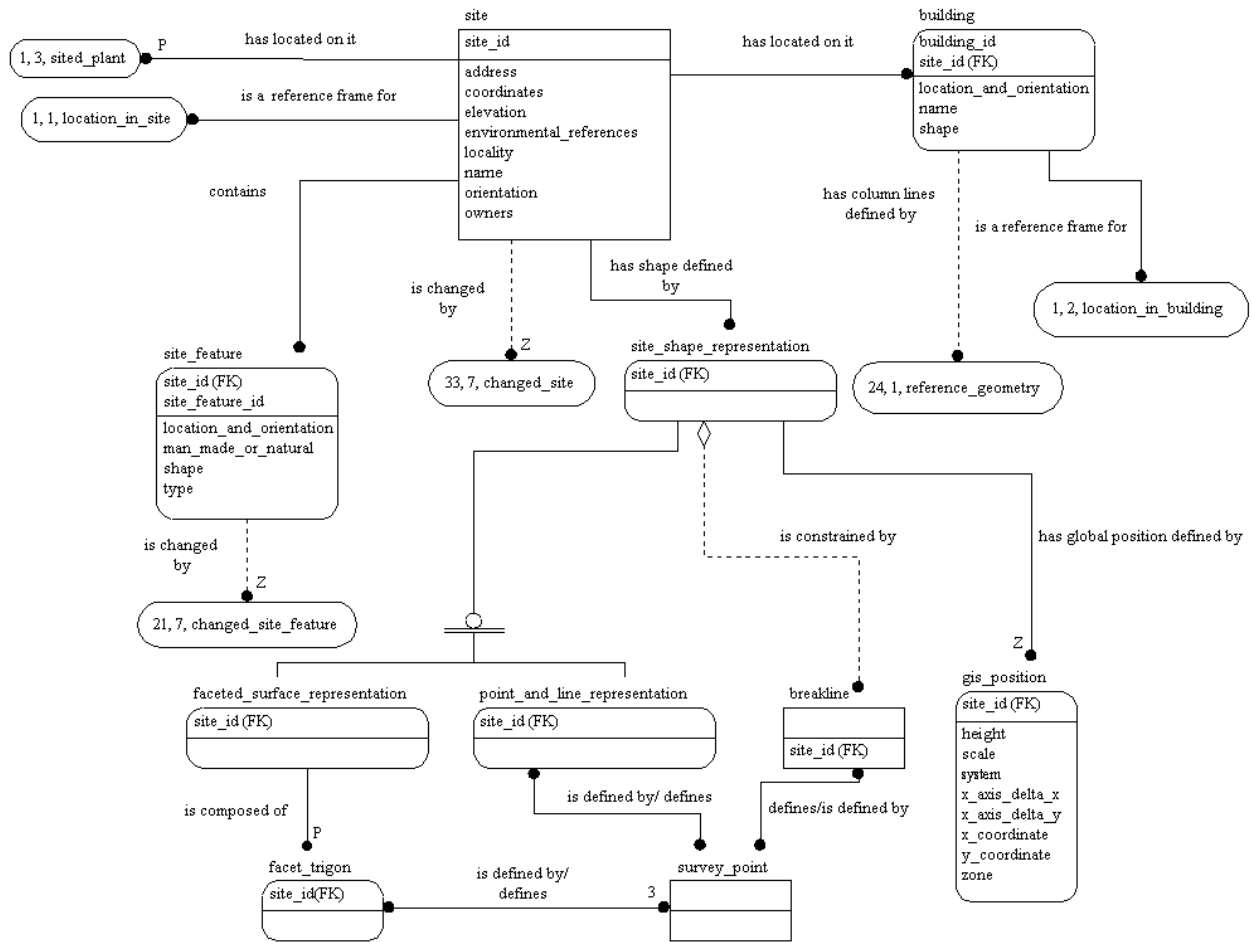


Figure G.11 — ARM diagram 10 of 47

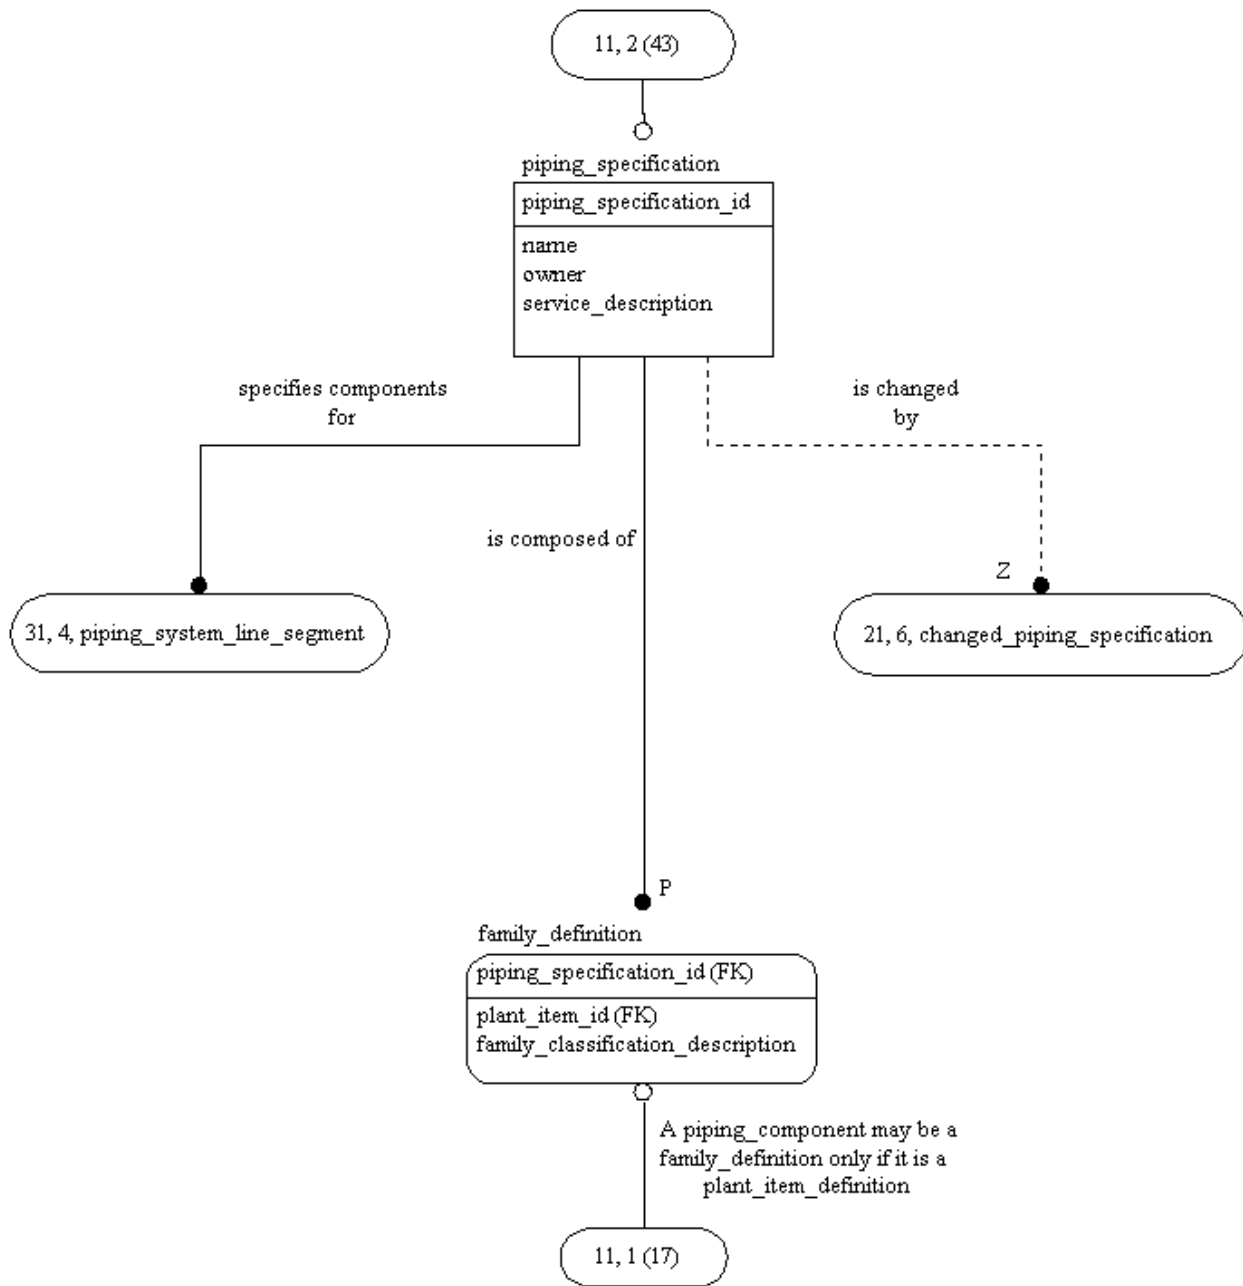


Figure G.12 — ARM diagram 11 of 47

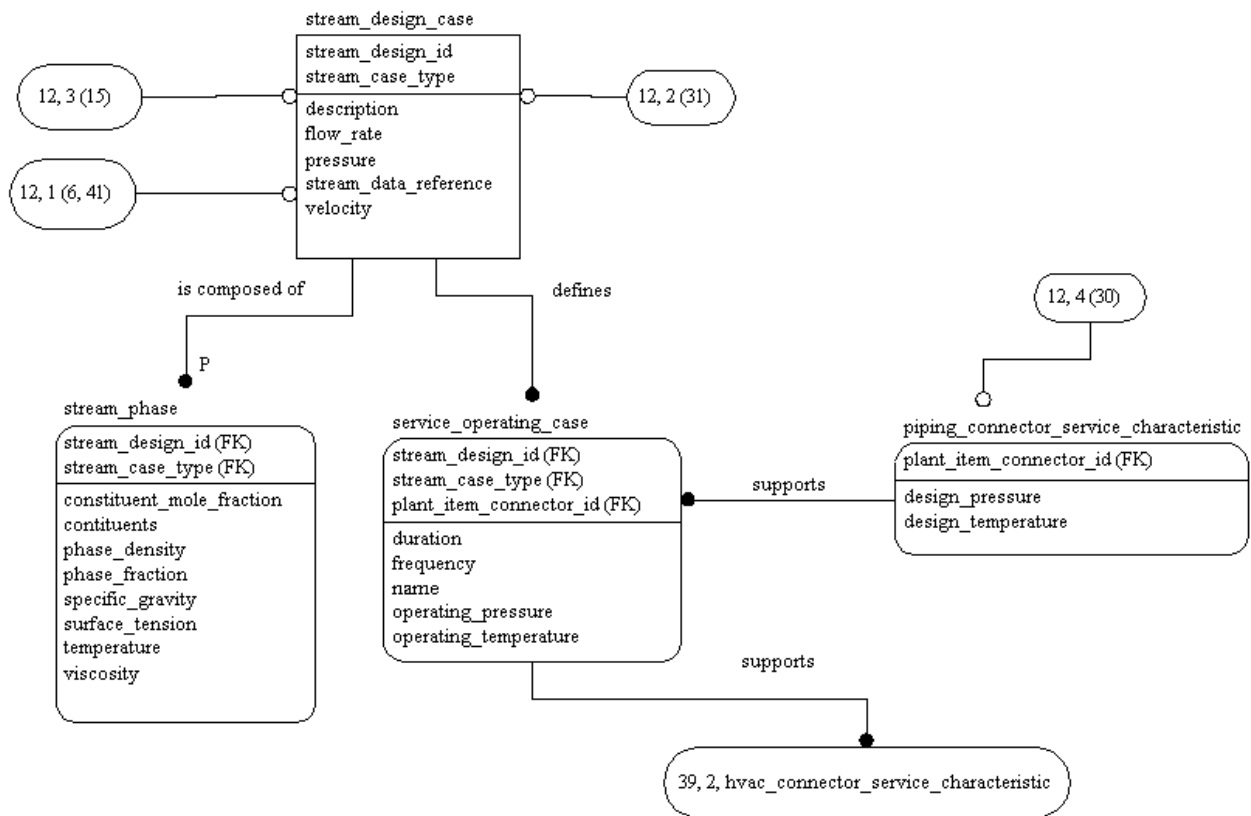


Figure G.13 — ARM diagram 12 of 47

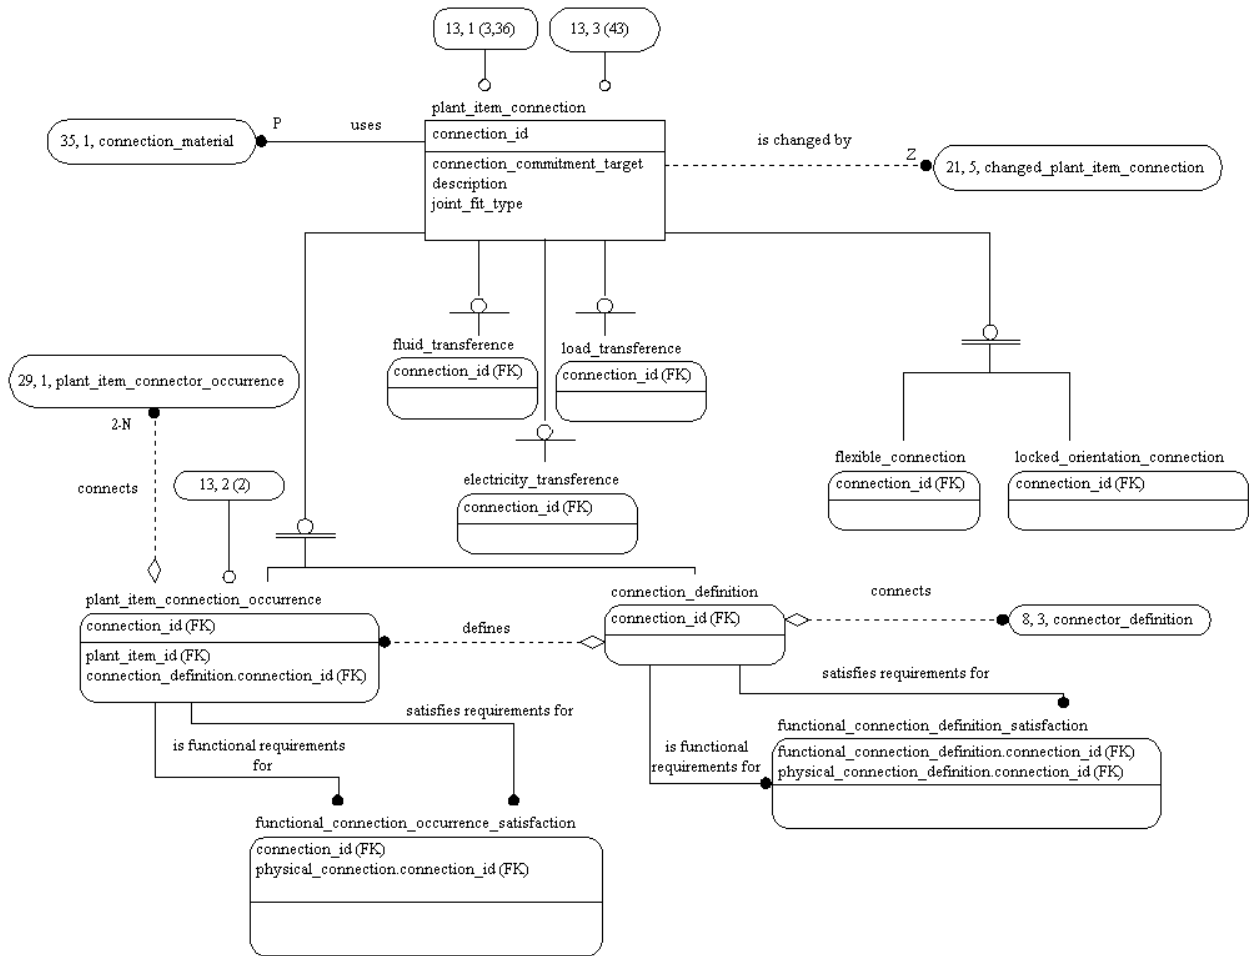


Figure G.14 — ARM diagram 13 of 47

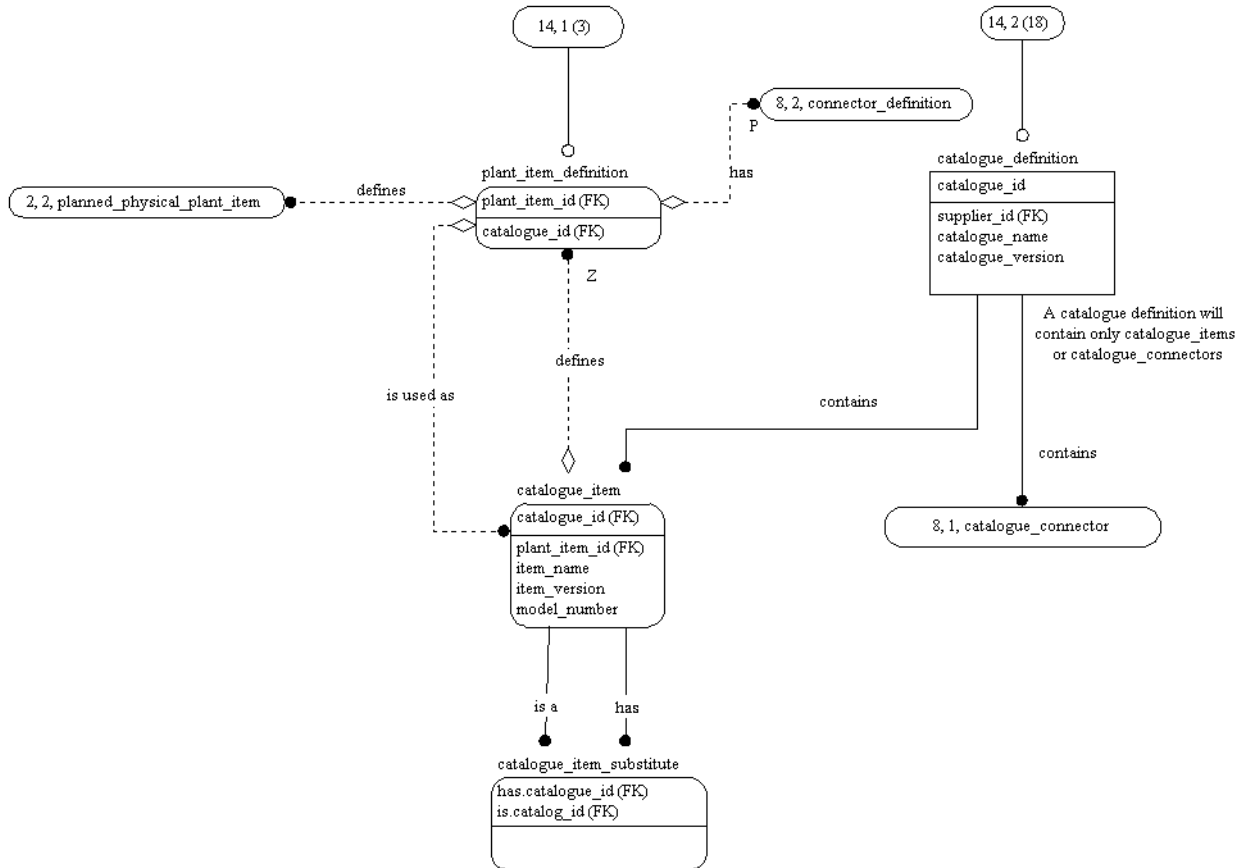


Figure G.15 — ARM diagram 14 of 47

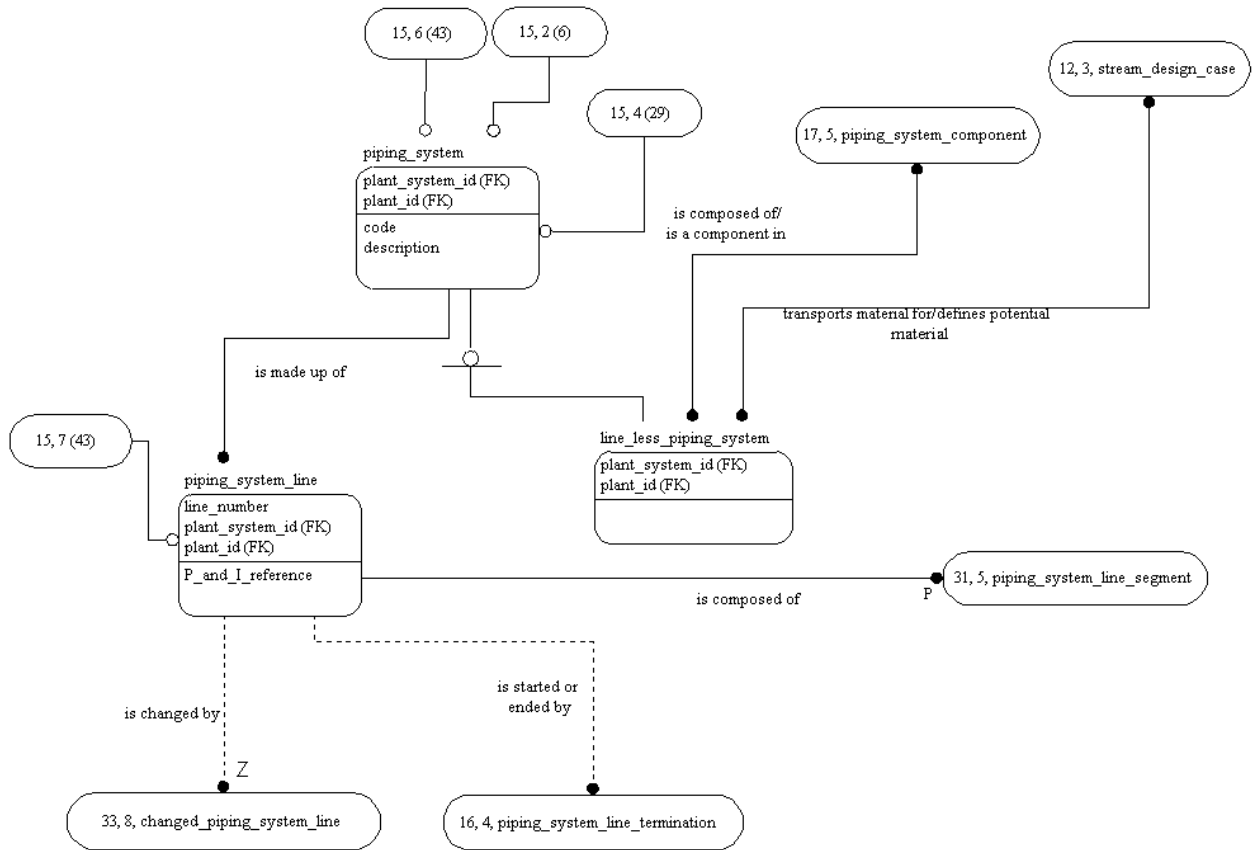


Figure G.16 — ARM diagram 15 of 47

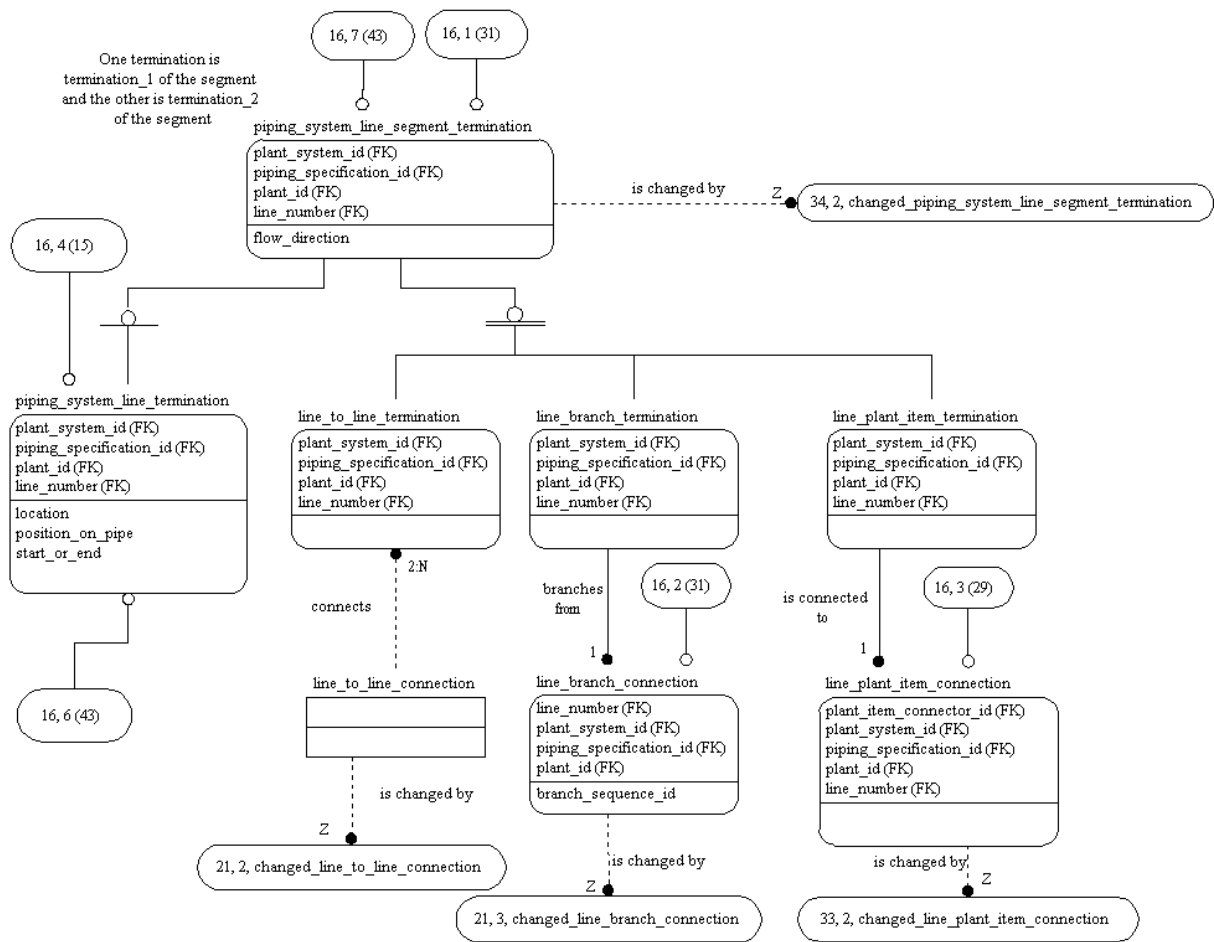


Figure G.17 — ARM diagram 16 of 47

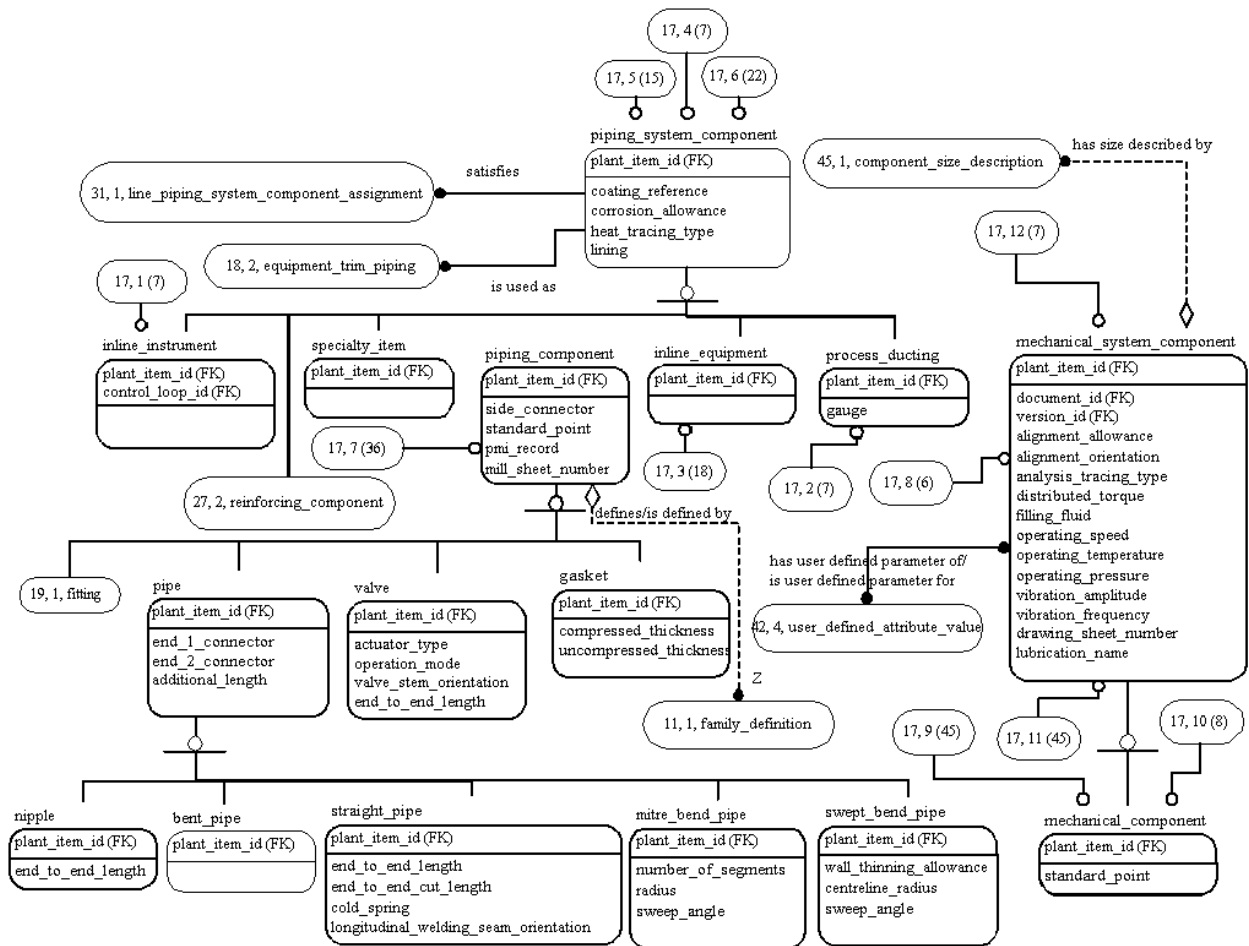


Figure G.18 — ARM diagram 17 of 47

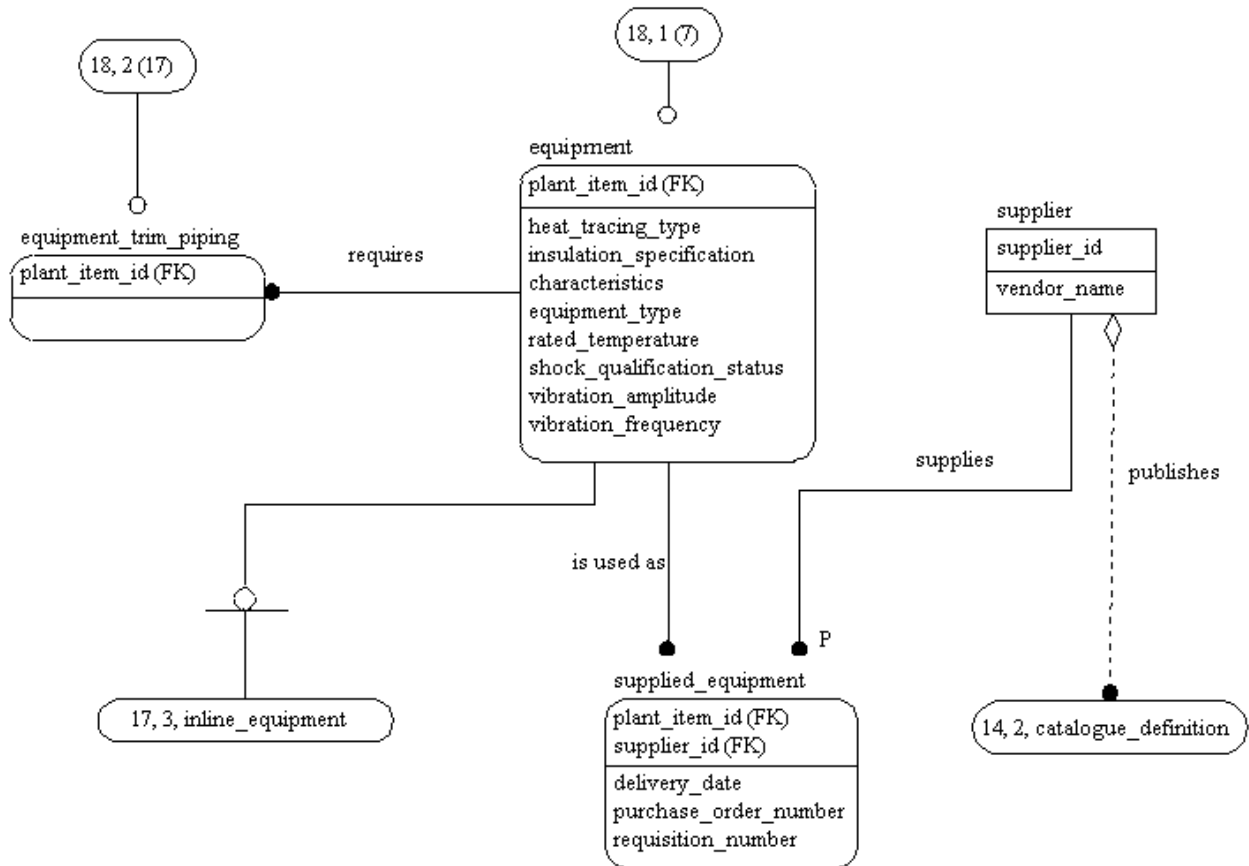


Figure G.19 — ARM diagram 18 of 47

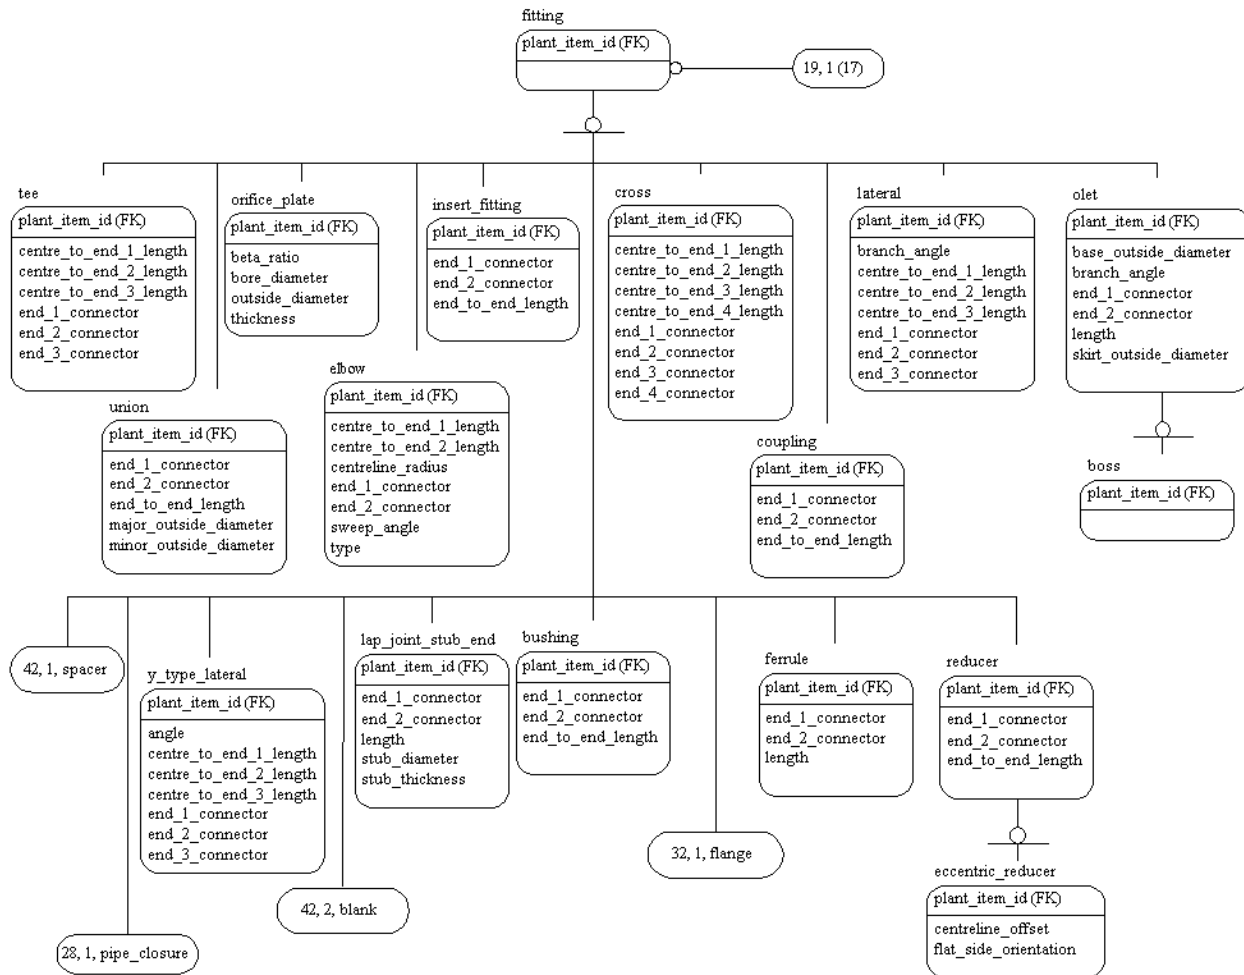


Figure G.20 — ARM diagram 19 of 47

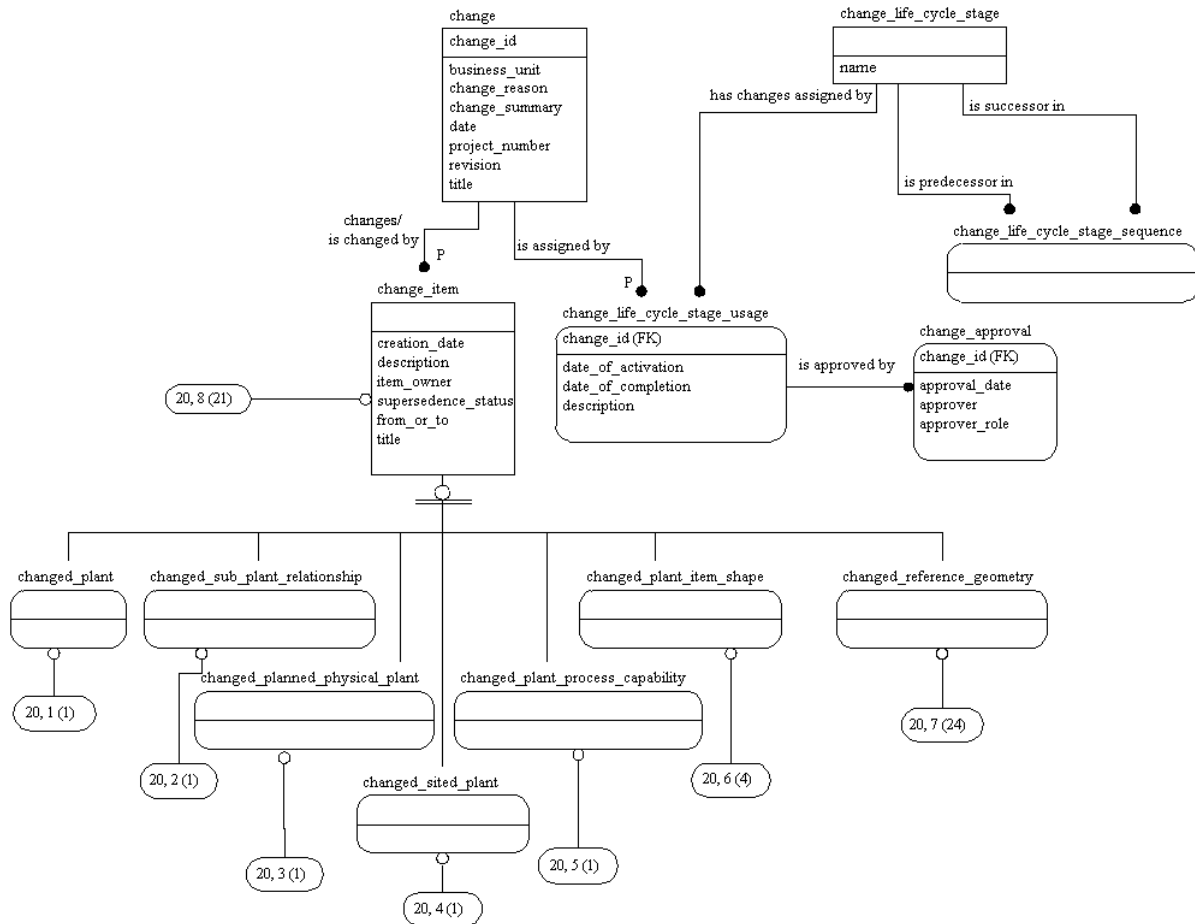


Figure G.21 — ARM diagram 20 of 47

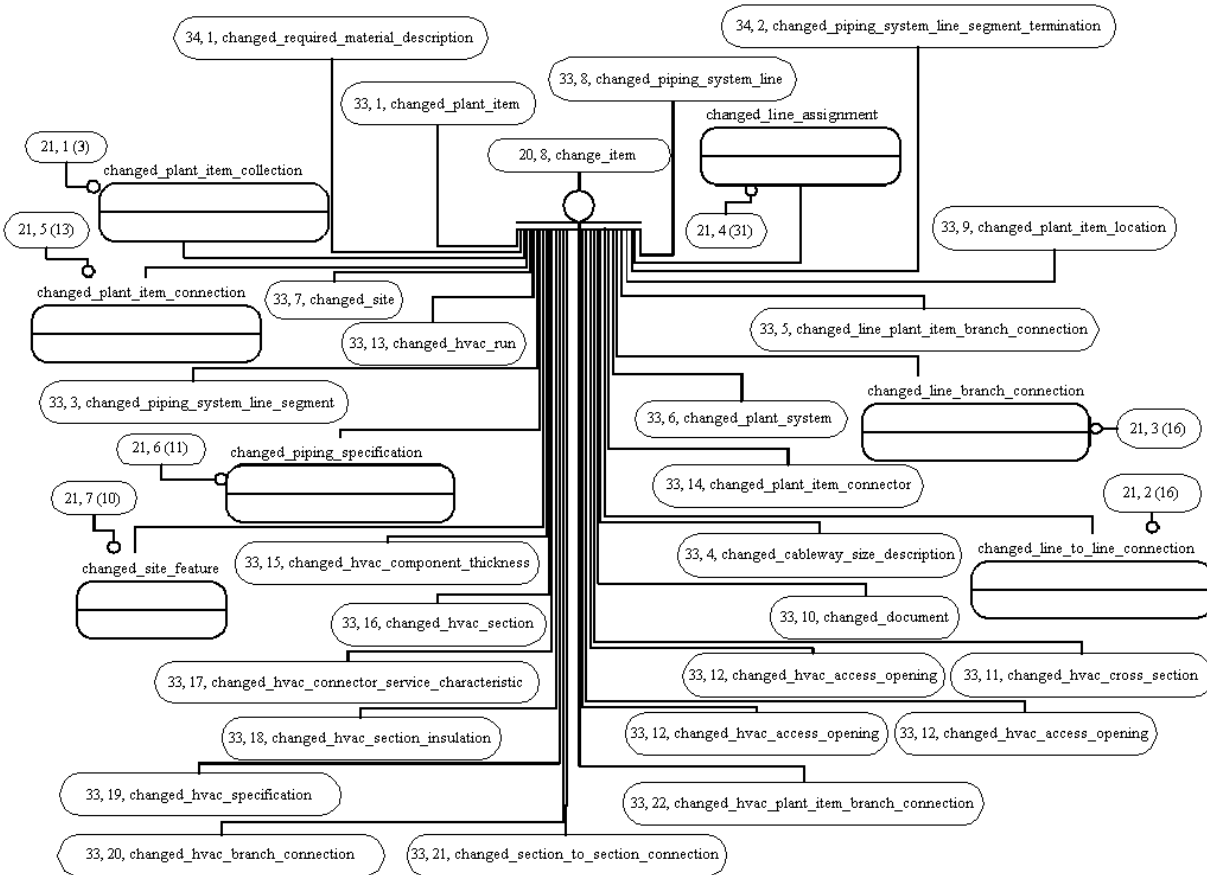


Figure G.22 — ARM diagram 21 of 47

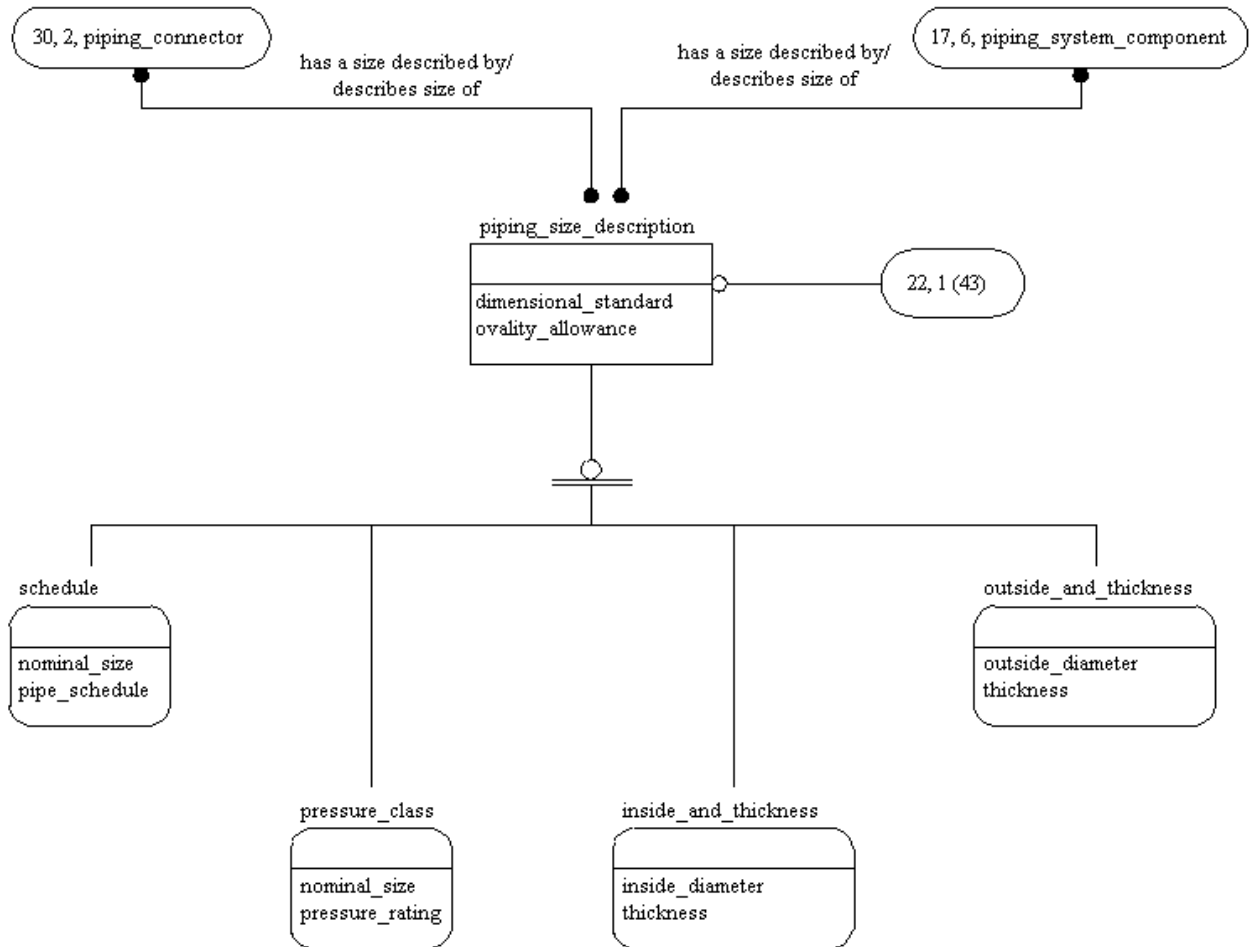


Figure G.23 — ARM diagram 22 of 47

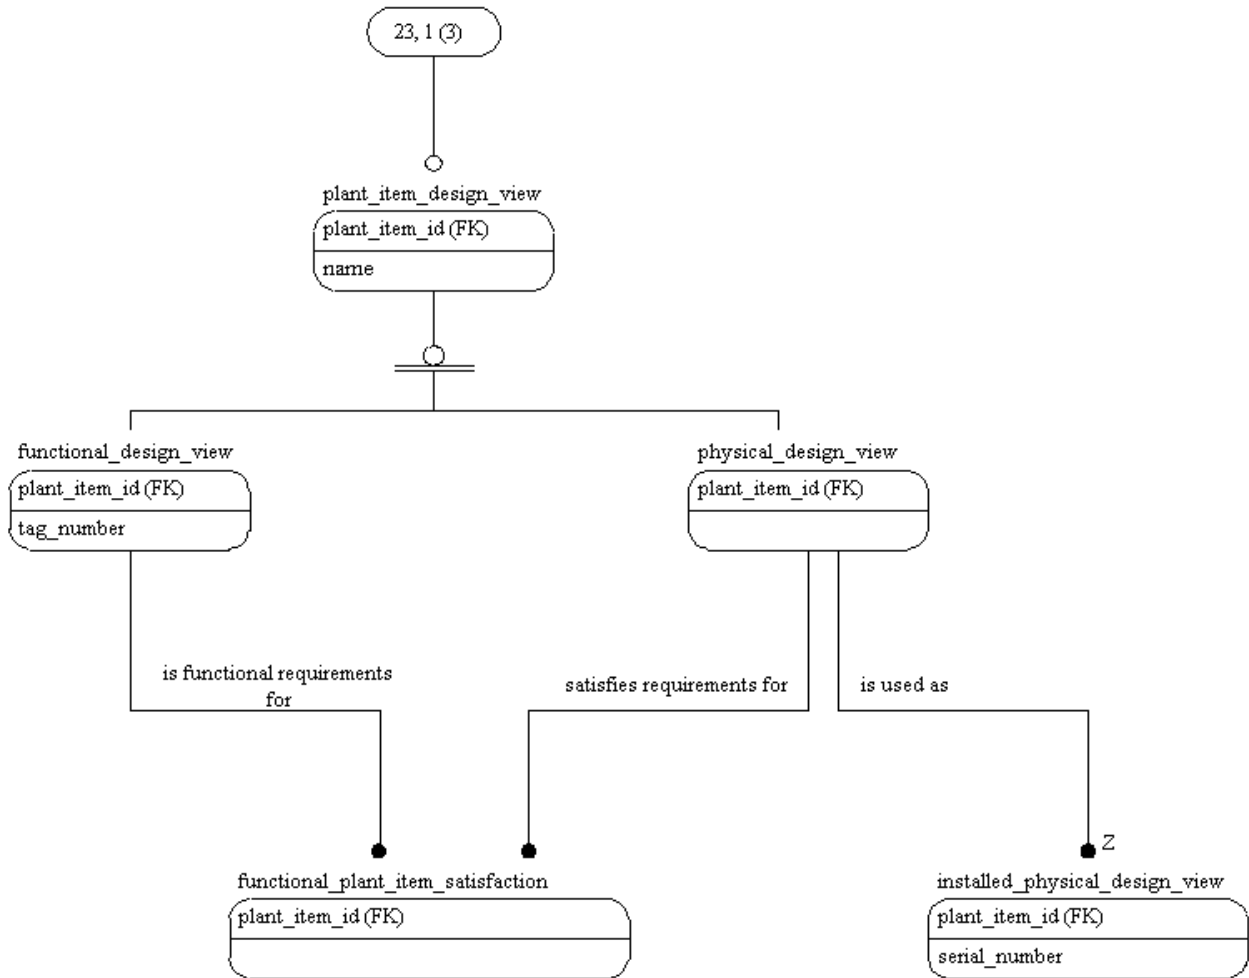


Figure G.24 — ARM diagram 23 of 47

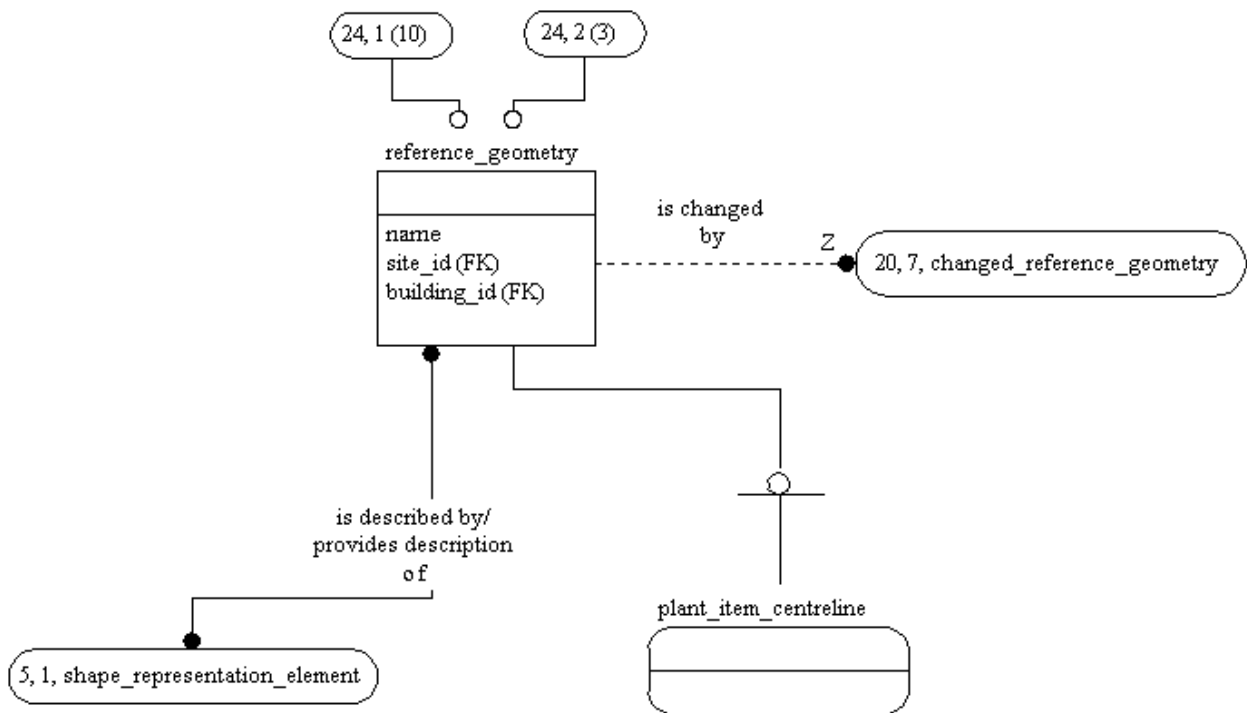


Figure G.25 — ARM diagram 24 of 47

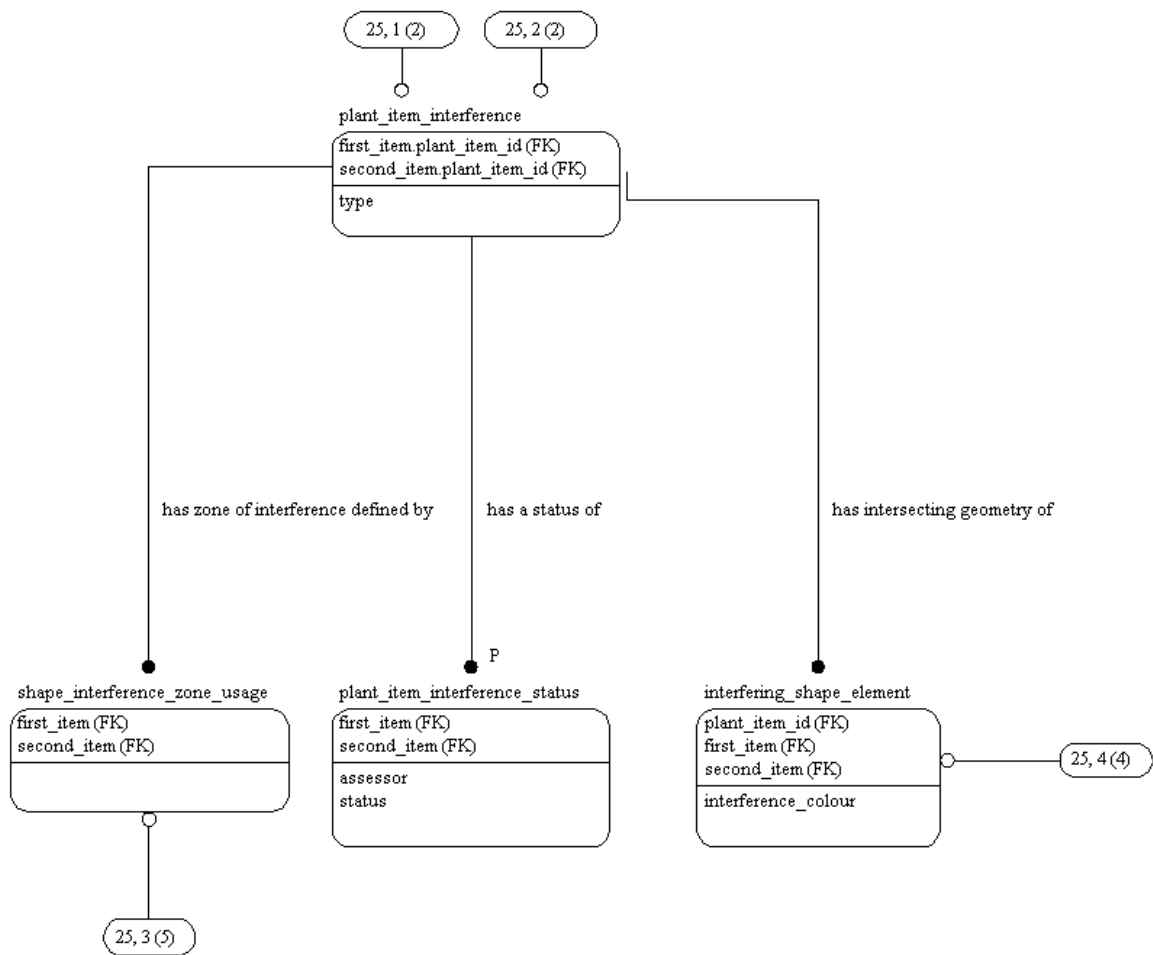


Figure G.26 — ARM diagram 25 of 47

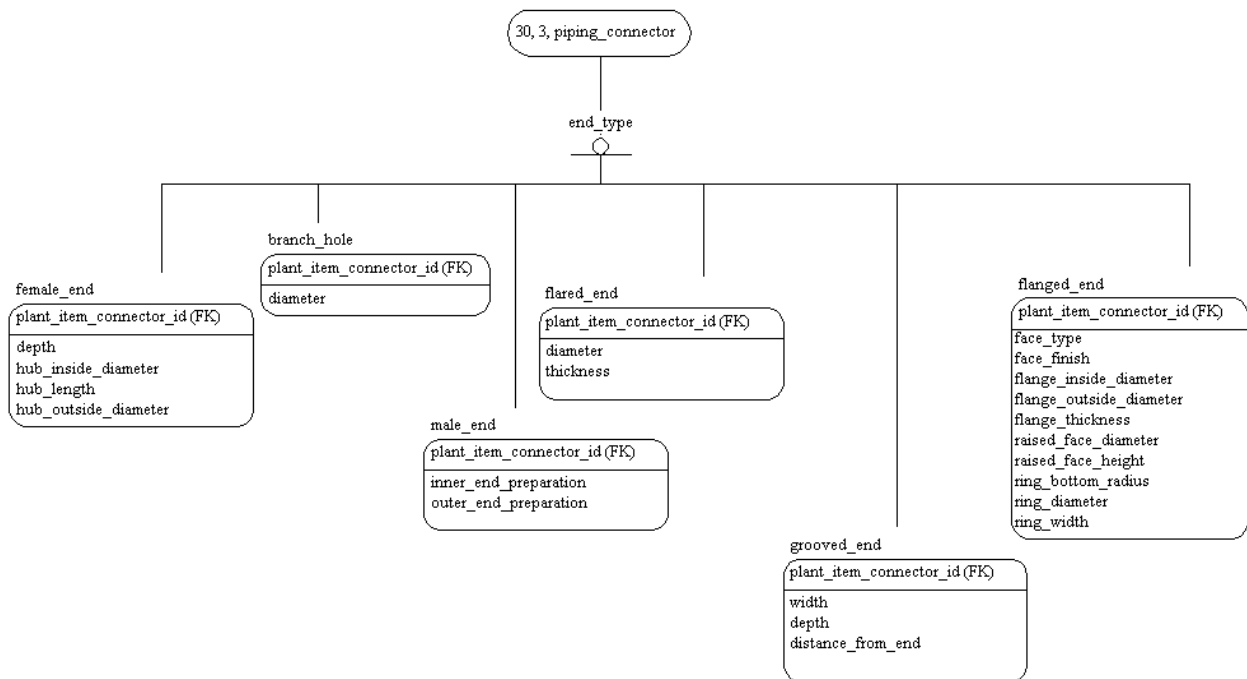


Figure G.27 — ARM diagram 26 of 47

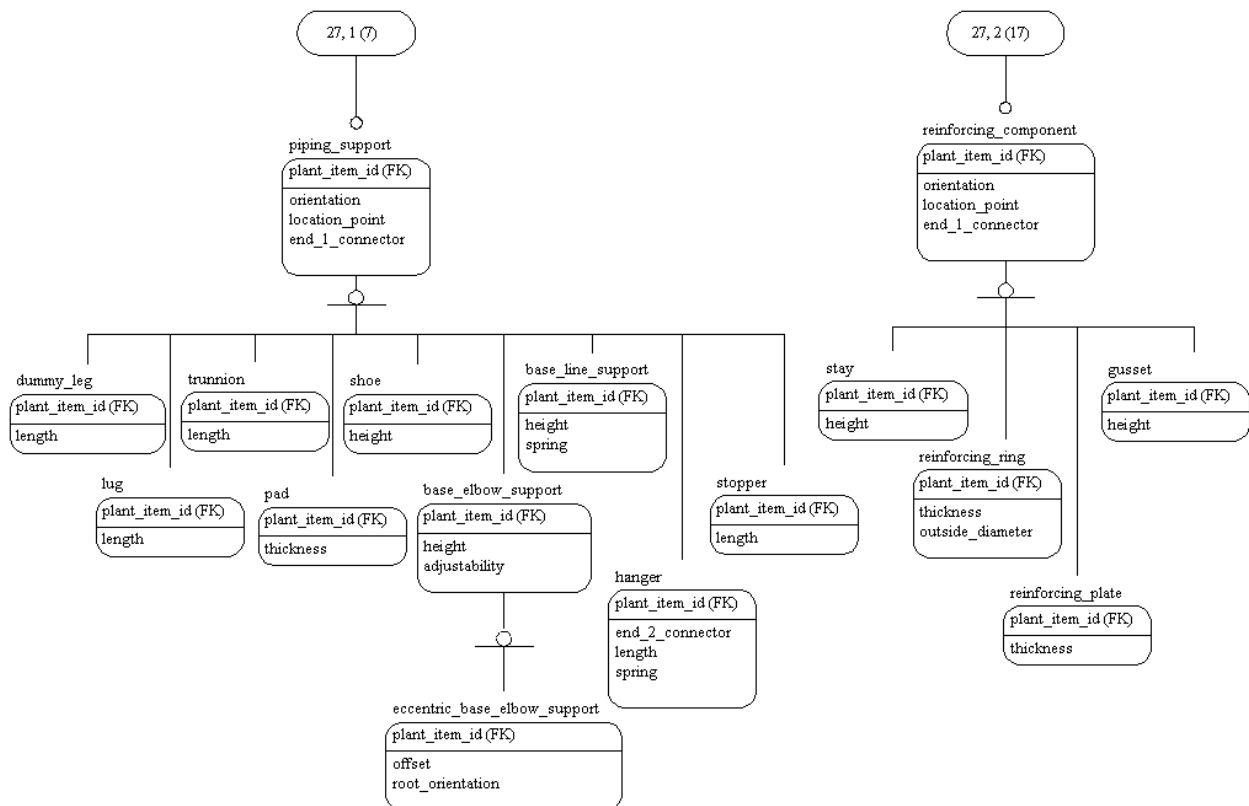


Figure G.28 — ARM diagram 27 of 47

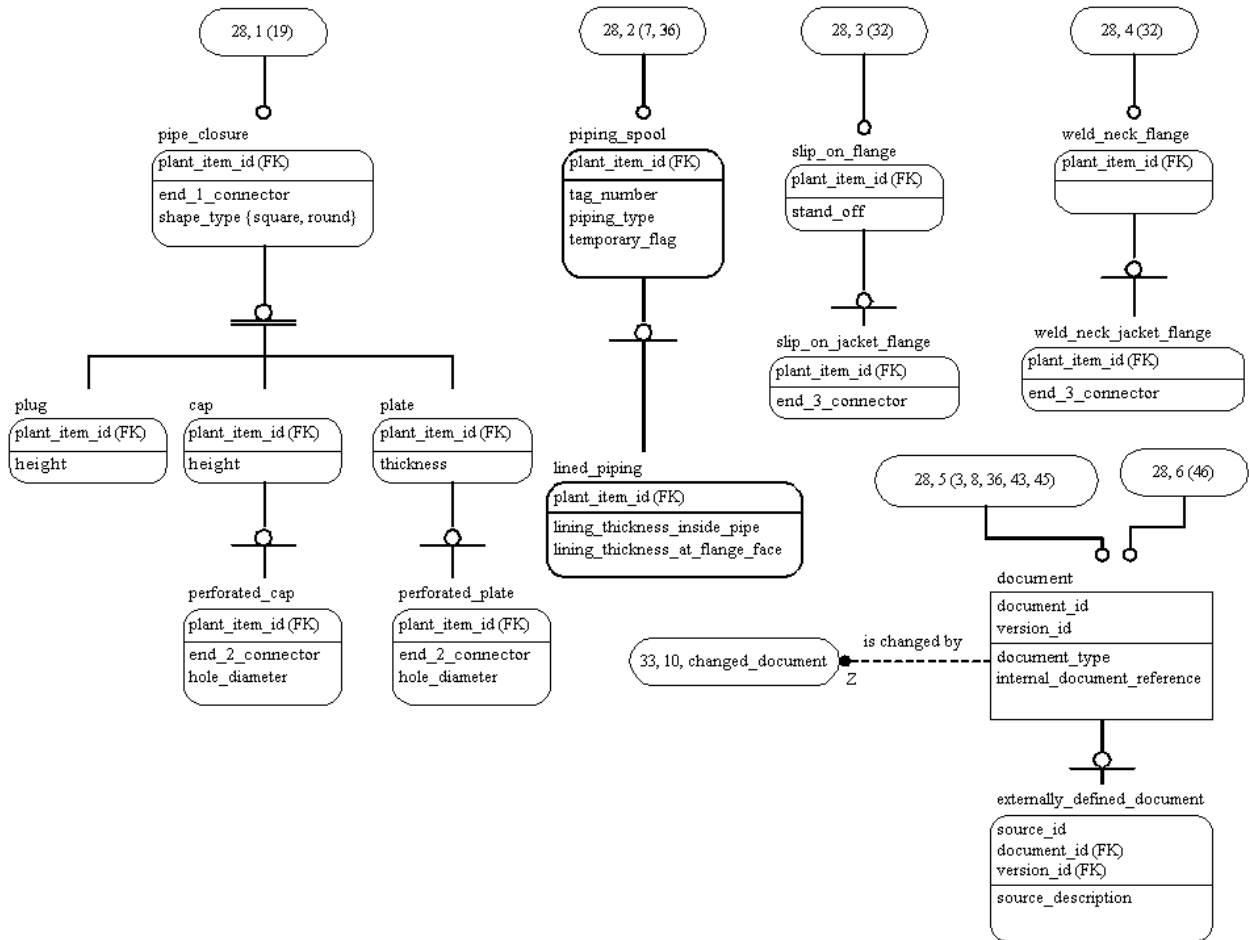


Figure G.29 — ARM diagram 28 of 47

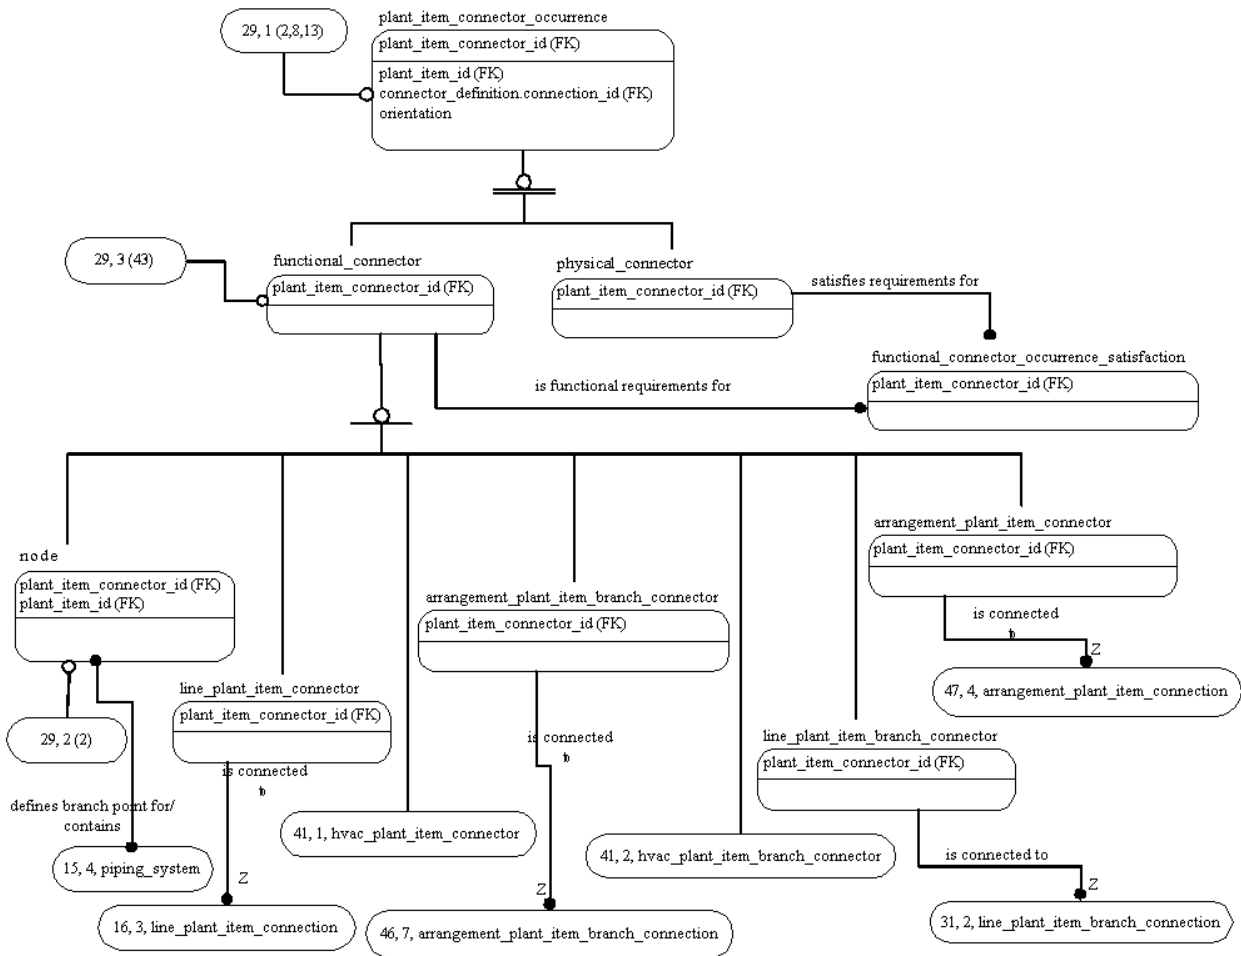


Figure G.30 — ARM diagram 29 of 47

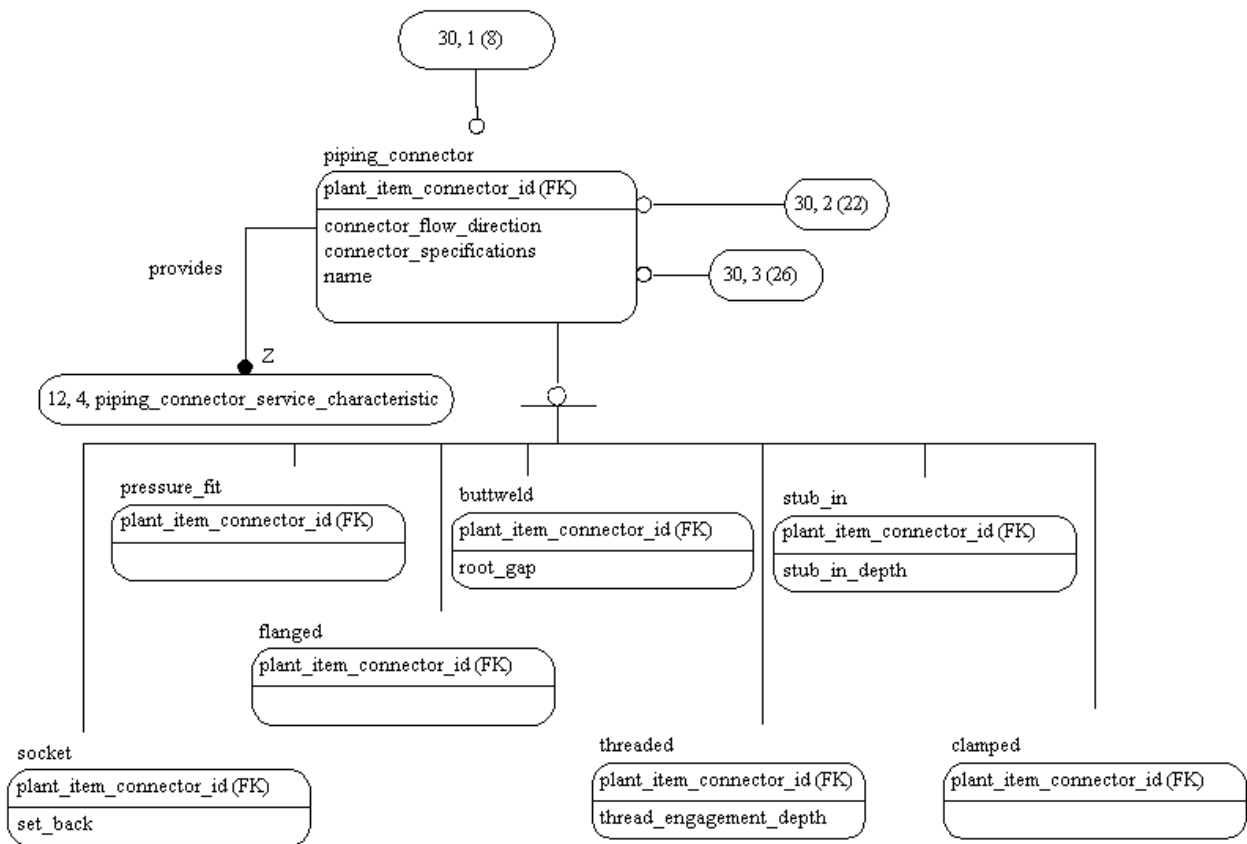


Figure G.31 — ARM diagram 30 of 47

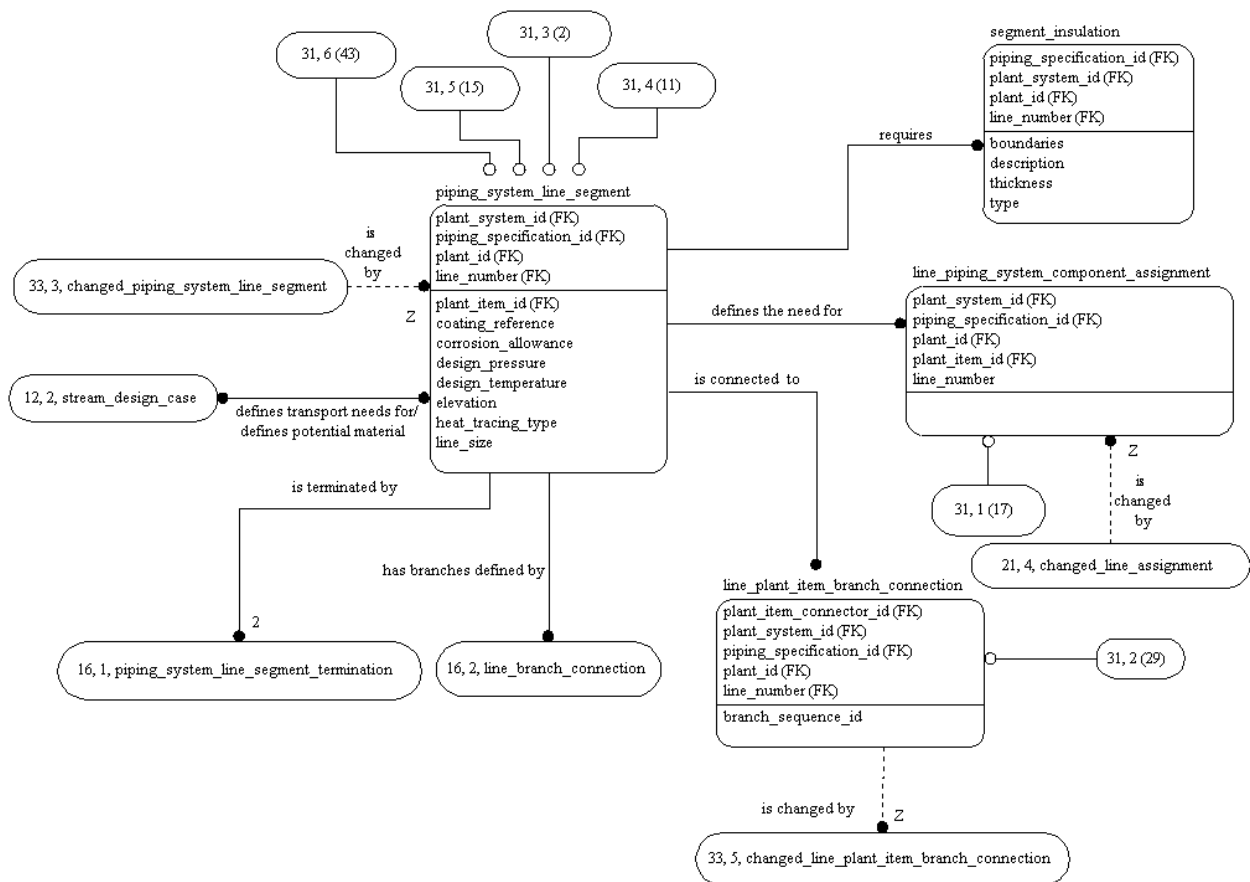


Figure G.32 — ARM diagram 31 of 47

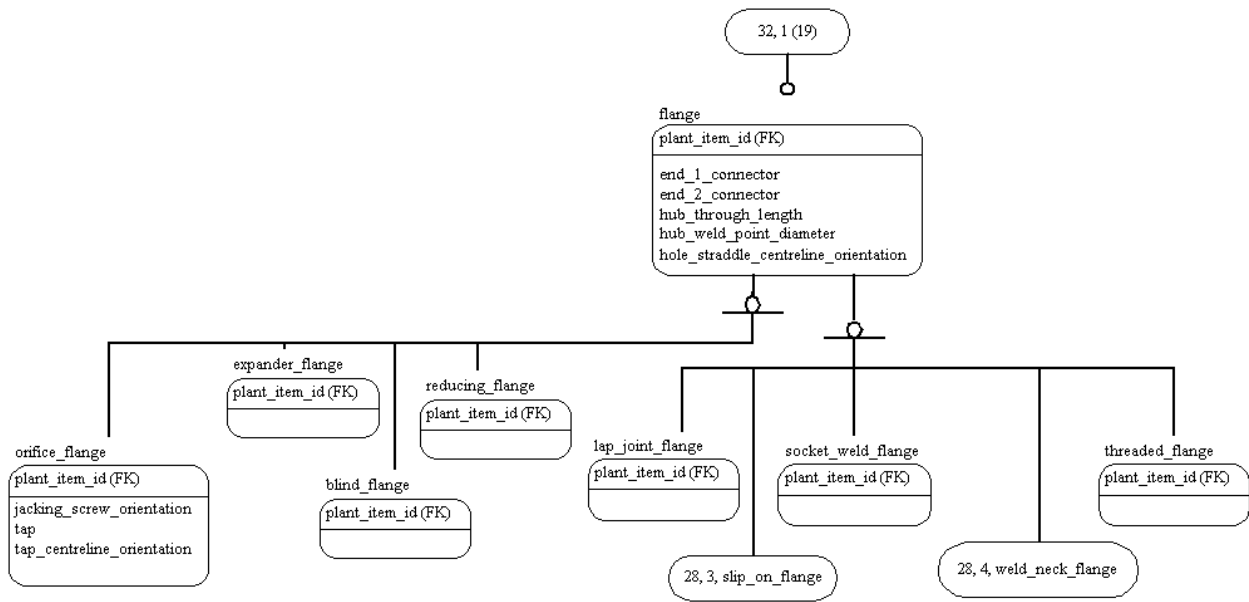


Figure G.33 — ARM diagram 32 of 47

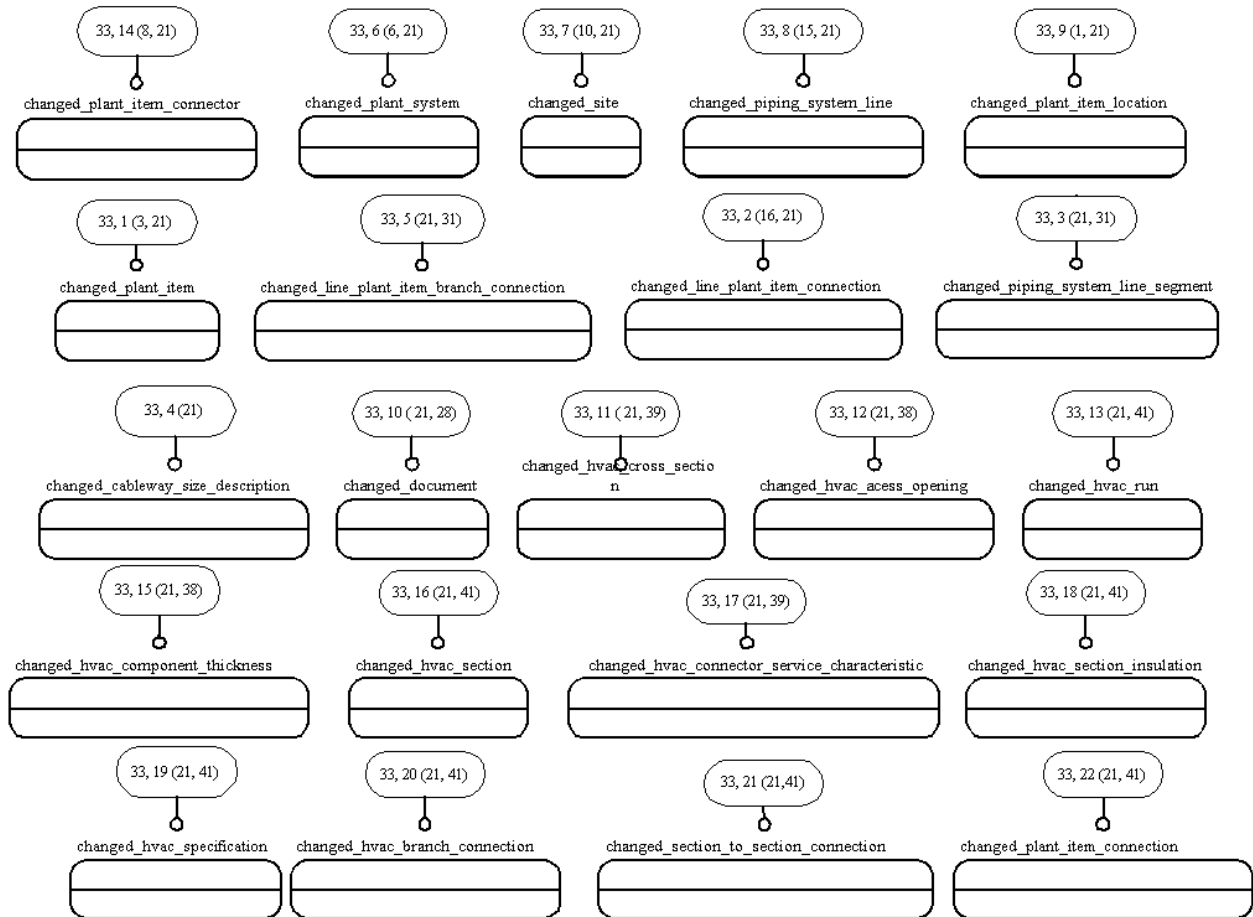


Figure G.34 — ARM diagram 33 of 47

ISO 10303-227:2005(E)

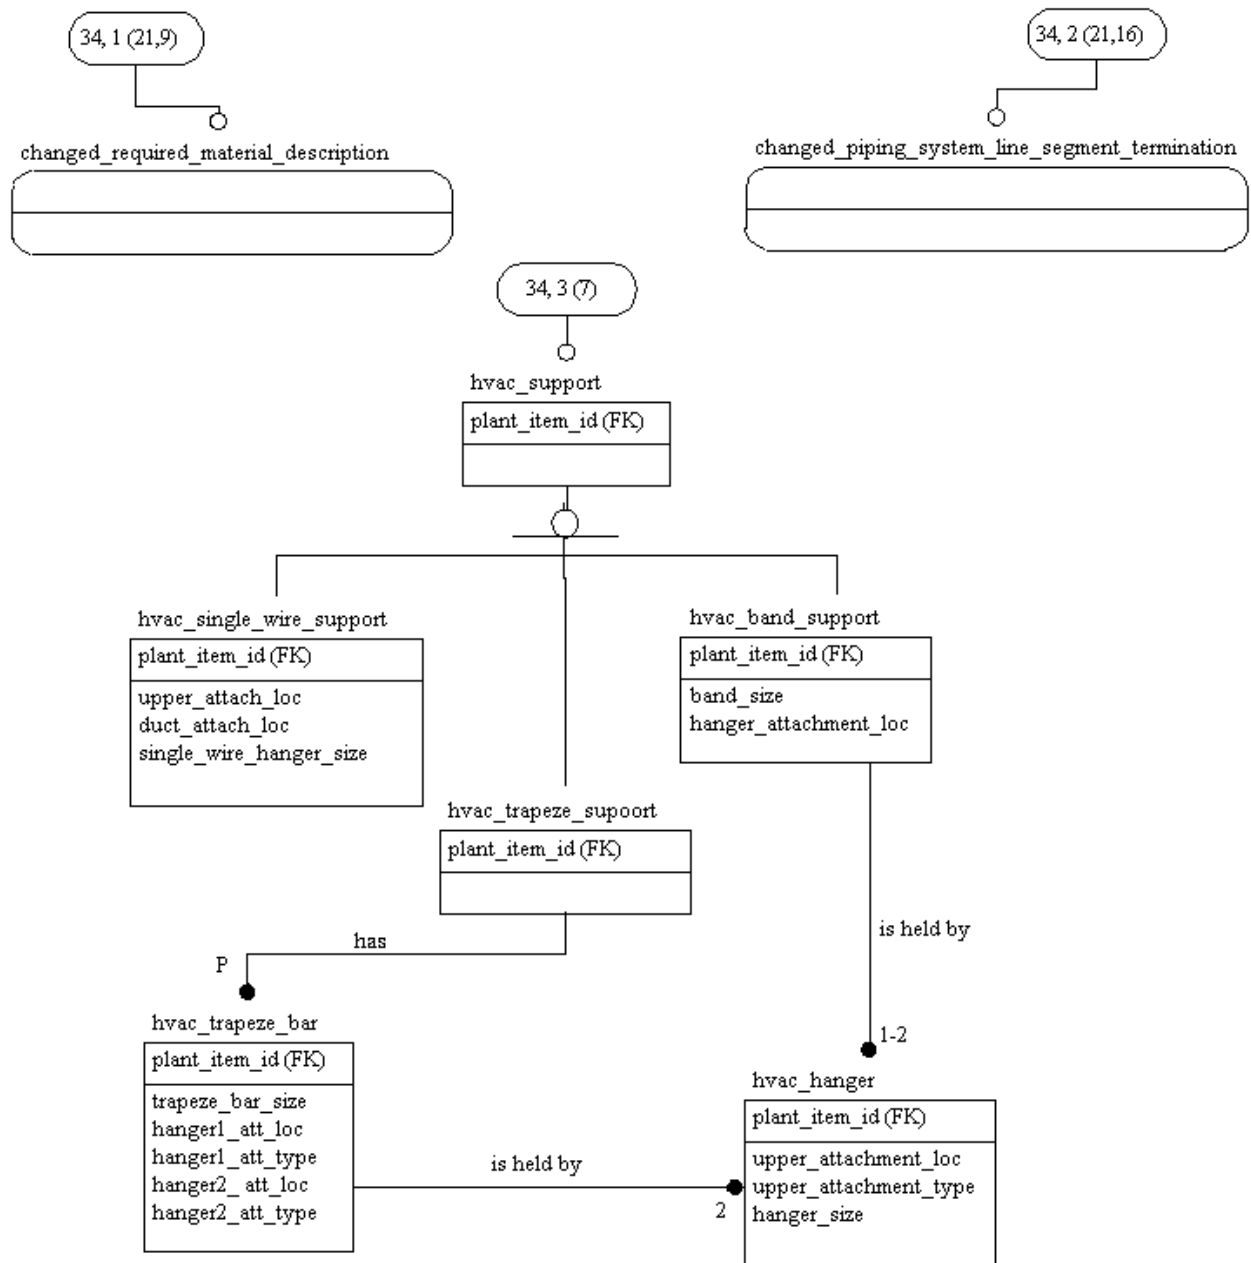


Figure G.35 — ARM diagram 34 of 47

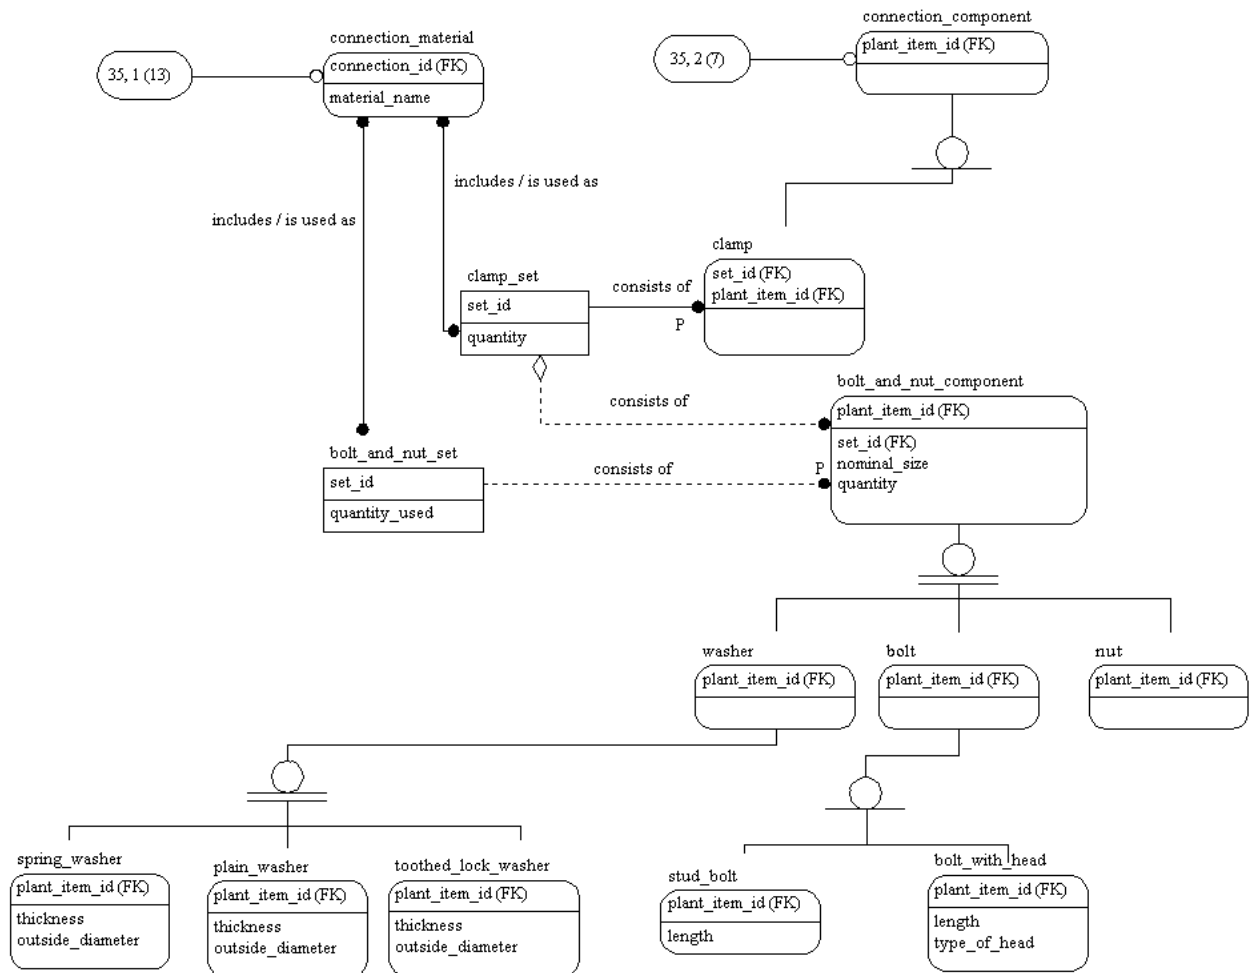


Figure G.36 — ARM diagram 35 of 47

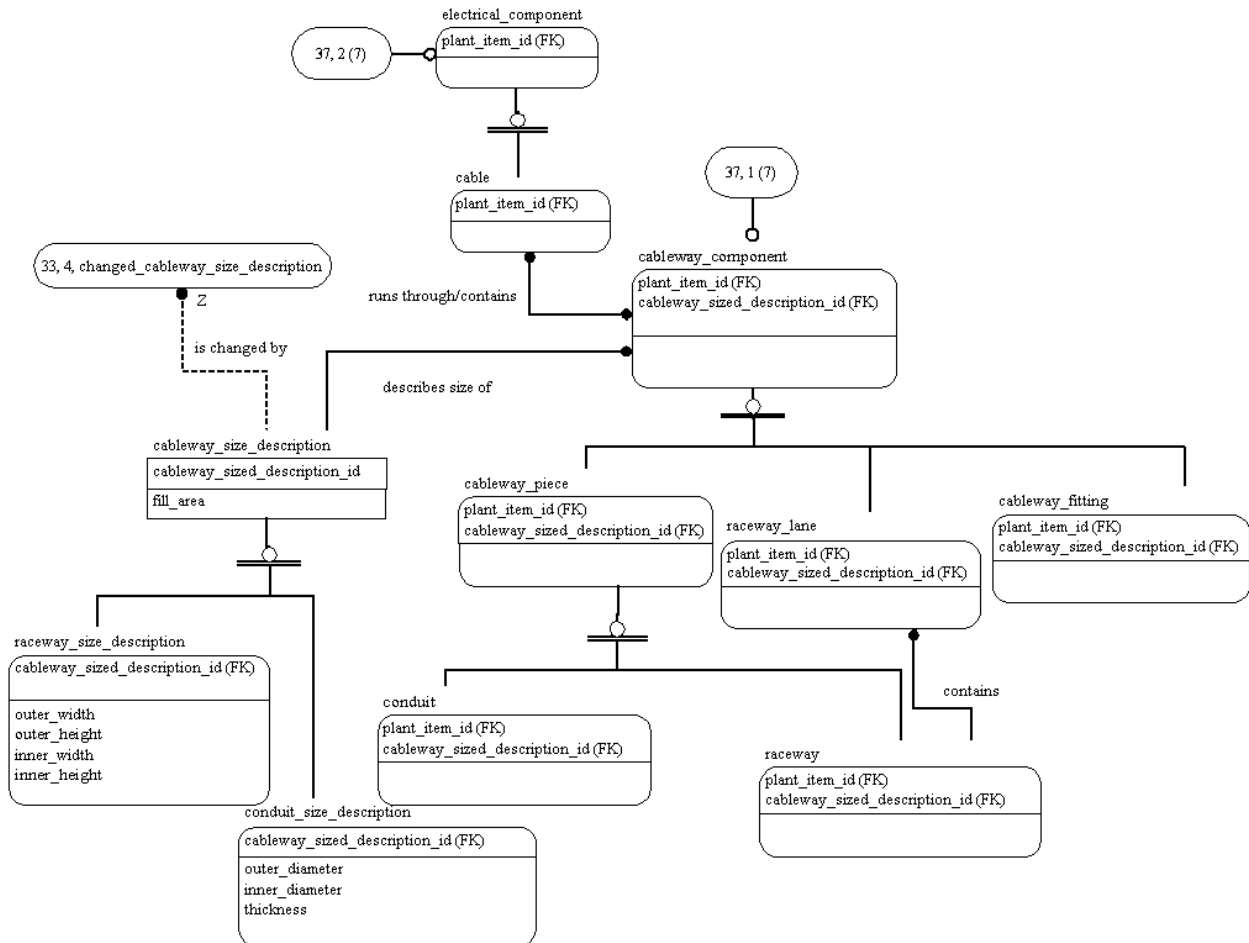


Figure G.38 — ARM diagram 37 of 47

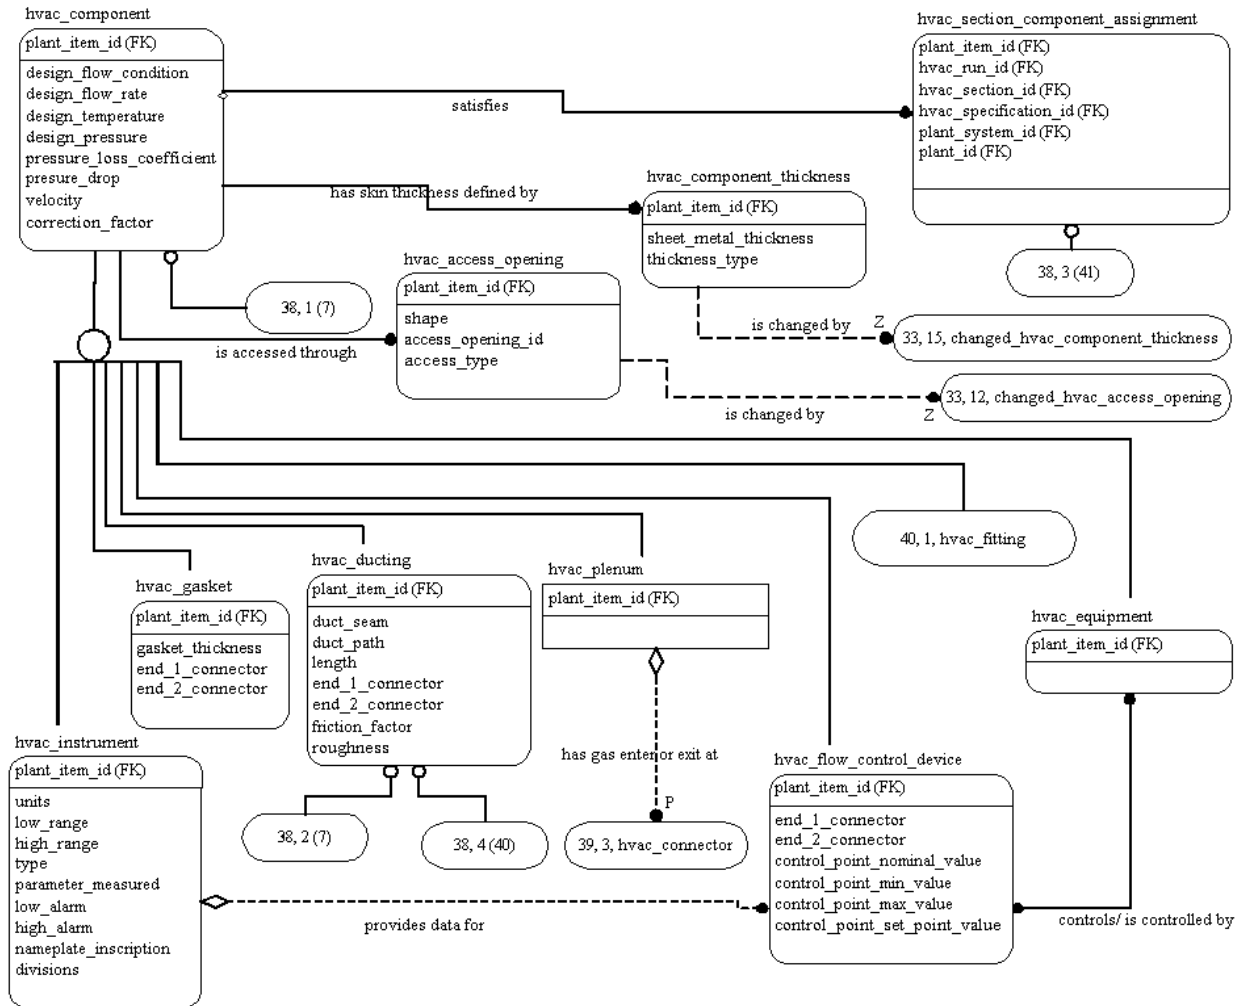


Figure G.39 — ARM diagram 38 of 47

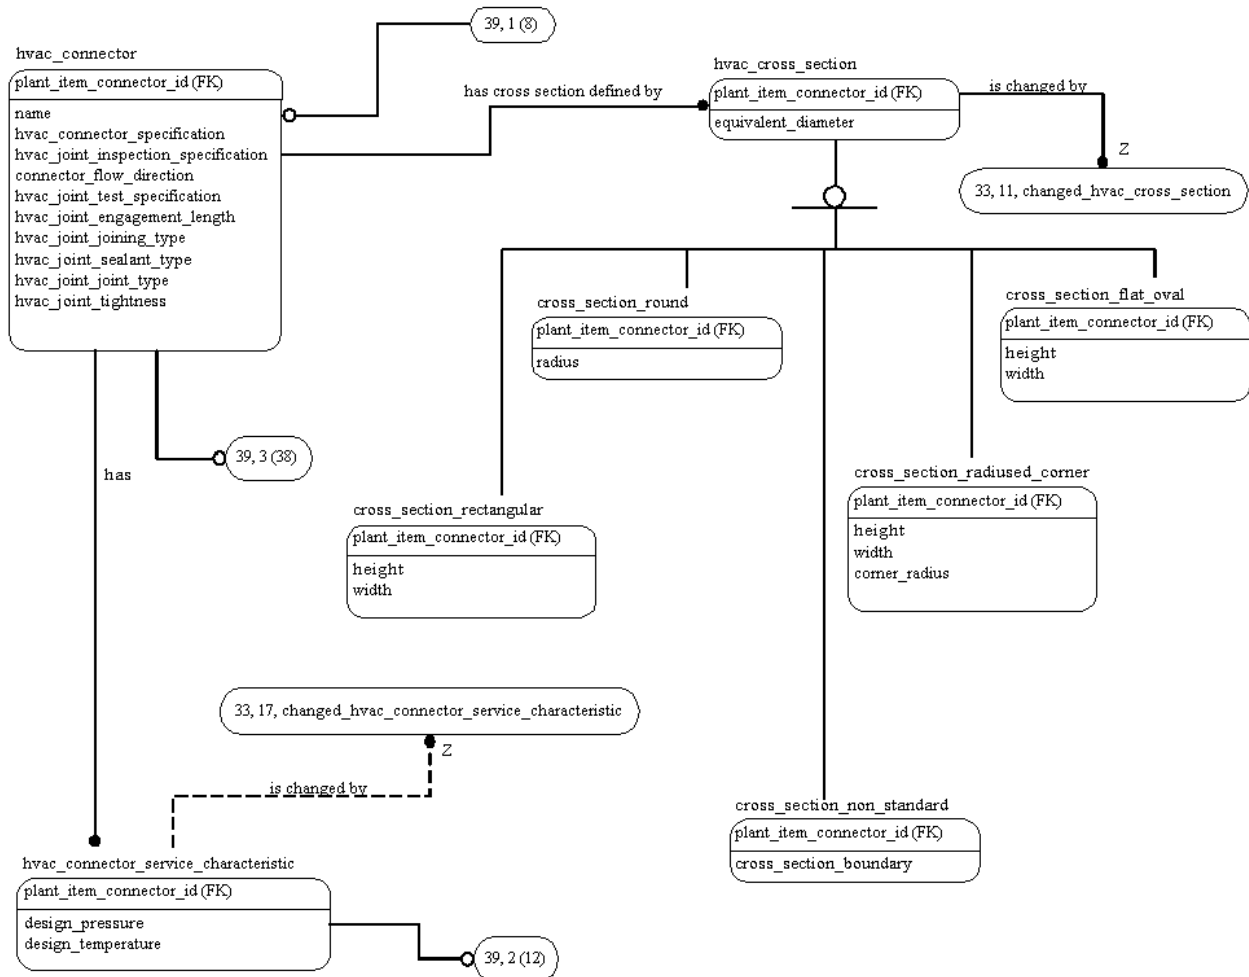


Figure G.40 — ARM diagram 39 of 47

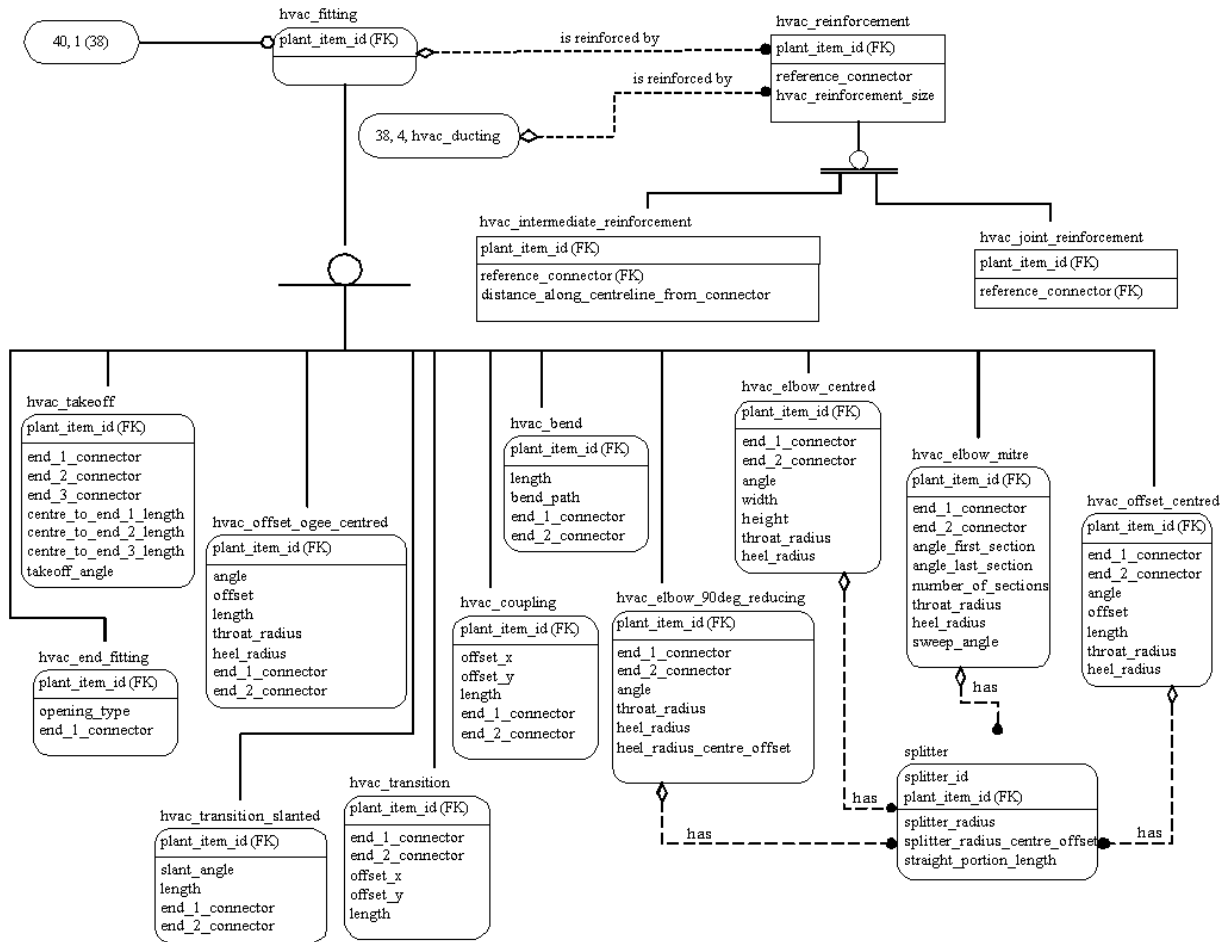


Figure G.41 — ARM diagram 40 of 47

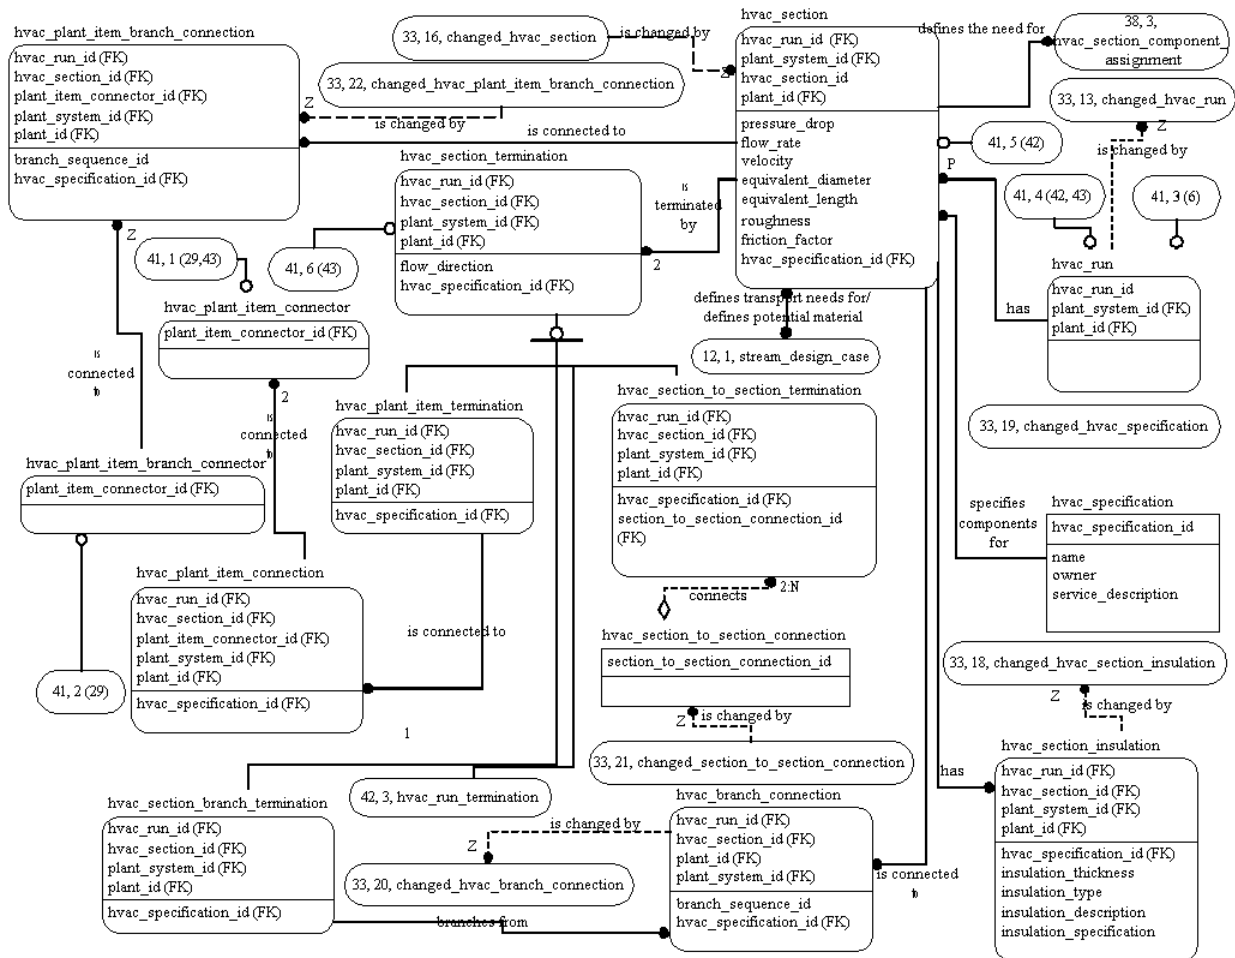


Figure G.42 — ARM diagram 41 of 47

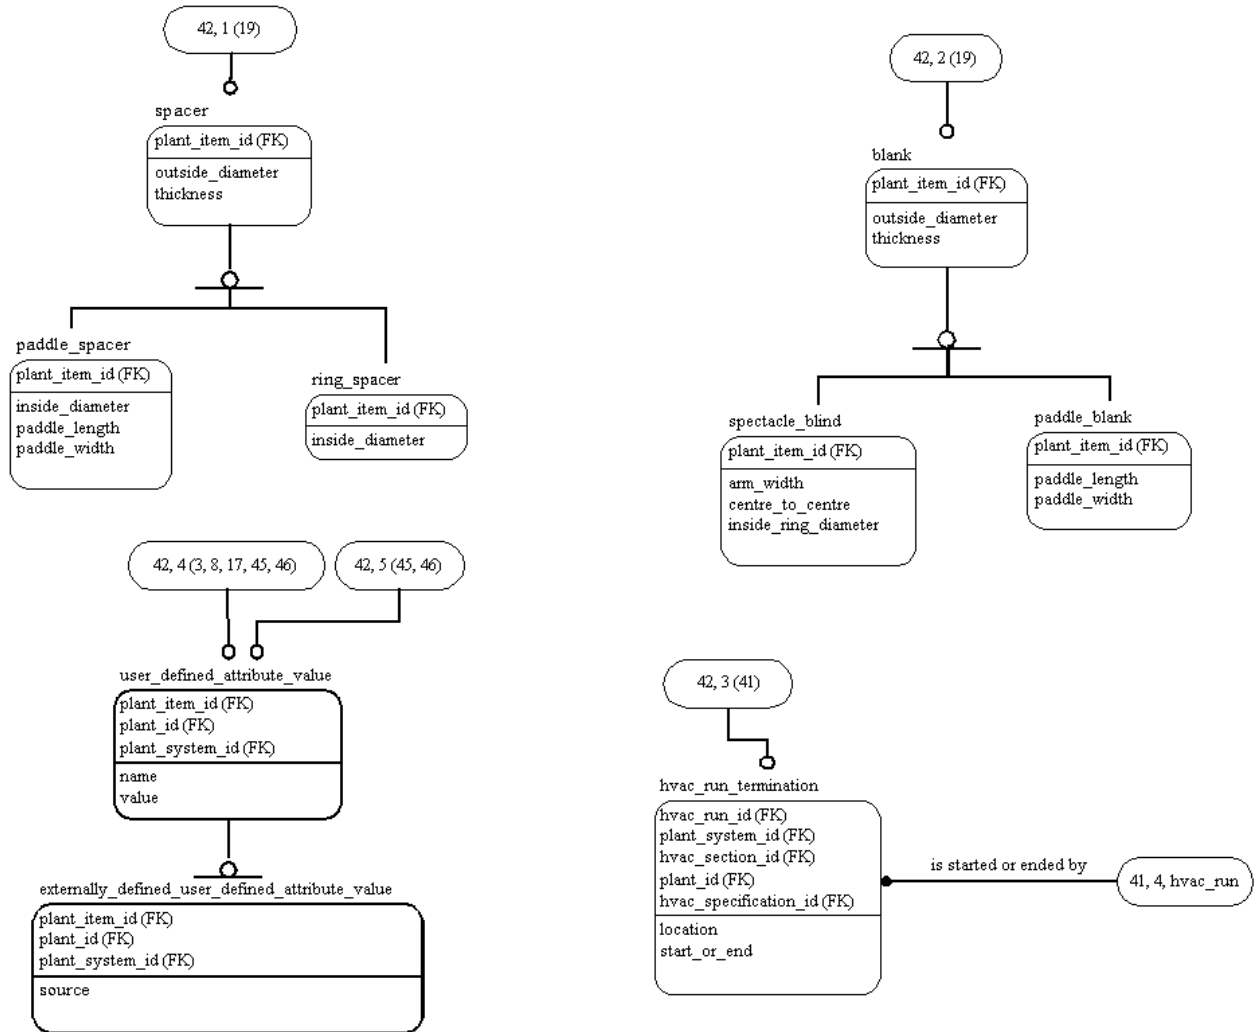


Figure G.43 — ARM diagram 42 of 47

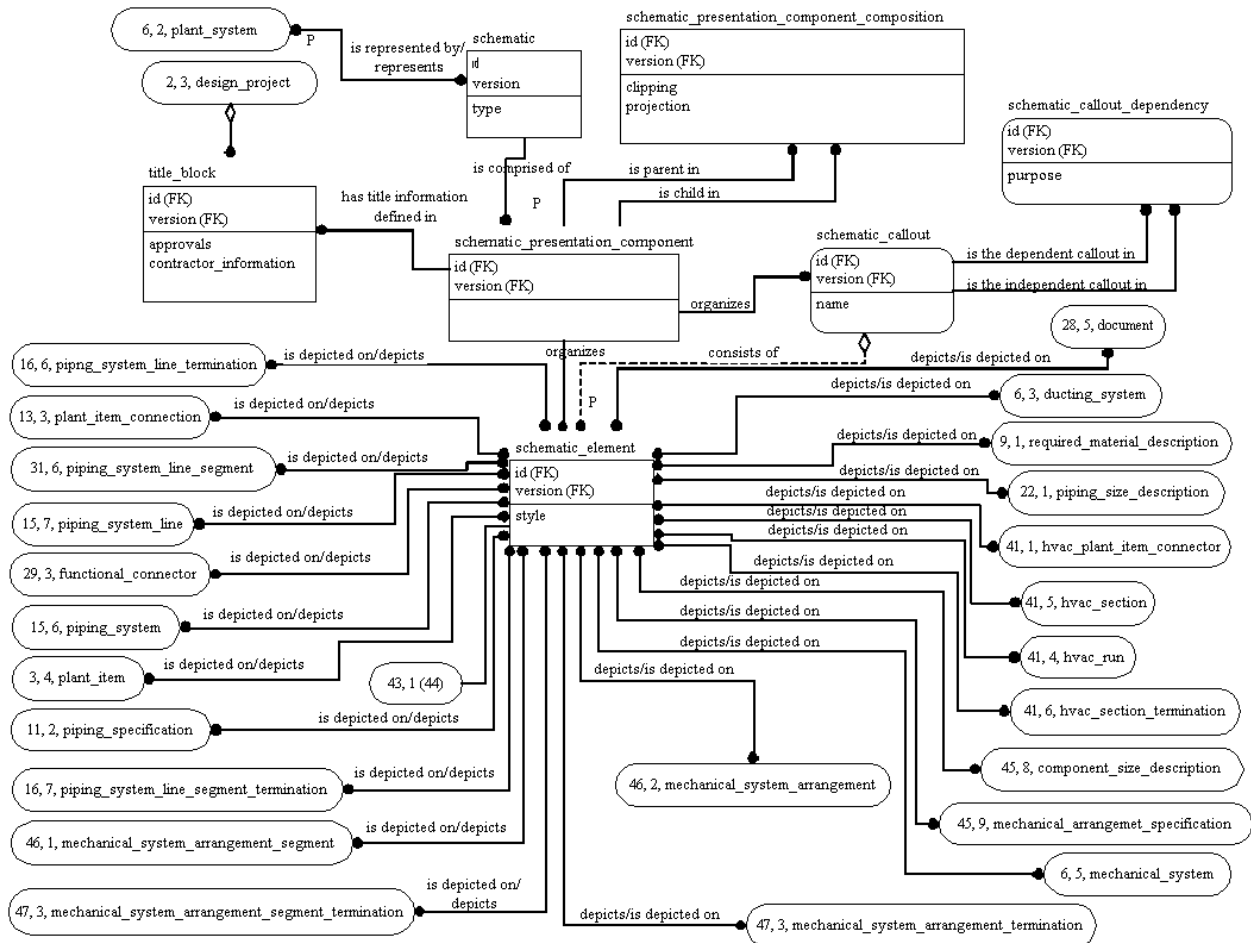


Figure G.44 — ARM diagram 43 of 47

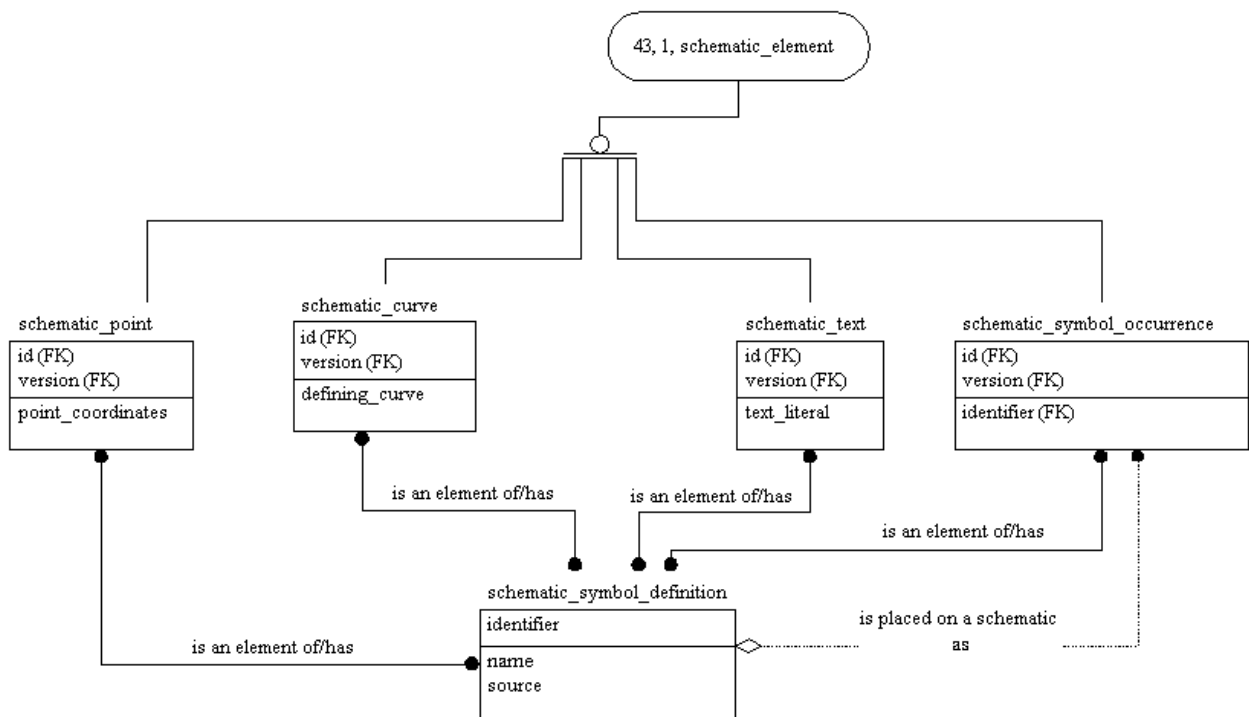


Figure G.45 — ARM diagram 44 of 47

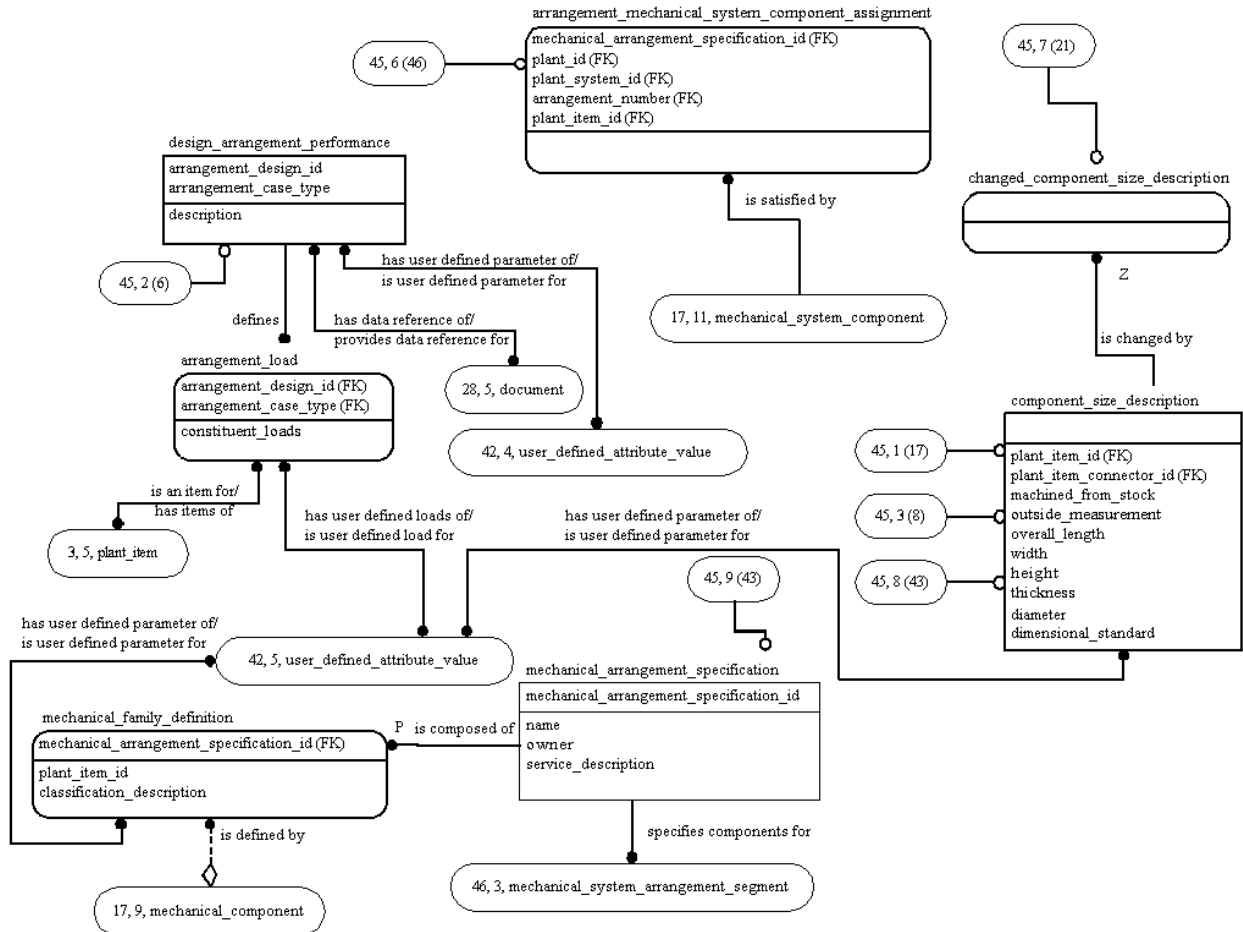


Figure G.46 — ARM diagram 45 of 47

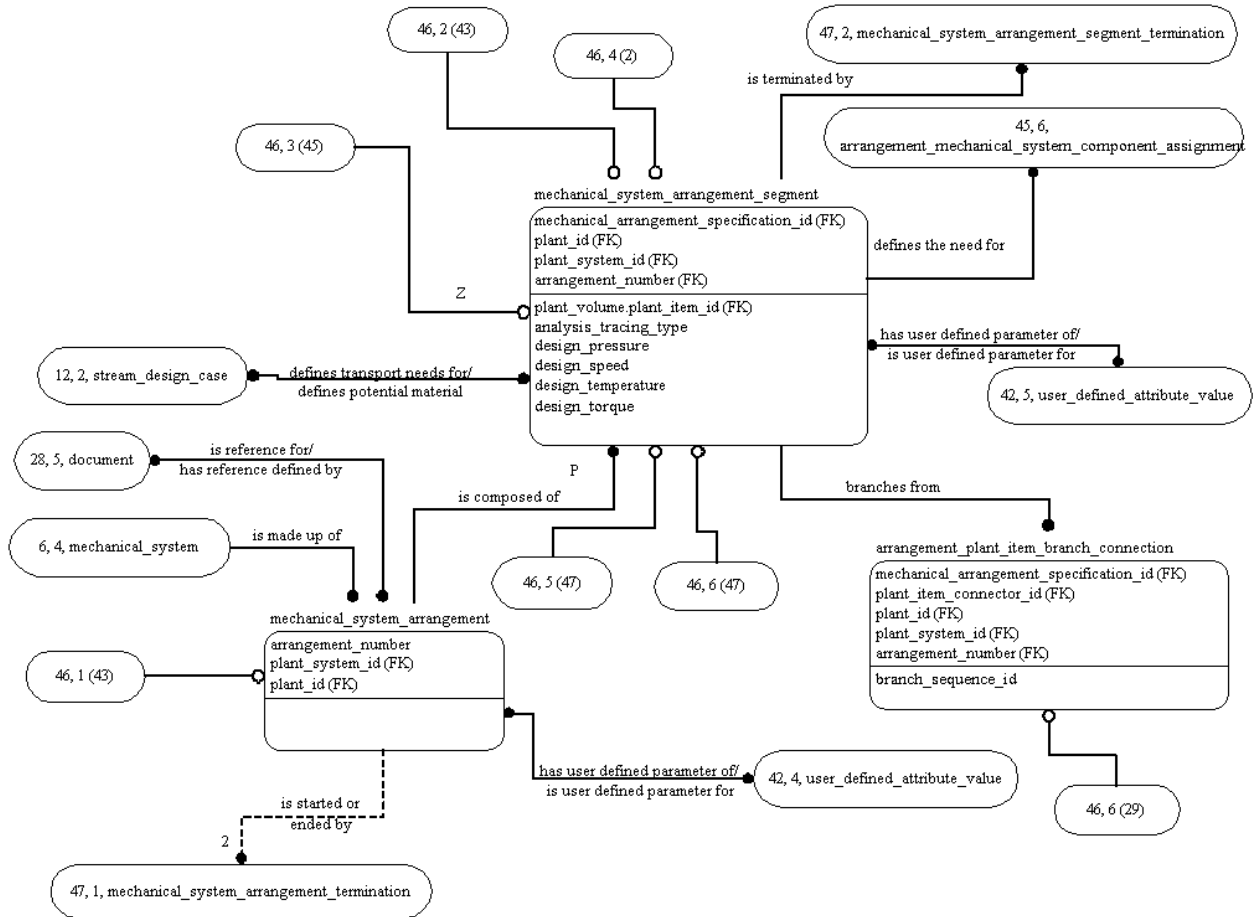


Figure G.47 — ARM diagram 46 of 47

Annex H
(informative)
AIM EXPRESS-G

Figures H.1 through H.55 correspond to the AIM EXPRESS expanded listing given in annex A. The figures use the EXPRESS-G graphical notation for the EXPRESS language. EXPRESS-G is defined in annex A of ISO 10303-11.

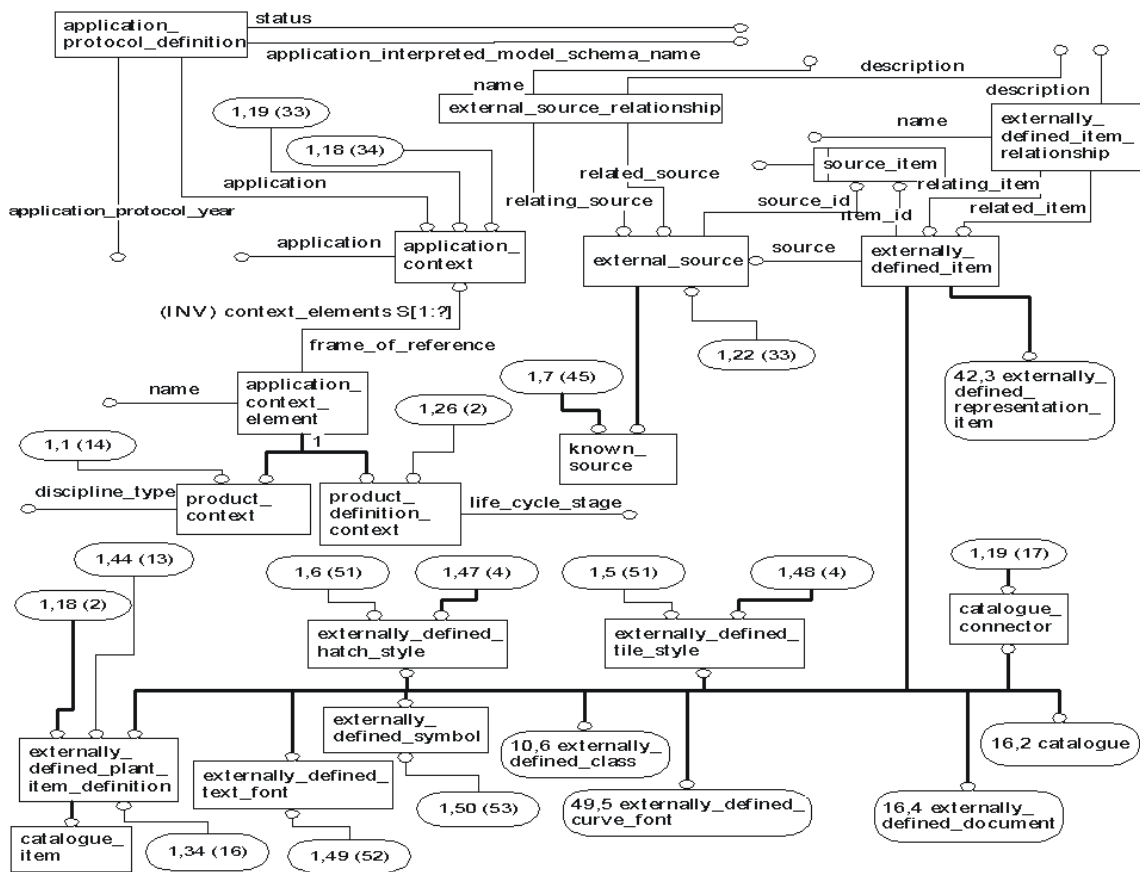


Figure H.1 — AIM EXPRESS-G diagram 1 of 55

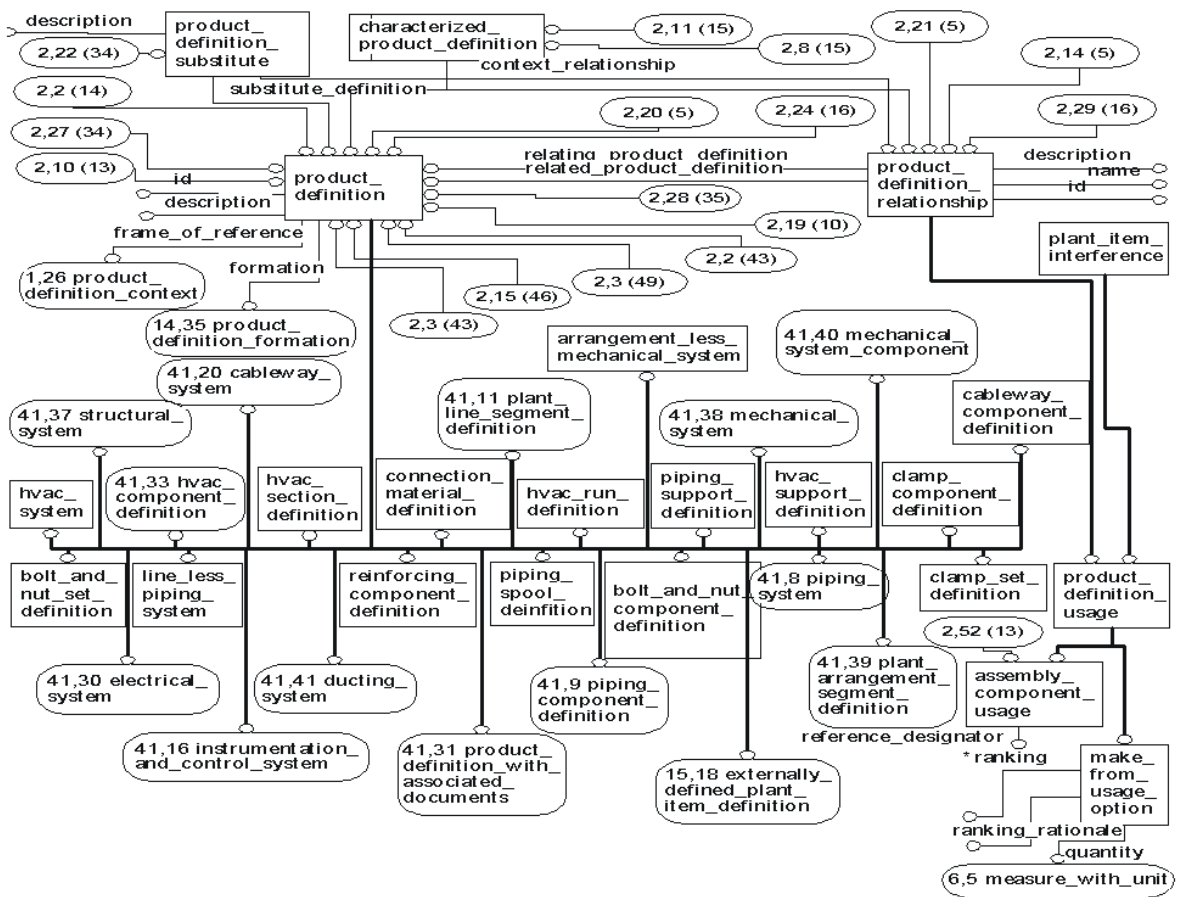


Figure H.2 — AIM EXPRESS-G diagram 2 of 55

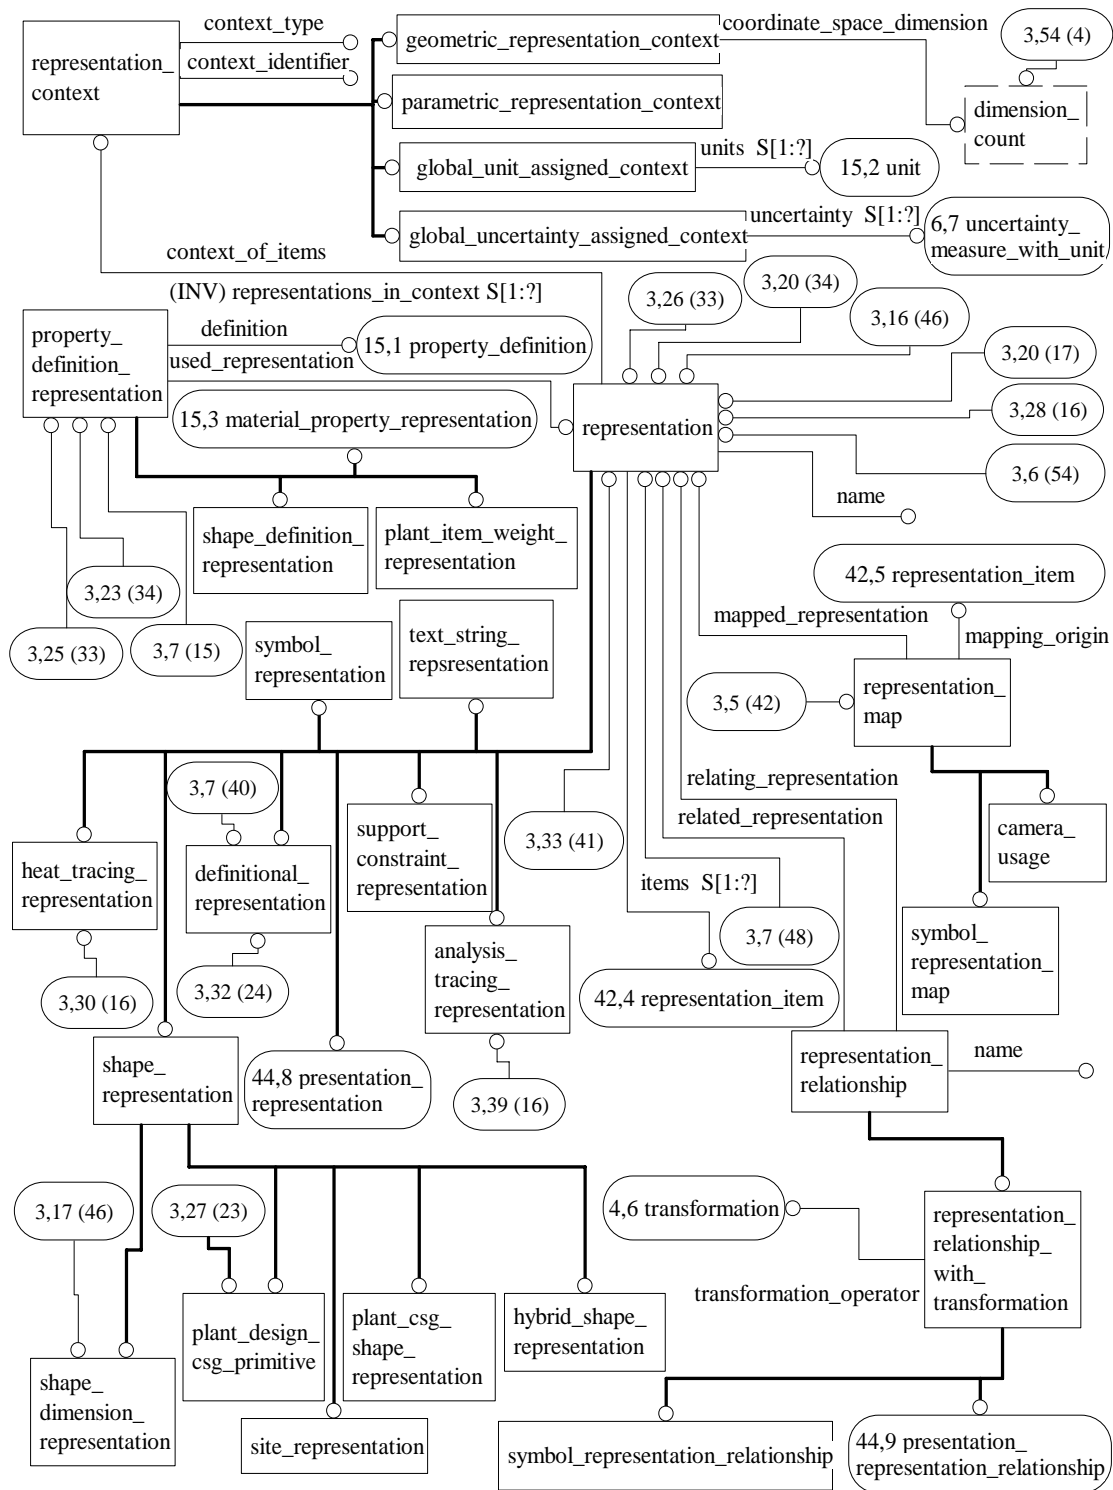


Figure H.3 — AIM EXPRESS-G diagram 3 of 55

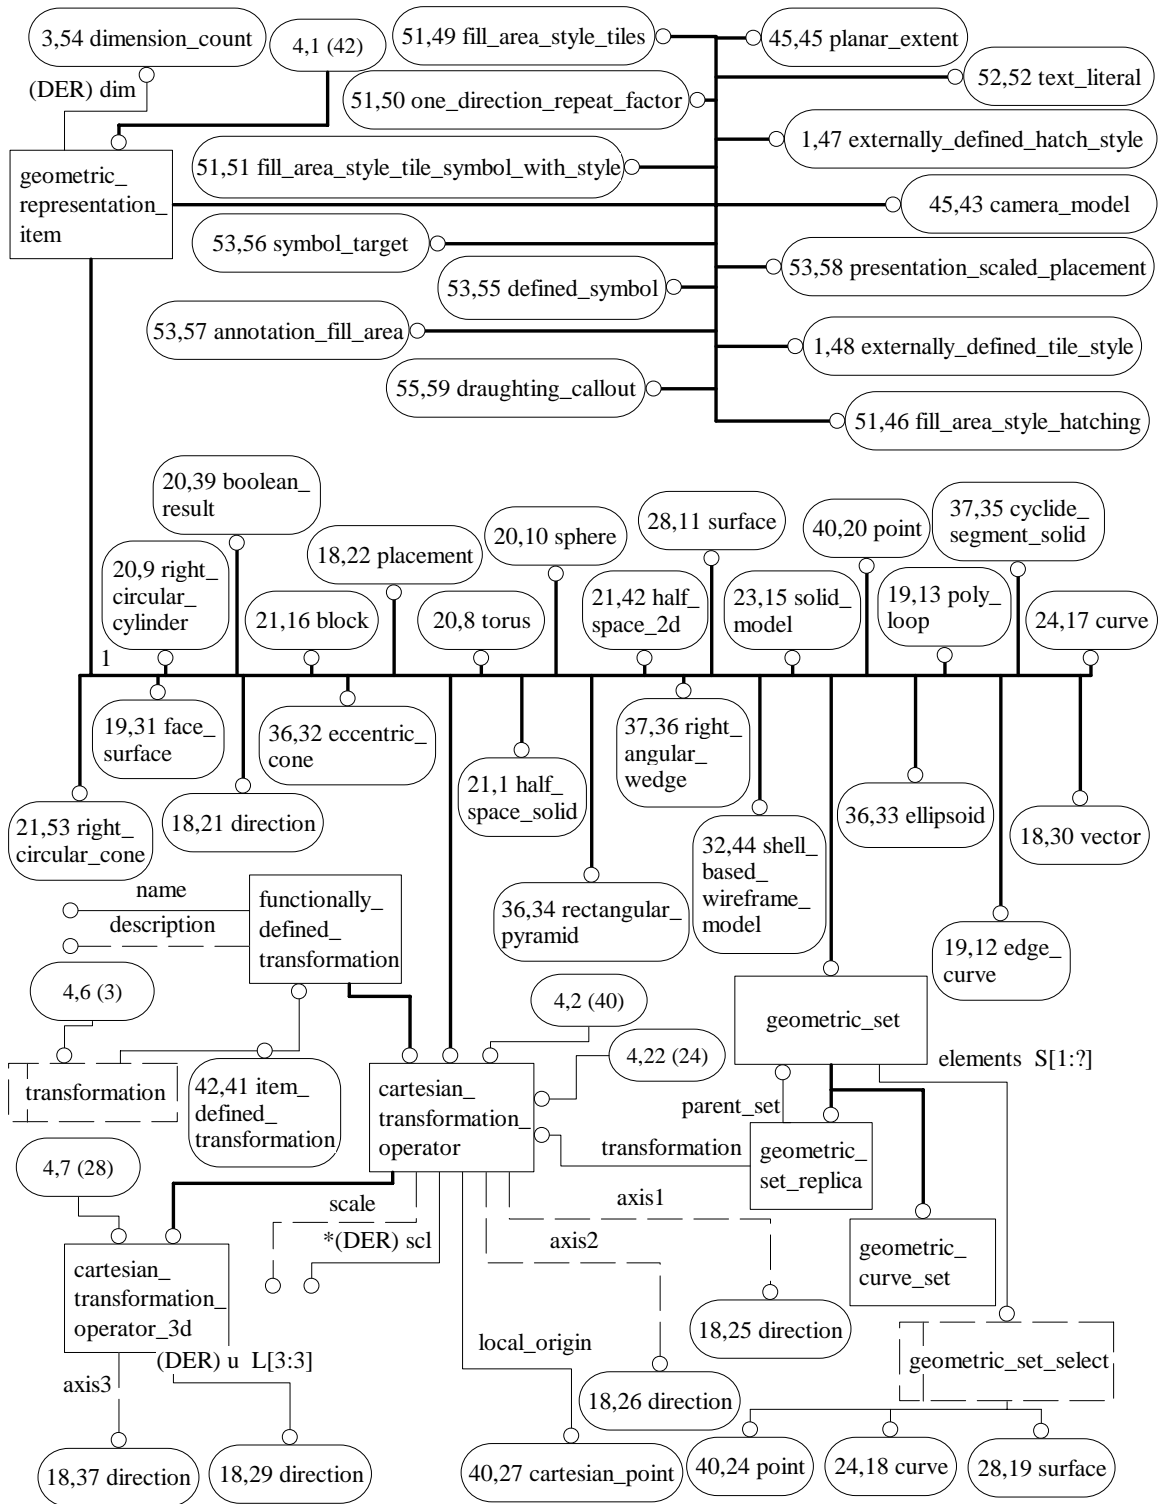


Figure H.4 — AIM EXPRESS-G diagram 4 of 55

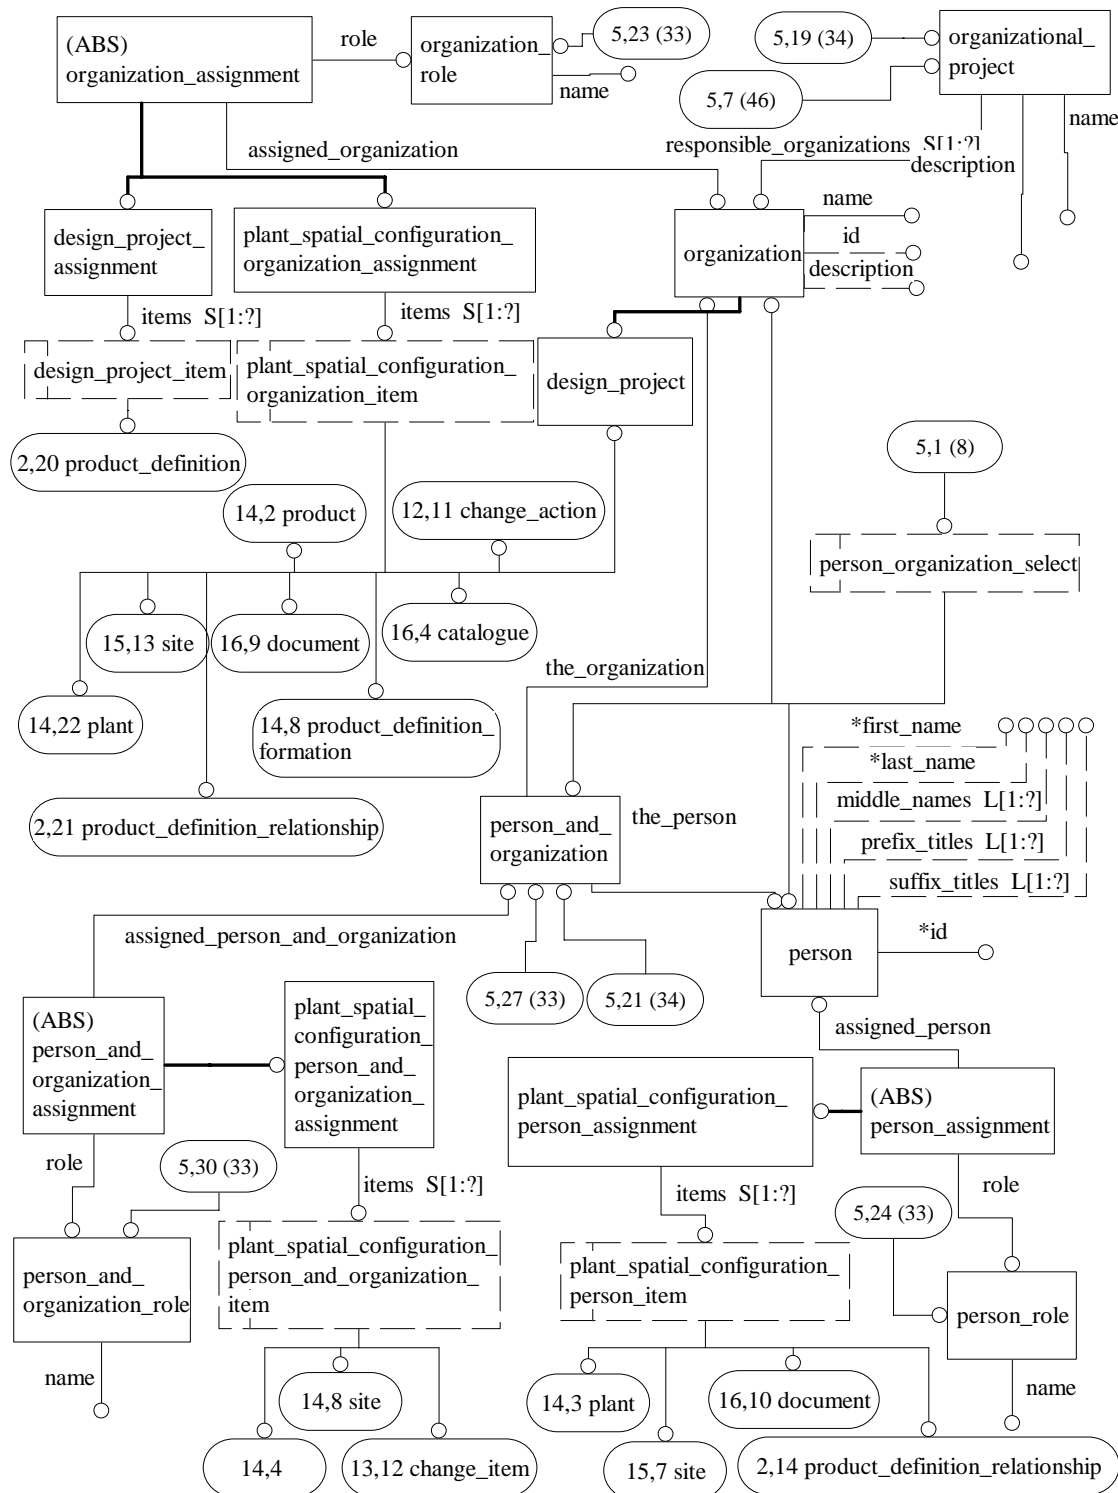


Figure H.5 — AIM EXPRESS-G diagram 5 of 55

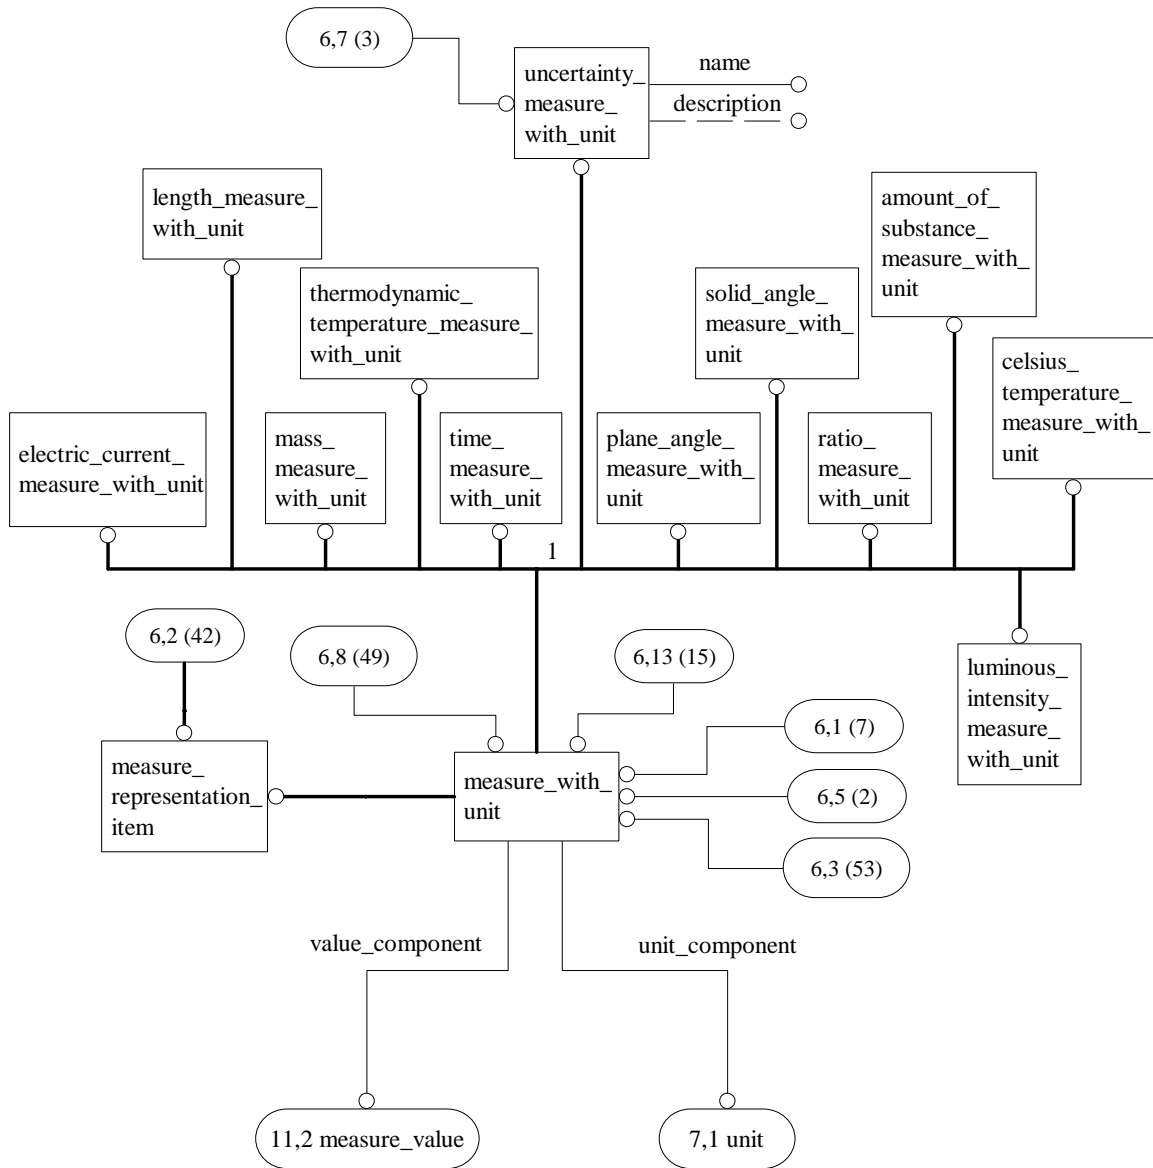


Figure H.6 — AIM EXPRESS-G diagram 6 of 55

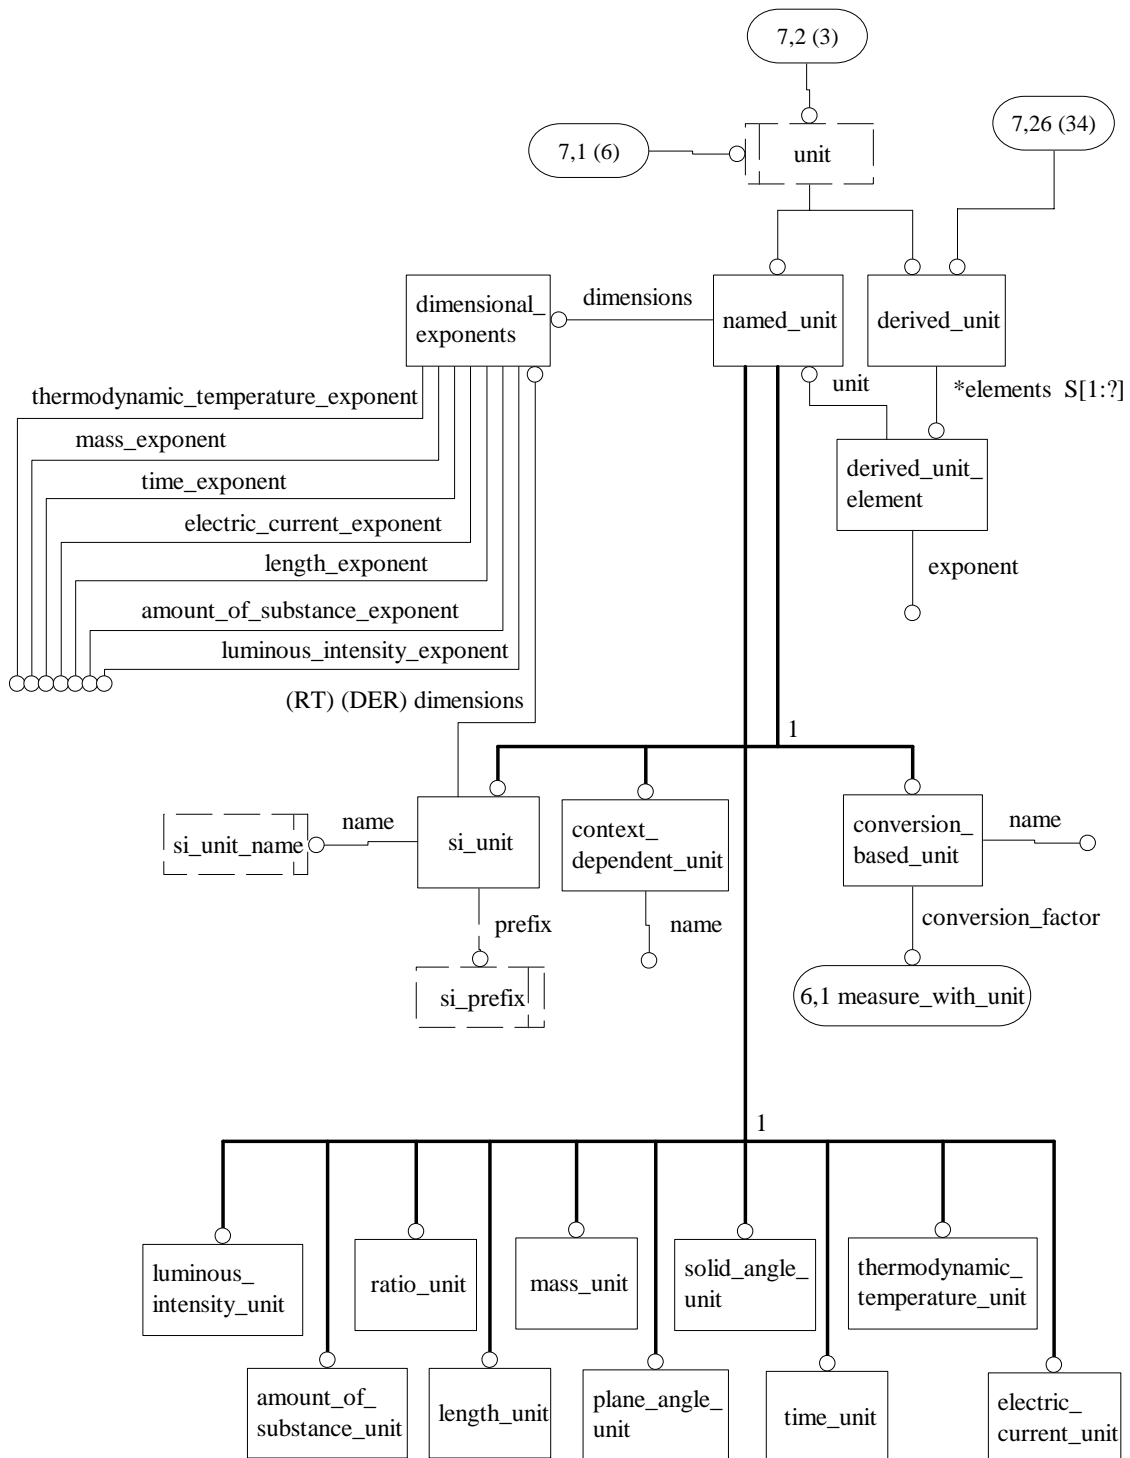


Figure H.7 — AIM EXPRESS-G diagram 7 of 55

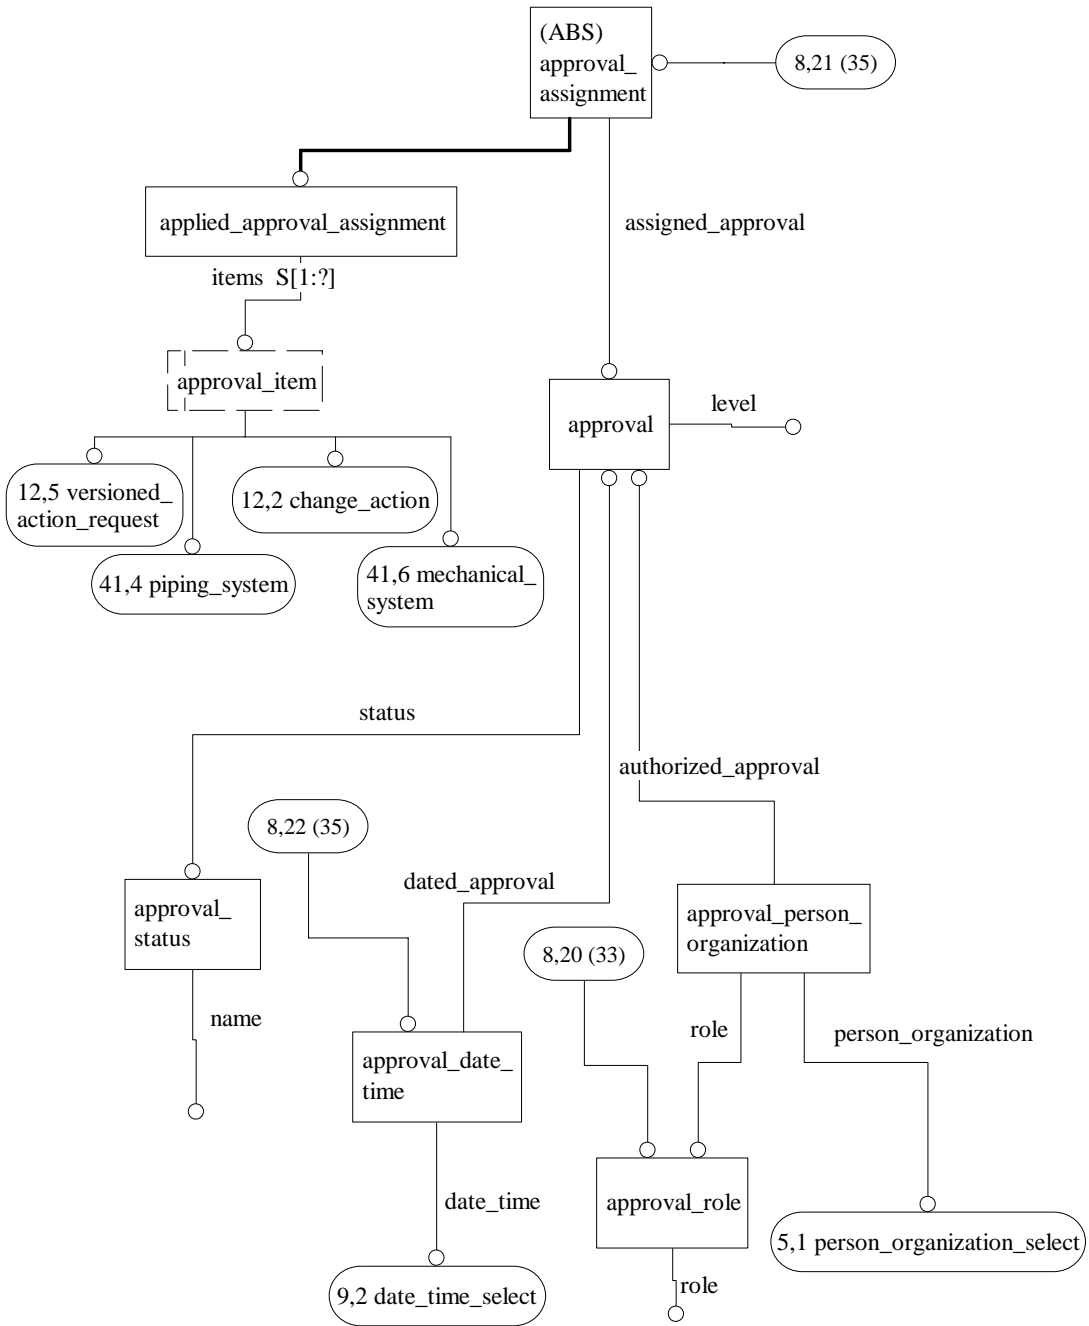


Figure H.8 — AIM EXPRESS-G diagram 8 of 55

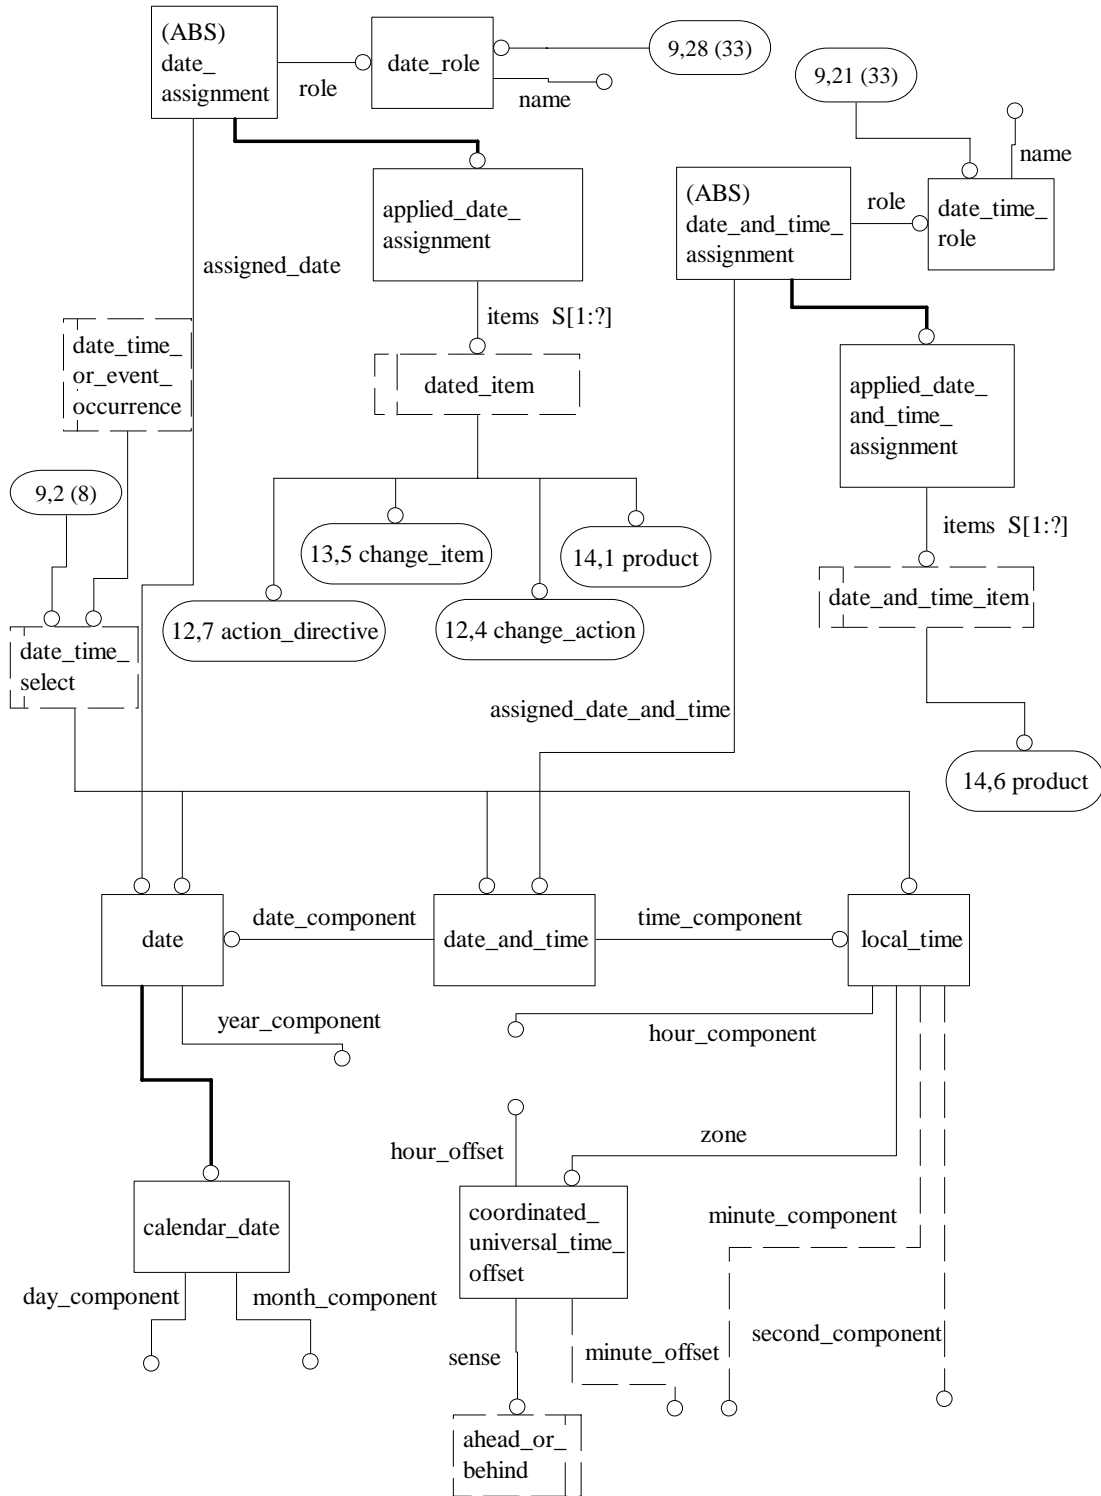


Figure H.9 — AIM EXPRESS-G diagram 9 of 55

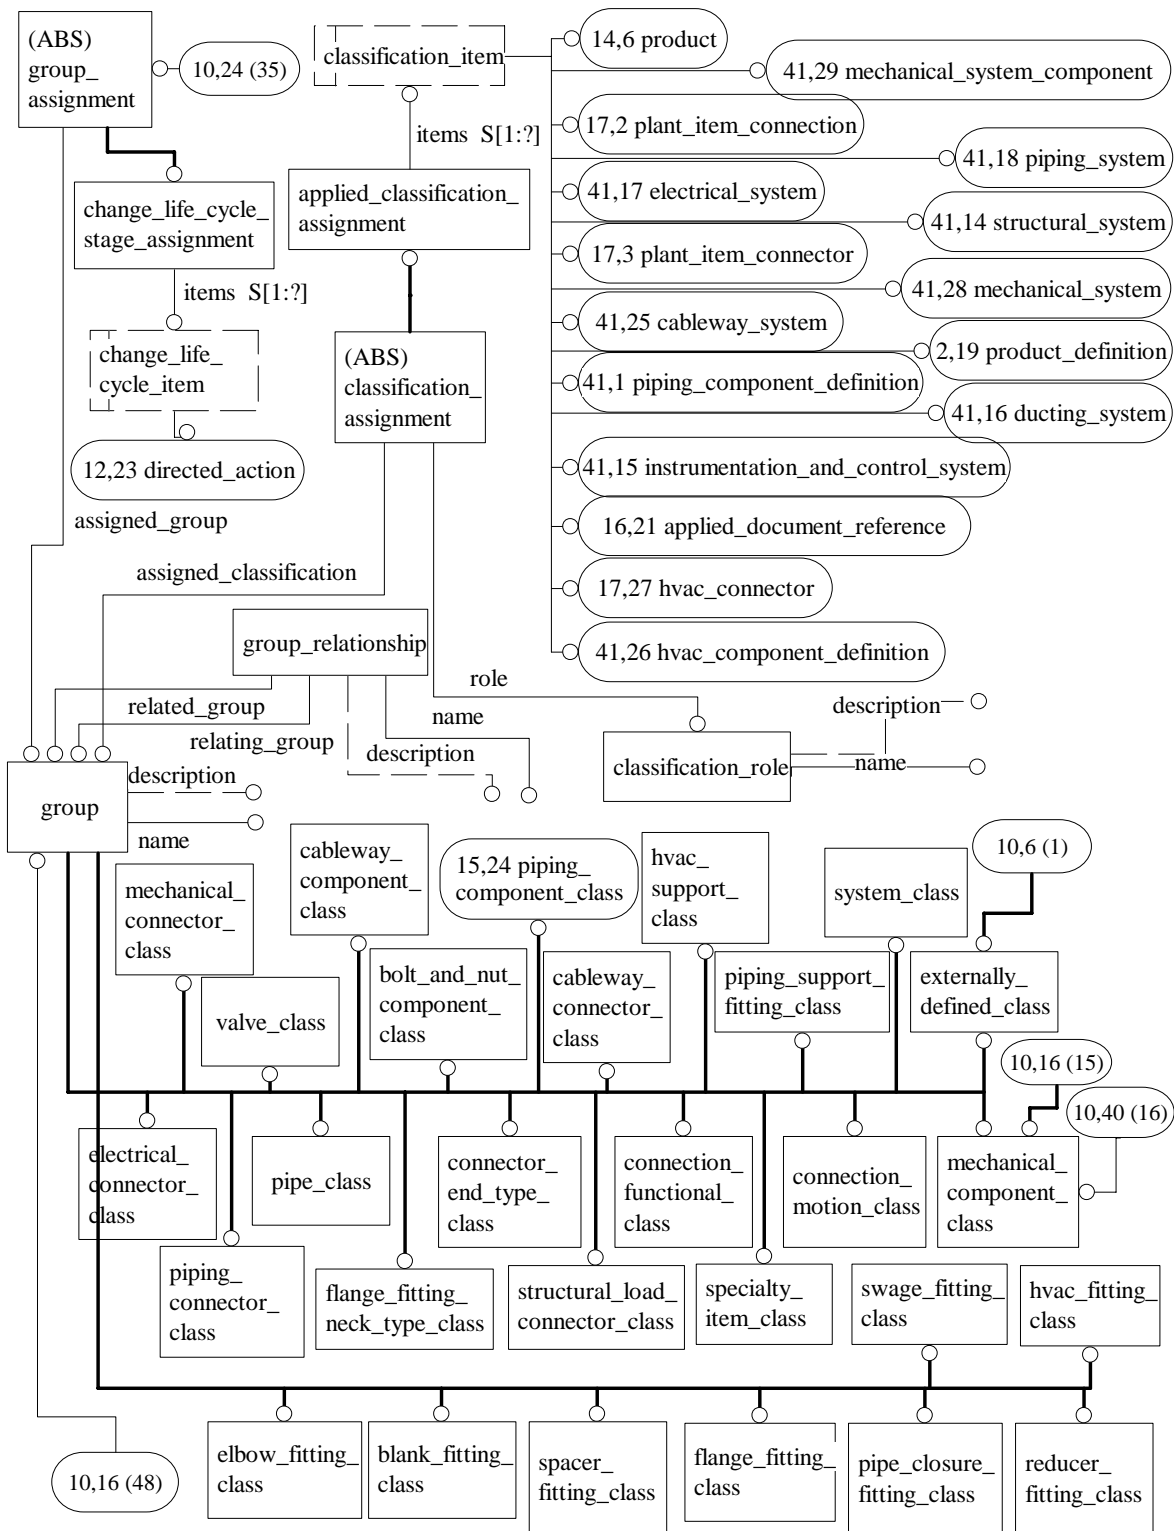


Figure H.10 — AIM EXPRESS-G diagram 10 of 55

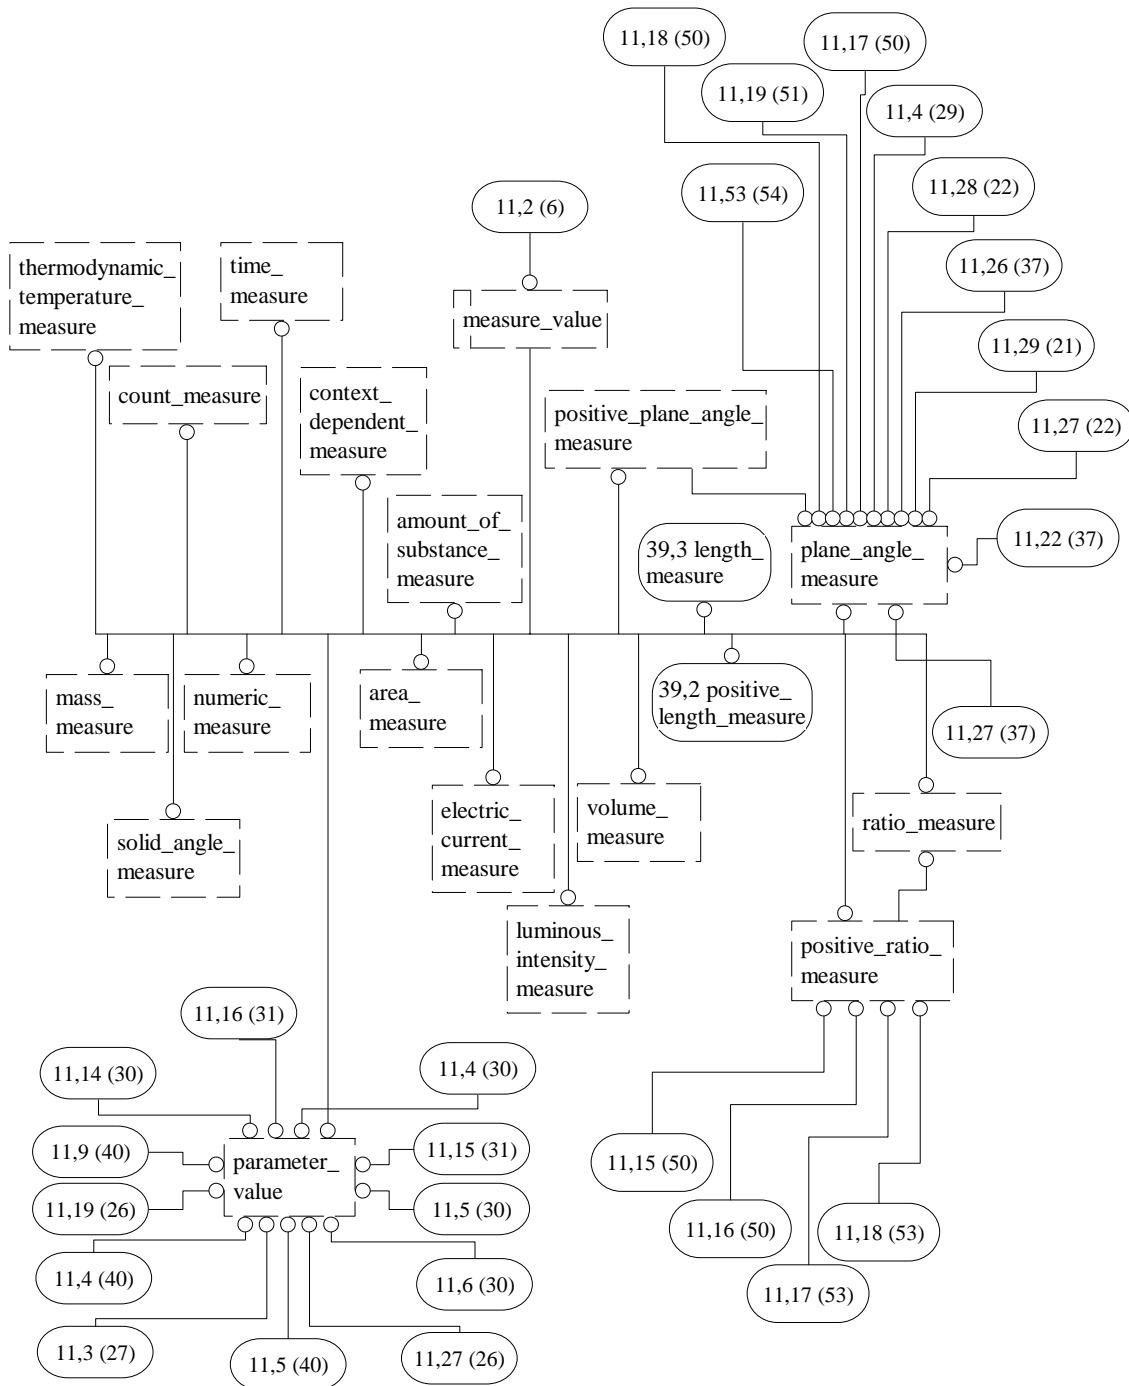


Figure H.11 — AIM EXPRESS-G diagram 11 of 55

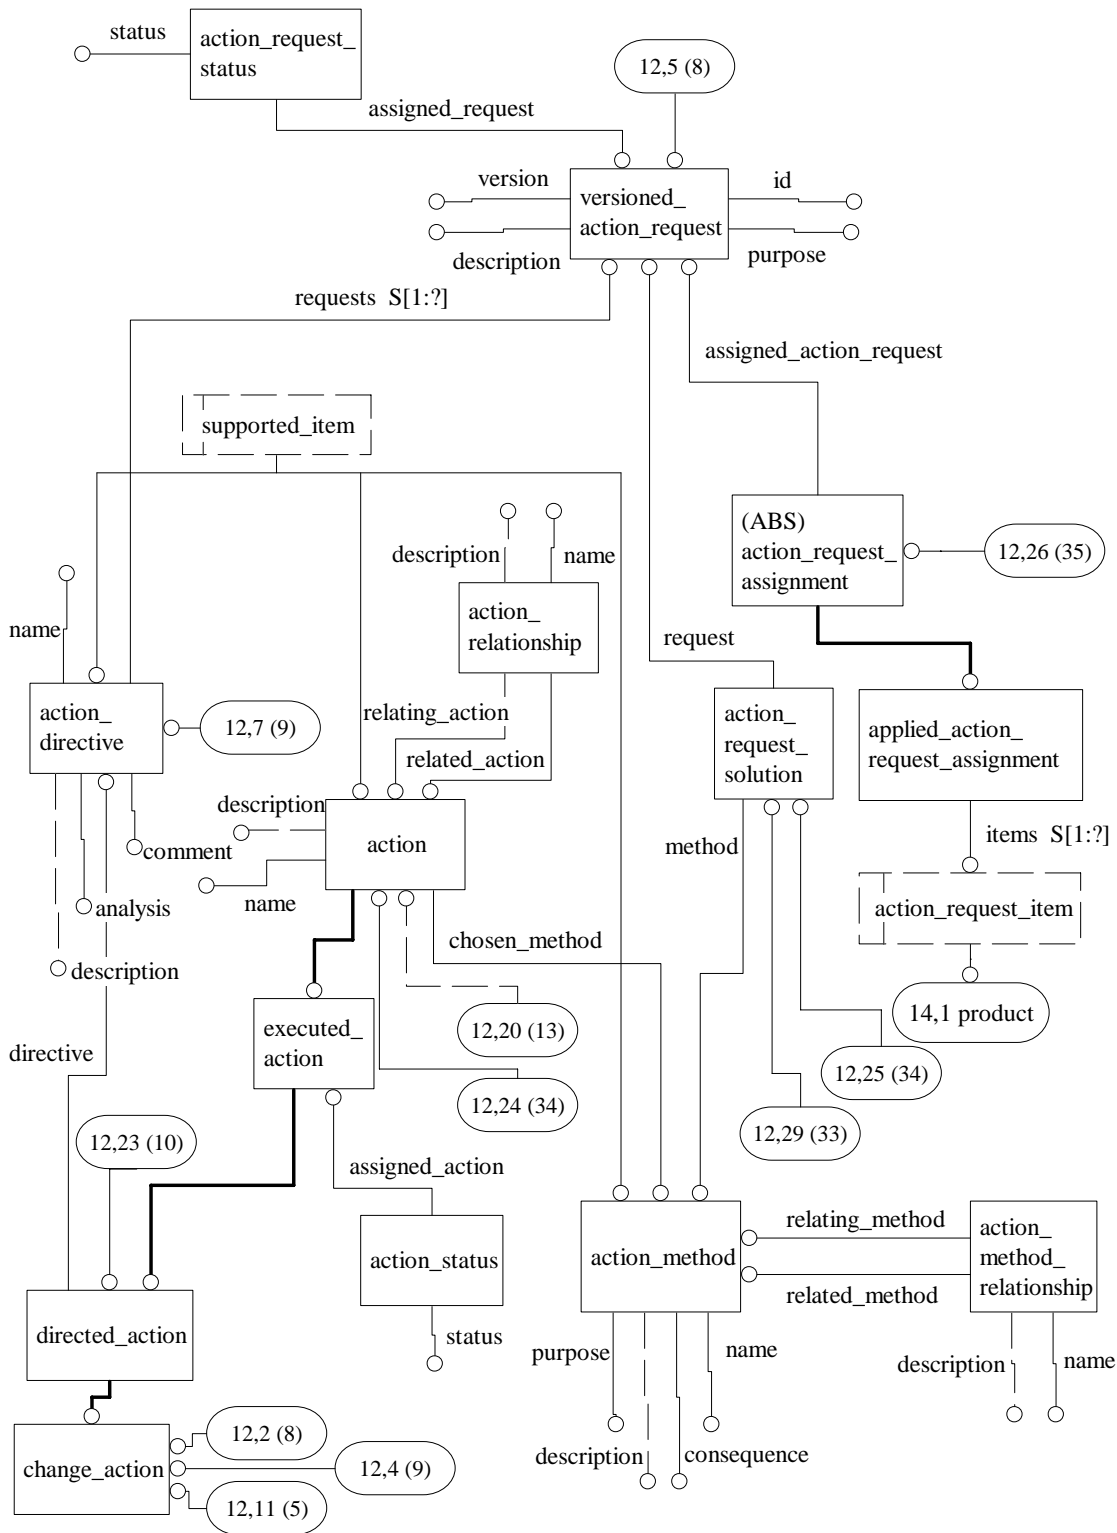


Figure H.12 — AIM EXPRESS-G diagram 12 of 55

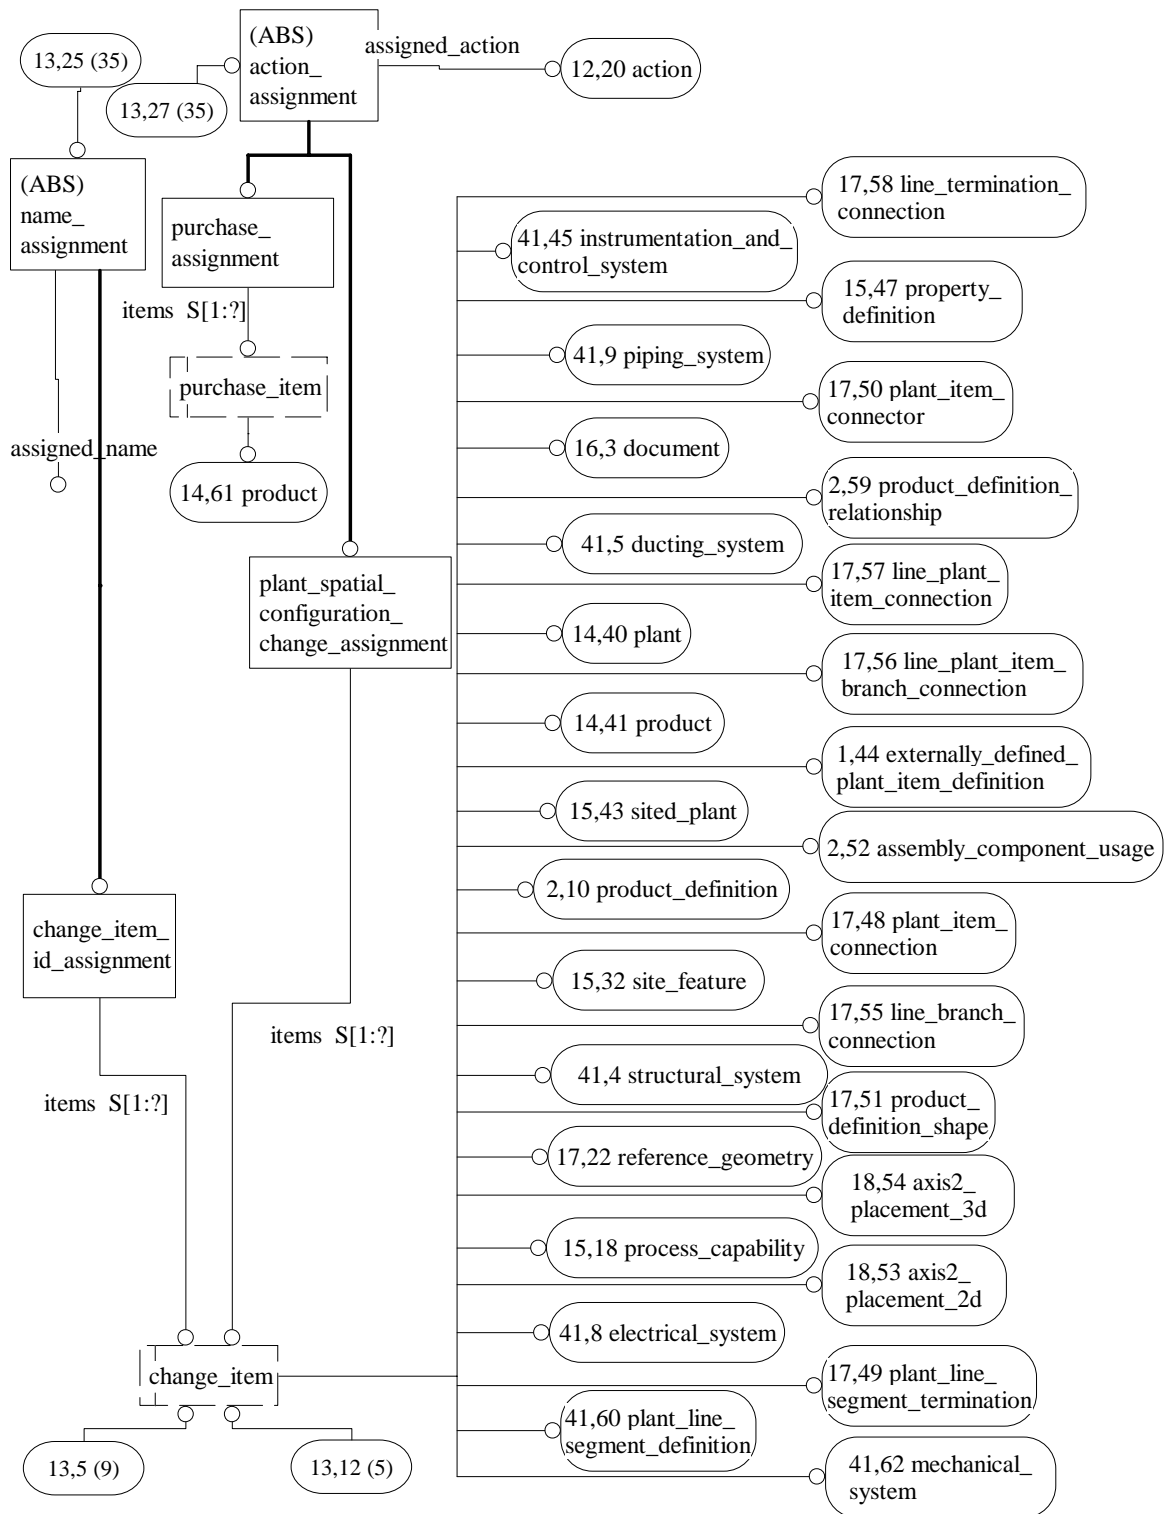


Figure H.13 — AIM EXPRESS-G diagram 13 of 55

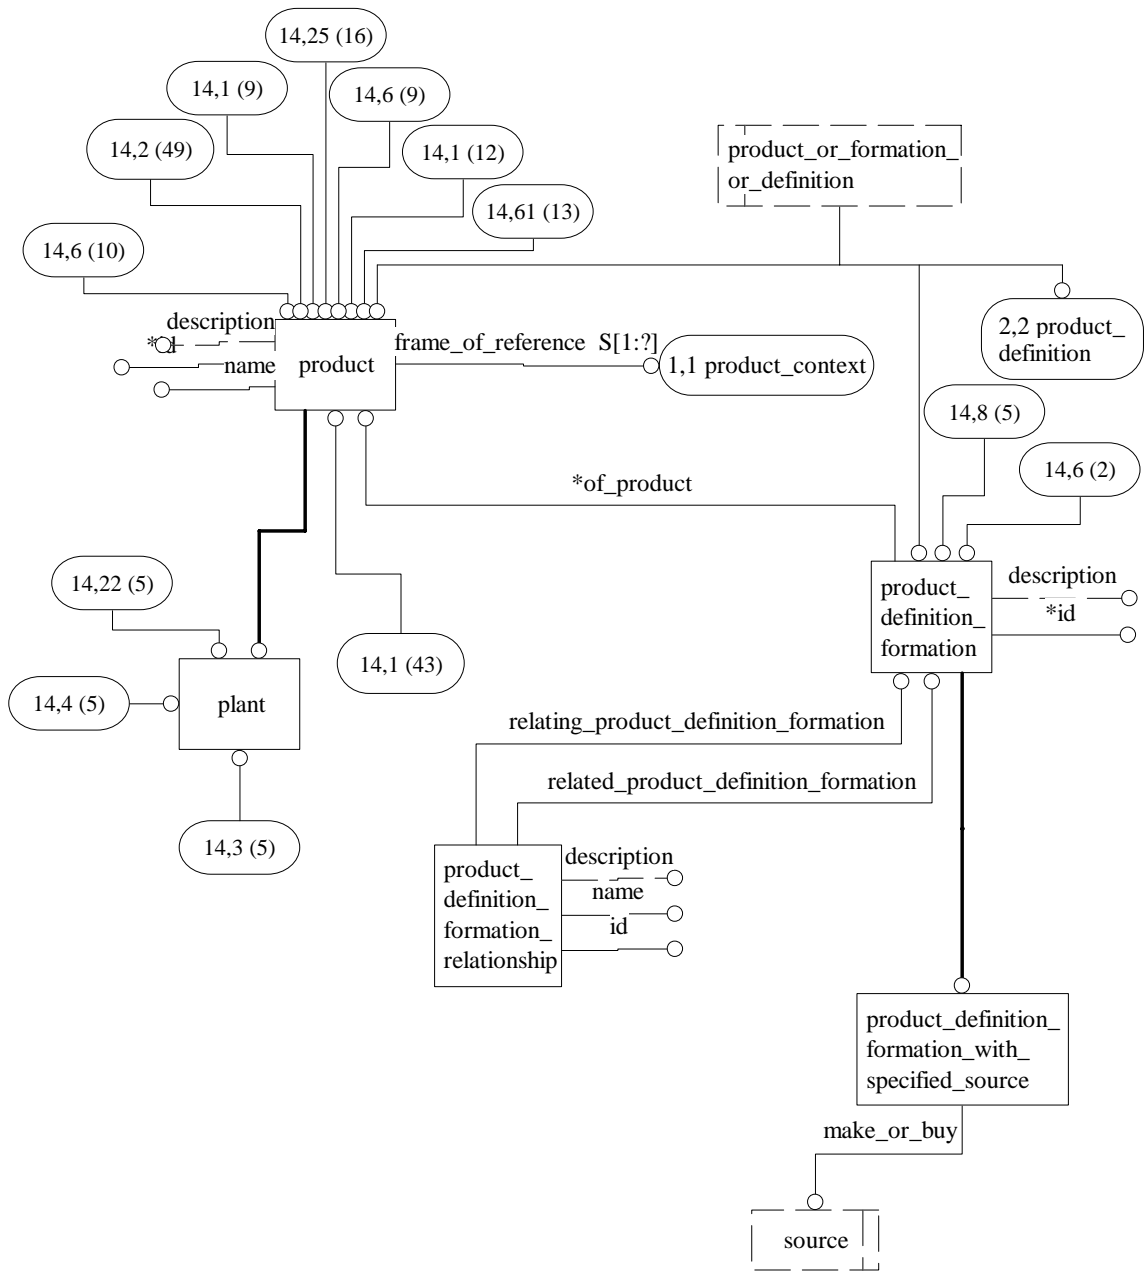


Figure H.14 — AIM EXPRESS-G diagram 14 of 55

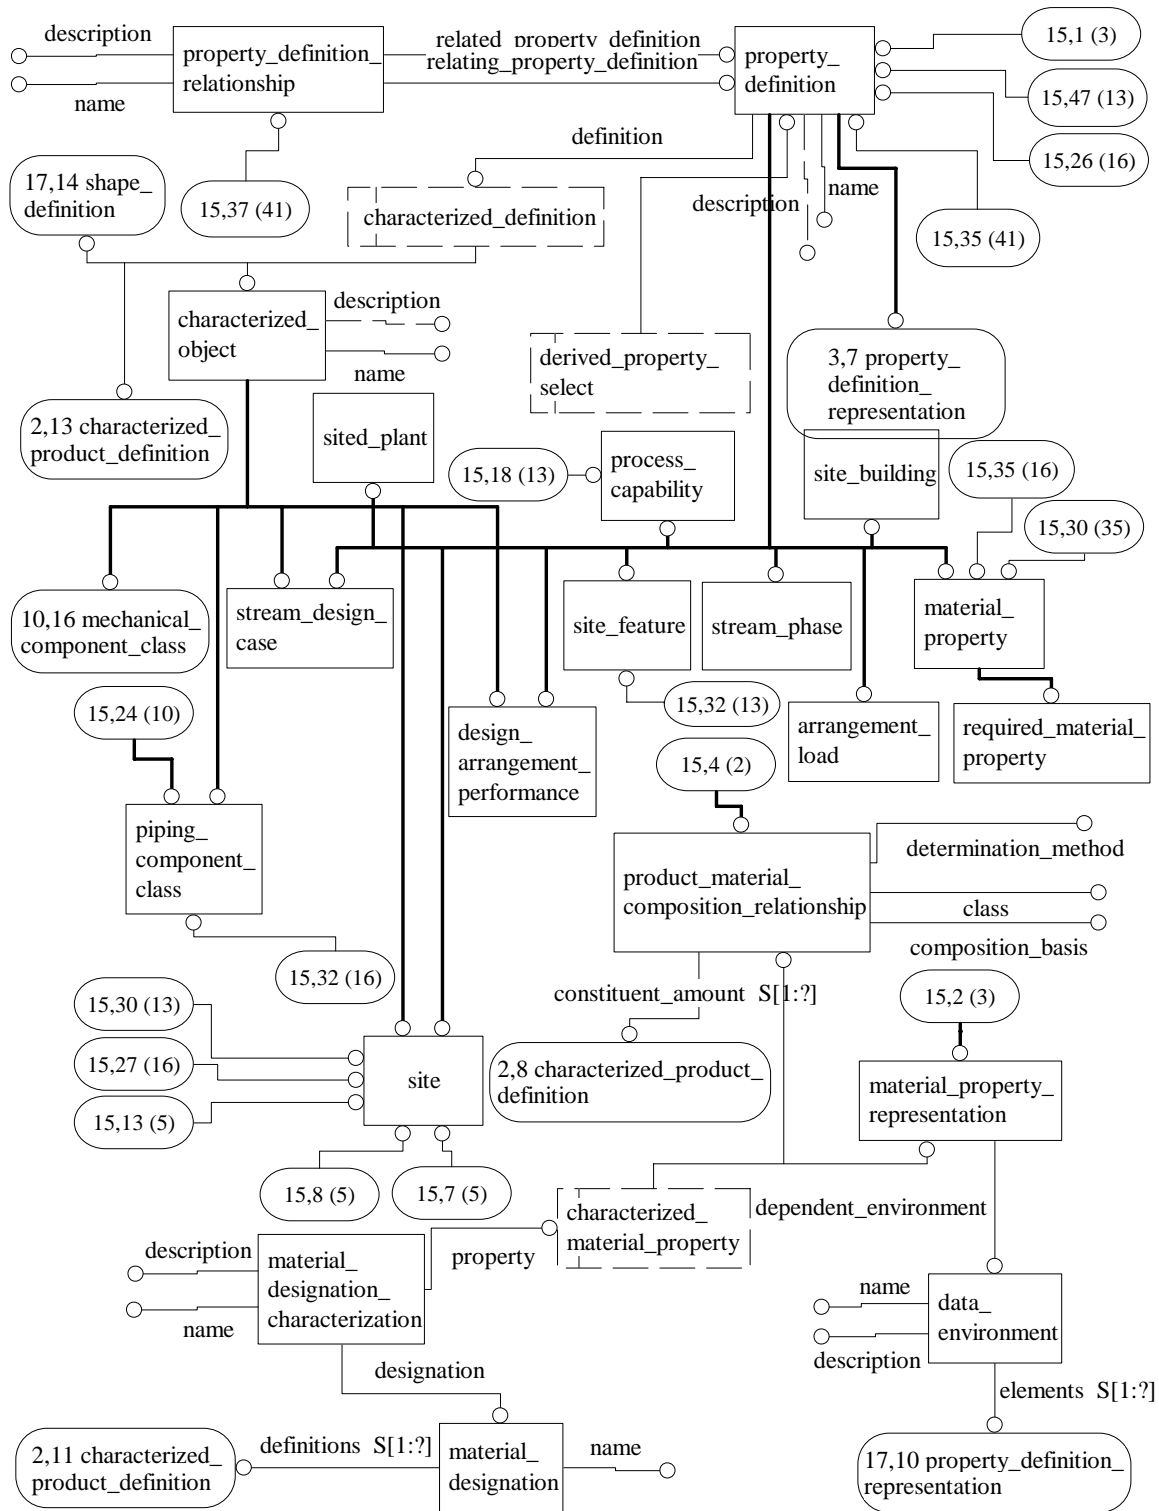


Figure H.15 — AIM EXPRESS-G diagram 15 of 55

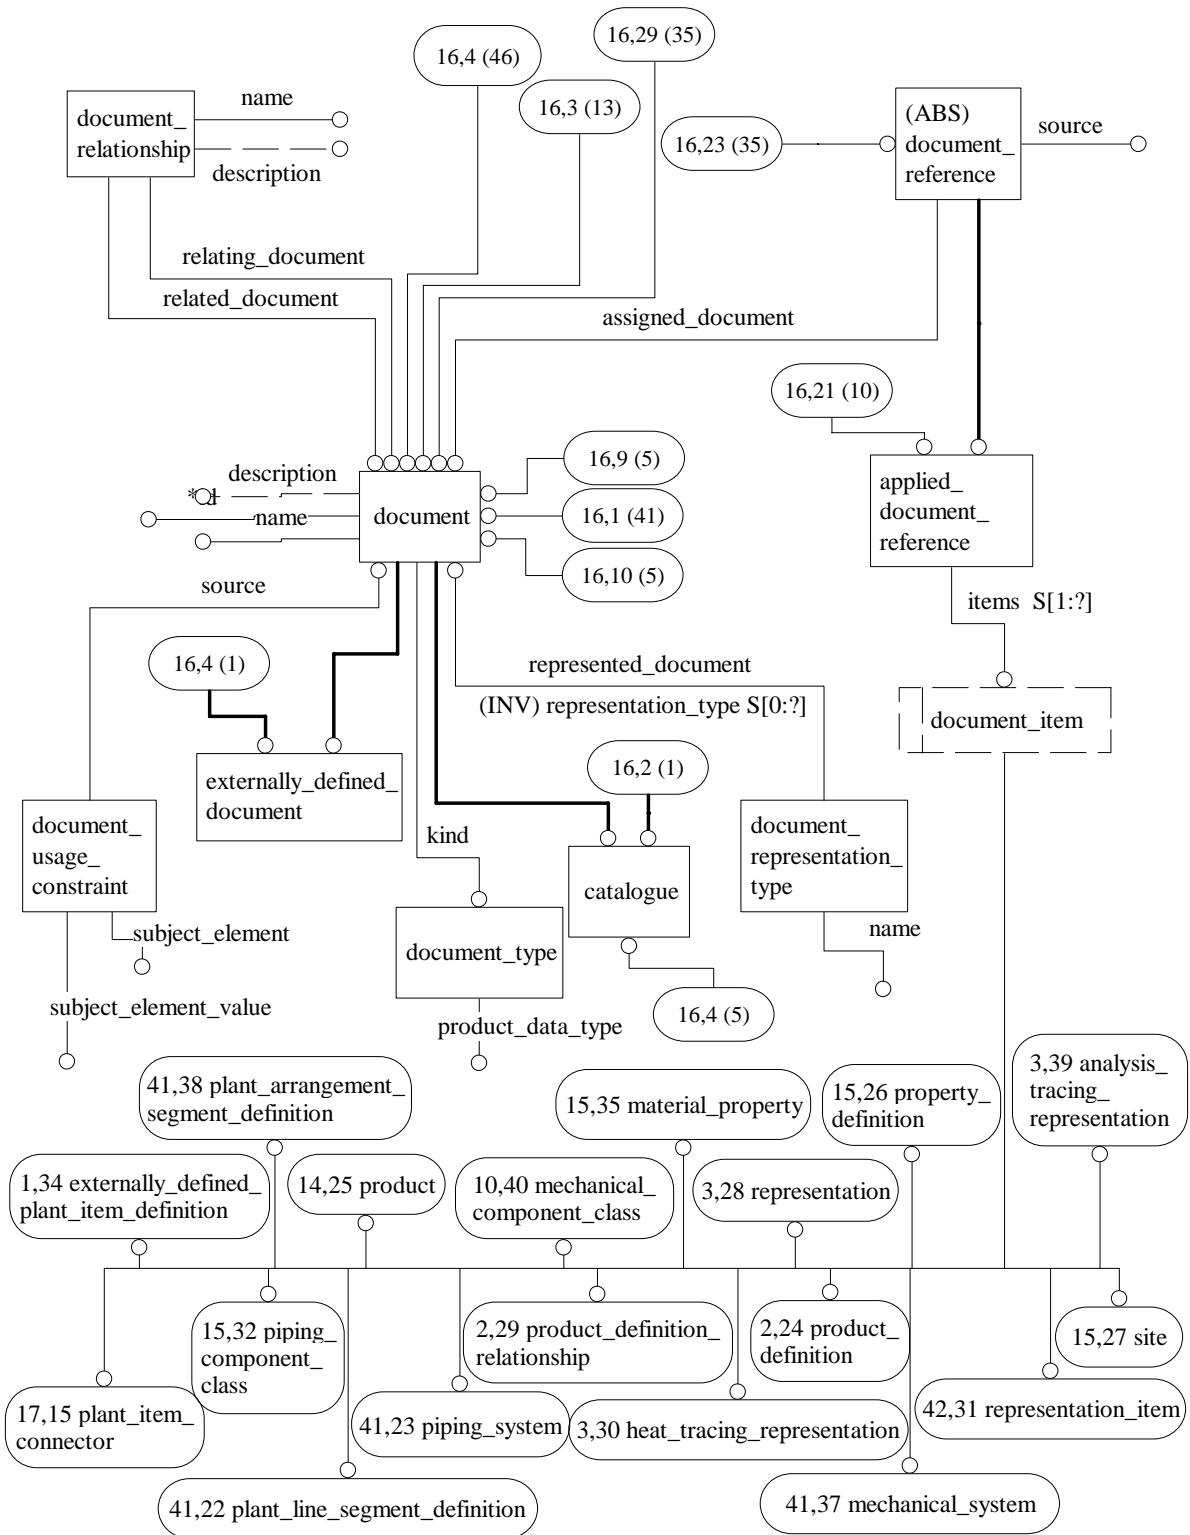


Figure H.16 — AIM EXPRESS-G diagram 16 of 55

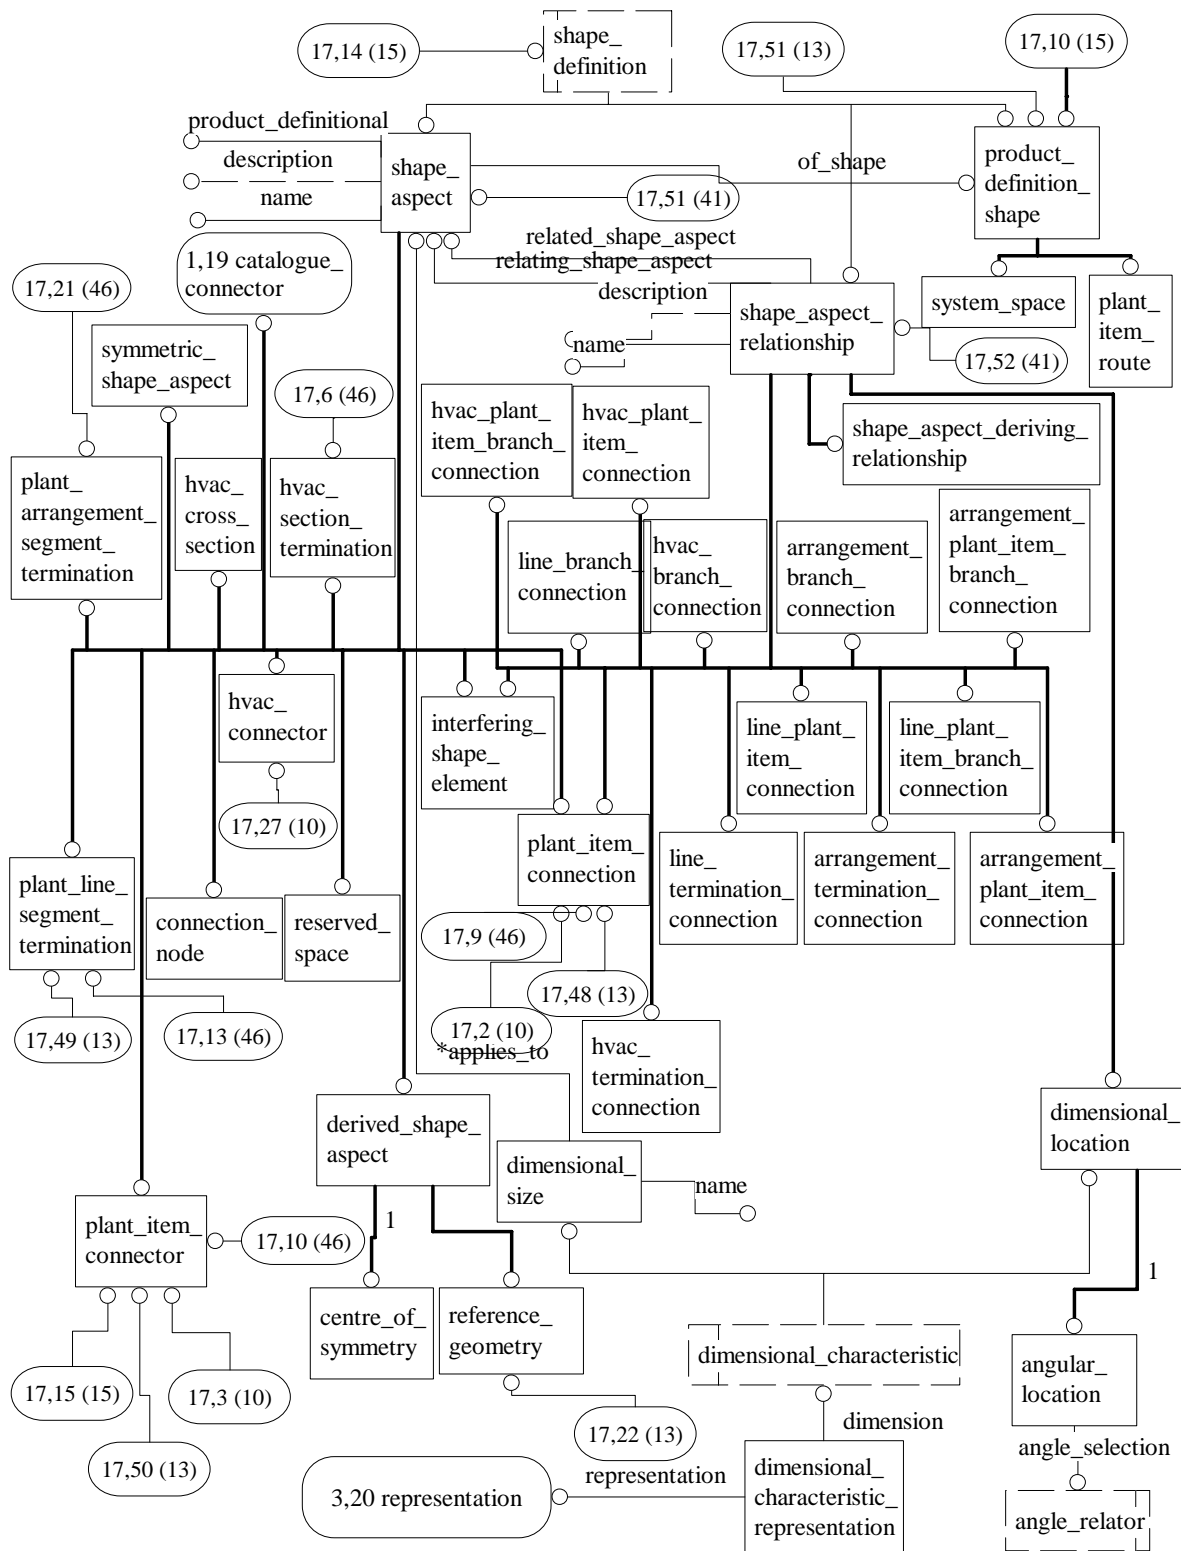


Figure H.17 — AIM EXPRESS-G diagram 17 of 55

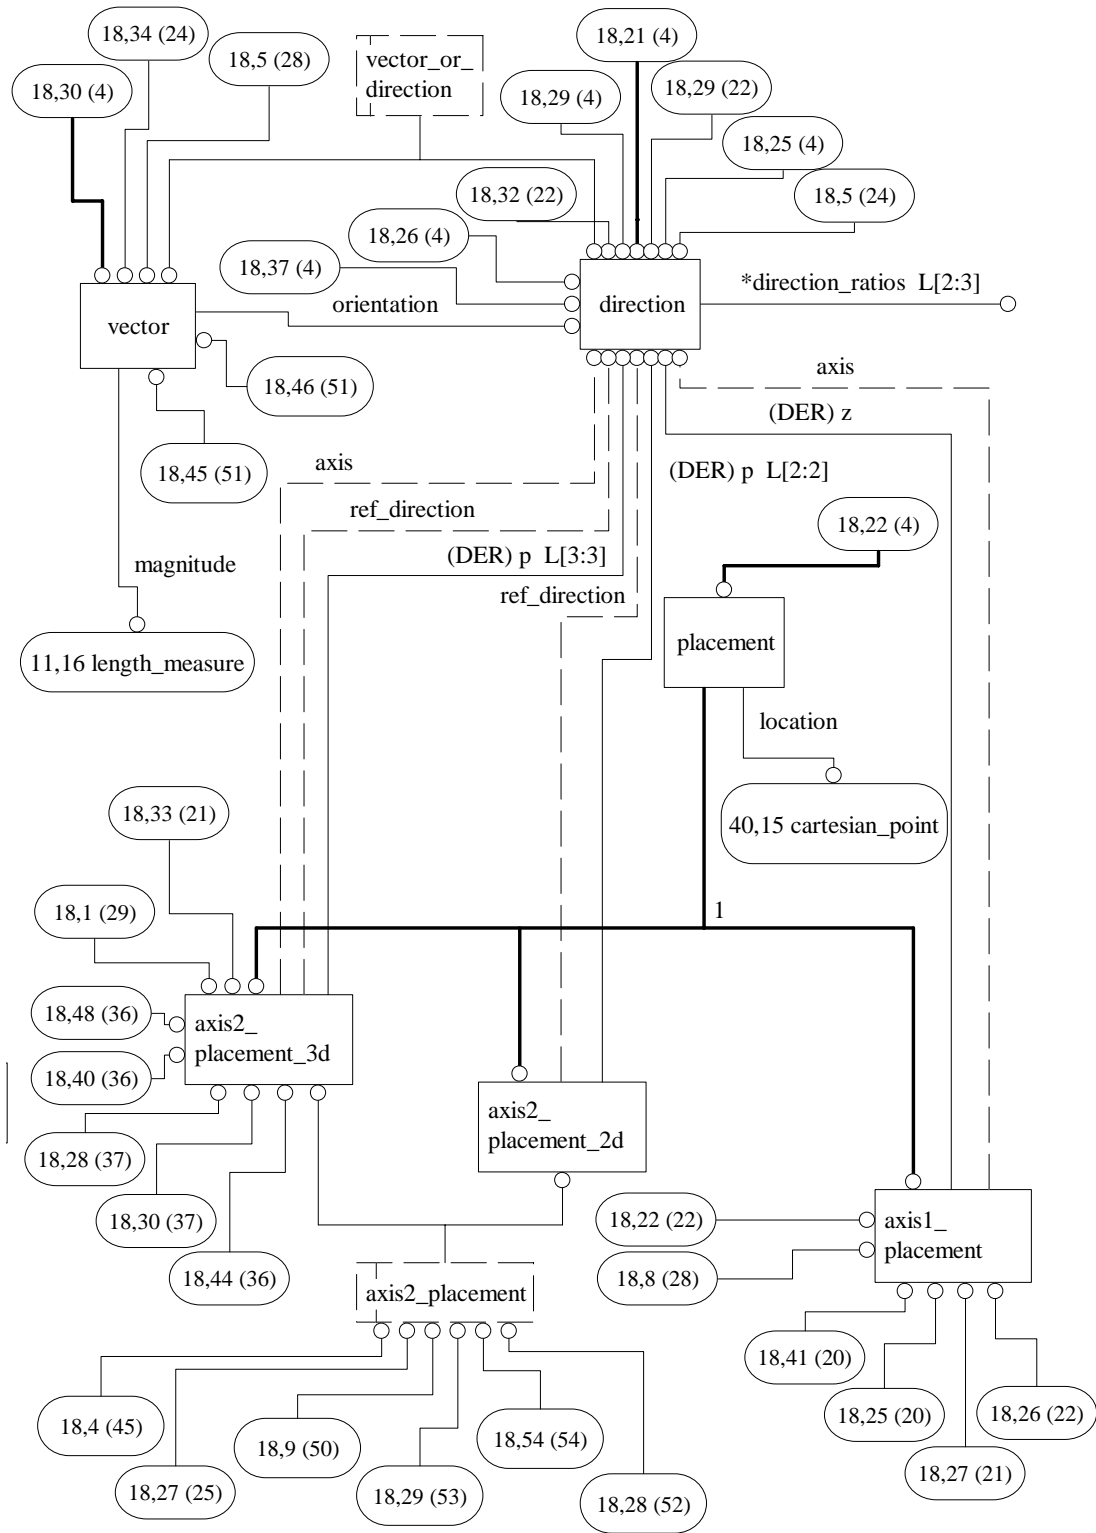


Figure H.18 — AIM EXPRESS-G diagram 18 of 55

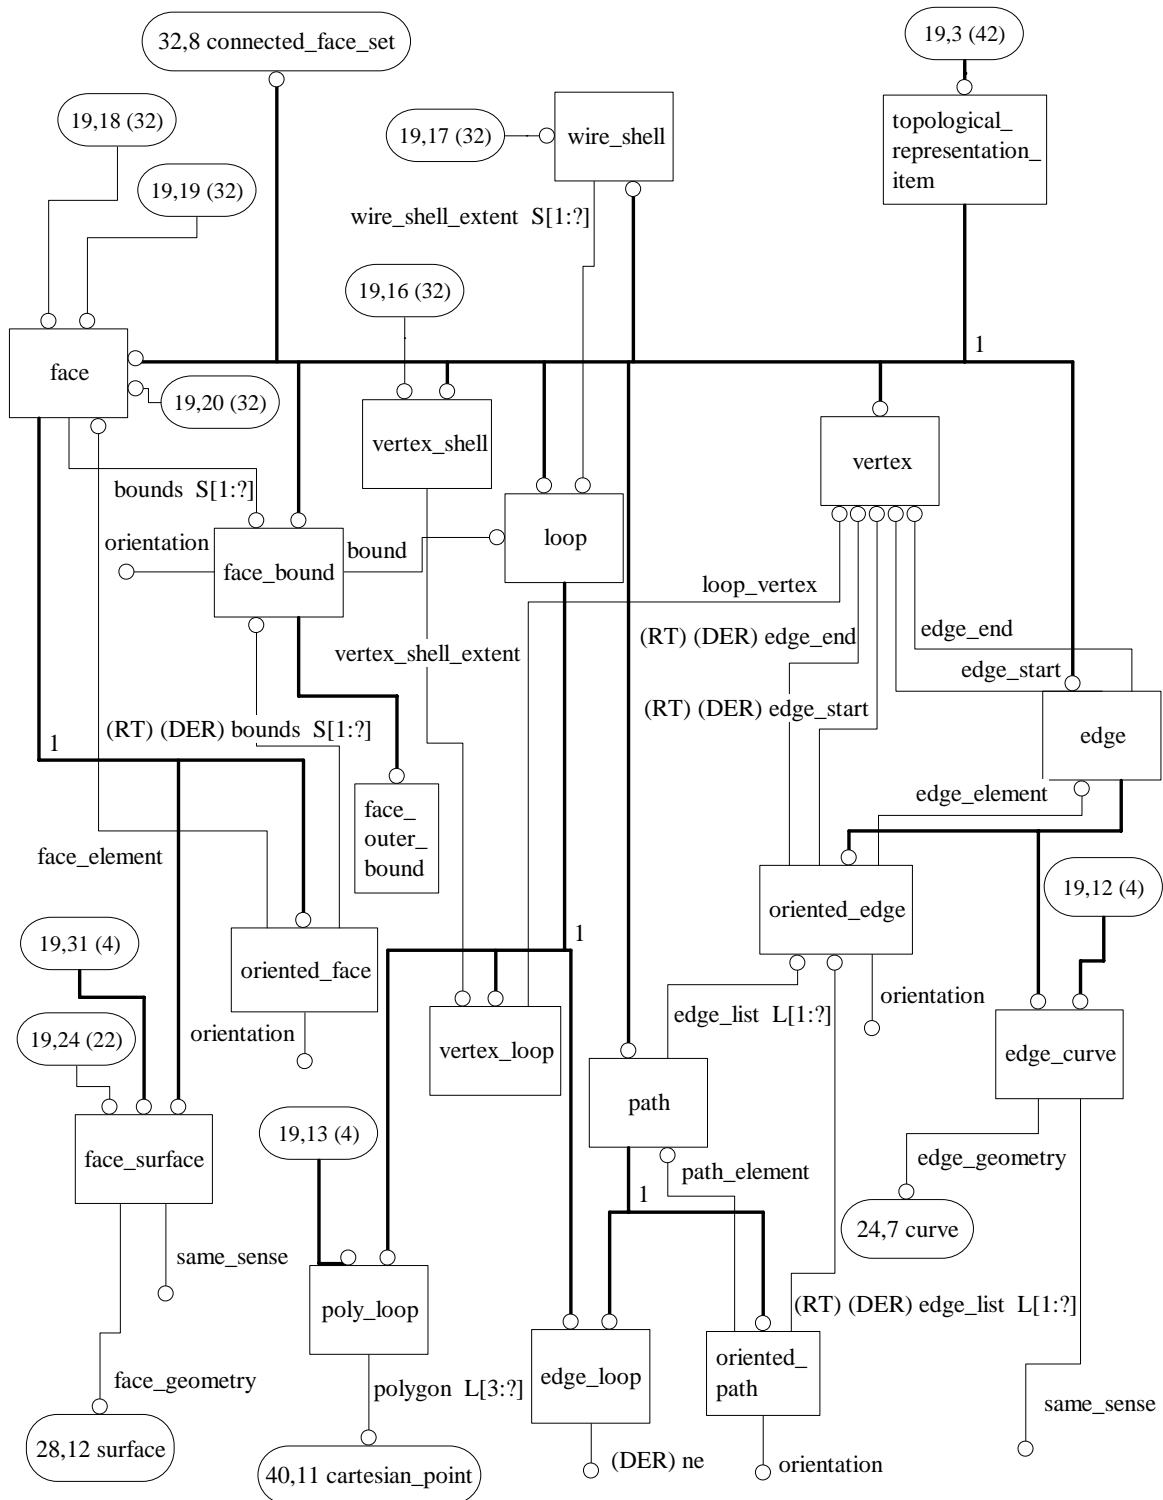


Figure H.19 — AIM EXPRESS-G diagram 19 of 55

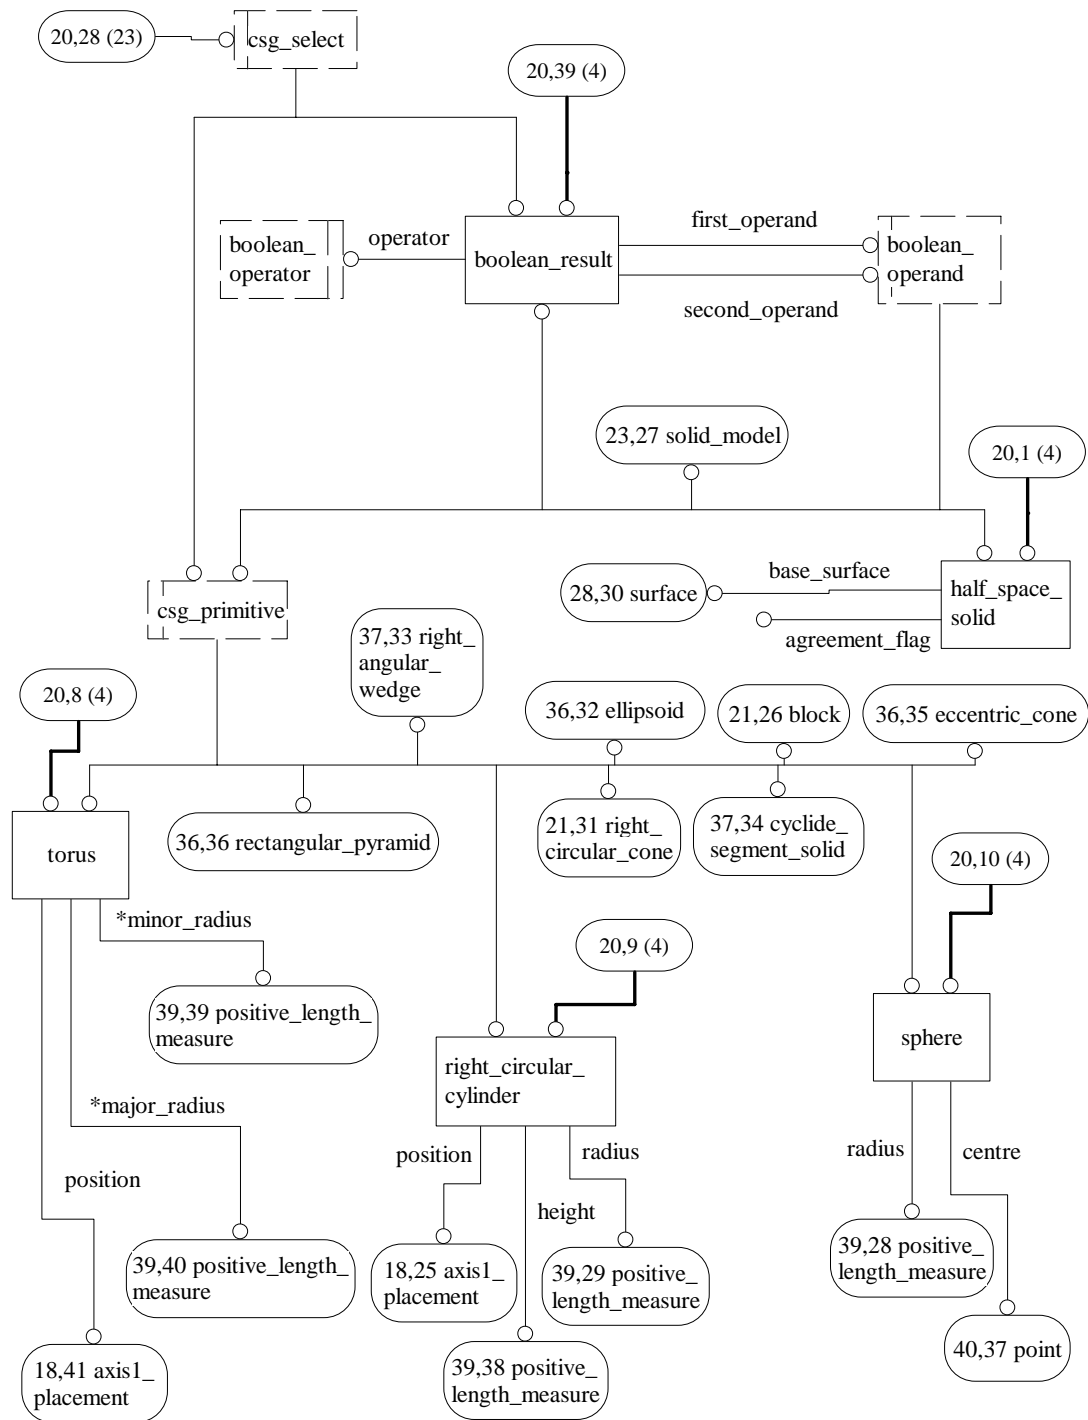


Figure H.20 — AIM EXPRESS-G diagram 20 of 55

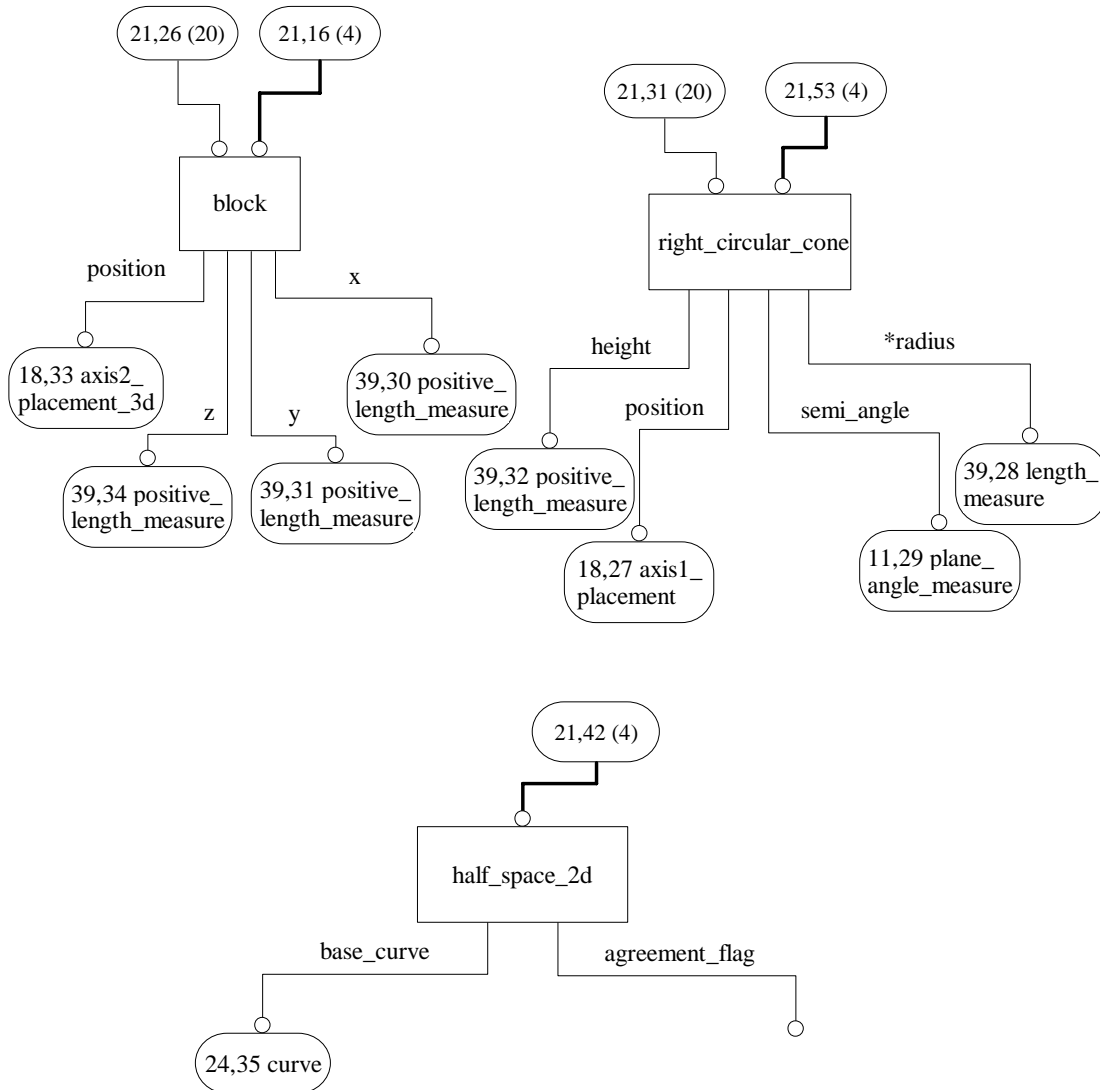


Figure H.21 — AIM EXPRESS-G diagram 21 of 55

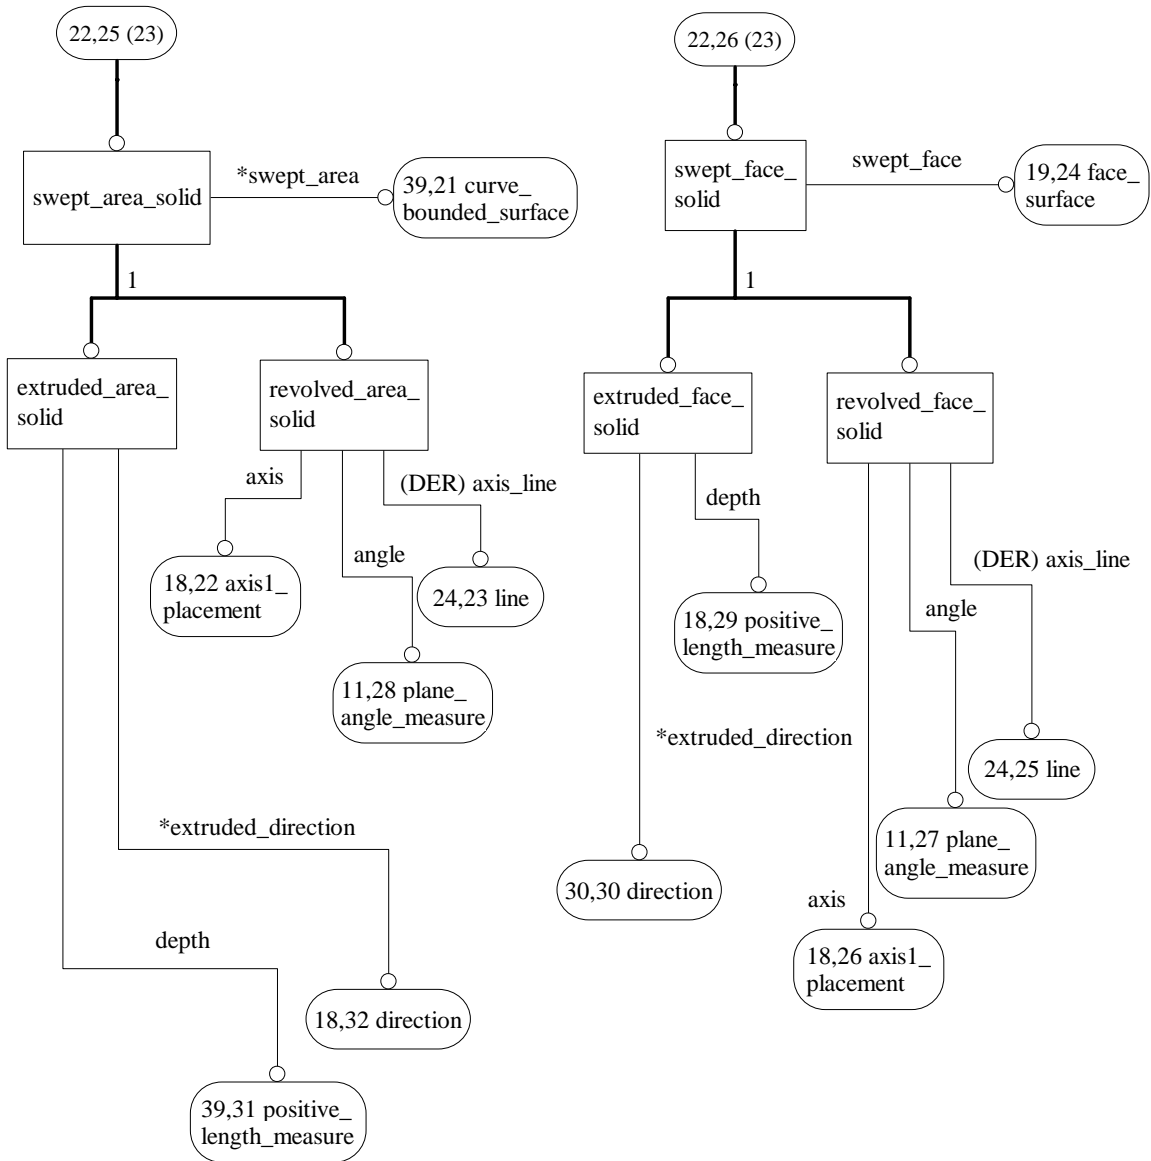


Figure H.22 — AIM EXPRESS-G diagram 22 of 55

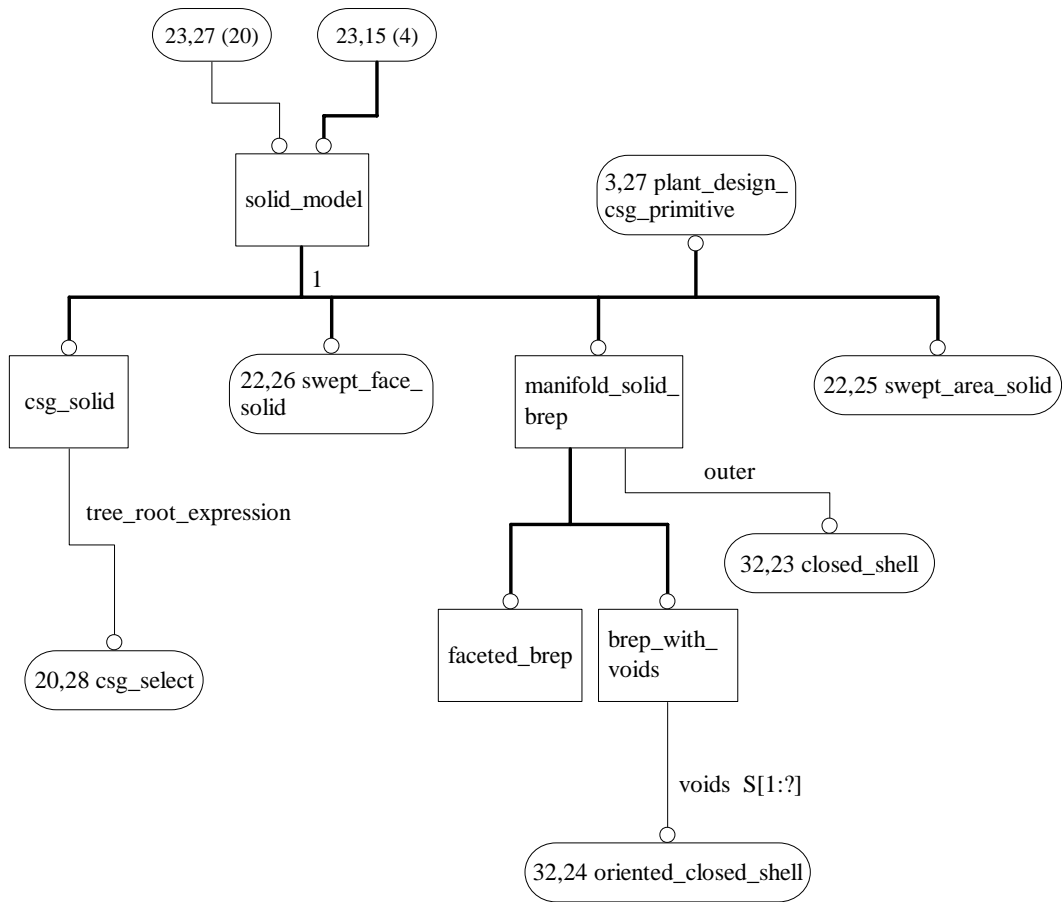


Figure H.23 — AIM EXPRESS-G diagram 23 of 55

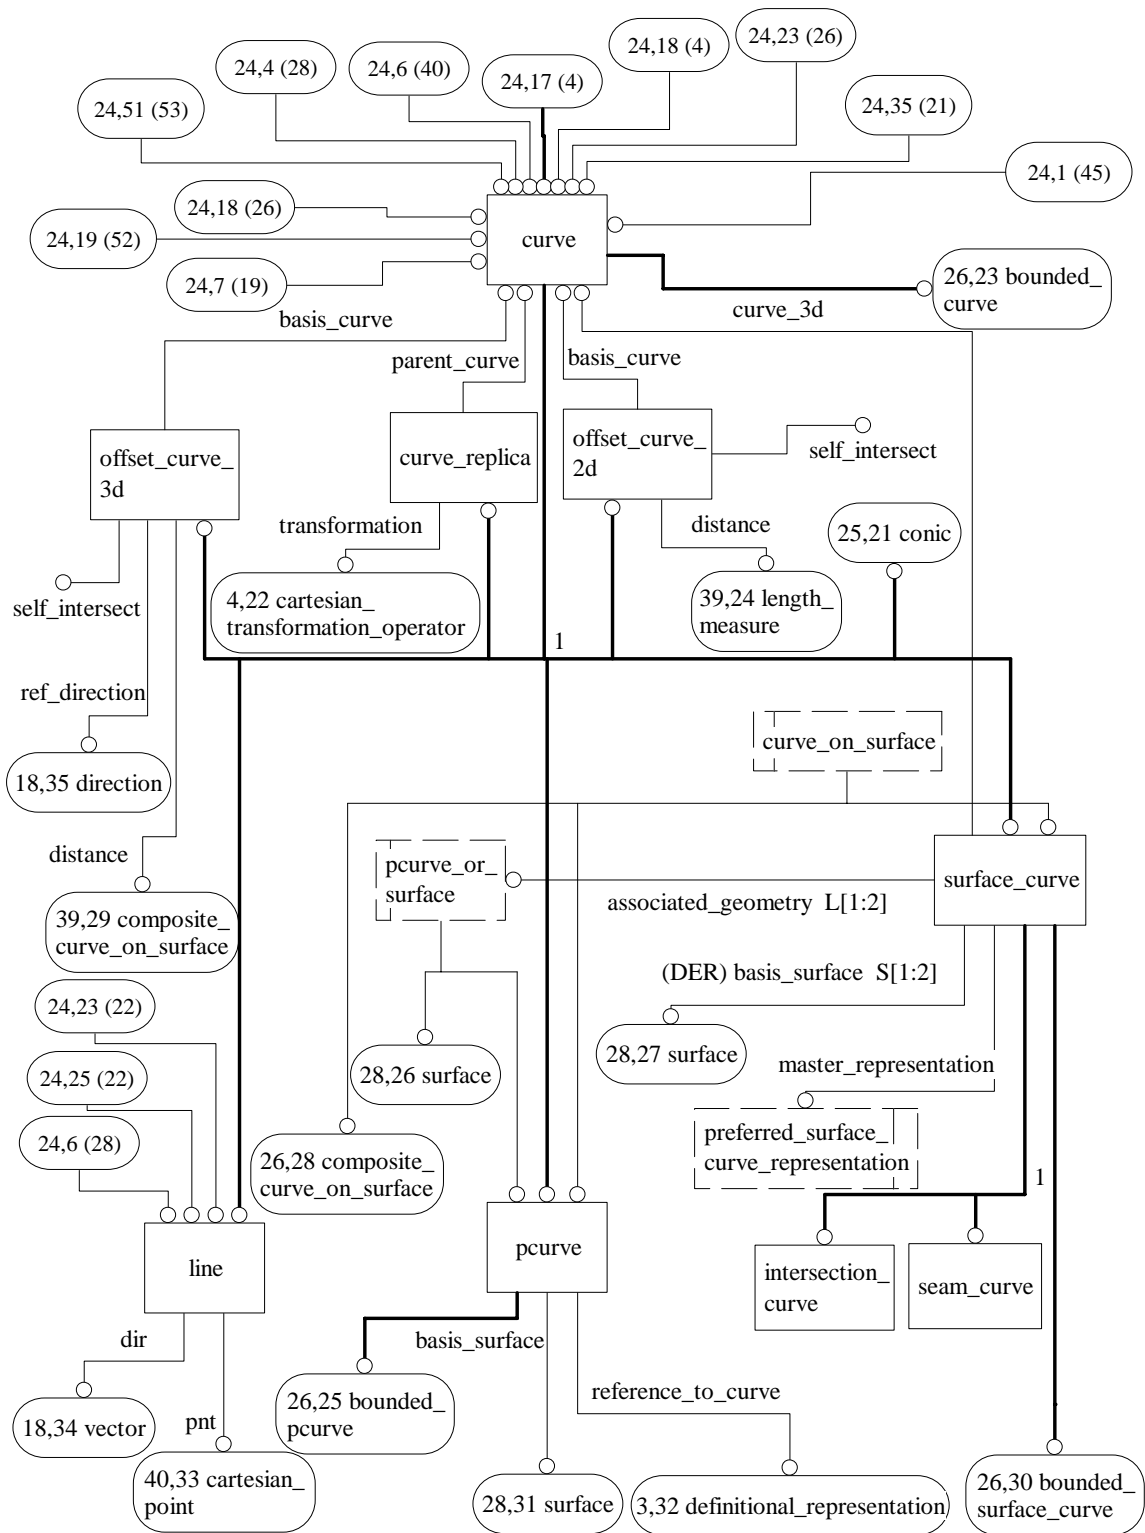


Figure H.24 — AIM EXPRESS-G diagram 24 of 55

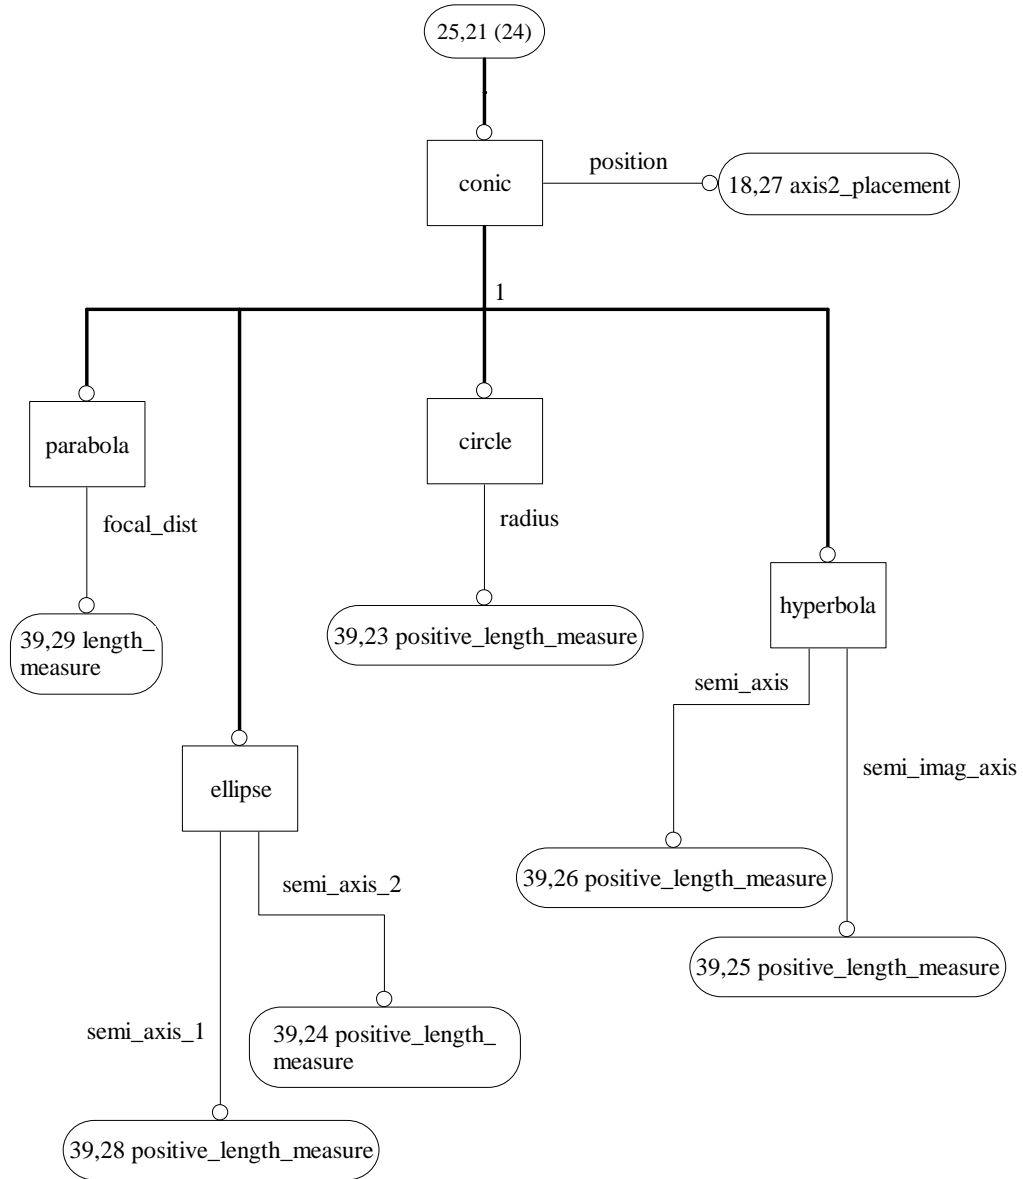


Figure H.25 — AIM EXPRESS-G diagram 25 of 55

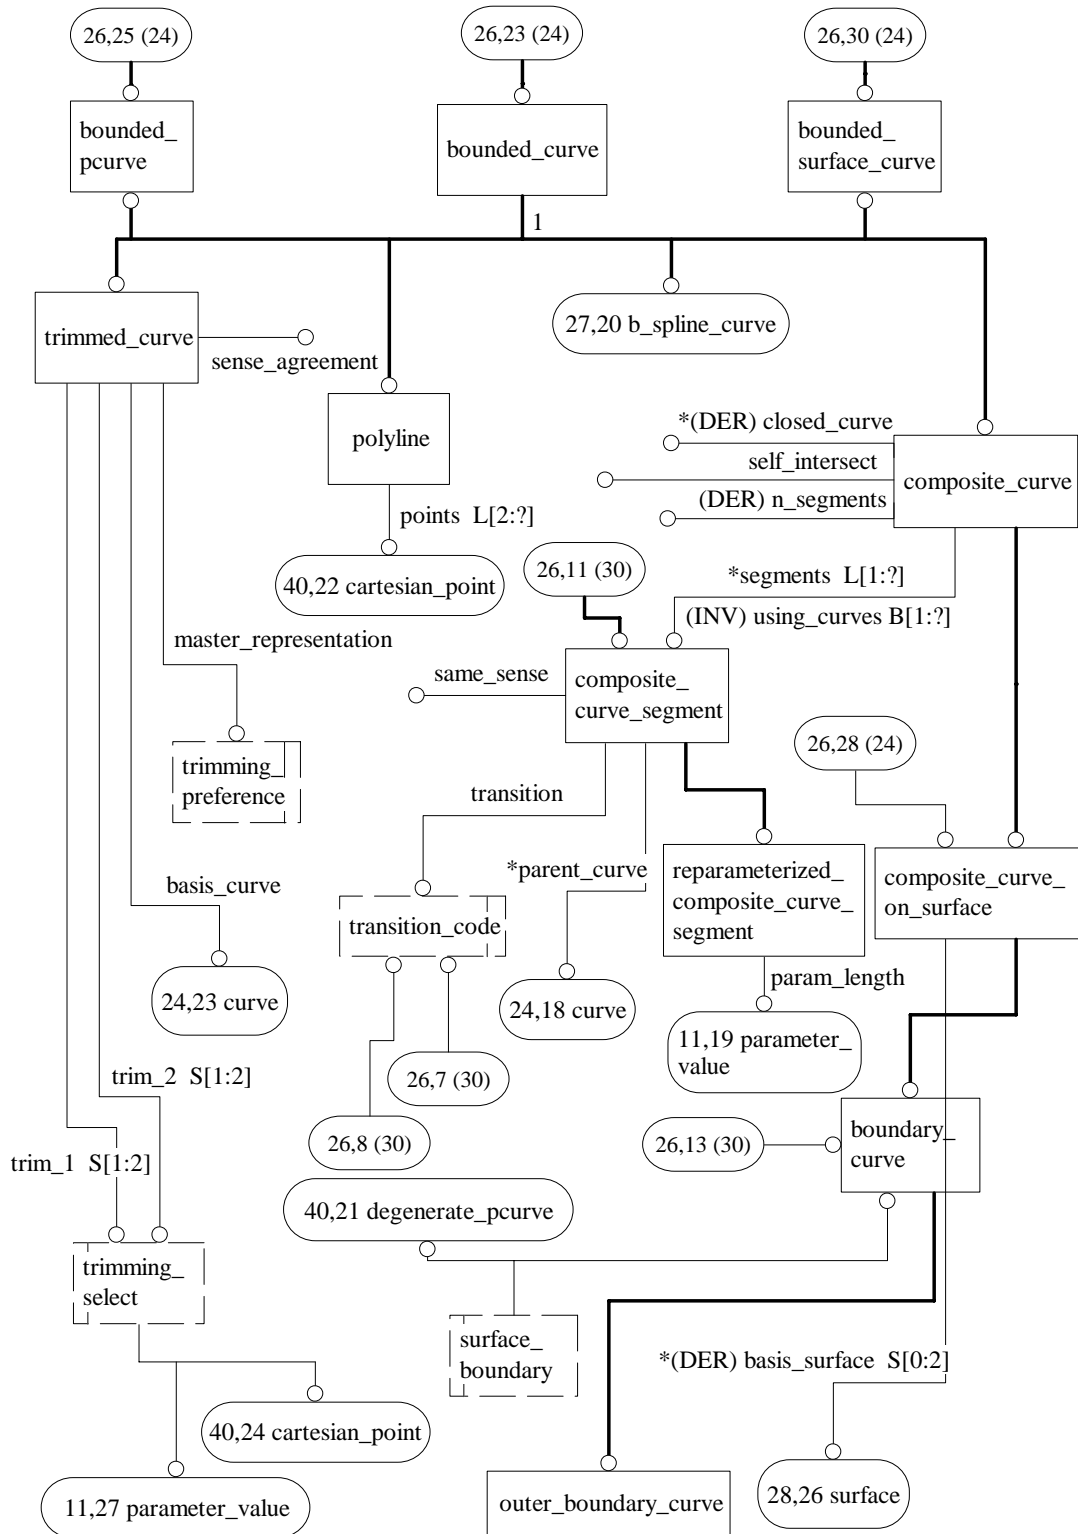


Figure H.26 — AIM EXPRESS-G diagram 26 of 55

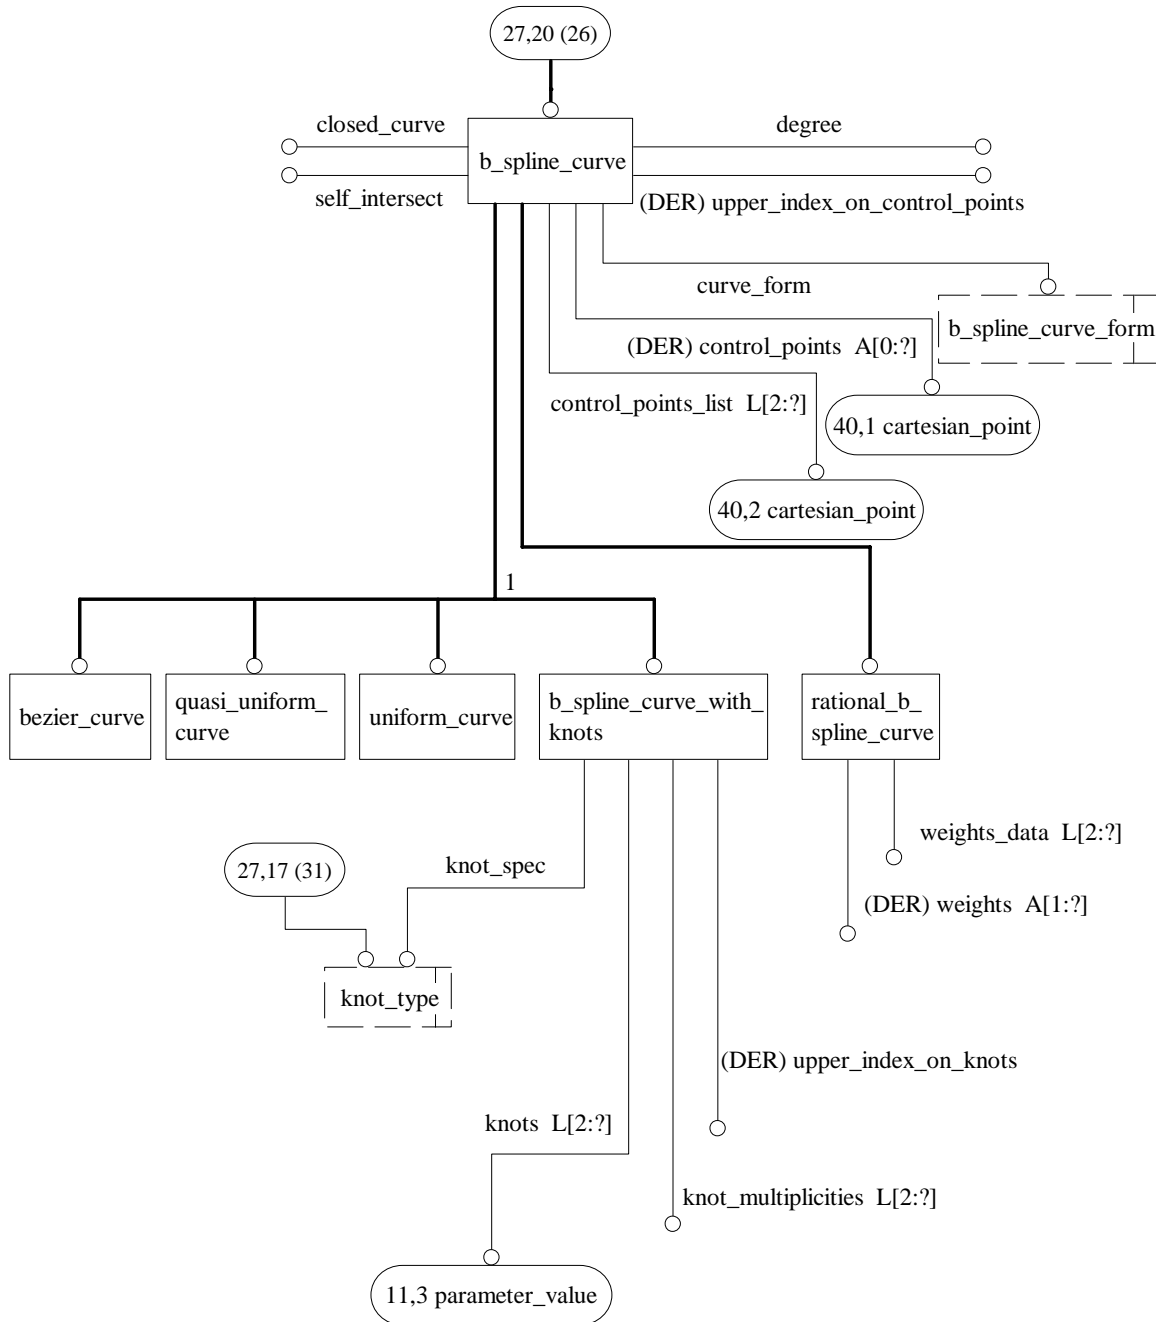


Figure H.27 — AIM EXPRESS-G diagram 27 of 55

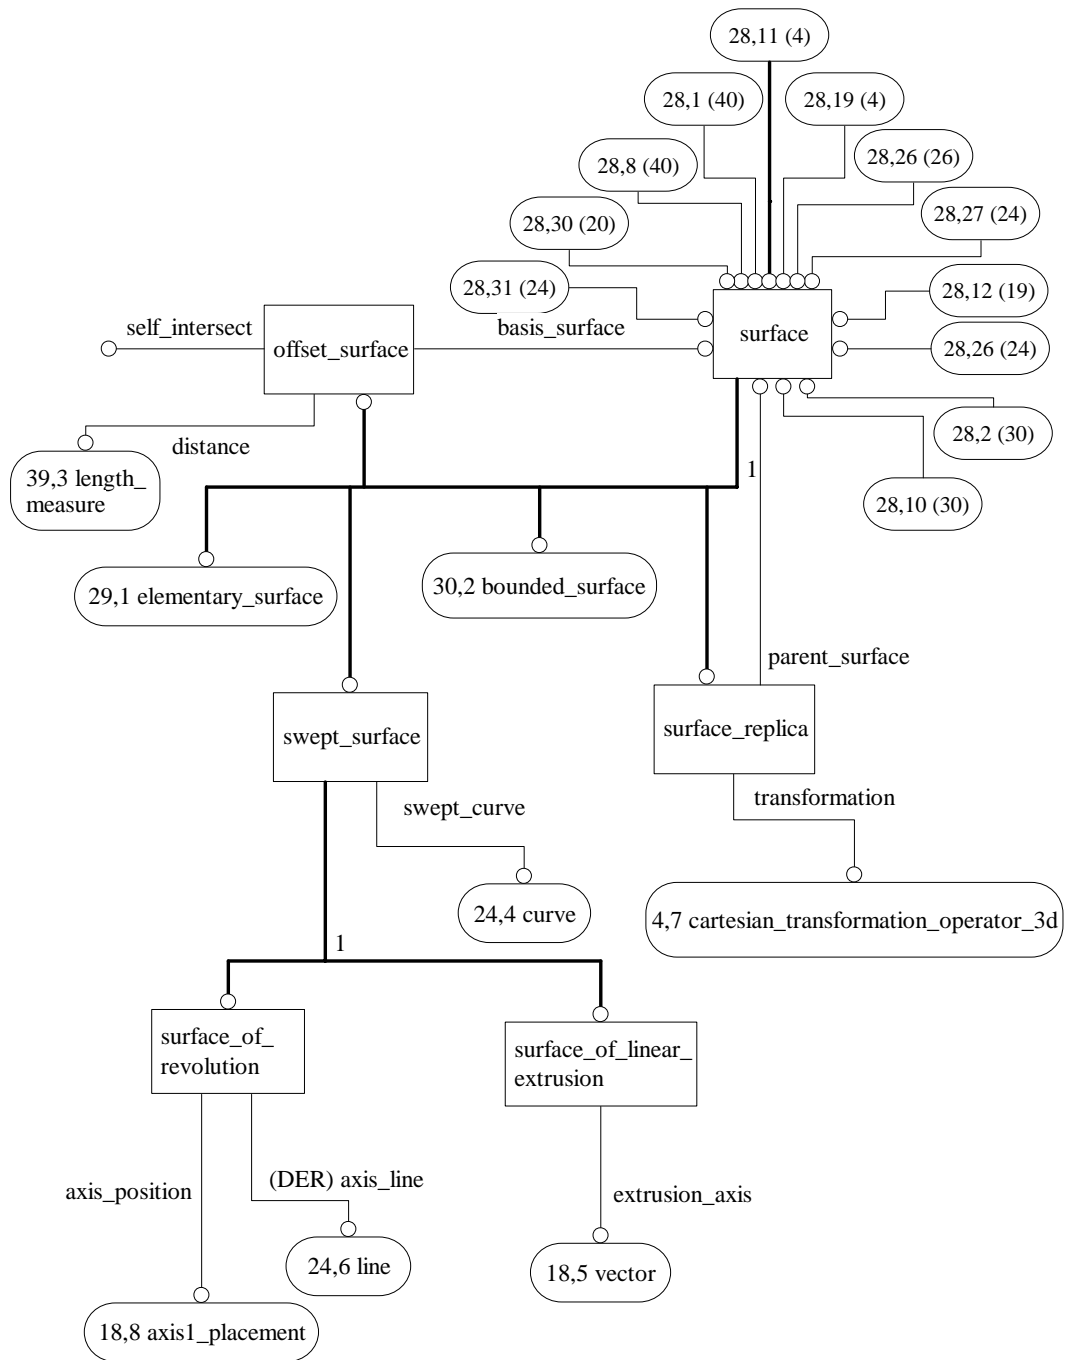


Figure H.28 — AIM EXPRESS-G diagram 28 of 55

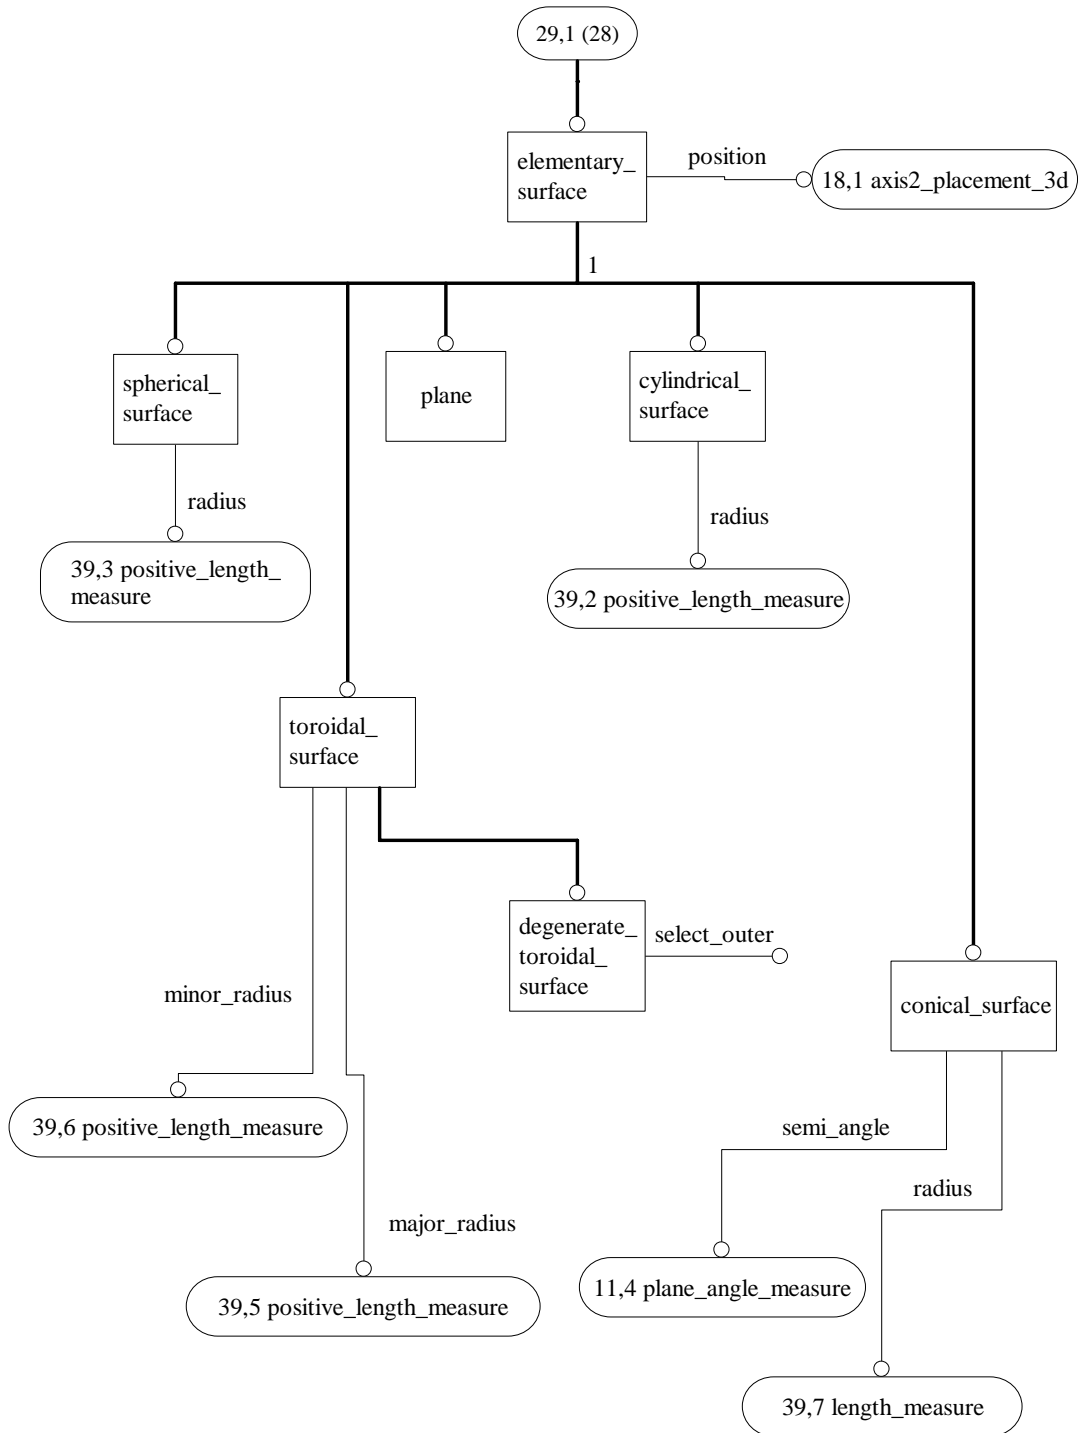


Figure H.29 — AIM EXPRESS-G diagram 29 of 55

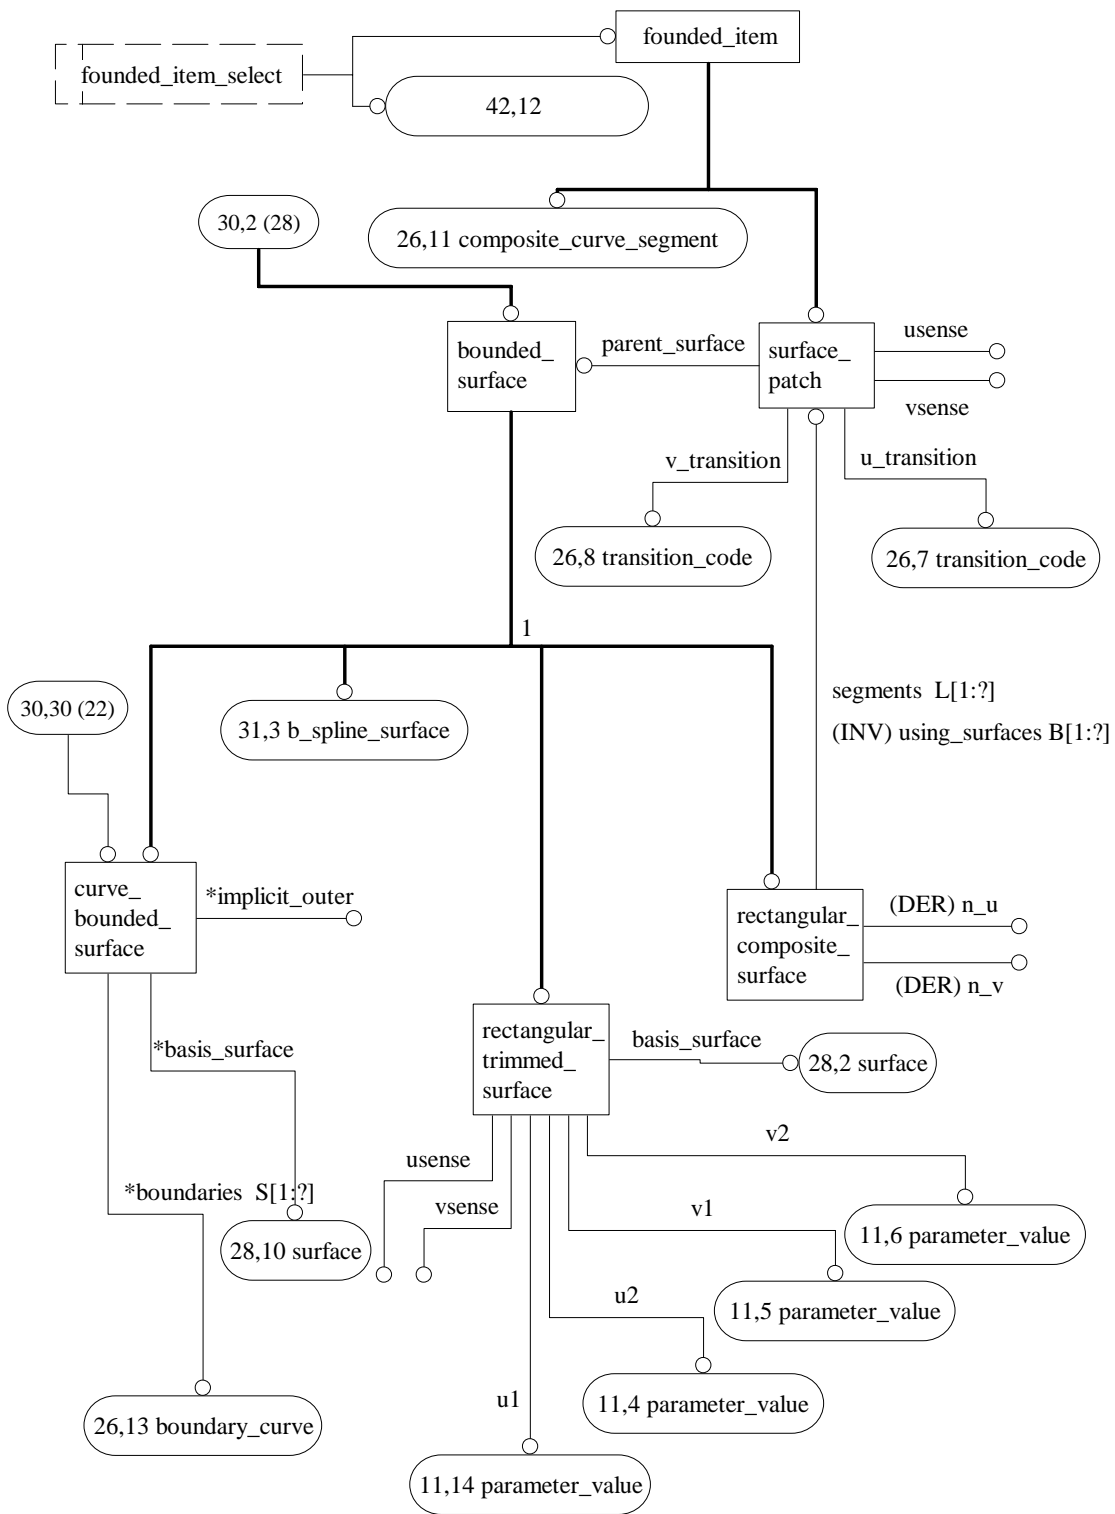


Figure H.30 — AIM EXPRESS-G diagram 30 of 55

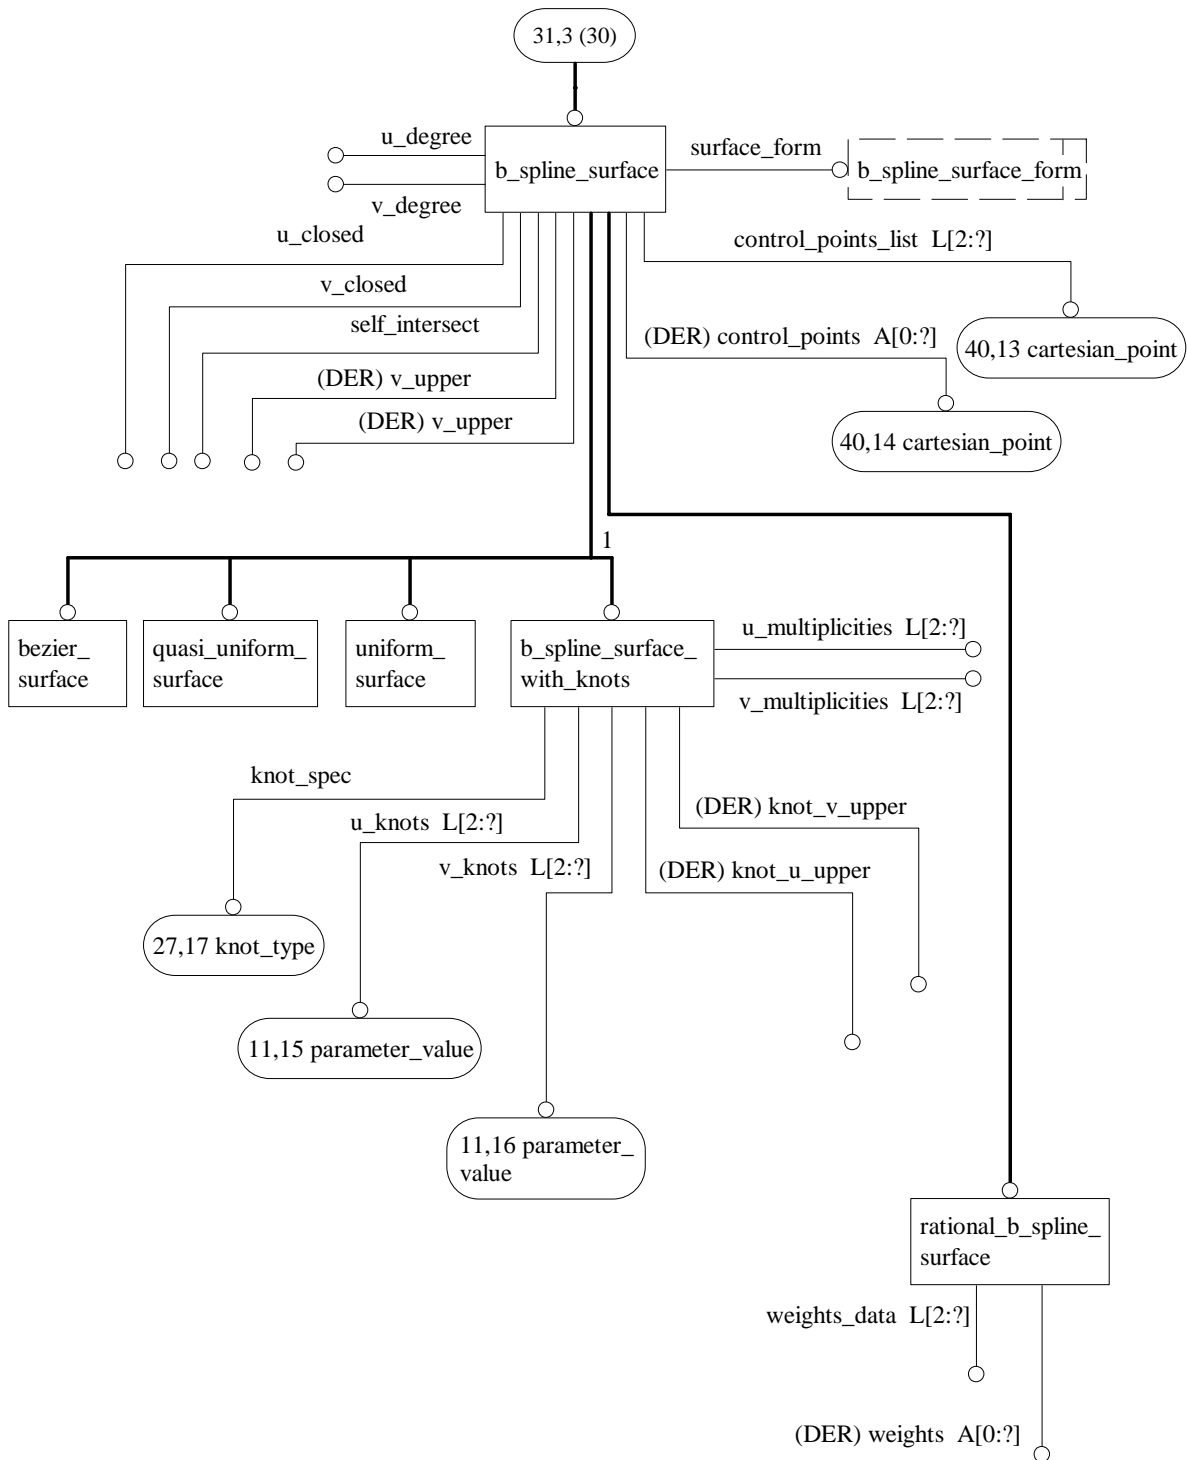


Figure H.31 — AIM EXPRESS-G diagram 31 of 55

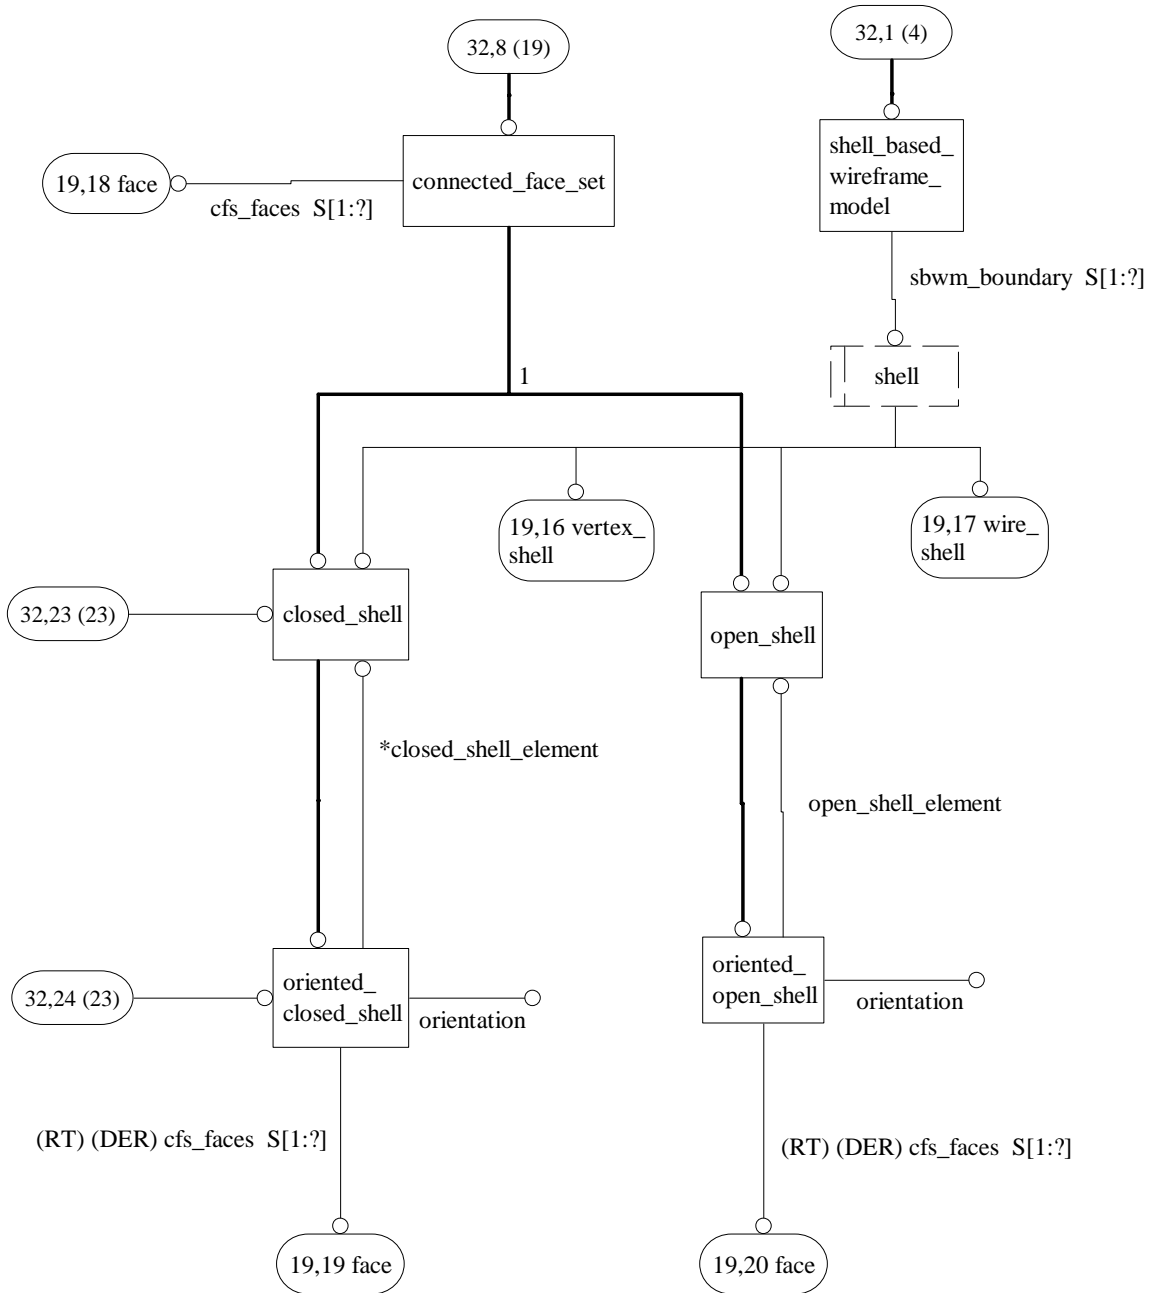


Figure H.32 — AIM EXPRESS-G diagram 32 of 55

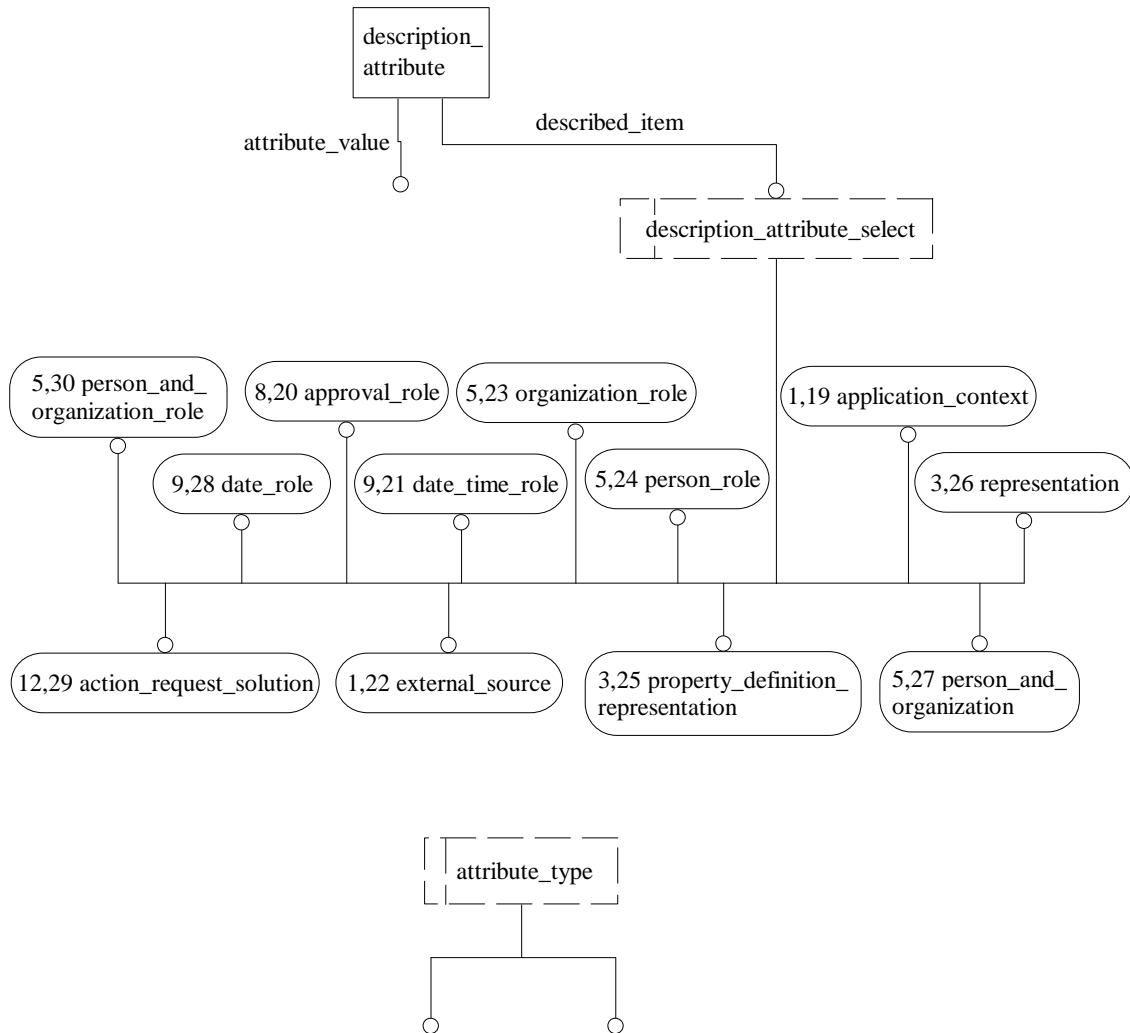


Figure H.33 — AIM EXPRESS-G diagram 33 of 55

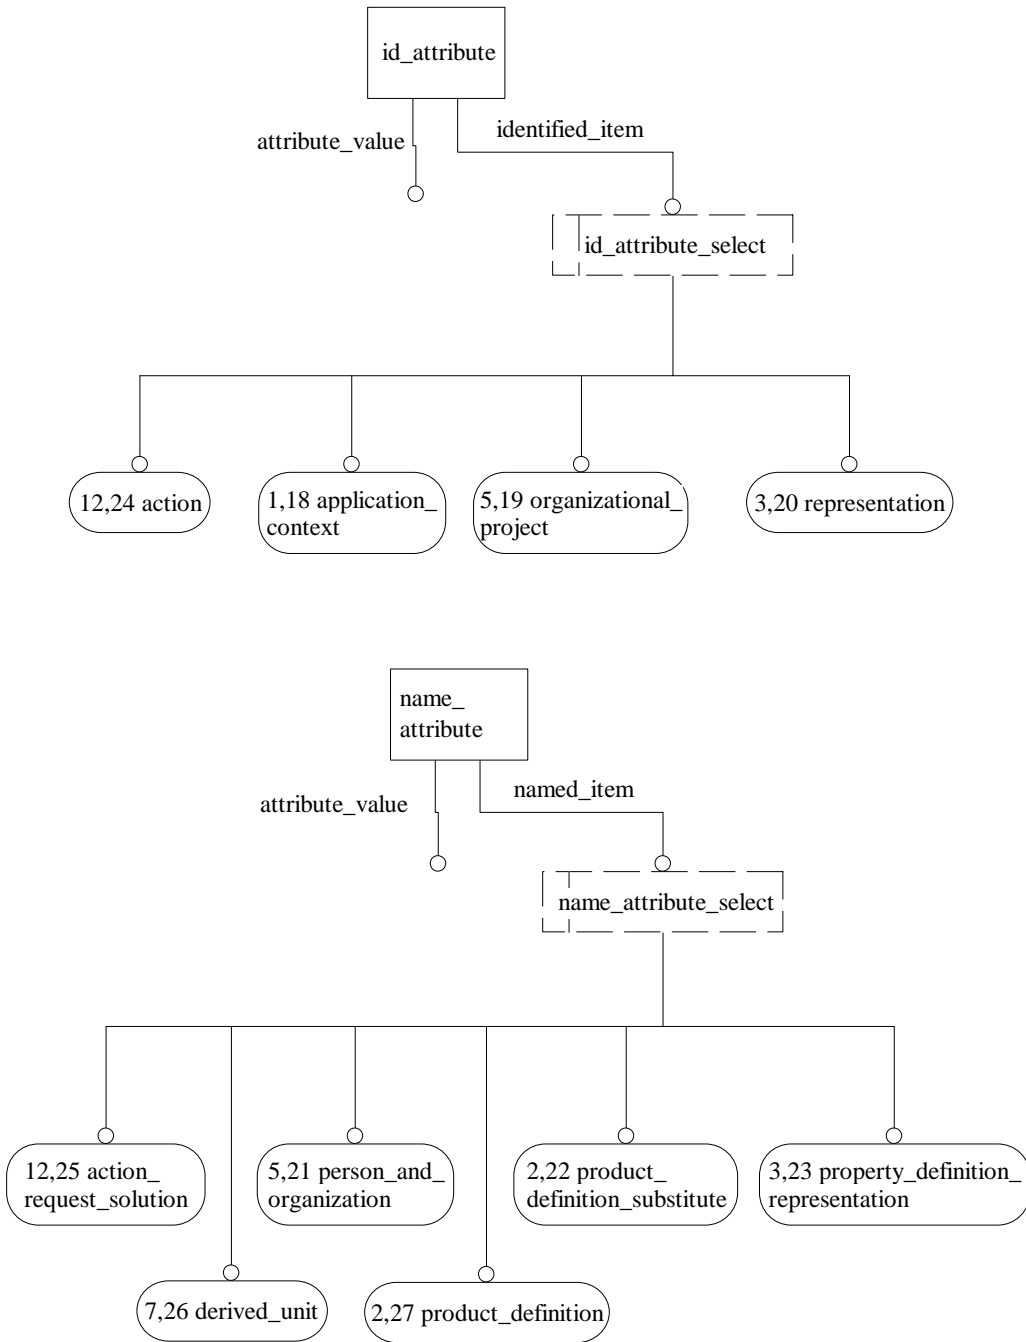


Figure H.34 — AIM EXPRESS-G diagram 34 of 55

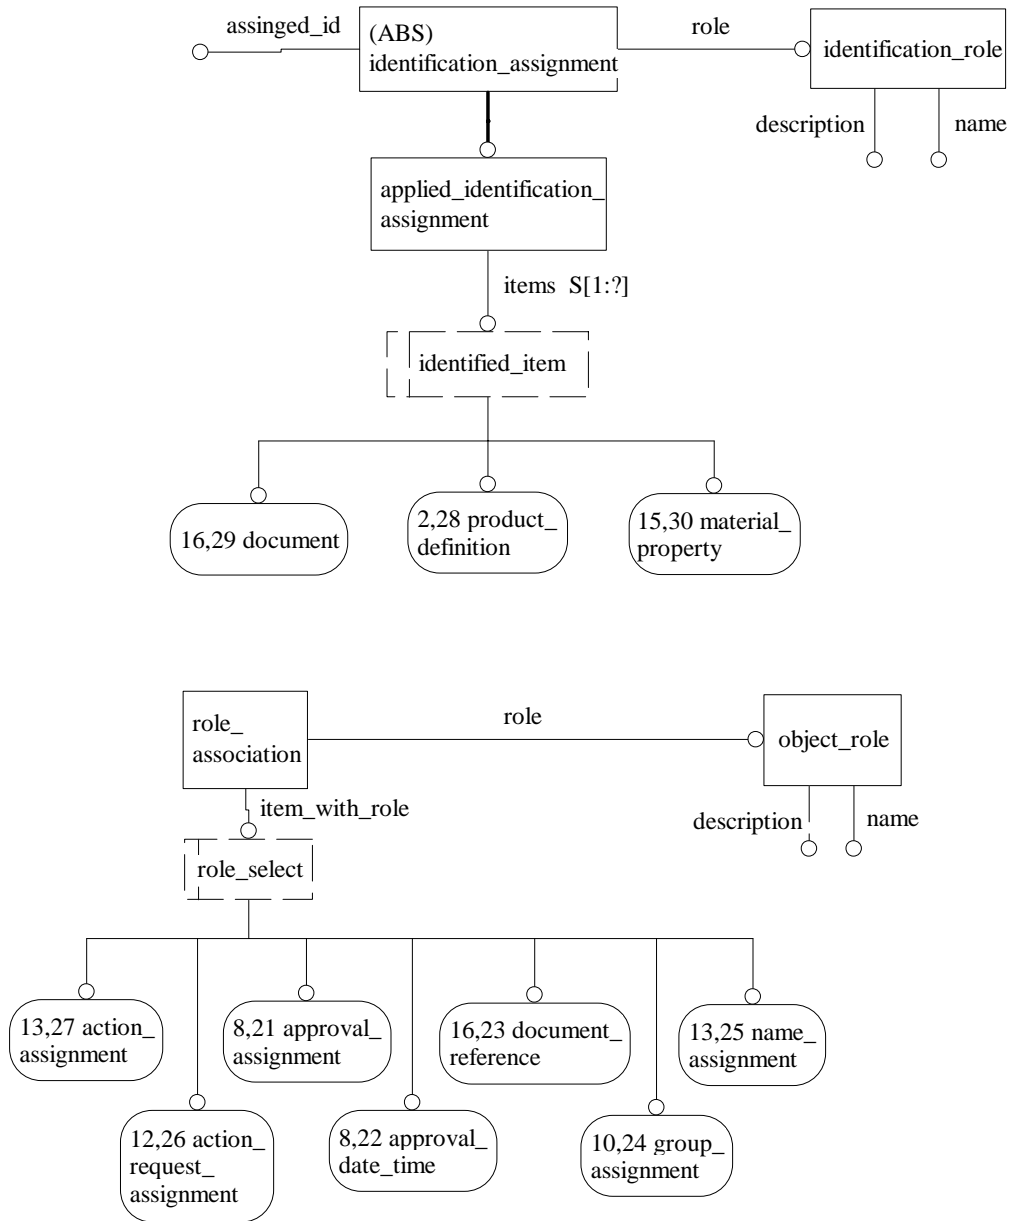


Figure H.35 — AIM EXPRESS-G diagram 35 of 55

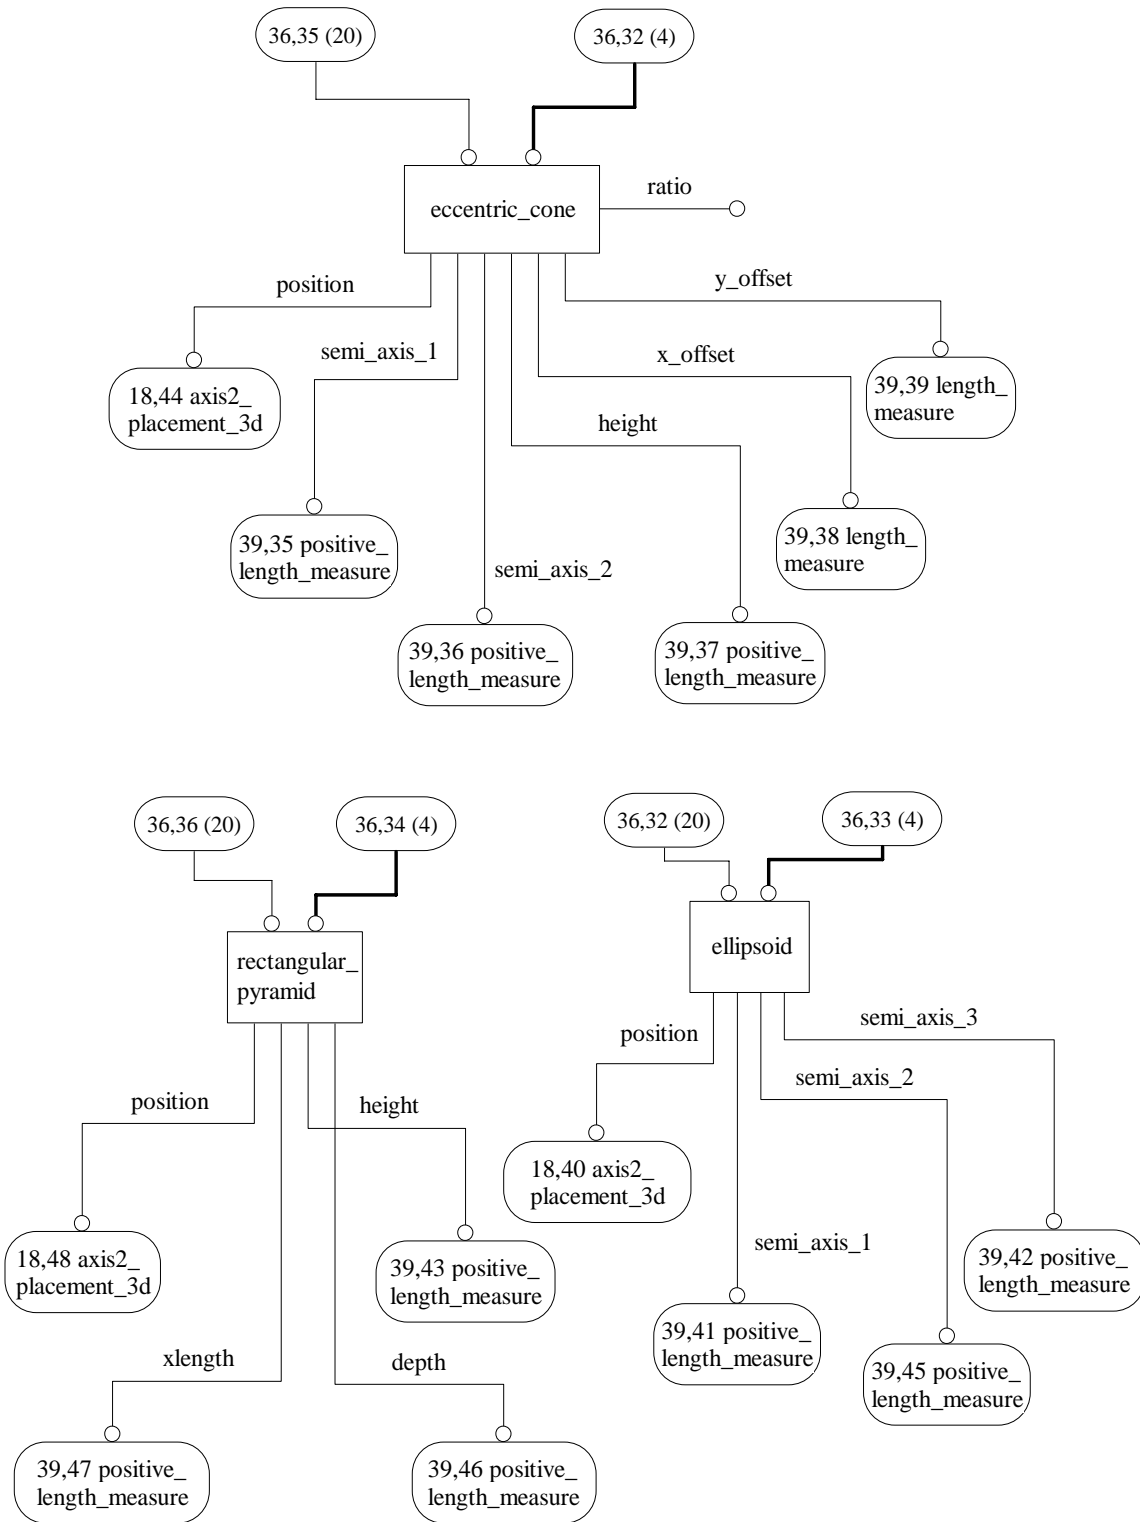


Figure H.36 — AIM EXPRESS-G diagram 36 of 55

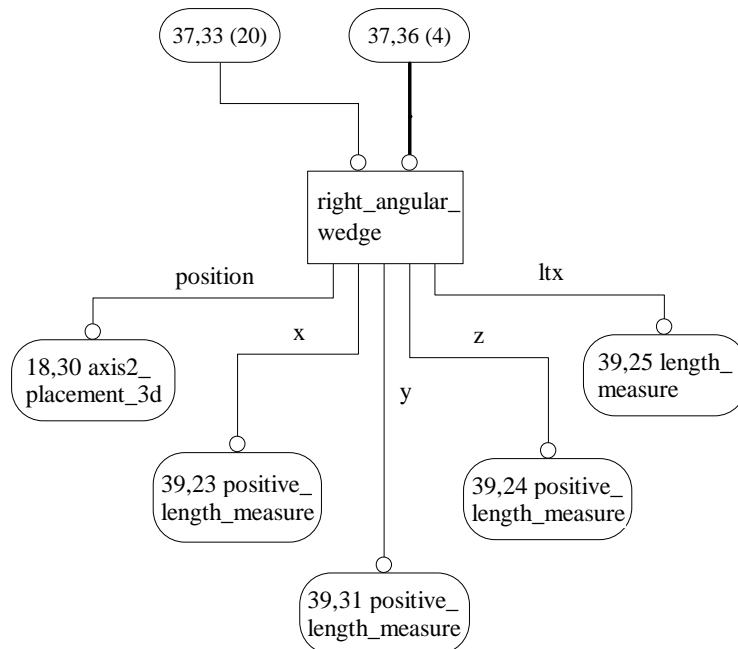
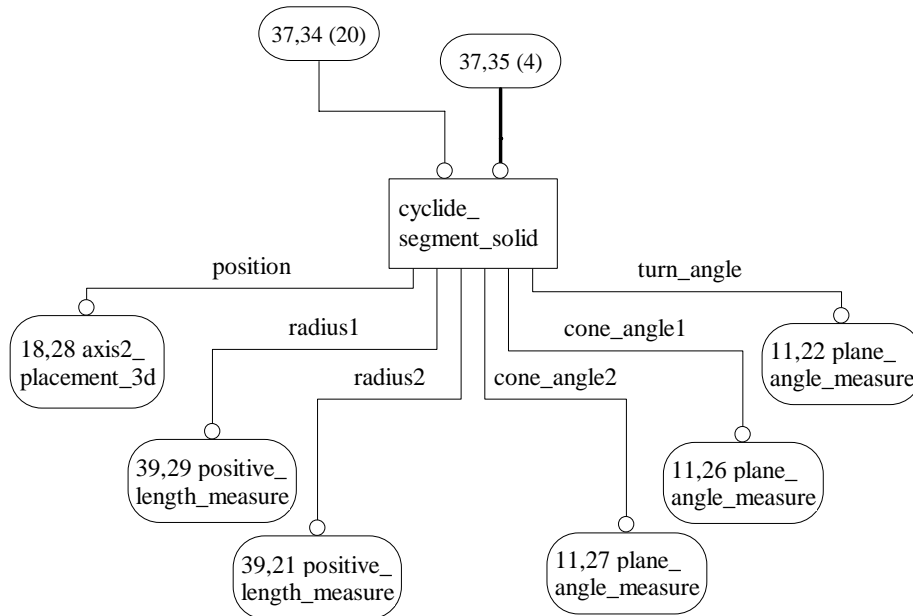


Figure H.37 — AIM EXPRESS-G diagram 37 of 55

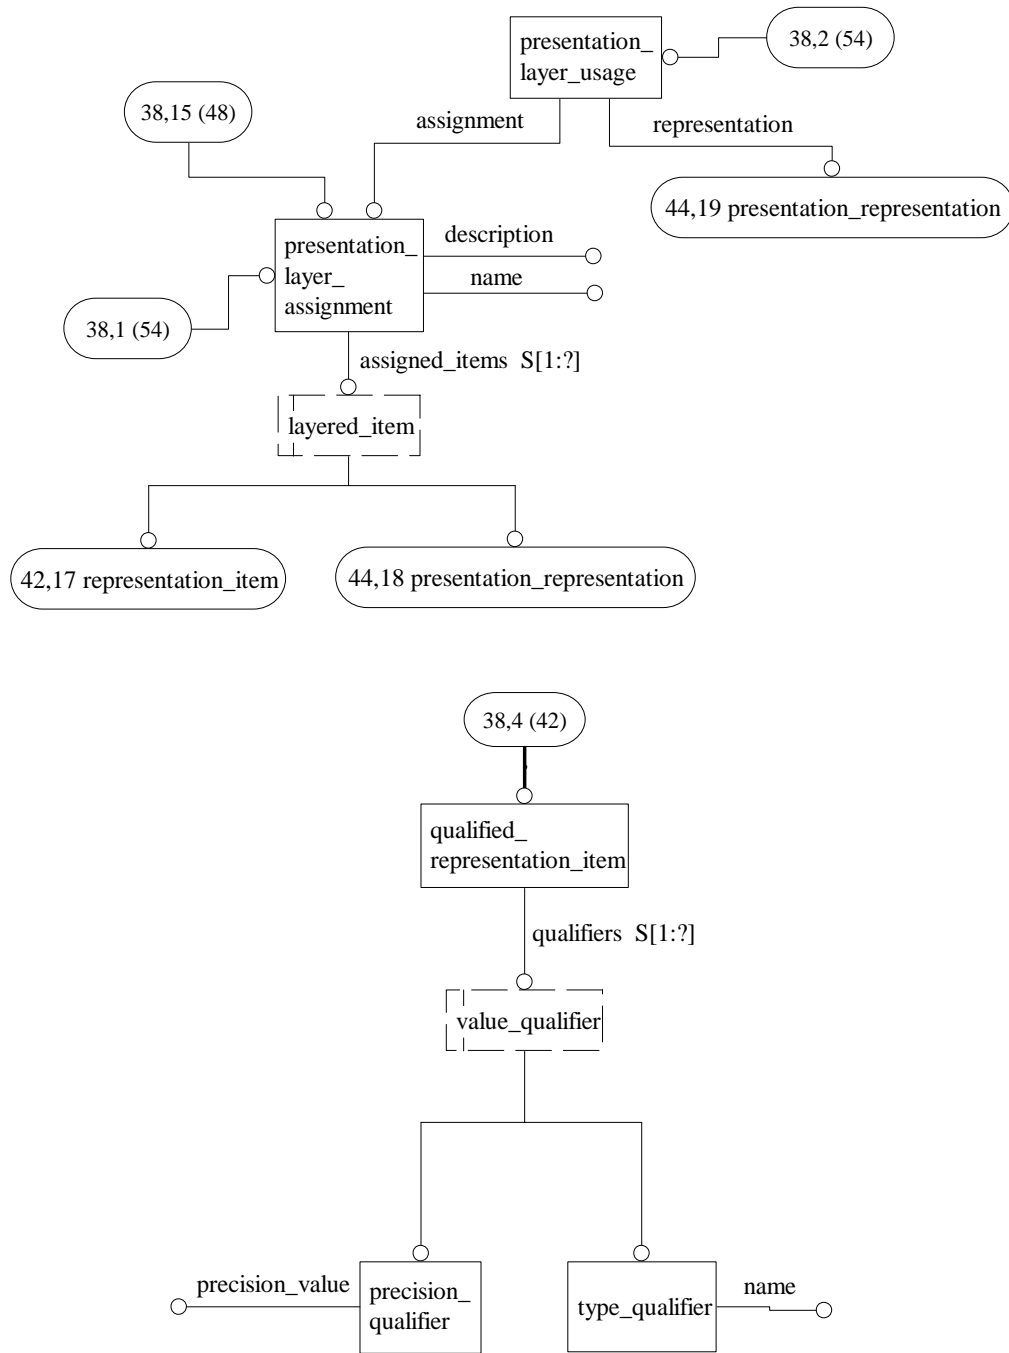


Figure H.38 — AIM EXPRESS-G diagram 38 of 55

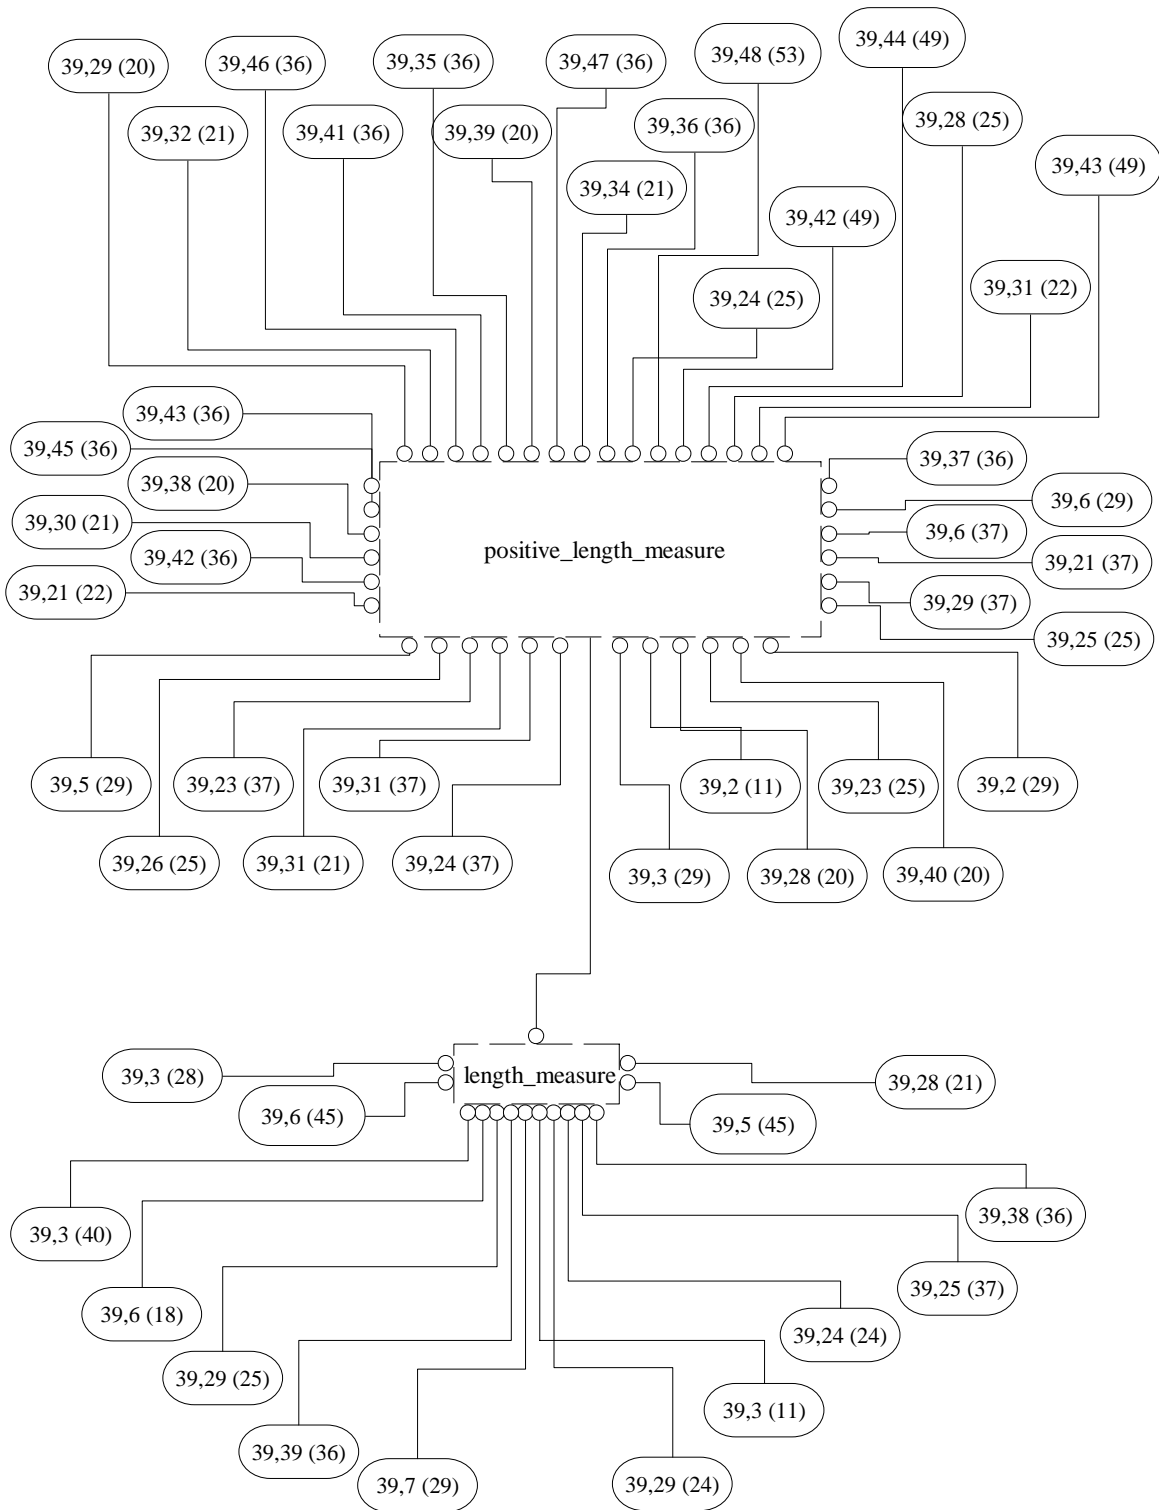


Figure H.39 — AIM EXPRESS-G diagram 39 of 55

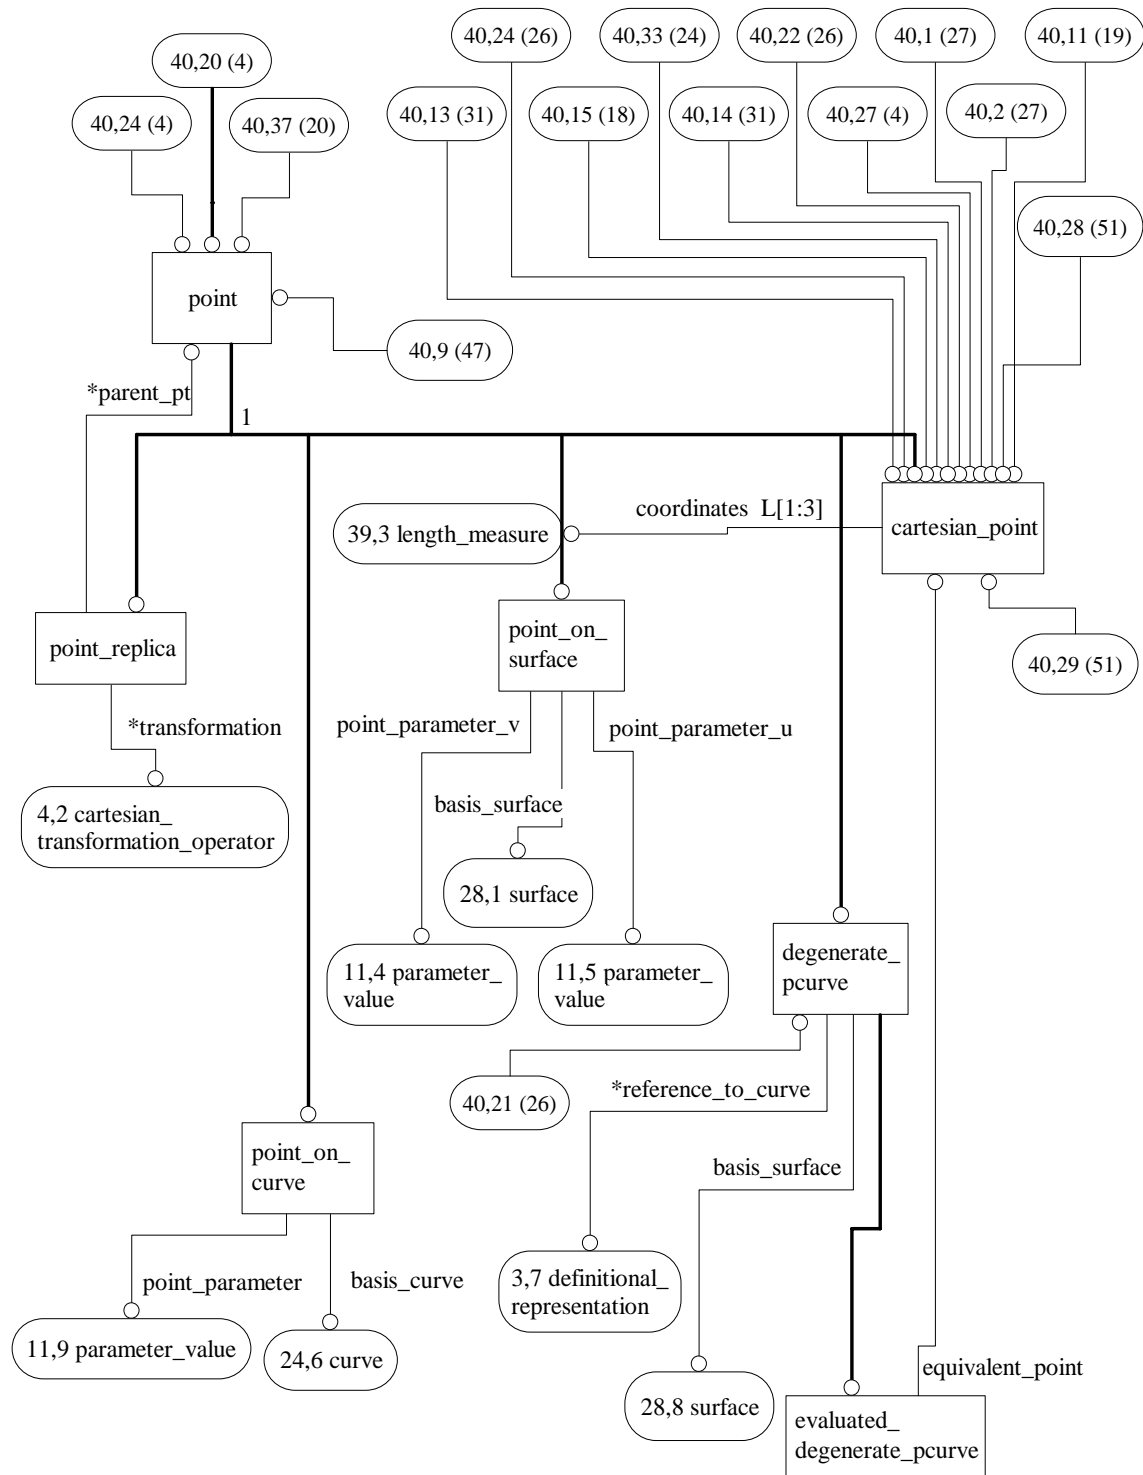


Figure H.40 — AIM EXPRESS-G diagram 40 of 55

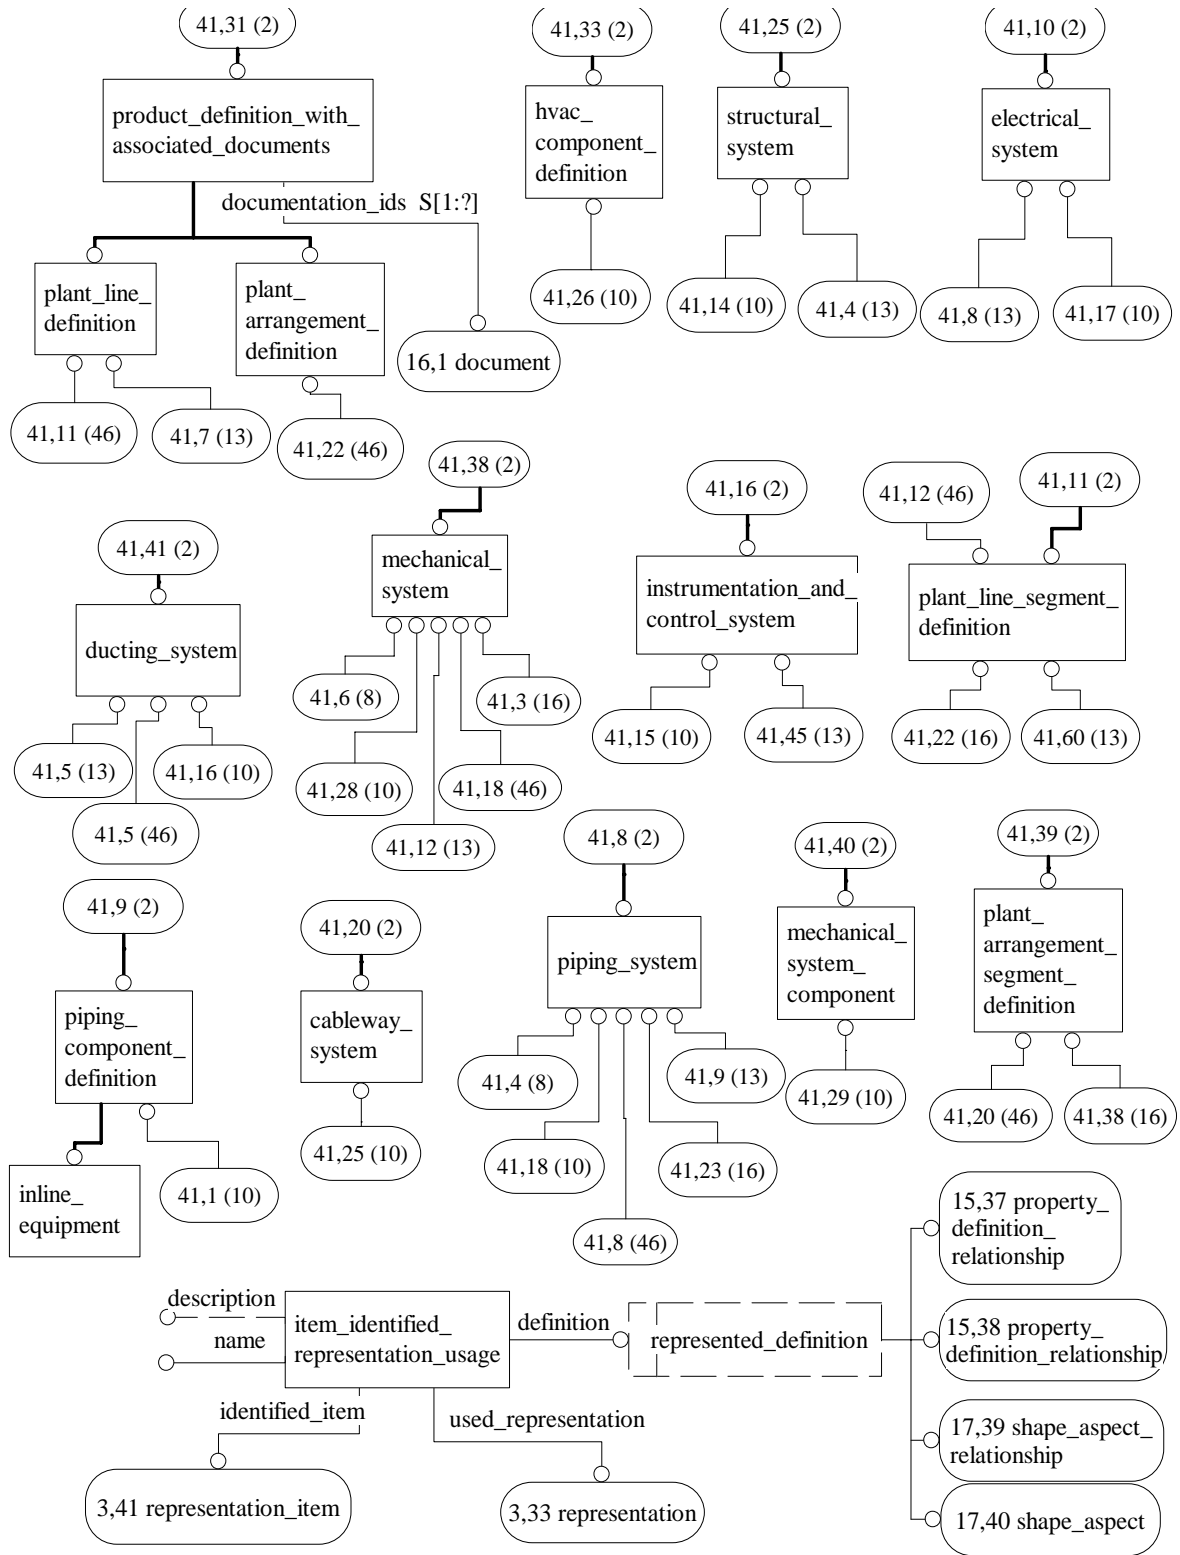


Figure H.41 — AIM EXPRESS-G diagram 41 of 55

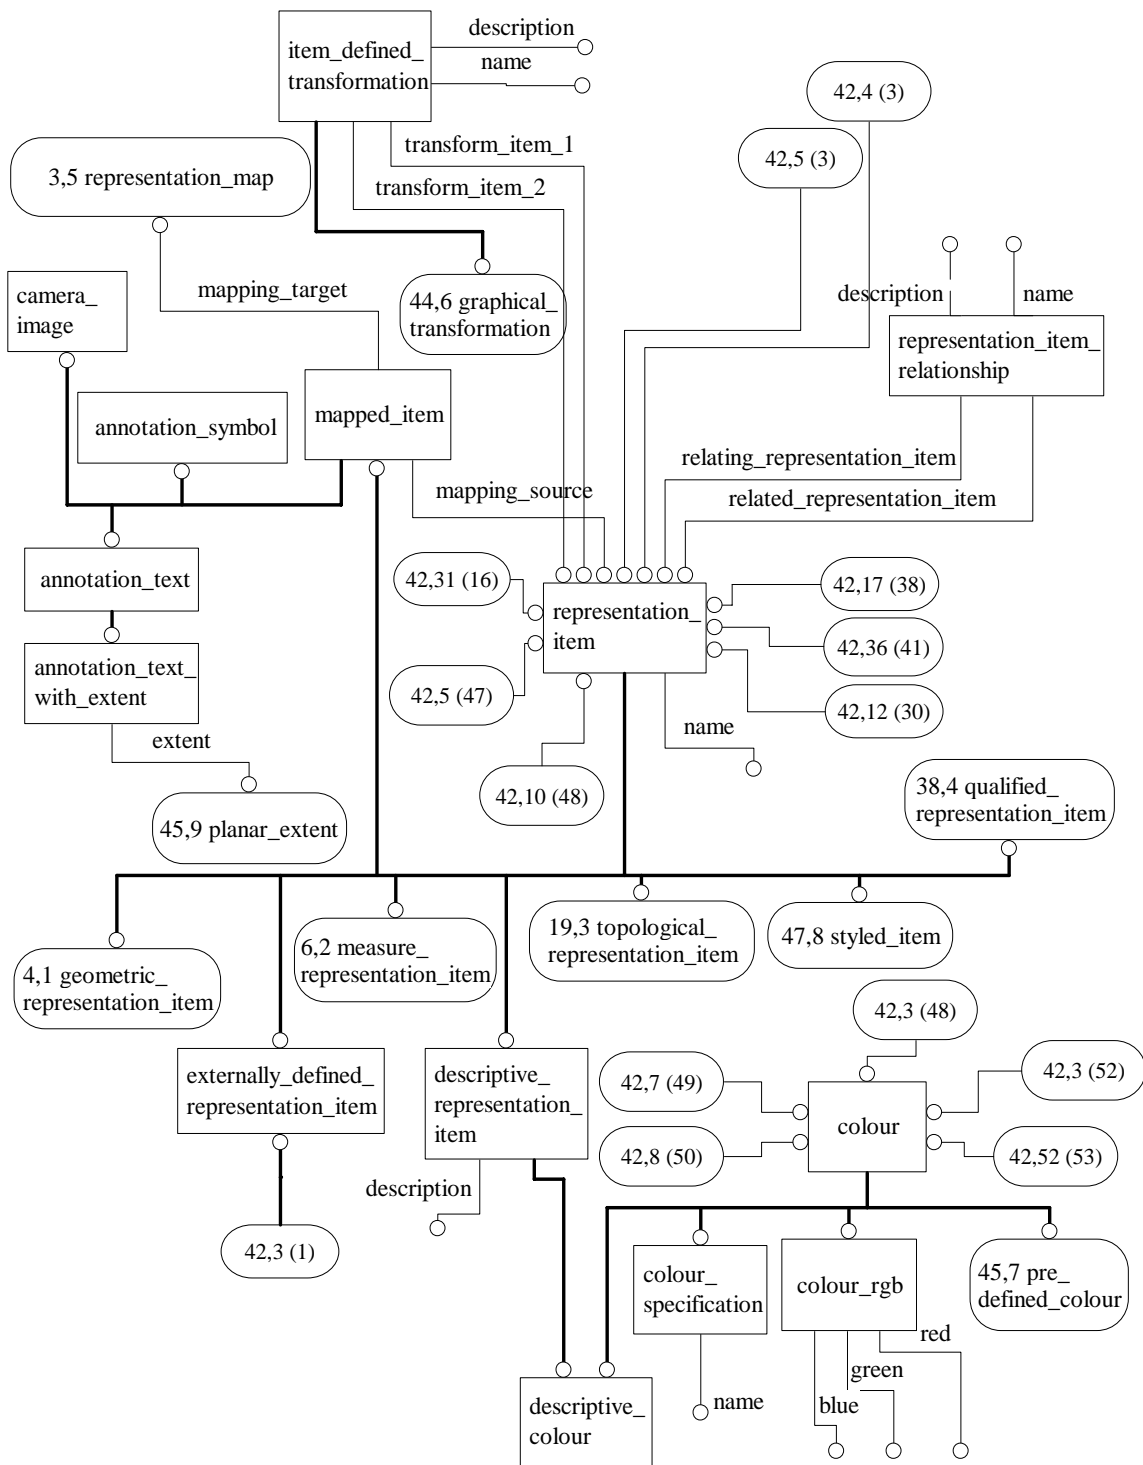


Figure H.42 — AIM EXPRESS-G diagram 42 of 55

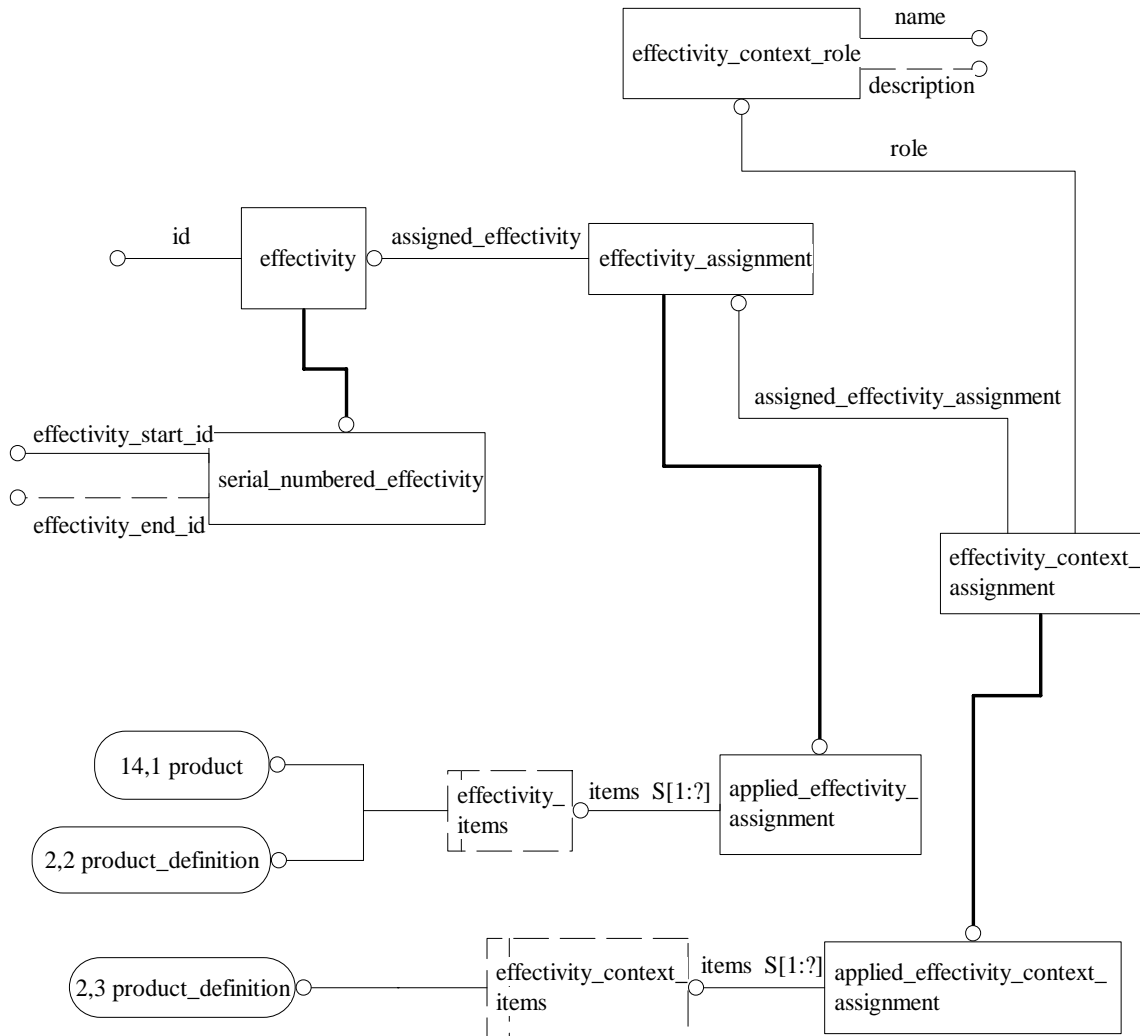


Figure H.43 — AIM EXPRESS-G diagram 43 of 55

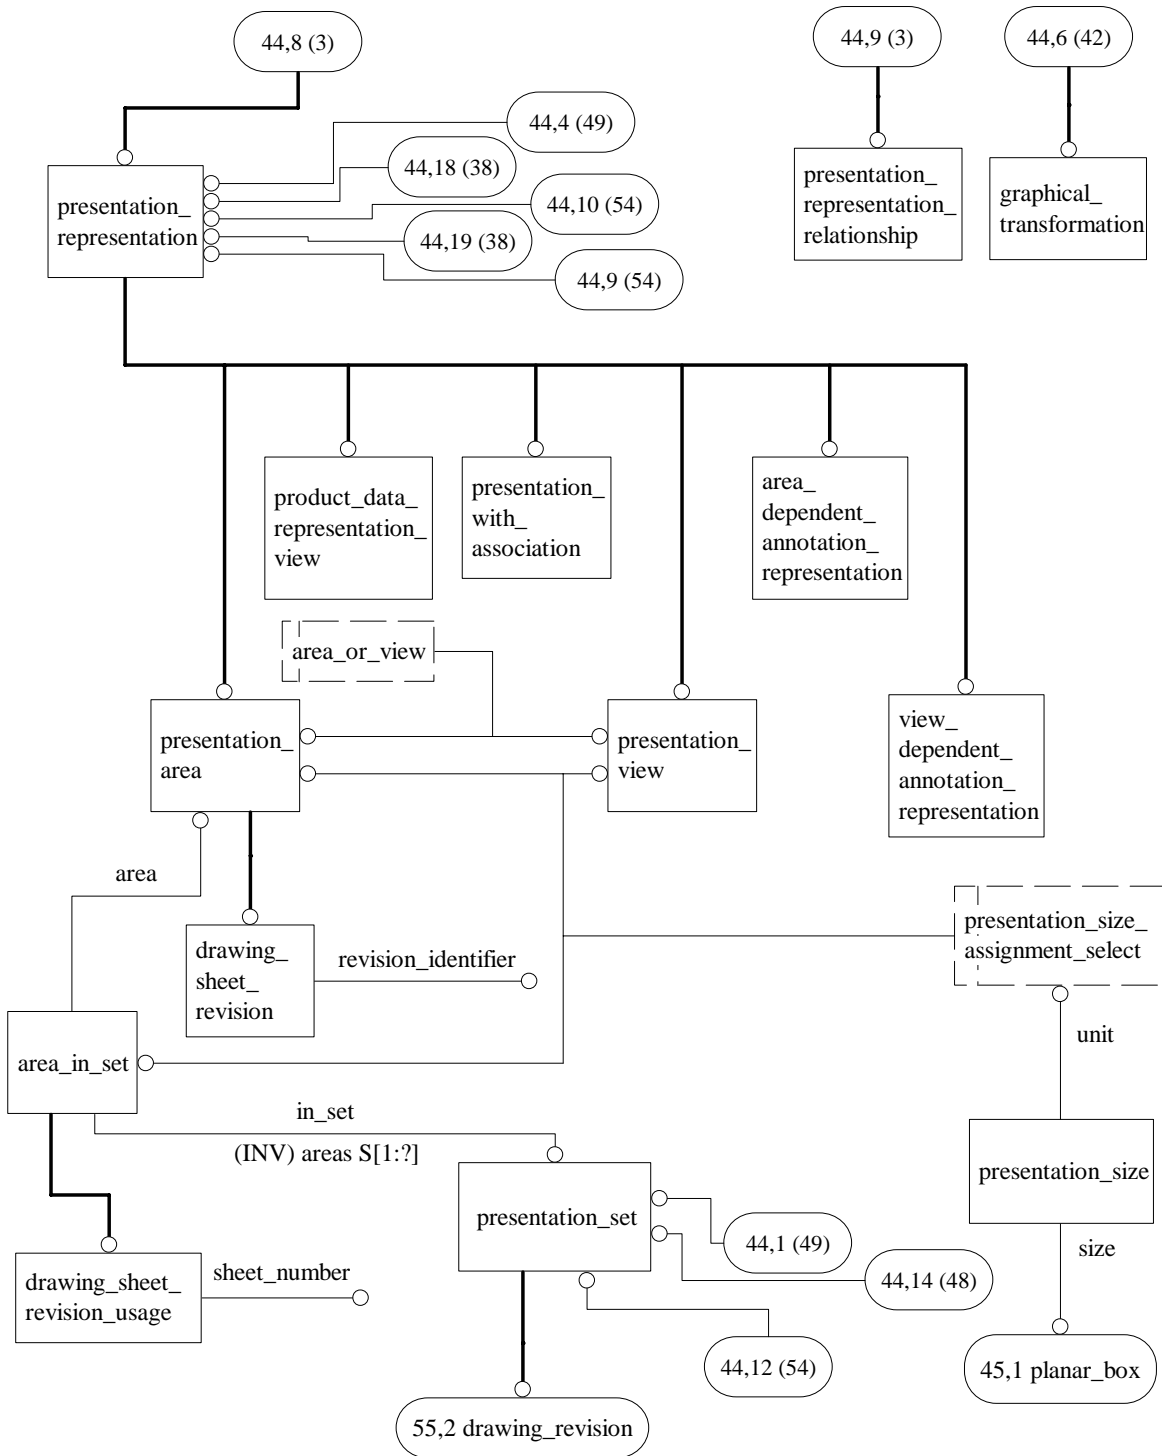


Figure H.44 — AIM EXPRESS-G diagram 44 of 55

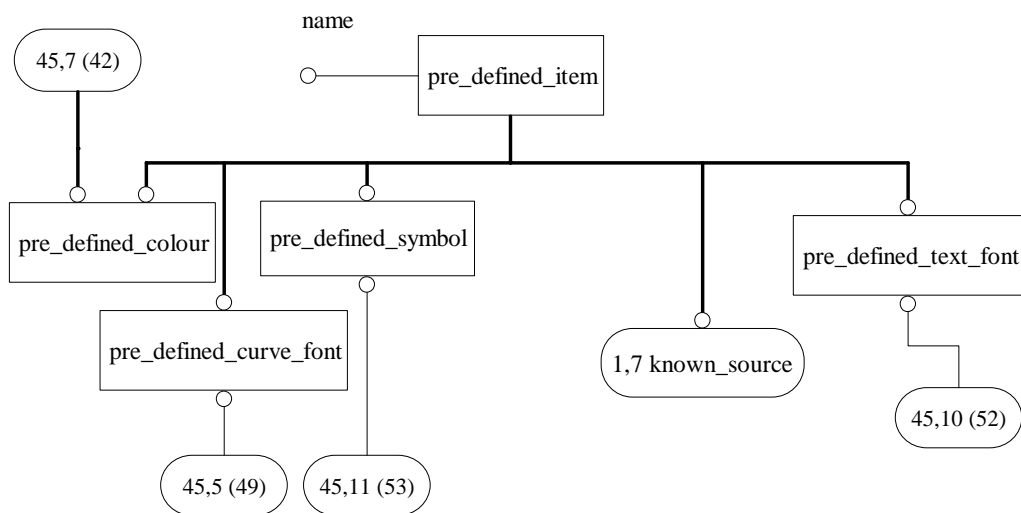
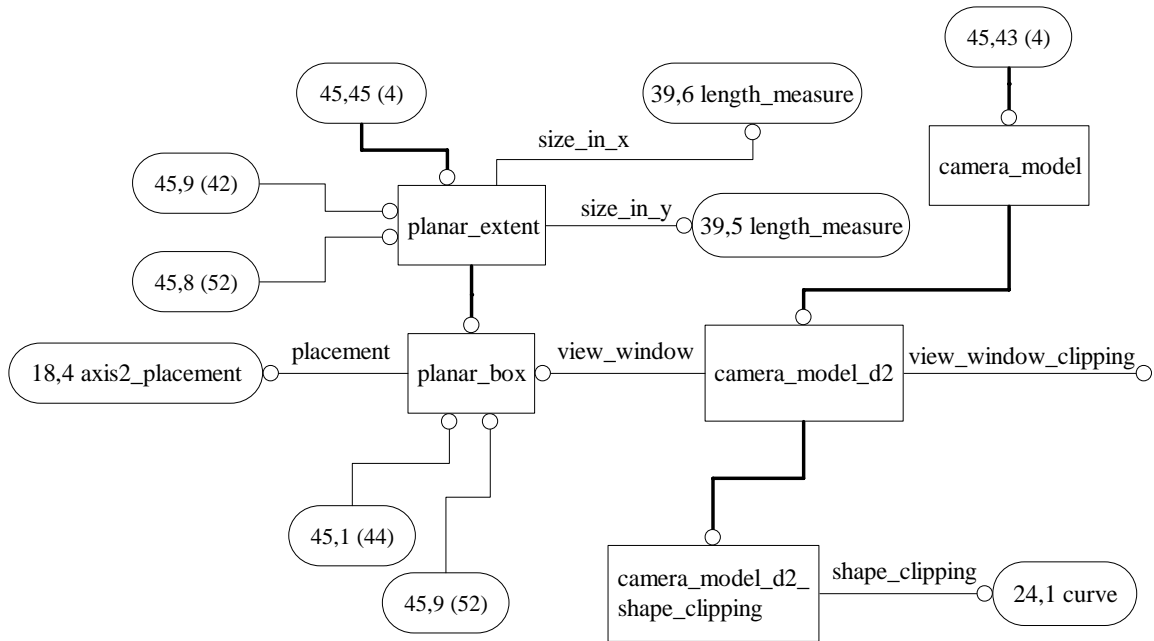


Figure H.45 — AIM EXPRESS-G diagram 45 of 55

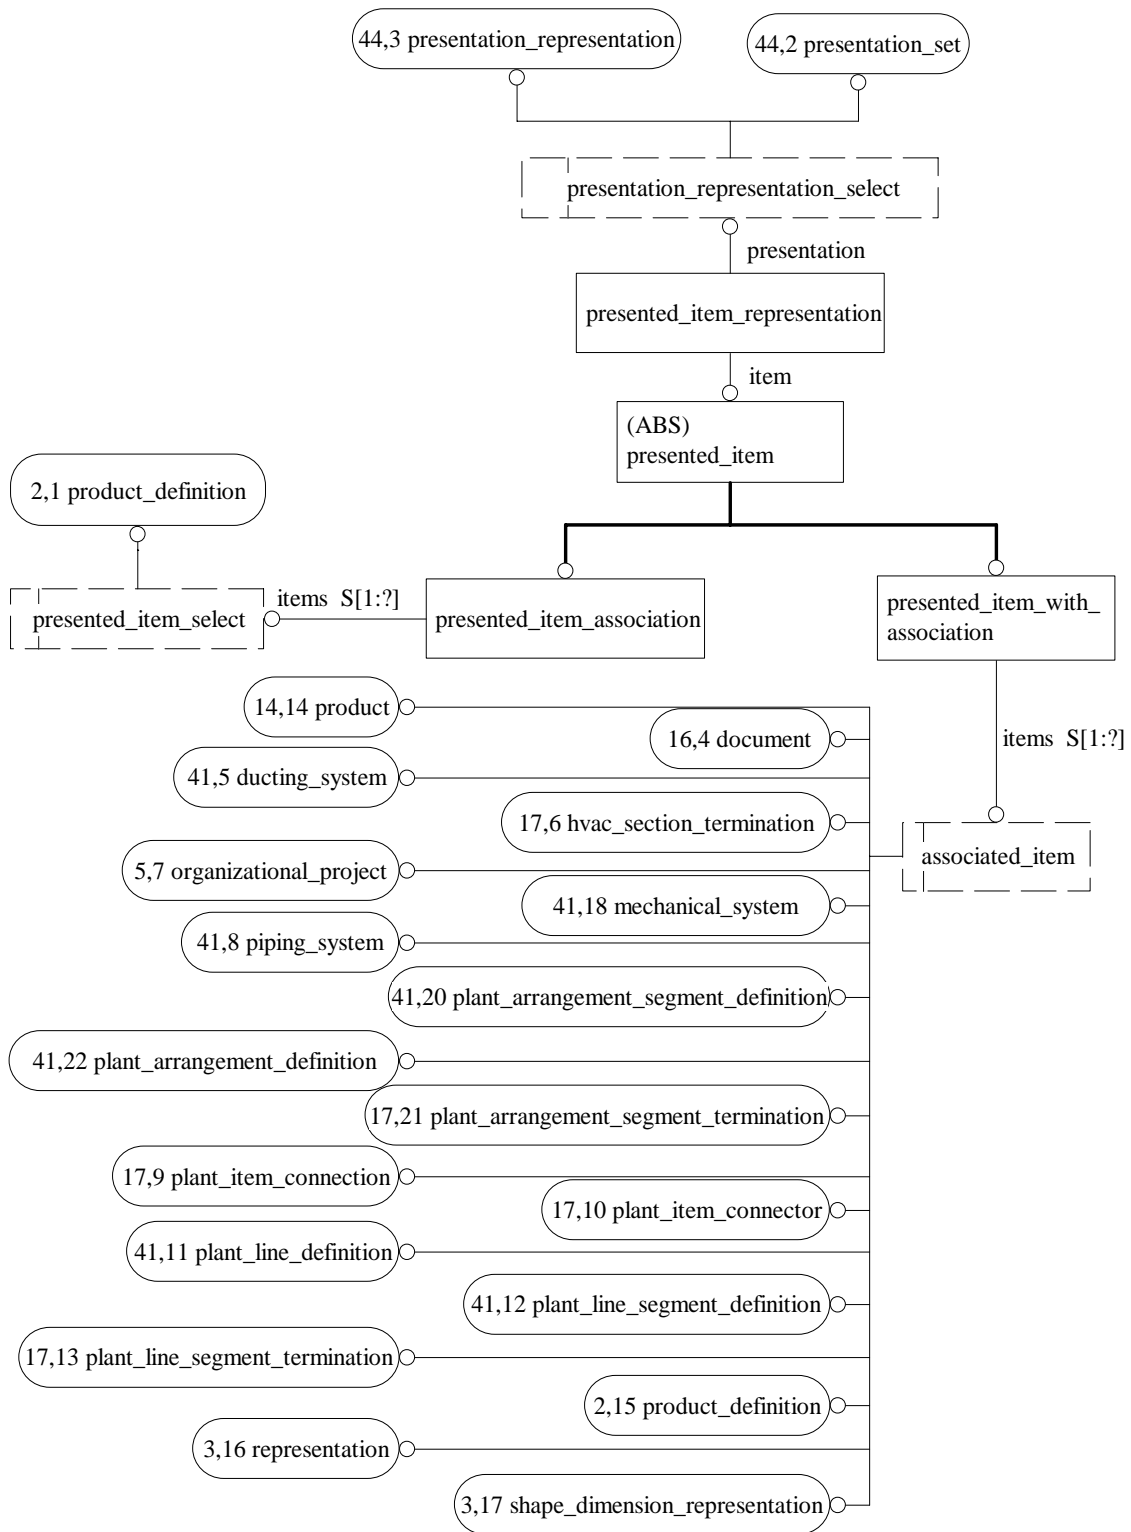


Figure H.46 — AIM EXPRESS-G diagram 46 of 55

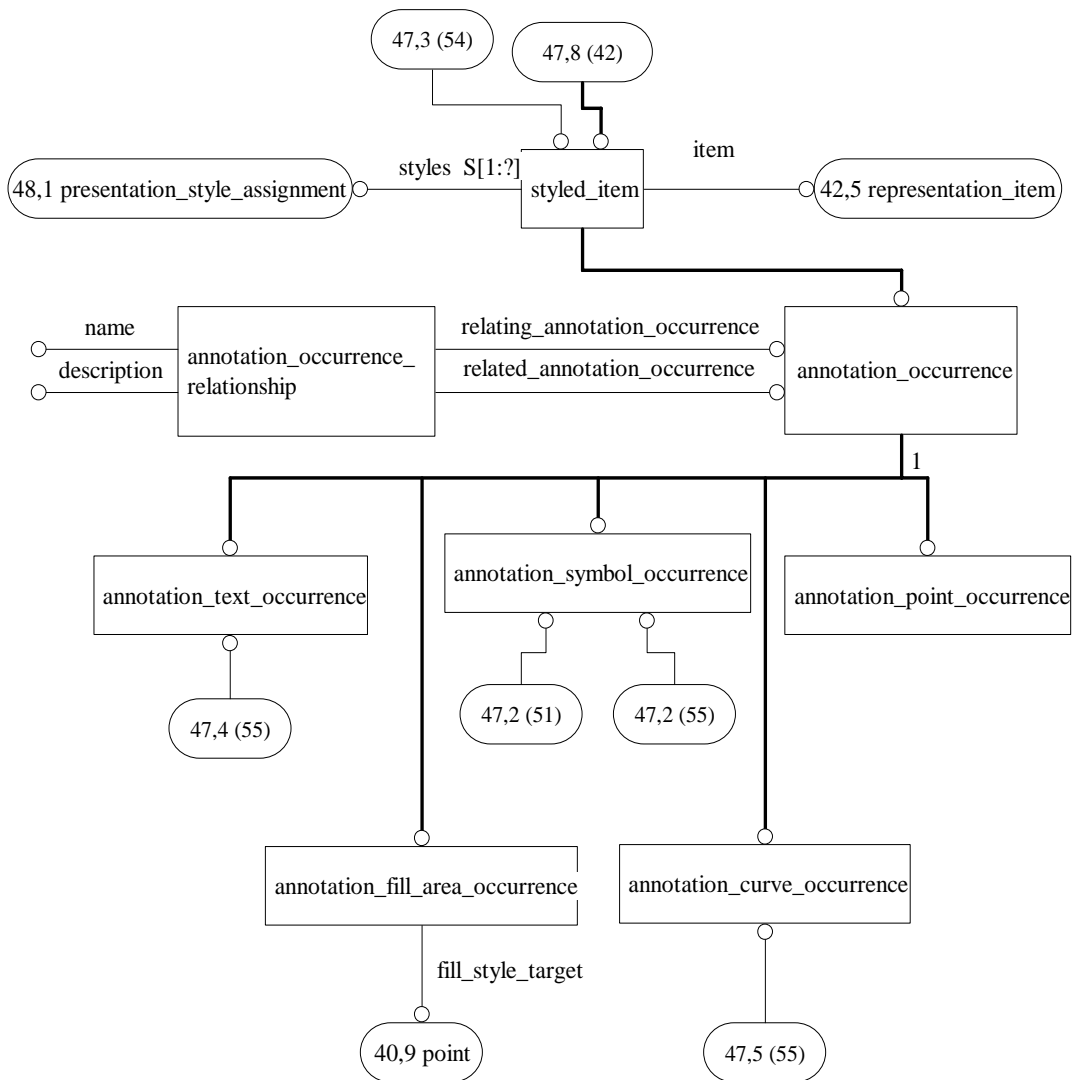


Figure H.47 — AIM EXPRESS-G diagram 47 of 55

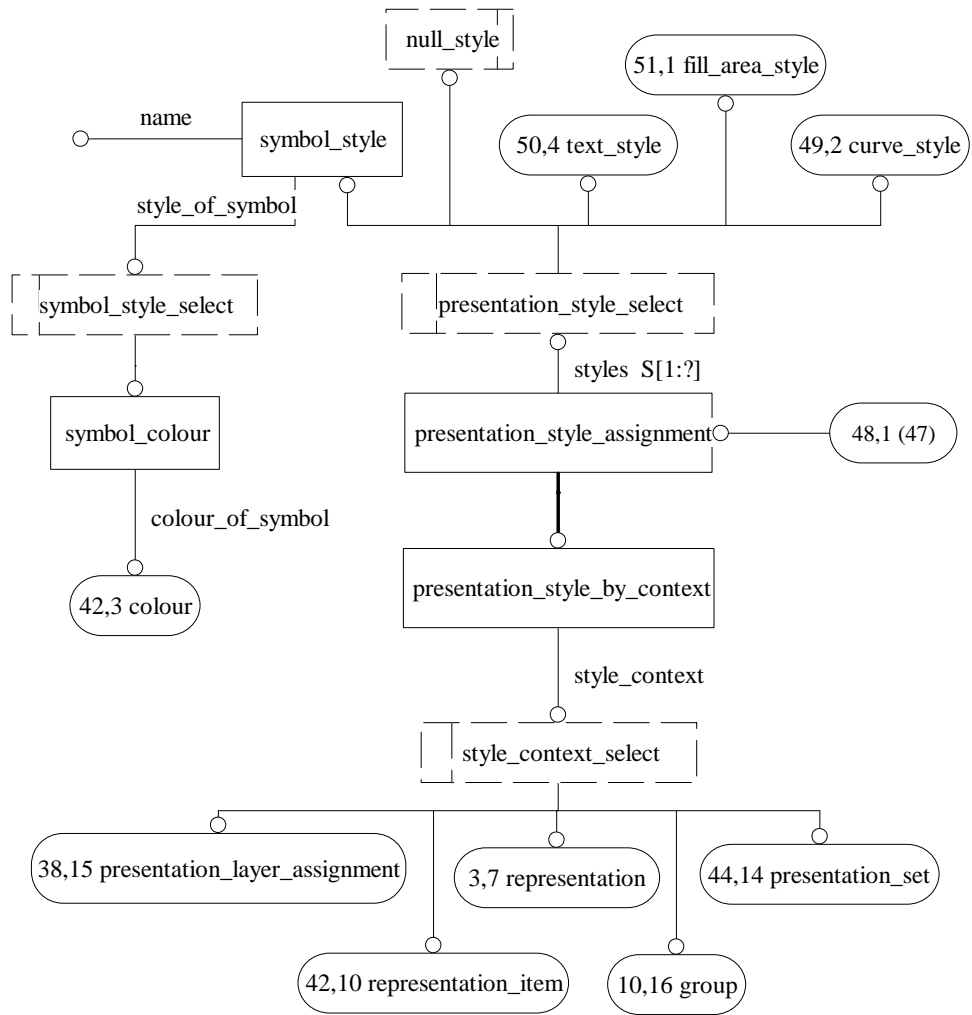


Figure H.48 — AIM EXPRESS-G diagram 48 of 55



Figure H.49 — AIM EXPRESS-G diagram 49 of 55

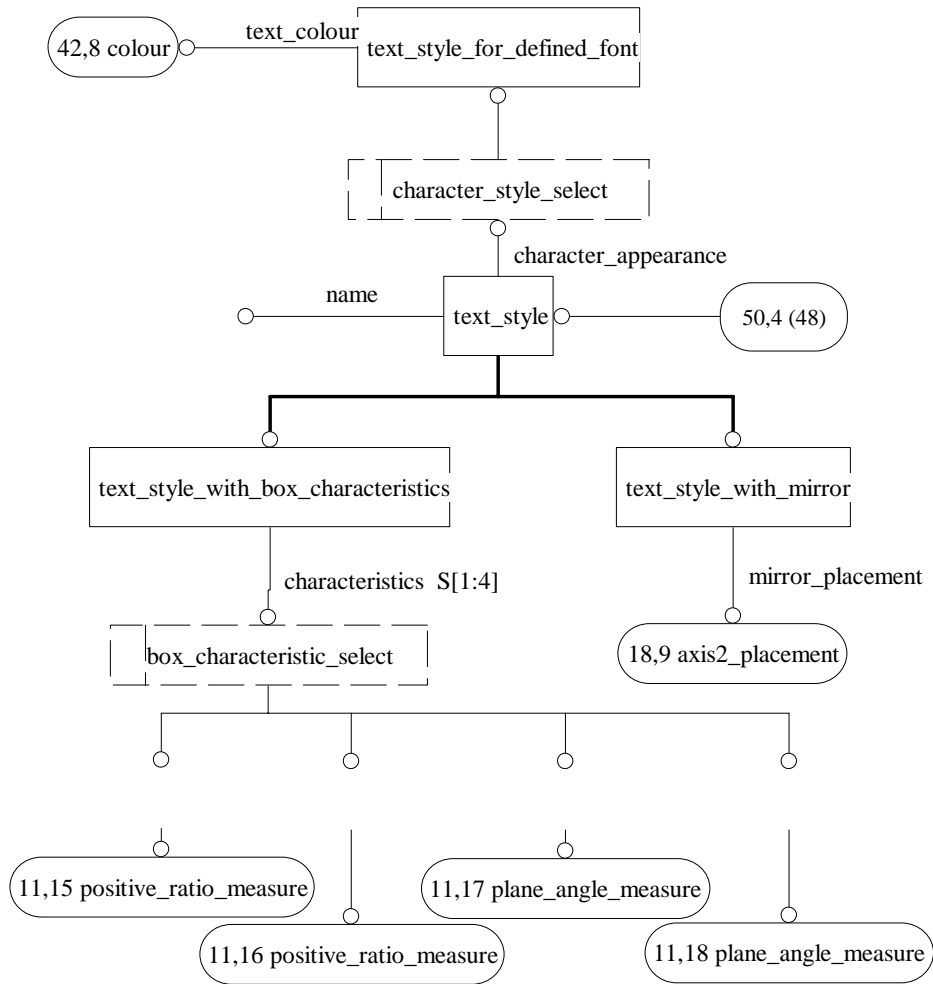


Figure H.50 — AIM EXPRESS-G diagram 50 of 55

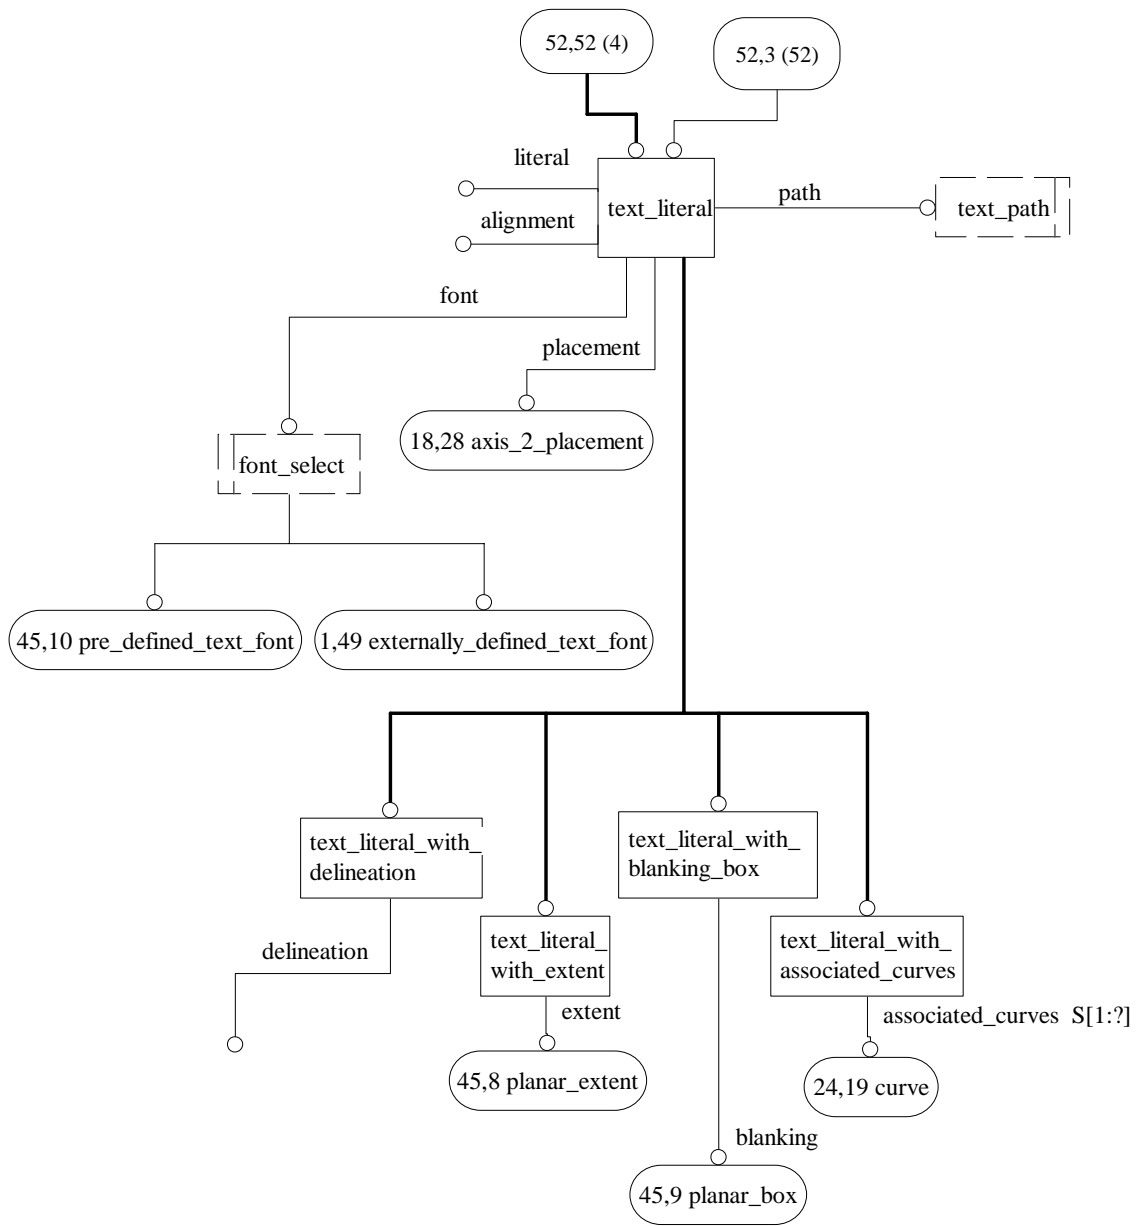


Figure H.52 — AIM EXPRESS-G diagram 52 of 55

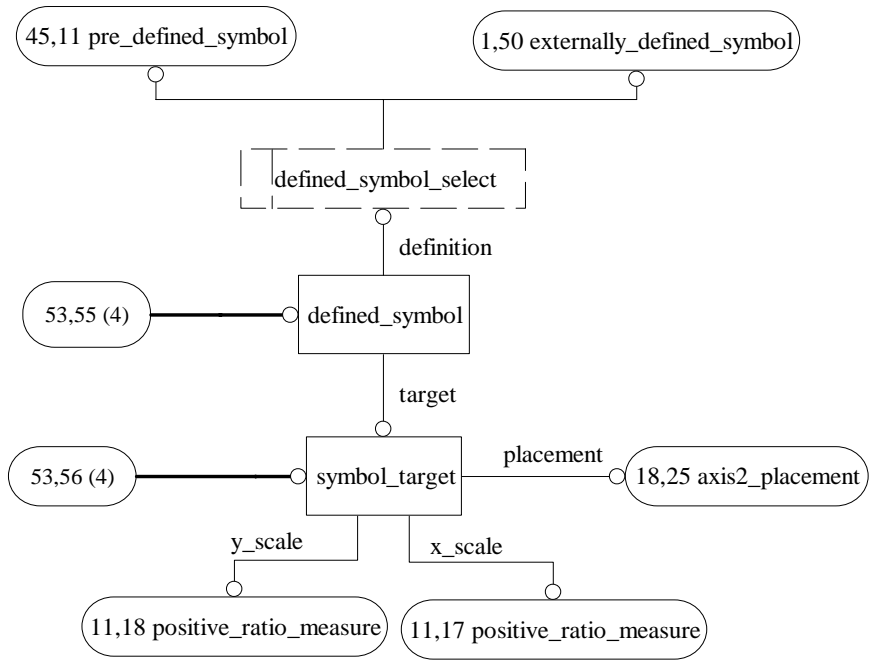


Figure H.53 — AIM EXPRESS-G diagram 53 of 55

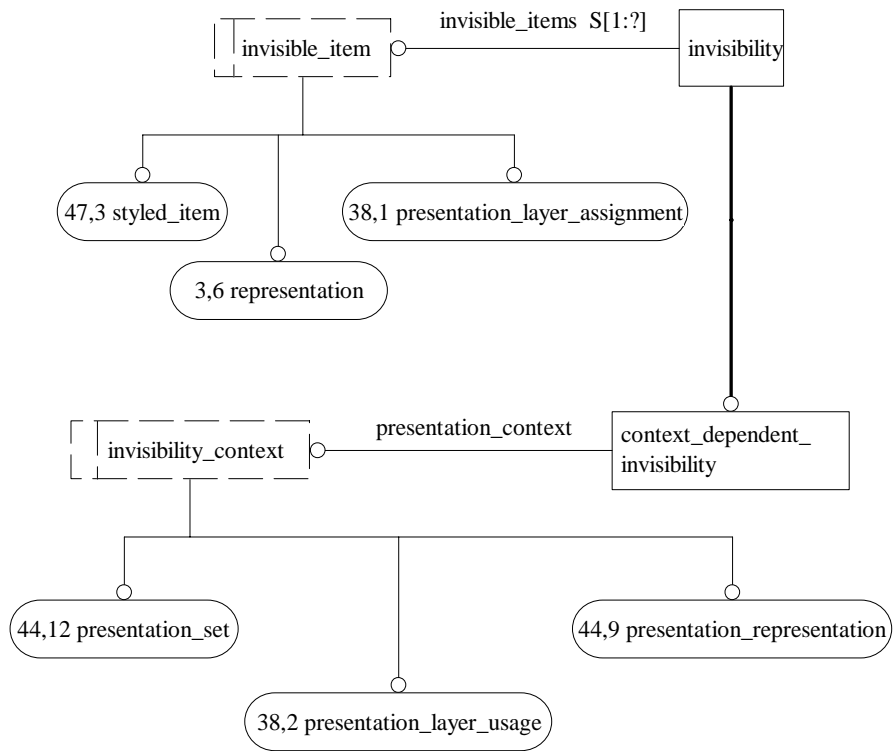


Figure H.54 — AIM EXPRESS-G diagram 54 of 55

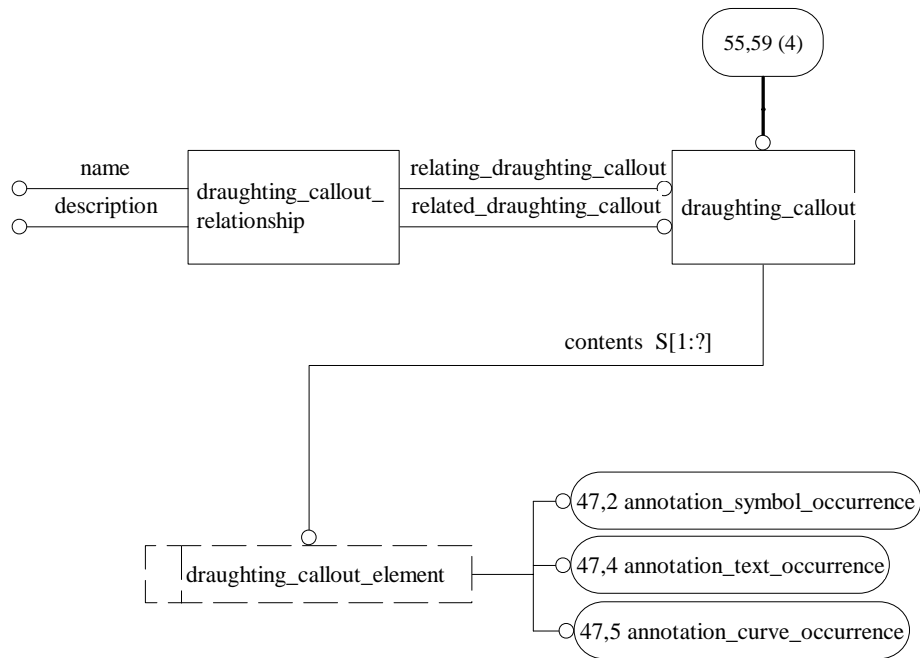
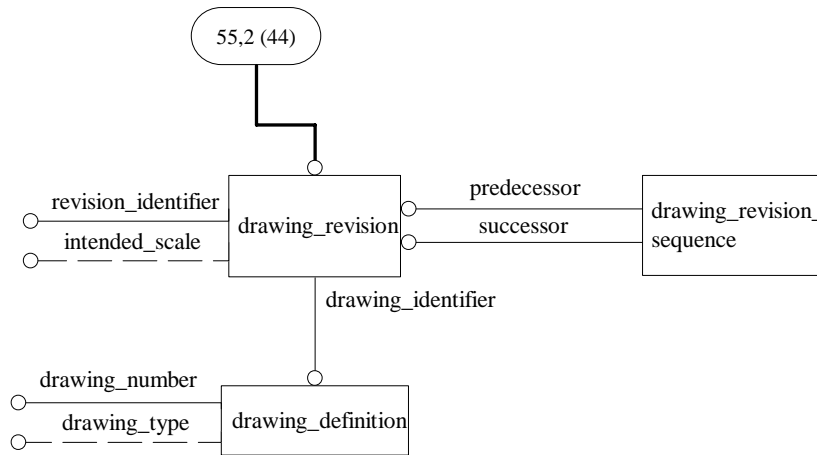


Figure H.55 — AIM EXPRESS-G diagram 55 of 55

Annex J
(informative)
AIM EXPRESS listing

This annex provides a listing of the complete EXPRESS schema specified in annex A of this part of ISO 10303 without comments or other explanatory text. It also provides a listing of the EXPRESS entity names and corresponding short names as specified in annex B of this part of ISO 10303.

The content of this annex is available in computer-interpretable form and links to it can be found at the following URLs:

- Short names: <http://www.steptools.com/sc4/services/index.html>
- EXPRESS: <http://www.steptools.com/sc4/archive/>

If there is difficulty accessing these sites contact ISO Central Secretariat or contact the ISO TC 184/SC4 Secretariat directly at: sc4sec@tc184-sc4.org.

NOTE The information provided in computer-interpretable form at the above URLs is informative. The information that is contained in the body of this part of ISO 10303 is normative.

Annex K
(informative)
Application protocol usage guide

In the previous edition of ISO 10303-227, this annex provided an explanation and guidance on the usage of this part of ISO 10303. For edition 2, a separate AP227 Usage Guide and Test Case document [16] has been developed to assist the users and implementors of this AP. This document includes discussions of usage for piping, HVAC, and Cableways. It is strongly suggested that one consult this report for guidance in the usage of this application protocol. The recommendations previously described in annex K have instead been included in the AP227 Usage Guide and Test Case document [16]. The guidelines provided in that guide are suggestions for best usage of this part of ISO 10303. They shall be interpreted by users of this standard as recommendations rather than as requirements.

NOTE 1 The material in this annex differs from that in the Technical Discussion, annex L, in that the purpose of the material presented herein is to explain how to use this part of ISO 10303 in several important areas.

NOTE 2 A detailed Usage Guide for this part of ISO 10303 for Ship Piping was previously published as a separate document [15]. The recommendations in that guide have also been captured in the AP227 Usage Guide and Test Case document [16].

Annex L
(informative)
Technical discussions

This annex provides discussions of certain technical aspects of this part of ISO 10303 for the purpose of clarifying those aspects.

NOTE 1 The material in this annex differs from that in the Usage Guide, annex K, in that the purpose of the material here is to explain technical aspects of the design of this part of ISO 10303 that may be confusing or unclear as a result of the documentation format.

NOTE 2 If further examples are required to increase clarity of these concepts, one should consult the AP227 Usage Guide and Test Case document [16].

L.1 Fitting parameters and nominal size

The shape of fitting piping components may be defined parametrically in this part of ISO 10303. There are three aspects to this parametric definition:

- Fitting parameters;
- Connector parameters;
- Piping size description.

Fitting parameters are attributes of fitting application objects, such as an Elbow, defined in clause 4.2. An Elbow is defined by the attributes:

- `centre_to_end_1_length`;
- `centre_to_end_2_length`;
- `centreline_radius`;
- `end_1_connector`;
- `end_2_connector`;
- `sweep_angle`;
- `type`.

`Centre_to_end_1_length`, `centre_to_end_2_length`, `centreline_radius`, and `sweep_angle` are fitting parameters. `End_1_connector` and `end_2_connector` are connectors (or references to connectors) that have parameters of their own depending on the end type (for example, socket, flange). `Type` is a label that classifies or describes the Elbow.

Each connector of the Elbow may have its own set of parameters. If one end of the Elbow was flanged, the parameters at the flanged end would be:

- flange_inside_diameter;
- flange_outside_diameter;
- flange_thickness;
- raised_face_diameter;
- raised_face_height;
- ring_bottom_radius;
- ring_diameter;
- ring_width.

If the other end of the elbow was a socket, the parameters at the socket end would be:

- depth;
- hub_inside_diameter;
- hub_length;
- hub_outside_diameter.

For piping components, the specification of a nominal size is a very important and very common approach to specifying the shape of the component. This is done with the piping_size_description application object. The attributes for this object are:

- dimensional_standard;
- ovality_allowance.

The four kinds of piping size descriptions are inside_and_thickness, outside_and_thickness, pressure_class, and schedule. The attributes for the inside_and_thickness object are:

- inside_diameter;
- thickness.

The attributes for the outside_and_thickness object are:

- outside_diameter;
- thickness.

ISO 10303-227:2005(E)

The attributes for the `pressure_class` object are:

- `nominal_size`;
- `pressure_rating`.

The attributes for the `schedule` object are:

- `nominal_size`;
- `pipe_schedule`.

All of the attributes of piping size description and the four kinds of piping size descriptions are parameters, except for dimensional standard and pipe schedule, that are references to documents. It is important to note that nominal size, as used in this part of ISO 10303, has the same meaning as the term used in process plant industry. It does not denote an actual dimension of a component (as does "outside diameter"), but rather is an approximation or description of the size of the component.

A piping size description may be applied to a piping component in its entirety or to an individual connector on a piping component. Therefore, conflicts may arise between the specification of a piping size description and the fitting or connector parameters. This part of ISO 10303 does not specify a precedence among these representations in the case of conflicts. Precedence needs to be resolved on a case-by-case or project-wide basis.

L.2 Value range, family definitions and range values

Dimensions, fitting parameters, and nominal sizes are typically associated with a single value.

EXAMPLE 1 Single values for weld neck flange attributes are:

- hub through length: 5 inches
- hub weld point diameter: 3 inches
- flange inside diameter: 1.5 inches
- flange outside diameter: 8 inches
- flange thickness: 0.75 inches

There are occasions, however, when a family of parts needs to be described, such as in a piping specification.

EXAMPLE 2 A range of values for the attributes of a family of weld neck flanges are:

- hub through length: 5 inches
- hub weld point diameter: 3 inches
- flange inside diameter: 1 to 2 inches
- flange outside diameter: 6 to 8 inches

— flange thickness: 0.75 to 1.25 inches

This part of ISO 10303 supports the specification of a range of values (i.e., a "value range") for a given dimension, parameter, or nominal size for the purpose of defining a family of parts. This is done by specifying two dimensional values for a given parameter. One dimension has a `representation_item.name` with a value of "minimum_<parameter name>" (e.g., "minimum_flange_inside_diameter") and the other has a `representation_item.name` with a value of "maximum_<parameter name>".

A separate but related concept is the notion of range value. A range value, like the range of values, has a minimum and maximum value. It does not, however, indicate a family of parts. It indicates a parameter that may actually vary on the physical part. A range value is not a dimension that can vary within a prescribed tolerance.

EXAMPLE 3 Insulation may be described as 6 inches thick, but in reality it may be 5-7 inches thick. Range values permit this to be specified.

In clause 4.2, the attributes that use range values are differentiated from the attributes that use value ranges by an explanatory note that follows the attribute definition.

L.3 Piping specifications

As noted in clause 1, this part of ISO 10303 is intended for the exchange of references to piping specifications, not the exchange of the specification itself. However, since piping specifications are important to piping design, some aspects of piping specifications are included. The `piping_specification.owner` is the individual or organization that is responsible for its content (either as a creator or maintainer). The `piping_specification.name` is whatever useful designation the owner applies to it. The `piping_specification.piping_specification_id` is a designation that differentiates one piping specification from another (see K.1).

Service limits are specified in `piping_specification.service_description`. This is simply a narrative explanation or description of the conditions that the piping specification is applicable under. It is not the role of the piping specification to fully explicate the stream conditions. If it is necessary to exchange this information, `Stream_design_cases` may be defined.

Piping specifications identify certain families of parts that can be used given the service limits. The family of parts is specified with a `Plant_item_definition` (or, more precisely, a `Piping_component` that is also a `Plant_item_definition`) that has a special property. The parameter values for the component may be specified as a range of values.

EXAMPLE A piping specification may specify a family of 90-degree elbows with a centreline radius of six inches and a nominal size of between one inch and three inches. Everything about the family is same except for the variation in the nominal size.

See annex L.2 for a complete explanation of value ranges.

L.4 Catalogues items and connectors

As noted in clause 1, this part of ISO 10303 is intended for the exchange of catalogue identifications, not the exchange of the catalogue itself. Catalogues play two roles in this part of ISO 10303:

— partial catalogue information may be exchanged. This information is limited to the identification of the catalogue and the definition of plant items contained in the catalogue. The definition of the plant items in the catalogue is exactly the same as the definition of a plant item as allowed by this part of ISO 10303.

— a plant item may be identified as being from or contained in a particular catalogue;

A catalogue may be an external, predefined catalogue or a user defined catalogue. See K for a complete explanation of how external, predefined catalogues are referenced.

Many design systems also use a catalogue-based approach for connectors. This part of ISO 10303 addresses this requirement with the application object `Catalogue_connector`. A `Catalogue_connector` behaves just like a `Catalogue_item` as described above. The exception is that since a connector (and, therefore, a `Catalogue_connector`) is a `shape_aspect`, a `Catalogue_connector` cannot be individually instanced within an exchange file. A `Catalogue_connector` definition may be exchanged independently, but any `Catalogue_connector` instance must be part of a plant item definition. It cannot be part of a plant item instance.

L.5 Pipe lengths

The representation of piping components within a piping design makes a distinction between two kinds of `product_definitions`: a physical `Plant_item_definition` and a `Physical plant_item_instance`. The definition is defined once and instantiated numerous times within a design at different locations to reduce duplication of information. This approach accommodates situations such as the repeated use of a pressure gauge at different locations in a design - one design, many usages.

In most piping designs, individual pieces of straight pipe of a given nominal size and material come in a large variety of lengths. Given the one design-many use approach, this would require that a definition and an instance be created for each pipe of differing length (since the length property of the pipe design shape differs). It is not practical to create `Plant_item_definitions` for each individual piece because everything about the pipe design is the same except for the length.

The use of this part of ISO 10303 permits two approaches for addressing this situation. The first is that the `Plant_item_definition` may be defined without specifying a length attribute. In this case, the length of the pipe would be associated with the `Plant_item_instance` `product_definition`. In this approach, all the information about the pipe - material, insulation, nominal size (a shape property) - would be associated with the `Plant_item_definition` `product_definition`. The shape property of the instance would be represented by (i.e., have `representation_items` of) the mapped shape of the `Plant_item_definition` (see discussion of `mapped_item`) and the parameter `end_to_end_length`.

The second approach is similar to the first, but specifies `descriptive_representation_item` with the attribute `description` assigned a value of "as required", rather than specifying an `end_to_end_length`. This completely eliminates the need to specify a length and permits the pipe to be "cut to fit" at the plant site.

L.6 Logical connectivity and relationship to physical design

Piping lines and line segments represent the logical connectivity of the process streams and equipment. This is part of a functional design in that the functional capability of the piping system is partially represented by the connectivity of the piping lines and (functional) plant items. The complete representation of the functional capabilities of the piping system is outside the scope of this part of ISO 10303. ISO 10303-221 [3] may be used to represent the complete functionality of the piping system.

The physical design of the piping is associated with the functional design of the piping lines through `line_piping_system_component_assignment`. This association links an element of the physical design (an instance, not a definition), such as a valve, to a `Piping_system_line_segment`. This association says "this piping component is on this line". Therefore, one or more piping components may be considered as being "on" a piping line.

Since physical piping components may be connected to form piping runs or piping assemblies, two kinds of connectivity can exist within a usage of this part of ISO 10303: logical connectivity represented by piping system lines and physical connectivity represented by plant item connections. In general, the only points where logical connections correspond to physical connections are where the line terminates at a piece of equipment. This is due to the fact that lines may end at equipment (by definition) and equipment connectors establish connections with piping components. Most physical connections, however, do not correspond to logical connections. Figure L.1 illustrates the relationship between the piping line segments, connectivity between line segments, physical components, and the connectivity between physical components.

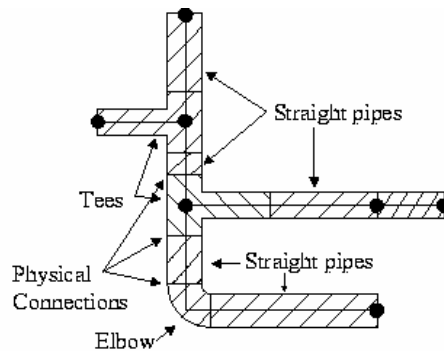


Figure L.1 — Relationship between logical connectivity and physical connectivity

Bibliography

- [1] *Federal Information Processing Standards Publication 183, Integration Definition for Function Modeling (IDEF0)*, FIPS PUB 183, National Institute of Standards and Technology, December 1993.
- [2] *Federal Information Processing Standards Publication 184, Integration Definition for Information Modeling (IDEF1X)*, FIPS PUB 184, National Institute of Standards and Technology, December 1993.
- [3] ISO 10303-221, *Functional Data and their Schematic Representation for Process Plant*, TC184/SC4/WG3/N559, 23 February 1997.
- [4] *Cast Iron Pipe Flanges and Flanged Fittings*, NSI B16.1, American National Standards Institute, 1989.
- [5] *Pipe Flanges and Flanged Fittings*, ANSI B16.5, American National Standards Institute, 1988.
- [6] *Welded and Seamless Wrought Steel Pipe*, ANSI B36.10, American National Standards Institute, 1985.
- [7] *Stainless Steel Pipe*, ANSI B36.19, American National Standards Institute, 1985.
- [8] *The Piping Guide for the Design and Drafting of Industrial Piping Systems*, Sherwood, David R., Whistance, Dennis J., Syntek Books Company, Inc., 1991.
- [9] *Piping Handbook*, Nayyar, Mohinder L., McGraw-Hill, Inc., Sixth Edition, 1992.
- [10] *Guidelines on Terminology for Valves and Fittings*, MSS SP-96, Manufacturers Standardization Society of the Valve and Fittings Industry, Inc., 1991.
- [11] ISO TC184/SC4/WG3/N582, *Application Protocol 227 Validation Report Version 1.1*, 21 March 1997.
- [12] *Process Engineering Data: Process Design and Process Specifications of Major Equipment*, ISO 10303-231, Group 1 Version, 3 September 1996.
- [13] ISO 13584, *Industrial automation systems and integration — Parts Library*, 1996
- [14] Hoffman-Wellenhof, B., Lichtenegger, H., and Collins, J., *Global Positioning System - Theory and Practise*, Third Edition, Springer-Verlag Wien, New York, 1994.
- [15] NSRP 0424, Usage Guide for ISO 10303-227 for Ship Piping Systems Version 3.0, 1 October 2000
- [16] ISO TC184/SC4/WG3/N1482, AP227 Usage Guide and Test Case Document.

INDEX

3D	14
AAM	14
Abstract test suite	5, 14
Action	
AIM diagrams	1512
Action_assignment	
AIM diagrams	1513
Action_directive	
AIM diagrams	1512
Action_method	
AIM diagrams	1512
Action_method_relationship	
AIM diagrams	1512
Action_relationship	
AIM diagrams	1512
Action_request_assignment	
AIM diagrams	1512
Action_request_item	
AIM diagrams	1512
AIM EXPRESS short listing types	1038
Action_request_solution	
AIM diagrams	1512
Action_request_status	
AIM diagrams	1512
AIM EXPRESS short listing imported entity modifications	1161
Action_status	
AIM diagrams	1512
Actual	
definition	6
AE	14
AEC	14
Ahead_or_behind	
AIM diagrams	1509
AIC	14
AIM	14
AISC	14
Amount_of_substance_measure	
AIM diagrams	1511
Amount_of_substance_measure_with_unit	
AIM diagrams	1506
Amount_of_substance_unit	
AIM diagrams	1507
Analysis_data_point	
application assertion	234
application object	37
ARM diagrams	1455
mapping specification	881
Analysis_tracing_representation	1045
AIM diagrams	1503
AIM EXPRESS short listing entities	1045
Angle_relator	
AIM diagrams	1517

ISO 10303-227:2005(E)

Angular_location	
AIM diagrams	1517
Annotation_curve_occurrence	
AIM diagrams	1547
Annotation_fill_area_occurrence	
AIM diagrams	1547
Annotation_occurrence	
AIM diagrams	1547
Annotation_occurrence_relationship	
AIM diagrams	1547
Annotation_point_occurrence	
AIM diagrams	1547
Annotation_symbol	
AIM diagrams	1542
Annotation_symbol_occurrence	
AIM diagrams	1547
Annotation_text	
AIM diagrams	1542
Annotation_text_occurrence	
AIM diagrams	1547
Annotation_text_with_extent	
AIM diagrams	1542
ANSI	14
AP	14
Application	5
Application activity model	5
Application interpreted model	5
Application protocol	5
Application reference model	5
Application_context	
AIM diagrams	1501
Application_context	
AIM EXPRESS short listing imported entity modifications	1161
Application_context_element	
AIM diagrams	1501
Application_context_requires_ap_definition	
AIM EXPRESS short listing rules	1165
Application_protocol_definition	
AIM diagrams	1501
AIM EXPRESS short listing imported entity modifications	1161
Applied_action_request_assignment	
AIM diagrams	1512
AIM EXPRESS short listing entities	1045
Applied_approval_assignment	
AIM diagrams	1508
AIM EXPRESS short listing entities	1045
mapping table	292
Applied_classification_assignment	
AIM diagrams	1510
AIM EXPRESS short listing entities	1046
Applied_date_and_time_assignment	
AIM diagrams	1509
AIM EXPRESS short listing entities	1047

Applied_date_assignment	
AIM diagrams	1509
AIM EXPRESS short listing entities.....	1047
Applied_document_reference	
AIM diagrams	1516
AIM EXPRESS short listing entities.....	1048
Applied_document_usage_constraint_assignment	
AIM EXPRESS short listing entities.....	1048
Applied_effectivity_assignment	
AIM diagrams	1543
AIM EXPRESS short listing entities.....	1049
Applied_effectivity_context_assignment	
AIM diagrams	1543
AIM EXPRESS short listing entities.....	1049
Applied_identification_assignment	
AIM diagrams	1535
AIM EXPRESS short listing entities.....	1049
mapping table.....	288
Applied_identification_correlation	
AIM EXPRESS short listing functions	1176
applied_organization_assignment	
mapping table.....	292
Approval	
AIM diagrams	1508
AIM EXPRESS short listing imported entity modifications	1162
Approval_assignment	
AIM diagrams	1508
Approval_date_time	
AIM diagrams	1508
AIM EXPRESS short listing imported entity modifications	1162
Approval_item	
AIM diagrams	1508
AIM EXPRESS short listing types.....	1038, 1042
Approval_person_organization	
AIM diagrams	1508
AIM EXPRESS short listing imported entity modifications	1162
Approval_requires_approval_date_time	
AIM EXPRESS short listing rules	1166
Approval_requires_approval_person_organization	
AIM EXPRESS short listing rules	1166
Approval_role	
AIM diagrams	1508
Approval_status	
AIM diagrams	1508
approved_item	
mapping table.....	292
Area_dependent_annotation_representation	
AIM diagrams	1544
Area_in_set	
AIM diagrams	1544
Area_measure	
AIM diagrams	1511

ISO 10303-227:2005(E)

Area_or_view	
AIM diagrams	1544
ARM	14
Arrangement_branch_connection	1050
AIM diagrams	1517
AIM EXPRESS short listing entities	1050
application object	38
ARM diagrams	1499
mapping specification	548
Arrangement_branch_termination	
application object	38
ARM diagrams	1499
Arrangement_less_mechanical_system	1050
AIM diagrams	1502
AIM EXPRESS short listing entities	1050
application object	38
ARM diagrams	1458
Arrangement_load	1051
AIM diagrams	1515
AIM EXPRESS short listing entities	1051
application object	38
ARM diagrams	1497
Arrangement_mechanical_system_component_assignment	
application object	38
ARM diagrams	1497
arrangement_plant_item_branch_connection	1052
Arrangement_plant_item_branch_connection	
AIM diagrams	1517
AIM EXPRESS short listing entities	1051
application object	38
ARM diagrams	1498
Arrangement_plant_item_branch_connector	
ARM diagrams	1481
Arrangement_plant_item_branch_connector	
application object	39
arrangement_plant_item_connection	1052
Arrangement_plant_item_connection	
AIM EXPRESS short listing entities	1052
application object	39
ARM diagrams	1499
Arrangement_plant_item_connector	
ARM diagrams	1481
Arrangement_plant_item_connector	
application object	39
Arrangement_plant_item_termination	
application object	39
ARM diagrams	1499
arrangement_termination_connection	1052
Arrangement_termination_connection	
AIM EXPRESS short listing entities	1052
Arrangement_to_arrangement_connection	
application object	39

Arrangement_to_arrangement_termination	
application object	39
Arrangement_to_Arrangement_termination	
ARM diagrams	1499
Assembly	
definition	7
Assembly_component_usage	
AIM diagrams	1502
associated_item	
mapping table	272, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285
Associated_item	
AIM diagrams	1546
Associative_schematics	
mapping specification	271
Associative_schematics	
unit of functionality	16
ASTM	14
ATS	14
Attribute_type	
AIM diagrams	1533
Axis1_placement	
AIM diagrams	1518
Axis2_placement	
AIM diagrams	1518
Axis2_placement_2d	
AIM diagrams	1518
Axis2_placement_3d	
AIM diagrams	1518
B_rep_element	
application object	39
ARM diagrams	1457
mapping specification	539
B_spline_curve	
AIM diagrams	1527
B_spline_curve_form	
AIM diagrams	1527
B_spline_curve_with_knots	
AIM diagrams	1527
B_spline_surface	
AIM diagrams	1531
B_spline_surface_form	
AIM diagrams	1531
B_spline_surface_with_knots	
AIM diagrams	1531
Bag_to_set	
AIM EXPRESS short listing functions	1178
Base_elbow_support	
application object	39
ARM diagrams	1479
mapping specification	571
Base_line_support	
application object	40
ARM diagrams	1479

ISO 10303-227:2005(E)

mapping specification	573
Basic engineering data	
definition	7
Bent_pipe	
ARM diagrams	1469
Bezier_curve	
AIM diagrams	1527
Bezier_surface	
AIM diagrams	1531
Blank	
application object	42
ARM diagrams	1494
mapping specification	576
Blank_fitting_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1053
Blind_flange	
application object	42
ARM diagrams	1484
mapping specification	580
Block	
AIM diagrams	1521
application object	43
ARM diagrams	1457
mapping specification	877
Bolt	
application object	43
ARM diagrams	1487
mapping specification	883
Bolt_and_nut_component	
application object	43
ARM diagrams	1487
mapping specification	884
Bolt_and_nut_component_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1054
Bolt_and_nut_component_definition	
AIM diagrams	1502
AIM EXPRESS short listing entities.....	1055
Bolt_and_nut_set	
application object	43
ARM diagrams	1487
mapping specification	886
Bolt_and_nut_set_definition	
AIM diagrams	1502
AIM EXPRESS short listing entities.....	1055
Bolt_with_head	
application object	44
ARM diagrams	1487
Boolean_operand	
AIM diagrams	1520
Boolean_operator	
AIM diagrams	1520

Boolean_result	
AIM diagrams	1520
BOP	14
Boss	
application object	44
ARM diagrams	1471
mapping specification	581
Boundary_curve	
AIM diagrams	1526
Bounded_curve	
AIM diagrams	1526
Bounded_pcurve	
AIM diagrams	1526
Bounded_surface	
AIM diagrams	1530
Bounded_surface_curve	
AIM diagrams	1526
Box_characteristic_select	
AIM diagrams	1550
Branch	
definition	7
Branch_hole	
application object	45
ARM diagrams	1478
mapping specification	334
Breakline	
application object	45
ARM diagrams	1462
mapping specification	1009
B-rep	14
Brep_with_voids	
AIM diagrams	1523
Building	
application object	45
ARM diagrams	1462
mapping specification	1009
Bushing	
application object	46
ARM diagrams	1471
mapping specification	582
Buttweld	
application object	47
ARM diagrams	1482
mapping specification	336
Cable	
application object	47
ARM diagrams	1489
mapping specification	293
Cable_support	
application object	47
ARM diagrams	1459
mapping specification	889

ISO 10303-227:2005(E)

Cableway_component	
application object	47
ARM diagrams	1489
mapping specification	294
Cableway_component_characterization	
mapping specification	293
unit of functionality	17
Cableway_component_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1055
Cableway_component_definition	
AIM diagrams	1502
AIM EXPRESS short listing entities.....	1056
Cableway_connector	
application object	47
ARM diagrams	1460
mapping specification	295
Cableway_connector_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1056
Cableway_fitting	
application object	48
ARM diagrams	1489
mapping specification	295
Cableway_piece	
application object	48
ARM diagrams	1489
mapping specification	297
Cableway_size_description	
application object	48
ARM diagrams	1489
mapping specification	298
Cableway_system	
AIM diagrams	1541
AIM EXPRESS short listing entities.....	1056
application object	48
ARM diagrams	1458
mapping specification	846
CAD.....	14
Calender_date	
AIM diagrams	1509
Camera_image	
AIM diagrams	1542
Camera_model	
AIM diagrams	1545
Camera_model_d2	
AIM diagrams	1545
Camera_model_d2_shape_clipping	
AIM diagrams	1545
Camera_usage	
AIM diagrams	1503
Cap	
application object	48

ARM diagrams	1480
mapping specification	585
Cartesian_point	
AIM diagrams	1540
Cartesian_transformation_operator	
AIM diagrams	1504
Cartesian_transformation_operator_3d	
AIM diagrams	1504
Catalogue	
AIM diagrams	1516
Catalogue	
AIM EXPRESS short listing entities.....	1057
definition	7
Catalogue_connector	
AIM diagrams	1501
Catalogue_connector	
AIM EXPRESS short listing entities.....	1057
application object	49
ARM diagrams	1460
mapping specification	337
Catalogue_definition	
application object	49
ARM diagrams	1466
mapping specification	890
Catalogue_item	
AIM diagrams	1501
Catalogue_item	
AIM EXPRESS short listing entities.....	1058
application object	50
ARM diagrams	1466
mapping specification	891
Catalogue_item_substitute	
application object	50
ARM diagrams	1466
mapping specification	893
CC.....	14
celsius_temperature_measure_with_unit	
AIM diagrams	1506
Centre_of_symmetry	
AIM diagrams	1517
Change	
mapping specification	306
Change	
application object	50
Change	
ARM diagrams	1472
Change_action	
AIM diagrams	1512
AIM EXPRESS short listing entities.....	1058
Change_action_requires_date	
AIM EXPRESS short listing rules	1167
Change_approval	
application object	51

ISO 10303-227:2005(E)

ARM diagrams	1472
mapping specification	309
Change_information	
mapping specification	306
unit of functionality	18
Change_item	
mapping specification	311
Change_item	
application object	52
Change_item	
AIM EXPRESS short listing types	1039
Change_item	
ARM diagrams	1472
Change_item	
AIM diagrams	1513
Change_item_id_assignment	
AIM diagrams	1513
AIM EXPRESS short listing entities	1059
Change_item_requires_creation_date	
AIM EXPRESS short listing rules	1167
Change_item_requires_id	
AIM EXPRESS short listing rules	1168
Change_life_cycle_item	
AIM diagrams	1510
AIM EXPRESS short listing types	1040
Change_life_cycle_stage	
mapping specification	313
Change_life_cycle_stage	
application object	53
Change_life_cycle_stage	
ARM diagrams	1472
Change_life_cycle_stage_assignment	
AIM diagrams	1510
AIM EXPRESS short listing entities	1060
Change_life_cycle_stage_sequence	
application object	53
ARM diagrams	1472
mapping specification	314
Change_life_cycle_stage_usage	
application object	53
ARM diagrams	1472
mapping specification	314
Change_life_cycle_stage_usage_requires_approval	
AIM EXPRESS short listing rules	1168
Change_life_cycle_stage_usage_requires_stage	
AIM EXPRESS short listing rules	1168
Changed_cableway_size_description	
application object	54
ARM diagrams	1485
mapping specification	316
Changed_component_size_description	
application object	54
ARM diagrams	1497

mapping specification	316
Changed_document	
application object	54
ARM diagrams	1485
mapping specification	317
Changed_hvac_access_opening	
application object	54
ARM diagrams	1485
mapping specification	317
Changed_hvac_branch_connection	
application object	54
ARM diagrams	1485
mapping specification	317
Changed_hvac_component_thickness	
application object	54
ARM diagrams	1485
mapping specification	317
Changed_hvac_connector_service_characteristic	
application object	54
ARM diagrams	1485
mapping specification	317
Changed_hvac_cross_section	
application object	55
ARM diagrams	1485
mapping specification	317
Changed_hvac_plant_item_branch_connection	
application object	55
mapping specification	317
Changed_hvac_run	
application object	55
ARM diagrams	1485
mapping specification	318
Changed_hvac_section	
application object	55
ARM diagrams	1485
mapping specification	318
Changed_hvac_section_insulation	
application object	55
ARM diagrams	1485
mapping specification	318
Changed_hvac_section_to_section_connection	
application object	55
ARM diagrams	1485
mapping specification	318
Changed_hvac_specification	
application object	55
ARM diagrams	1485
mapping specification	318
Changed_line_assignment	
application object	55
ARM diagrams	1473
mapping specification	318

ISO 10303-227:2005(E)

Changed_line_branch_connection	
application object	55
ARM diagrams	1473
mapping specification	318
Changed_line_plant_item_branch_connection	
application object	55
ARM diagrams	1485
mapping specification	318
Changed_line_plant_item_connection	
application object	56
ARM diagrams	1485
mapping specification	319
Changed_line_to_line_connection	
application object	56
ARM diagrams	1473
mapping specification	319
Changed_piping_specification	
application object	56
ARM diagrams	1473
mapping specification	319
Changed_piping_system_line	
application object	56
ARM diagrams	1485
mapping specification	319
Changed_piping_system_line_segment	
application object	56
ARM diagrams	1485
mapping specification	319
Changed_piping_system_line_segment_termination	
application object	56
ARM diagrams	1486
mapping specification	320
Changed_planned_physical_plant	
application object	56
ARM diagrams	1472
mapping specification	320
Changed_plant	
application object	56
ARM diagrams	1472
mapping specification	320
Changed_plant_item	
application object	56
ARM diagrams	1485
mapping specification	320
Changed_plant_item_collection	
application object	56
ARM diagrams	1473
mapping specification	321
Changed_plant_item_connection	
application object	56
ARM diagrams	1473, 1485
mapping specification	321

Changed_plant_item_connector	
application object	57
ARM diagrams	1485
mapping specification	321
Changed_plant_item_location	
application object	57
ARM diagrams	1485
mapping specification	322
Changed_plant_item_shape	
application object	57
ARM diagrams	1472
mapping specification	322
Changed_plant_process_capability	
application object	57
ARM diagrams	1472
mapping specification	322
Changed_plant_system	
application object	57
ARM diagrams	1485
mapping specification	322
Changed_reference_geometry	
application object	57
ARM diagrams	1472
mapping specification	323
Changed_required_material_description	
application object	57
ARM diagrams	1486
mapping specification	323
Changed_site	
application object	57
ARM diagrams	1485
mapping specification	323
Changed_site_feature	
application object	57
ARM diagrams	1473
mapping specification	323
Changed_sited_plant	
application object	57
ARM diagrams	1472
mapping specification	324
Changed_sub_plant_relationship	
application object	57
ARM diagrams	1472
mapping specification	324
Character_style_select	
AIM diagrams	1550
Characterized_definition	
AIM diagrams	1515
Characterized_material_property	
AIM diagrams	1515
Characterized_object	
AIM diagrams	1515

ISO 10303-227:2005(E)

Characterized_product_definition	
AIM diagrams	1502
Circular_ellipsoid	
application object	58
ARM diagrams	1457
mapping specification	877
Clamp	
application object	58
ARM diagrams	1487
mapping specification	884
Clamp_component_definition	
AIM diagrams	1502
AIM EXPRESS short listing entities.....	1060
Clamp_set	
application object	58
ARM diagrams	1487
mapping specification	888
Clamp_set_definition	
AIM diagrams	1502
AIM EXPRESS short listing entities.....	1060
Clamped	
application object	58
ARM diagrams	1482
mapping specification	338
Class_in_tree	
AIM EXPRESS short listing functions	1178
Classification_assignment	
AIM diagrams	1510
Classification_item	
AIM diagrams	1510
AIM EXPRESS short listing types.....	1040
Classification_role	
AIM diagrams	1510
Closed_shell	
AIM diagrams	1532
Collection	
definition	7
Colour	
AIM diagrams	1542
Colour_rgb	
AIM diagrams	1542
Colour_specification	
AIM diagrams	1542
Component	
definition	8
Component_size_description	
mapping specification	540
Component_size_description	
application object	59
ARM diagrams	1497
Composite_curve	
AIM diagrams	1526

Composite_curve_on_surface	
AIM diagrams	1526
Composite_curve_segment	
AIM diagrams	1526
Compound_bend_pipe	
application object	41
mapping specification	588
Conduit	
application object	60
ARM diagrams	1489
mapping specification	299
Conduit_size_description	
application object	60
ARM diagrams	1489
mapping specification	300
Cone	
application object	61, 66
ARM diagrams	1457
mapping specification	877
Conformance class.....	5
Conformance testing.....	6
Conic	
AIM diagrams	1525
application object	61
ARM diagrams	1457
mapping specification	539
Conical_surface	
AIM diagrams	1529
Connected_collection	
application object	61
ARM diagrams	1455
mapping specification	893
Connected_face_set	
AIM diagrams	1532
Connection	
definition	8
mapping specification	324
unit of functionality	20
Connection_component	
application object	61
ARM diagrams	1487
mapping specification	893
Connection_definition	
application object	61
ARM diagrams	1465
mapping specification	324
Connection_functional_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1060
Connection_inspection_record	
application object	62
ARM diagrams	1488
mapping specification	804

ISO 10303-227:2005(E)

Connection_material	
application object	66
ARM diagrams	1487
mapping specification	894
Connection_material_definition	
AIM diagrams	1502
AIM EXPRESS short listing entities.....	1061
Connection_motion_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1061
Connection_node	
AIM diagrams	1517
AIM EXPRESS short listing entities.....	1061
Connector	
definition	8
mapping specification	334
unit of functionality	20
Connector_definition	
application object	66
ARM diagrams	1460
mapping specification	338
Connector_end_type_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1062
Construction material	
definition	8
Context_dependent_Invisibility	
AIM diagrams	1554
Context_dependent_measure	
AIM diagrams	1511
Context_dependet_unit	
AIM diagrams	1507
Conversion_based_unit	
AIM diagrams	1507
Coordinated_universal_time_offset	
AIM diagrams	1509
COP	14
Count_measure	
AIM diagrams	1511
Coupling	
application object	66
ARM diagrams	1471
mapping specification	589
Cross	
application object	67
ARM diagrams	1471
mapping specification	593
Cross_section_flat_oval	
application object	69
ARM diagrams	1491
mapping specification	392
Cross_section_non_standard	
application object	69

ARM diagrams	1491
mapping specification	394
Cross_section_radiused_corner	
application object	70
ARM diagrams	1491
mapping specification	394
Cross_section_rectangular	
application object	70
ARM diagrams	1491
mapping specification	397
Cross_section_round	
application object	71
ARM diagrams	1491
mapping specification	399
CSG	14
Csg_element	
application object	71
ARM diagrams	1457
mapping specification	877
CSG_primitive	
AIM diagrams	1520
CSG_select	
AIM diagrams	1520
CSG_solid	
AIM diagrams	1523
Curve	
AIM diagrams	1524
application object	71
ARM diagrams	1457
mapping specification	539
Curve_bounded_surface	
AIM diagrams	1530
Curve_font_or_scaled_curve_font_select	
AIM diagrams	1549
Curve_or_surface	
AIM diagrams	1524
Curve_replica	
AIM diagrams	1524, 1525
Curve_style	
AIM diagrams	1549
Curve_style_font	
AIM diagrams	1549
Curve_style_font_pattern	
AIM diagrams	1549
Curve_style_font_select	
AIM diagrams	1549
Curve_style_wide	
AIM diagrams	1549
Cyclide_segment_solid	
AIM diagrams	1537
Cylinder	
application object	71
ARM diagrams	1457

ISO 10303-227:2005(E)

mapping specification	877
Cylindrical_surface	
AIM diagrams	1529
Data_environment	
AIM diagrams	1515
Date	
AIM diagrams	1509
Date_and_time	
AIM diagrams	1509
Date_and_time_assignment	
AIM diagrams	1509
Date_and_time_item	
AIM diagrams	1509
AIM EXPRESS short listing types	1041
Date_assignment	
AIM diagrams	1509
Date_role	
AIM diagrams	1509
Date_time_or_event_occurrence	
AIM diagrams	1509
Date_time_role	
AIM diagrams	1509
Date_time_select	
AIM diagrams	1509
Dated_item	
AIM diagrams	1509
AIM EXPRESS short listing types	1041
Defined_symbol	
AIM diagrams	1553
Defined_symbol_select	
AIM diagrams	1553
Definitional_representation	
AIM diagrams	1503
Degenerate_pcurve	
AIM diagrams	1540
Degenerate_toroidal_surface	
AIM diagrams	1529
Dependent_instantiable_application_context	
AIM EXPRESS short listing rules	1169
Dependent_instantiable_product_context	
AIM EXPRESS short listing rules	1169
Dependent_instantiable_product_definition_context	
AIM EXPRESS short listing rules	1170
Derived_Property_select	
AIM diagrams	1515
Derived_shape_aspect	
AIM diagrams	1517
Derived_unit	
AIM diagrams	1507
Derived_unit_element	
AIM diagrams	1507
Description_attribute	
AIM diagrams	1533

AIM EXPRESS short listing imported entity modifications	1162
Description_attribute_limited_usage	
AIM EXPRESS short listing rules	1175
Description_attribute_select	
AIM diagrams	1533
Descriptive_colour	
AIM diagrams	1542
AIM EXPRESS short listing entities.....	1063
Descriptive_representation_item	
AIM diagrams	1542
Design	
definition	8
design_arrangement_performance.....	1063
Design_arrangement_performance	
AIM diagrams	1515
AIM EXPRESS short listing entities.....	1063
application object	71
ARM diagrams	1497
Design_project	
AIM diagrams	1505
AIM EXPRESS short listing entities.....	1064
application object	72
ARM diagrams	1454
mapping specification	895
Design_project_assignment	
AIM EXPRESS short listing entities.....	1064
Design_project_item	
AIM diagrams	1505
AIM EXPRESS short listing types.....	1041
Detail_shape	
application object	72
ARM diagrams	1456
mapping specification	999
Dimensional_characteristic	
AIM diagrams	1517
Dimensional_characteristic_representation	
AIM diagrams	1517
Dimensional_exponents	
AIM diagrams	1507
Dimensional_location	
AIM diagrams	1517
Dimensional_size	
AIM diagrams	1517
Directed_action	
AIM diagrams	1512
Direction	
AIM diagrams	1518
Document	
AIM diagrams	1516
application object	73
ARM diagrams	1480
mapping specification	896

ISO 10303-227:2005(E)

Document_item	
AIM diagrams	1516
AIM EXPRESS short listing types	1042
Document_reference	
AIM diagrams	1516
Document_relationship	
AIM diagrams	1516
Document_representation_type	
AIM diagrams	1516
Document_type	
AIM diagrams	1516
Document_usage_constraint	
AIM diagrams	1516
Draughting_callout	
AIM diagrams	1556
Draughting_callout_element	
AIM diagrams	1556
Draughting_callout_relationship	
AIM diagrams	1556
Drawing_definition	
AIM diagrams	1555
Drawing_revision	
AIM diagrams	1555
Drawing_revision_sequence	
AIM diagrams	1555
Drawing_sheet_revision	
AIM diagrams	1544
Drawing_sheet_revision_usage	
AIM diagrams	1544
Ducting_component	
application object	73
ARM diagrams	1459
mapping specification	898
Ducting_system	
AIM diagrams	1541
AIM EXPRESS short listing entities	1065
application object	73
ARM diagrams	1458
mapping specification	847
Dummy_leg	
application object	74
ARM diagrams	1479
mapping specification	601
Eccentric_base_elbow_support	
application object	74
ARM diagrams	1479
mapping specification	603
Eccentric_cone	
application object	75
ARM diagrams	1457
mapping specification	878
Eccentric_Cone	
AIM diagrams	1536

Eccentric_cylinder	
application object	75
ARM diagrams	1457
mapping specification	878
Eccentric_pyramid	
application object	75
ARM diagrams	1457
mapping specification	878
Eccentric_reducer	
application object	75
ARM diagrams	1471
mapping specification	606
ECN	14
Edge	
AIM diagrams	1519
Edge_curve	
AIM diagrams	1519
Edge_loop	
AIM diagrams	1519
Effectivity	
AIM diagrams	1543
Effectivity_assignment	
AIM diagrams	1543
Effectivity_context_assignment	
AIM diagrams	1543
Effectivity_context_items	
AIM diagrams	1543
Effectivity_context_role	
AIM diagrams	1543
Effectivity_items	
AIM diagrams	1543
Elbow	
application object	76
ARM diagrams	1471
mapping specification	608
Elbow_fitting_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1065
Electric_current_measure	
AIM diagrams	1511
Electric_current_measure_with_unit	
AIM diagrams	1506
Electric_current_unit	
AIM diagrams	1507
Electrical_component	
application object	77
ARM diagrams	1489
mapping specification	898
Electrical_connector	
application object	78
ARM diagrams	1460
mapping specification	340

ISO 10303-227:2005(E)

Electrical_connector_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1066
Electrical_system	
AIM diagrams	1541
AIM EXPRESS short listing entities.....	1066
application object	78
ARM diagrams	1458
mapping specification	848
Electricity_transference	
application object	78
ARM diagrams	1465
mapping specification	326
Elementary_surface	
AIM diagrams	1529
Ellipse	
AIM diagrams	1525
Ellipsoid	
AIM diagrams	1536
Envelope_shape	
application object	78
ARM diagrams	1456
mapping specification	999
EPA	14
Equipment	
application object	78
ARM diagrams	1470
definition	8
mapping specification	899
Equipment_breaching	
application object	80
ARM diagrams	1459
mapping specification	905
Equipment_trim_piping	
application object	80
ARM diagrams	1470
mapping specification	906
Evaluated_degenerate_pcurve	
AIM diagrams	1540
Executed_action	
AIM diagrams	1512
Expander_flange	
application object	80
ARM diagrams	1484
mapping specification	617
External_classification	
application object	80
ARM diagrams	1458
mapping specification	849
External_schema_context	
application object	81
mapping specification	920

External_source	
AIM diagrams	1501
External_source	
AIM EXPRESS short listing imported entity modifications	1163
External_source_relationship	
AIM diagrams	1501
AIM EXPRESS short listing imported entity modifications	1163
Externally_defined_class	
AIM EXPRESS short listing entities.....	1067
Externally_defined_curve_font	
AIM diagrams	1549
Externally_defined_document	
AIM diagrams	1516
Externally_defined_document	
AIM EXPRESS short listing entities.....	1068
application object	81
ARM diagrams	1480
mapping specification	906
Externally_defined_hatch_style	
AIM diagrams	1501
Externally_defined_item	
AIM diagrams	1501
Externally_defined_item	
AIM EXPRESS short listing imported entity modifications	1162
Externally_defined_item_relationship	
AIM diagrams	1501
Externally_defined_plant_item_definition	
AIM EXPRESS short listing entities.....	1068
Externally_defined_representation_item	
AIM diagrams	1542
AIM EXPRESS short listing entities.....	1069
Externally_defined_tile_style	
AIM diagrams	1501
Externally_defined_user_defined_attribute_value	
application object	82
ARM diagrams	1494
mapping specification	907
Externally_defined_plant_item_definition	
AIM diagrams	1501
Externally_defined_text_font	
AIM diagrams	1501
Externally_defined_symbol	
AIM diagrams	1501
Extremely_defined_class	
AIM diagrams	1510
Extruded_area_solid	
AIM diagrams	1522
Extruded_face_solid	
AIM diagrams	1522
Extrusion	
application object	82
ARM diagrams	1457
mapping specification	878

ISO 10303-227:2005(E)

Face	
AIM diagrams	1519
Face_bound	
AIM diagrams	1519
Face_outer_bound	
AIM diagrams	1519
Face_surface	
AIM diagrams	1519
Facet_trigon	
application object	82
ARM diagrams	1462
mapping specification	1011
Faceted_brep	
AIM diagrams	1523
application object	82
ARM diagrams	1457
mapping specification	878
Faceted_surface_representation	
application object	82
ARM diagrams	1462
mapping specification	1011
Family_definition	
application object	82
ARM diagrams	1463
mapping specification	618
FDA	14
Female_end	
application object	83
ARM diagrams	1478
mapping specification	341
Ferrule	
application object	84
ARM diagrams	1471
mapping specification	618
Fill_area_style	
AIM diagrams	1551
Fill_area_style_colour	
AIM diagrams	1551
Fill_area_style_files	
AIM diagrams	1551
Fill_area_style_hatching	
AIM diagrams	1551
Fill_area_style_tile_shape_select	
AIM diagrams	1551
Fill_area_style_tile_symbol_with_style	
AIM diagrams	1551
Fill_style_select	
AIM diagrams	1551
Fitting	
application object	84
ARM diagrams	1471
mapping specification	621

Flange	
application object	85
ARM diagrams	1484
mapping specification	622
Flange_fitting_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1069
Flange_fitting_neck_type_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1070
Flanged	
application object	86
ARM diagrams	1482
mapping specification	348
Flanged_end	
application object	86
ARM diagrams	1478
mapping specification	348
Flared_end	
application object	90
ARM diagrams	1478
mapping specification	359
Flexible_connection	
application object	90
ARM diagrams	1465
mapping specification	327
Fluid_transference	
application object	90
ARM diagrams	1465
mapping specification	327
Font_select	
AIM diagrams	1552
Founded_item	
AIM diagrams	1530
Founded_item_select	
AIM diagrams	1530
Free_form_curve	
application object	90
ARM diagrams	1457
mapping specification	539
Functional	
definition	9
Functional characteristics	
definition	9
Functional requirements	
definition	9
Functional_connection_definition_satisfaction	
application object	91
ARM diagrams	1465
mapping specification	328
Functional_connection_occurrence_satisfaction	
application object	91
ARM diagrams	1465

ISO 10303-227:2005(E)

mapping specification	328
Functional_connector	
application object	91
ARM diagrams	1481
mapping specification	363
Functional_connector_definition_satisfaction	
application object	91
ARM diagrams	1460
mapping specification	364
Functional_connector_occurrence_satisfaction	
application object	91
ARM diagrams	1481
mapping specification	364
Functional_design_view	
application object	91
ARM diagrams	1475
mapping specification	907
Functional_plant	
application object	91
ARM diagrams	1453
mapping specification	850
Functional_plant_item_satisfaction	
application object	92
ARM diagrams	1475
mapping specification	908
Functional_plant_satisfaction	
application object	92
ARM diagrams	1453
mapping specification	850
Functionally_defined_transformation	
AIM diagrams	1504
Gasket	
application object	92
ARM diagrams	1469
mapping specification	627
Geometric_curve_set	
AIM diagrams	1504
Geometric_representation_context	
AIM diagrams	1503
Geometric_representation_item	
AIM diagrams	1504
Geometric_set	
AIM diagrams	1504
Geometric_set_replica	
AIM diagrams	1504
Geometric_set_select	
AIM diagrams	1504
GIS.....	14
Gis_position	
application object	92
ARM diagrams	1462
mapping specification	1012

Global_uncertainty_assigned_context	
AIM diagrams	1503
Global_unit_assigned_context	
AIM diagrams	1503
Graphical_transformation	
AIM diagrams	1544
Grooved_end	
application object	94
ARM diagrams	1478
mapping specification	364
Group	
AIM diagrams	1510
Group_assignment	
AIM diagrams	1510
Group_relationship	
AIM diagrams	1510
GUID	15
Gusset	
application object	95
ARM diagrams	1479
mapping specification	631
Half_space_2d	
AIM diagrams	1521
Half_sphere_solid	
AIM diagrams	1520
Hanger	
application object	95
ARM diagrams	1479
Heat_tracing_representation	
AIM diagrams	1503
AIM EXPRESS short listing entities.....	1070
Hemisphere	
application object	97
ARM diagrams	1457
mapping specification	879
Plant Design CSG Primitive.....	1106
Hexagon_head_bolt	
mapping specification	909
Hierarchically_organized_collection	
application object	97
ARM diagrams	1455
mapping specification	911
Hull_applicability	
application object	97
ARM diagrams	1455
HVAC.....	15
Hvac_support	
mapping specification	497
Hvac_access_opening	
application object	97
ARM diagrams	1490
mapping specification	408

ISO 10303-227:2005(E)

Hvac_band_support	
application object	98
ARM diagrams	1486
Hvac_bend	
application object	98
ARM diagrams	1492
mapping specification	411
Hvac_branch_connection	
AIM diagrams	1517
AIM EXPRESS short listing entities.....	1071
application object	99
ARM diagrams	1493
mapping specification	520
Hvac_component	
application object	99
ARM diagrams	1490
mapping specification	415
Hvac_component_characterization	
unit of functionality	21
HVAC_component_characterization	
mapping specification	392
Hvac_component_definition	
AIM diagrams	1541
AIM EXPRESS short listing entities.....	1071
Hvac_component_thickness	
application object	100
ARM diagrams	1490
mapping specification	422
Hvac_connector	
AIM diagrams	1517
AIM EXPRESS short listing entities.....	1072
application object	101
ARM diagrams	1491
mapping specification	400
Hvac_connector_service_characteristic	
application object	104
ARM diagrams	1491
mapping specification	405
Hvac_coupling	
application object	104
ARM diagrams	1492
mapping specification	423
Hvac_cross_section	
AIM diagrams	1517
AIM EXPRESS short listing entities.....	1076
application object	105
ARM diagrams	1491
mapping specification	406
Hvac_ducting	
application object	105, 122
ARM diagrams	1490
mapping specification	428

Hvac_elbow_90deg_reducing	
application object	106
ARM diagrams	1492
mapping specification	433
Hvac_elbow_centred	
application object	108
ARM diagrams	1492
mapping specification	439
Hvac_elbow_mitre	
application object	109
ARM diagrams	1492
mapping specification	446
Hvac_end_fitting	
application object	111
ARM diagrams	1492
mapping specification	453
Hvac_equipment	
application object	111
ARM diagrams	1490
mapping specification	455
Hvac_fitting	
application object	111
ARM diagrams	1492
mapping specification	456
Hvac_fitting_class	
AIM diagrams	1510
AIM EXPRESS short listing entities	1076
Hvac_flow_control_device	
application object	111
ARM diagrams	1490
mapping specification	456
Hvac_gasket	
application object	112
ARM diagrams	1490
mapping specification	460
Hvac_hanger	
application object	113
ARM diagrams	1486
Hvac_instrument	
application object	113
ARM diagrams	1490
mapping specification	467
Hvac_intermediate_reinforcement	
application object	114
ARM diagrams	1492
Hvac_joint_reinforcement	
application object	114
ARM diagrams	1492
Hvac_offset_centred	
application object	115
ARM diagrams	1492
mapping specification	477

ISO 10303-227:2005(E)

Hvac_offset_ogee_centred	
application object	115
ARM diagrams	1492
mapping specification	483
Hvac_plant_item_branch_connection	
AIM diagrams	1517
AIM EXPRESS short listing entities	1077
application object	117
ARM diagrams	1493
mapping specification	521
Hvac_plant_item_branch_connector	
application object	117
ARM diagrams	1493
mapping specification	407
Hvac_plant_item_connection	
AIM diagrams	1517
AIM EXPRESS short listing entities	1078
application object	117
ARM diagrams	1493
mapping specification	522
Hvac_plant_item_connector	
application object	118
ARM diagrams	1493
mapping specification	407
Hvac_plant_item_termination	
application object	118
ARM diagrams	1493
mapping specification	522
Hvac_plenum	
application object	118
ARM diagrams	1490
mapping specification	489
Hvac_reinforcement	
application object	118
ARM diagrams	1492
Hvac_run	
application object	118
ARM diagrams	1493
mapping specification	523
Hvac_run_definition	
AIM diagrams	1502
AIM EXPRESS short listing entities	1086
Hvac_run_termination	
application object	118
ARM diagrams	1494
mapping specification	523
Hvac_section	
application object	119
ARM diagrams	1493
mapping specification	525
Hvac_section_branch_termination	
application object	120
ARM diagrams	1493

mapping specification	533
Hvac_section_component_assignment	
application object	120
ARM diagrams	1490
mapping specification	533
Hvac_section_definition	
AIM diagrams	1502
AIM EXPRESS short listing entities.....	1078
Hvac_section_insulation	
application object	120
ARM diagrams	1493
mapping specification	534
Hvac_section_termination	
AIM diagrams	1517
AIM EXPRESS short listing entities.....	1083
application object	121
ARM diagrams	1493
mapping specification	536
Hvac_section_to_section_connection	
application object	121
ARM diagrams	1493
mapping specification	536
Hvac_section_to_section_termination	
application object	121
ARM diagrams	1493
Hvac_section_to_section_termination	
mapping specification	537
Hvac_single_wire_support	
application object	121
ARM diagrams	1486
Hvac_specification	
application object	122
ARM diagrams	1493
mapping specification	537
Hvac_support	
application object	122
ARM diagrams	1486
Hvac_support_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1084
Hvac_support_definition	
AIM diagrams	1502
AIM EXPRESS short listing entities.....	1084
Hvac_system	
AIM diagrams	1502
AIM EXPRESS short listing entities.....	1085
application object	122
ARM diagrams	1458
mapping specification	851
Hvac_system_functional_characterization	
unit of functionality.....	23
HVAC_system_functional_characterization	
mapping specification	520

ISO 10303-227:2005(E)

Hvac_takeoff	
application object	122
ARM diagrams	1492
mapping specification	498
Hvac_termination_connection	
AIM EXPRESS short listing entities.....	1087
Hvac_transition	
application object	123
ARM diagrams	1492
mapping specification	504
Hvac_transition_slanted	
application object	125
ARM diagrams	1492
mapping specification	508
Hvac_trapeze_bar	
application object	126
ARM diagrams	1486
Hvac_trapeze_support	
application object	126
ARM diagrams	1486
hybrid_shape_representation	
application object	127
Hybrid_shape_representation	
AIM diagrams	1503
AIM EXPRESS short listing entities.....	1087
ARM diagrams	1456
mapping specification	539, 999
unit of functionality	24
Hyperbola	
AIM diagrams	1525
ICOM.....	15
Id 15	
Id_attribute	
AIM diagrams	1534
AIM EXPRESS short listing entity modifications	1163
Id_attribute_select	
AIM diagrams	1534
Identification_assignment	
AIM diagrams	1535
Identification_role	
AIM diagrams	1535
Identified_item	
AIM diagrams	1535
AIM EXPRESS short listing types.....	1043
mapping table	288
IEC.....	15
Implementation method.....	5
Implementation under test	6
Inline_equipment	
AIM diagrams	1541
AIM EXPRESS short listing entities.....	1088
application object	127
ARM diagrams	1469

mapping specification	636
Inline_instrument	
application object	127
ARM diagrams	1469
mapping specification	637
Insert	
application object	127
Insert_fitting	
ARM diagrams	1471
mapping specification	637
Inside_and_thickness	
application object	128
ARM diagrams	1474
mapping specification	641
Inspection_condition	
application object	128
ARM diagrams	1488
mapping specification	807
Installed_physical_design_view	
application object	129
ARM diagrams	1475
mapping specification	913
Instrument	
application object	129
ARM diagrams	1459
definition	9
mapping specification	914
Instrumentation_and_control_component	
application object	130
ARM diagrams	1459
mapping specification	918
Instrumentation_and_control_system	
AIM diagrams	1541
AIM EXPRESS short listing entities.....	1089
application object	130
ARM diagrams	1458
mapping specification	851
Insulation	
application object	130
ARM diagrams	1459
definition	9
mapping specification	918
Integrated_resource	5
Interfering_shape_element	
AIM diagrams	1517
AIM EXPRESS short listing entities.....	1089
application object	130
ARM diagrams	1477
mapping specification	1000
Intersection_curve	
AIM diagrams	1524
Invisibility	
AIM diagrams	1554

ISO 10303-227:2005(E)

Invisibility_context	
AIM diagrams	1554
Invisible_item	
AIM diagrams	1554
ISO.....	15
Item_defined_transformation	
AIM diagrams	1542
Item_identified_representation_usage	
AIM diagrams	1541
Knot_type	
AIM diagrams	1527
Known_source	
AIM diagrams	1501
Known_source	
AIM EXPRESS short listing entities.....	1089
Lap_joint_flange	
application object	130
ARM diagrams	1484
mapping specification	643
Lap_joint_stub_end	
application object	131
ARM diagrams	1471
mapping specification	644
Lateral	
application object	132
ARM diagrams	1471
mapping specification	650
Layered_item	
AIM diagrams	1538
Length_measure	
AIM diagrams	1511, 1539
Length_measure_with_unit	
AIM diagrams	1506
Length_unit	
AIM diagrams	1507
Line	
AIM diagrams	1524
application object	134
ARM diagrams	1457
definition	9
mapping specification	539
Line segment	
definition	9
Line segment termination	
definition	9
Line segment termination connection	
definition	10
Line_branch_connection	
AIM diagrams	1517
AIM EXPRESS short listing entities.....	1090
application object	134
ARM diagrams	1468
mapping specification	816

Line_branch_termination	
application object	134
ARM diagrams	1468
mapping specification	817
Line_less_piping_system	
AIM diagrams	1502
AIM EXPRESS short listing entities.....	1091
application object	134
ARM diagrams	1467
mapping specification	852
Line_piping_system_component_assignment	
application object	135
ARM diagrams	1483
mapping specification	817
Line_plant_item_branch_connection	
AIM diagrams	1517
AIM EXPRESS short listing entities.....	1091
application object	135
ARM diagrams	1483
mapping specification	818
Line_plant_item_branch_connector	
application object	135
ARM diagrams	1481
mapping specification	819
Line_plant_item_connection	
AIM diagrams	1517
AIM EXPRESS short listing entities.....	1091
application object	135
ARM diagrams	1468
mapping specification	819
Line_plant_item_connector	
application object	135
ARM diagrams	1481
mapping specification	820
Line_plant_item_termination	
application object	135
ARM diagrams	1468
mapping specification	820
Line_termination_connection	
AIM diagrams	1517
AIM EXPRESS short listing entities.....	1092
Line_to_line_connection	
application object	135
ARM diagrams	1468
mapping specification	821
Line_to_line_termination	
application object	135
ARM diagrams	1468
mapping specification	821
Lined_piping	
application object	135
ARM diagrams	1480
mapping specification	658

ISO 10303-227:2005(E)

Load_transference	
application object	136
ARM diagrams	1465
mapping specification	329
Local_time	
AIM diagrams	1509
Location_in_building	
application object	136
ARM diagrams	1453
mapping specification	1014
Location_in_plant	
application object	136
ARM diagrams	1453
mapping specification	853
Location_in_ship	
application object	136
ARM diagrams	1453
mapping specification	853
Location_in_site	
application object	137
ARM diagrams	1453
mapping specification	1015
Locked_orientation_connection	
application object	137
ARM diagrams	1465
mapping specification	329
Loop	
AIM diagrams	1519
Lug	
application object	137
ARM diagrams	1479
mapping specification	660
Luminous_intensity_measure	
AIM diagrams	1511
Luminous_intensity_measure_with_unit	
AIM diagrams	1506
Luminous_intensity_unit	
AIM diagrams	1507
Make_from_usage_option	
AIM diagrams	1502
Male_end	
application object	138
ARM diagrams	1478
mapping specification	370
Mandatory_entity_type_for_external_schema_context	
AIM EXPRESS short listing rules	1176
Manifold_solid_brep	
AIM diagrams	1523
Manufacturing_line	
application object	138
ARM diagrams	1453
mapping specification	856

Mapped_item	
AIM diagrams	1542
Mass_measure	
AIM diagrams	1511
Mass_measure_with_unit	
AIM diagrams	1506
Mass_unit	
AIM diagrams	1507
Material	
definition	10
Material stream	
definition	10
Material_designation	
AIM diagrams	1515
Material_designation_characterization	
AIM diagrams	1515
Material_property	
AIM diagrams	1515
Material_property_representation	
AIM diagrams	1515
Material_specification_selection	
application object	138
ARM diagrams	1461
mapping specification	919
Material_specification_subset_reference	
application object	139
ARM diagrams	1461
mapping specification	920
Measure_representation_item	
AIM diagrams	1506
Measure_value	
AIM diagrams	1511
Measure_with_unit	
AIM diagrams	1506
Mechanical arrangement specification	
definition	10
Mechanical system	
definition	10
Mechanical_arrangement_specification	
application object	139
ARM diagrams	1497
Mechanical_component	
application object	140
ARM diagrams	1469
Mechanical_component_characterization	
mapping specification	539
unit of functionality	24
Mechanical_component_class	
AIM diagrams	1093
AIM EXPRESS short listing entities.....	1510
AIM EXPRESS short listing entities.....	1092
Mechanical_component_definition	
AIM EXPRESS short listing entities.....	1093
AIM EXPRESS short listing entities.....	1093

ISO 10303-227:2005(E)

Mechanical_connector	
application object	140
ARM diagrams	1460
Mechanical_connector_class	1093
AIM diagrams	1510
AIM EXPRESS short listing entities	1093
Mechanical_family_definition	
application object	141
ARM diagrams	1497
Mechanical_system	1093
AIM diagrams	1541
AIM EXPRESS short listing entities	1093
application object	141
ARM diagrams	1458
Mechanical_system_arrangement	
application object	142
ARM diagrams	1498
Mechanical_system_arrangement_segment	
application object	142
ARM diagrams	1498
Mechanical_system_arrangement_segment_termination	
application object	143
ARM diagrams	1499
Mechanical_system_arrangement_termination	
application object	144
ARM diagrams	1499
Mechanical_system_component	
AIM diagrams	1502, 1541
application object	144
ARM diagrams	1469
Mechanical_system_functional_characterization	
mapping specification	548
unit of functionality	25
Mitre_bend_pipe	
application object	147
ARM diagrams	1469
mapping specification	662
Name_assignment	
AIM diagrams	1513
Name_attribute	
AIM diagrams	1534
AIM EXPRESS short listing imported entity modifications	1163
Name_attribute_select	
AIM diagrams	1534
Named_unit	
AIM diagrams	1507
Nipple	
application object	148
ARM diagrams	1469
mapping specification	667
Node	
application object	148
ARM diagrams	1481

mapping specification	374
Nozzle	
application object	148
ARM diagrams	1459
mapping specification	931
Null_style	
AIM diagrams	1548
Numeric_measure	
AIM diagrams	1511
Nut	
application object	149
ARM diagrams	1487
mapping specification	933
Object_role	
AIM diagrams	1535
Offline_instrument	
application object	149
ARM diagrams	1459
mapping specification	934
Offset_curve_2d	
AIM diagrams	1524
Offset_curve_3d	
AIM diagrams	1524
Offset_surface	
AIM diagrams	1528
Olet	
application object	149
ARM diagrams	1471
mapping specification	669
One_direction_repeat_factor	
AIM diagrams	1551
Open_shell	
AIM diagrams	1532
organization_item	
mapping table	292
Oriented_closed_shell	
AIM diagrams	1532
Oriented_edge	
AIM diagrams	1519
Oriented_face	
AIM diagrams	1519
Oriented_open_shell	
AIM diagrams	1532
Oriented_path	
AIM diagrams	1519
Orifice_flange	
application object	150
ARM diagrams	1484
mapping specification	677
Orifice_plate	
application object	151
ARM diagrams	1471
mapping specification	685

ISO 10303-227:2005(E)

OSHA	15
Outer_boundary_curve	
AIM diagrams	1526
Outline_shape	
application object	153
ARM diagrams	1456
mapping specification	1000
Outside_and_thickness	
application object	153
ARM diagrams	1474
mapping specification	692
P&ID	15
Pad	
application object	153
ARM diagrams	1479
Paddle_blank	
application object	154
ARM diagrams	1494
mapping specification	694
Paddle_spacer	
application object	155
ARM diagrams	1494
mapping specification	698
Parabola	
AIM diagrams	1525
Parameter_value	
AIM diagrams	1511
Parametric_representation_context	
AIM diagrams	1503
Path	
AIM diagrams	1519
Pcurve	
AIM diagrams	1524
Pcurve_or_surface	
AIM diagrams	1524
Perforated_cap	
application object	156
ARM diagrams	1480
mapping specification	681
Perforated_plate	
application object	157
ARM diagrams	1480
mapping specification	704
Person	
AIM diagrams	1505
Person_and_organization	
AIM diagrams	1505
Person_and_organization_assignment	
AIM diagrams	1505
Person_and_organization_role	
AIM diagrams	1505
Person_assignment	
AIM diagrams	1505

Person_organization_select	
AIM diagrams	1505
Person_role	
AIM diagrams	1505
PFD.....	15
Physical	
definition	10
Physical_connector	
application object	157
ARM diagrams	1481
mapping specification	375
Physical_design_view	
application object	157
ARM diagrams	1475
mapping specification	934
PICS.....	5, 15
PIEBASE.....	15
Pipe	
application object	157
ARM diagrams	1469
definition	10
mapping specification	707
Pipe fitting	
definition	10
Pipe_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1094
Pipe_closure	
application object	158
ARM diagrams	1480
mapping specification	711
Pipe_closure_fitting_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1095
Piping and instrumentation diagram	
definition	11
Piping class	
definition	11
Piping specification	
definition	11
Piping system	
definition	11
Piping_assembly	
application object	159
ARM diagrams	1454
mapping specification	935
Piping_assembly_assignment	
application object	159
ARM diagrams	1454
mapping specification	936
Piping_component	
application object	159
ARM diagrams	1469

ISO 10303-227:2005(E)

mapping specification	712
Piping_component_characterization	
mapping specification	571
unit of functionality	26
Piping_component_class	
AIM diagrams	1515
AIM EXPRESS short listing entities	1095
Piping_component_definition	
AIM diagrams	1541
AIM EXPRESS short listing entities	1096
Piping_component_inspection_record	
application object	160
ARM diagrams	1488
mapping specification	808
Piping_connector	
application object	164
mapping specification	371, 376
Piping_connector Max	
ARM diagrams	1482
Piping_connector_class	
AIM diagrams	1510
AIM EXPRESS short listing entities	1096
Piping_connector_service_characteristic	
application object	165
ARM diagrams	1464
mapping specification	378
Piping_inspection	
mapping specification	804
unit of functionality	29
Piping_size_description	
application object	165
ARM diagrams	1474
mapping specification	715
Piping_specification	
application object	166
ARM diagrams	1463
mapping specification	821
Piping_spool	
application object	167
ARM diagrams	1480
mapping specification	717
Piping_spool_definition	
AIM diagrams	1502
AIM EXPRESS short listing entities	1096
Piping_spool_inspection_record	
application object	167
ARM diagrams	1488
mapping specification	811
Piping_support	
application object	169
ARM diagrams	1479
mapping specification	494, 718

Piping_support_definition	
AIM diagrams	1502
AIM EXPRESS short listing entities.....	1097
Piping_support_fitting_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1097
Piping_system	
AIM diagrams	1541
AIM EXPRESS short listing entities.....	1098
application object	170
ARM diagrams	1467
mapping specification	858
Piping_system_component	
application object	170
ARM diagrams	1469
mapping specification	936
Piping_system_functional_characterization	
mapping specification	816
unit of functionality	29
Piping_system_line	
application object	171
ARM diagrams	1467
mapping specification	823
Piping_system_line_segment	
application object	171
ARM diagrams	1483
mapping specification	824
Piping_system_line_segment_termination	
application object	172
ARM diagrams	1468
mapping specification	832
Piping_system_line_termination	
application object	173
ARM diagrams	1468
mapping specification	833
Placement	
AIM diagrams	1518
Plain_washer	
application object	174
ARM diagrams	1487
mapping specification	940
Planar_box	
AIM diagrams	1545
Planar_extent	
AIM diagrams	1545
Plane	
AIM diagrams	1529
Plane_angle_measure	
AIM diagrams	1511
Plane_angle_measure_with_unit	
AIM diagrams	1506
Plane_angle_unit	
AIM diagrams	1507

ISO 10303-227:2005(E)

Planned	
definition	11
Planned_physical_plant	
application object	174
ARM diagrams	1453
mapping specification	859
Planned_physical_plant_item	
application object	174
ARM diagrams	1454
mapping specification	943
Plant	
AIM diagrams	1514
AIM EXPRESS short listing entities.....	1098
application object	175
ARM diagrams	1453
mapping specification	860
Plant item	
definition	12
Plant system	
definition	12
plant_arrangement_definition.....	1100
Plant_arrangement_definition	
AIM diagrams	1541
AIM EXPRESS short listing entities.....	1100
Plant_arrangement_line_segment_termination	
AIM diagrams	1517
plant_arrangement_segment_definition.....	1101
Plant_arrangement_segment_definition	
AIM diagrams	1502, 1541
AIM EXPRESS short listing entities.....	1101
plant_arrangement_segment_termination.....	1104
Plant_arrangement_segment_termination	
AIM EXPRESS short listing entities.....	1104
Plant_characterization	
mapping specification	845
unit of functionality	30
plant_csg_shape_representation	
application object	176
Plant_csg_shape_representation	
AIM diagrams	1503
AIM EXPRESS short listing entities.....	1105
ARM diagrams	1456
mapping specification	877, 1000
unit of functionality	31
Plant_design_csg_primitive	
AIM diagrams	1503
AIM EXPRESS short listing entities.....	1106
Plant_item	
application assertion.....	234
application object	176
ARM diagrams	1455
mapping specification	946

Plant_item_centreline	
application object	177
ARM diagrams	1476
mapping specification	1001
Plant_item_characterization	
mapping specification	881
unit of functionality	32
Plant_item_collection	
application object	177
ARM diagrams	1455
mapping specification	953
Plant_item_connection	
AIM diagrams	1517
AIM EXPRESS short listing entities	1112
application object	178
ARM diagrams	1465
mapping specification	330
Plant_item_connection_occurrence	
application object	179
ARM diagrams	1465
mapping specification	332
Plant_item_connector	
AIM diagrams	1517
AIM EXPRESS short listing entities	1114
application object	180
ARM diagrams	1460
mapping specification	380
Plant_item_connector_occurrence	
application object	180
ARM diagrams	1481
mapping specification	382
Plant_item_definition	
application object	180
ARM diagrams	1466
mapping specification	954
Plant_item_design_view	
application object	181
ARM diagrams	1475
mapping specification	956
Plant_item_instance	
application object	181
ARM diagrams	1454
mapping specification	957
Plant_item_interference	
AIM EXPRESS short listing entities	1120
application object	181
ARM diagrams	1477
mapping specification	1001
Plant_item_interference_status	
application object	181
ARM diagrams	1477
mapping specification	1002

ISO 10303-227:2005(E)

Plant_item_location	
application object	182
ARM diagrams	1453
mapping specification	960
Plant_item_route	
AIM diagrams	1517
AIM EXPRESS short listing entities.....	1120
Plant_item_shape	
application object	182
ARM diagrams	1456
mapping specification	1003
Plant_item_weight	
application object	183
ARM diagrams	1455
mapping specification	962
Plant_item_weight_representation	
AIM diagrams	1503
AIM EXPRESS short listing entities.....	1121
Plant_line_definition	
AIM diagrams	1541
AIM EXPRESS short listing entities.....	1122
Plant_line_segment_definition	
AIM diagrams	1541
AIM EXPRESS short listing entities.....	1123
Plant_line_segment_termination	
AIM diagrams	1517
AIM EXPRESS short listing entities.....	1129
Plant_process_capability	
application object	184
ARM diagrams	1453
mapping specification	866
Plant_spatial_configuration_change_assignment	
AIM diagrams	1513
AIM EXPRESS short listing entities.....	1131
Plant_spatial_configuration_organization_assignment	
AIM diagrams	1505
AIM EXPRESS short listing entities.....	1131
Plant_spatial_configuration_organization_correlation	
AIM EXPRESS short listing functions	1179
Plant_spatial_configuration_organization_item	
AIM diagrams	1505
AIM EXPRESS short listing types.....	1043
Plant_spatial_configuration_person_and_organization_assignment	
AIM diagrams	1505
AIM EXPRESS short listing entities.....	1132
Plant_spatial_configuration_person_and_organization_correlation	
AIM EXPRESS short listing functions	1180
Plant_spatial_configuration_person_and_organization_item	
AIM diagrams	1505
AIM EXPRESS short listing types.....	1044
Plant_spatial_configuration_person_assignment	
AIM diagrams	1505
AIM EXPRESS short listing entities.....	1132

Plant_spatial_configuration_person_correlation	
AIM EXPRESS short listing functions	1181
Plant_spatial_configuration_person_item	
AIM diagrams	1505
AIM EXPRESS short listing types.....	1043
Plant_system	
application object	185
ARM diagrams	1458
mapping specification	867
Plant_system_assembly	
application object	185
ARM diagrams	1458
mapping specification	871
Plant_volume	
application object	185
ARM diagrams	1454
mapping specification	963
Plate	
application object	186
ARM diagrams	1480
mapping specification	721
Plug	
application object	186
ARM diagrams	1480
mapping specification	724
Point	
AIM diagrams	1540, 1541
application object	187
ARM diagrams	1457
mapping specification	539
Point_and_line_representation	
application object	187
ARM diagrams	1462
mapping specification	1015
Point_on_curve	
AIM diagrams	1540
Point_on_surface	
AIM diagrams	1540
Point_repilca	
AIM diagrams	1540
Poly_loop	
AIM diagrams	1519
Polygon	
application object	187
ARM diagrams	1457
mapping specification	539
Polyline	
AIM diagrams	1526
Positive_length_measure	
AIM diagrams	1511, 1539
Positive_plane_angle_measure	
AIM diagrams	1511

ISO 10303-227:2005(E)

Positive_ratio_measure	
AIM diagrams	1511
Pre_defined_colour	
AIM diagrams	1545
Pre_defined_curve_font	
AIM diagrams	1545
Pre_defined_item	
AIM diagrams	1545
AIM EXPRESS short listing imported entity modifications	1164
Pre_defined_symbol	
AIM diagrams	1545
Pre_defined_text_font	
AIM diagrams	1545
Precision_qualifier	
AIM diagrams	1538
Prefered_surface_curve_representation	
AIM diagrams	1524
Presentation_area	
AIM diagrams	1544
Presentation_layer_assignment	
AIM diagrams	1538
Presentation_layer_usage	
AIM diagrams	1538
Presentation_representation	
AIM diagrams	1544
Presentation_representation_relationship	
AIM diagrams	1544
Presentation_representation_select	
AIM diagrams	1546
Presentation_set	
AIM diagrams	1544
Presentation_size	
AIM diagrams	1544
Presentation_size_assignment_select	
AIM diagrams	1544
Presentation_style_assignment	
AIM diagrams	1548
Presentation_style_by_context	
AIM diagrams	1548
Presentation_style_select	
AIM diagrams	1548
Presentation_view	
AIM diagrams	1544
presentation_with_association	
mapping table	274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 293
Presentation_with_association	
AIM diagrams	1544
AIM EXPRESS short listing entities	1133
Presented_item	
AIM diagrams	1546
Presented_item_association	
AIM diagrams	1546

Presented_item_representation	
AIM diagrams	1546
Presented_item_select	
AIM diagrams	1546
presented_item_with_association	
mapping table	272, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285
Presented_item_with_association	
AIM diagrams	1546
AIM EXPRESS short listing entities	1134
Pressure_class	
application object	187
ARM diagrams	1474
mapping specification	725
Pressure_fit	
application object	188
ARM diagrams	1482
mapping specification	383
Process activity	
definition	12
Process flow diagram	
definition	12
Process material	
definition	12
Process plant	
definition	12
Process_capability	
AIM diagrams	1515
AIM EXPRESS short listing entities	1134
Process_ducting	
application object	188
ARM diagrams	1469
mapping specification	967
Product	5
AIM diagrams	1514
Product data	5
Product_context	
AIM diagrams	1501
Product_context	
AIM EXPRESS short listing imported entity modifications	1164
Product_context_discipline_type_constraint	
AIM EXPRESS short listing rules	1170
Product_data_representation_view	
AIM diagrams	1544
Product_definition	
AIM diagrams	1502
AIM EXPRESS short listing imported entity modifications	1164
Product_definition_context	
AIM diagrams	1501
Product_definition_context	
AIM EXPRESS short listing imported entity modifications	1164
Product_definition_context_name_constraint	
AIM EXPRESS short listing rules	1171

ISO 10303-227:2005(E)

Product_definition_formation	
AIM diagrams	1514
Product_definition_formation_relationship	
AIM diagrams	1514
Product_definition_formation_with_specified_source	
AIM diagrams	1514
Product_definition_relationship	
AIM diagrams	1502
Product_definition_shape	
AIM diagrams	1517
Product_definition_substitute	
AIM diagrams	1502
Product_definition_usage	
AIM diagrams	1502
Product_definition_usage_constraint	
AIM EXPRESS short listing rules	1171
Product_item_interference	
AIM diagrams	1502
Product_material_composition_relationship	
AIM diagrams	1515
Product_or_formation_definition	
AIM diagrams	1514
Project_design_assignment	
application object	188
ARM diagrams	1454
mapping specification	968
Property_definition	
AIM diagrams	1515
Property_definition_relationship	
AIM diagrams	1515
Property_definition_representation	
AIM diagrams	1503
Protocol information and conformance statement	5
PSI	15
Purchase_assignment	
AIM diagrams	1513
AIM EXPRESS short listing entities	1135
Purchase_item	
AIM diagrams	1513
AIM EXPRESS short listing types	1044
Pyramid	
application object	188
ARM diagrams	1457
mapping specification	879
Qualified_representation_item	
AIM diagrams	1538
Quasi_uniform_curve	
AIM diagrams	1527
Quasi_uniform_surface	
AIM diagrams	1531
Raceway	
application object	188
ARM diagrams	1489

mapping specification	302
Raceway_lane	
application object	189
ARM diagrams	1489
mapping specification	303
Raceway_size_description	
application object	189
ARM diagrams	1489
mapping specification	304
Range of values	
definition	13
Range value	
definition	13
Ratio_measure	
AIM diagrams	1511
Ratio_measure_with_unit	
AIM diagrams	1506
Ratio_unit	
AIM diagrams	1507
Rational_b_spline_curve	
AIM diagrams	1527
Rational_b_spline_surface	
AIM diagrams	1531
Rectangle to Ellipse	
Plant Design CSG Primitive.....	1107
Rectangular_composite_surface	
AIM diagrams	1530
Rectangular_pyramid	
AIM diagrams	1536
Rectangular_trimmed_surface	
AIM diagrams	1530
Reducer	
application object	189
ARM diagrams	1471
mapping specification	727
Reducer_fitting_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1135
Reducing_flange	
application object	190
ARM diagrams	1484
mapping specification	731
Reducing_torus	
application object	191
ARM diagrams	1457
mapping specification	879
Reference_geometry	
AIM diagrams	1517
AIM EXPRESS short listing entities.....	1136
application object	191
ARM diagrams	1476
mapping specification	1005

ISO 10303-227:2005(E)

Reinforcing_component	
application object	191
ARM diagrams	1479
mapping specification	732
Reinforcing_component_definition	
AIM diagrams	1502
AIM EXPRESS short listing entities.....	1136
Reinforcing_plate	
application object	192
ARM diagrams	1479
mapping specification	734
Reinforcing_ring	
application object	192
ARM diagrams	1479
mapping specification	736
Relative_item_location	
application object	193
ARM diagrams	1453
mapping specification	969
Reparameterized_composite_curve_segment	
AIM diagrams	1526
Representation	
AIM diagrams	1503
definition	13
Representation_context	
AIM diagrams	1503
Representation_item	
AIM diagrams	1542
Representation_item_relationship	
AIM diagrams	1542
Representation_map	
AIM diagrams	1503
Representation_relationship	
AIM diagrams	1503
Representation_relationship_with_transformation	
AIM diagrams	1503
Represented_definition	
AIM diagrams	1541
Required	
definition	13
Required_material_description	
application object	193
ARM diagrams	1461
mapping specification	969
Required_material_property	
AIM diagrams	1515
AIM EXPRESS short listing entities.....	1137
Reserved_space	
AIM diagrams	1517
AIM EXPRESS short listing entities.....	1137
application object	193
ARM diagrams	1454
mapping specification	971

Revolved_area_solid	
AIM diagrams	1522
Revolved_face_solid	
AIM diagrams	1522
Right_angular_wedge	
AIM diagrams	1537
Right_circular_cone	
AIM diagrams	1521
Right_circular_cylinder	
AIM diagrams	1520
Ring_spacer	
application object	194
ARM diagrams	1494
mapping specification	739
Role_association	
AIM diagrams	1535
AIM EXPRESS short listing imported entity modifications	1164
Role_select	
AIM diagrams	1535
Route	
application object	194
ARM diagrams	1454
mapping specification	971
Schedule	
application object	195
ARM diagrams	1474
mapping specification	741
Schematic	
application object	195
ARM diagrams	1495
mapping specification	271
Schematic_callout	
application object	196
ARM diagrams	1495
mapping specification	272
Schematic_callout_dependency	
application object	196
ARM diagrams	1495
mapping specification	273
Schematic_curve	
application object	196
ARM diagrams	1496
mapping specification	273
Schematic_element	
application object	196
ARM diagrams	1495
mapping specification	274
Schematic_point	
application object	197
ARM diagrams	1496
mapping specification	286
Schematic_presentation_component	
application object	197

ISO 10303-227:2005(E)

ARM diagrams	1495
mapping specification	286
Schematic_presentation_component_composition	
application object	197
ARM diagrams	1495
mapping specification	287
Schematic_symbol_definition	
application object	197
ARM diagrams	1496
mapping specification	288
Schematic_symbol_occurrence	
application object	198
ARM diagrams	1496
mapping specification	291
Schematic_text	
application object	198
ARM diagrams	1496
mapping specification	291
Seam_curve	
AIM diagrams	1524
Segment_insulation	
application object	198
ARM diagrams	1483
mapping specification	835
Serial_numbered_effectivity	
AIM diagrams	1543
Service_operating_case	
application object	199
ARM diagrams	1464
mapping specification	383
Shape	
mapping specification	999
unit of functionality	35
Shape_aspect	
AIM diagrams	1517
Shape_aspect_relationship	
AIM diagrams	1517
Shape_definition	
AIM diagrams	1517
Shape_definition_representation	
AIM diagrams	1503
Shape_dimension_representation	
AIM diagrams	1503
Shape_inspection_record	
application object	200
ARM diagrams	1488
mapping specification	813
Shape_interference_zone_usage	
application object	201
ARM diagrams	1477
mapping specification	1005
Shape_parameter	
application object	202

ARM diagrams	1457
mapping specification	1006
Shape_representation	
application object	202
ARM diagrams	1456
mapping specification	1006
Shape_representation_element	
application object	202
ARM diagrams	1457
mapping specification	1007
Shape_representation_element_usage	
application object	203
ARM diagrams	1456
mapping specification	1008
Shell_based_wireframe_model	
AIM diagrams	1532
Ship	
application object	203
ARM diagrams	1455
Shoe	
application object	205
ARM diagrams	1479
mapping specification	679, 744
SI_prefix	
AIM diagrams	1507
SI_unit	
AIM diagrams	1507
SI_unit_name	
AIM diagrams	1507
Site	
AIM diagrams	1515
AIM EXPRESS short listing entities.....	1138
application object	205
ARM diagrams	1462
definition	13
mapping specification	1016
Site_building	
AIM diagrams	1515
AIM EXPRESS short listing entities.....	1139
Site_characterization	
mapping specification	1009
unit of functionality	36
Site_feature	
AIM diagrams	1515
AIM EXPRESS short listing entities.....	1139
application object	206
ARM diagrams	1462
mapping specification	1022
Site_representation	
AIM diagrams	1503
AIM EXPRESS short listing entities.....	1140
Site_shape_representation	
application object	207

ISO 10303-227:2005(E)

ARM diagrams	1462
mapping specification	1024
Sited_plant	
AIM diagrams	1515
AIM EXPRESS short listing entities.....	1142
application object	207
ARM diagrams	1453
mapping specification	1025
Size_select	
AIM diagrams	1549
Slip_on_flange	
application object	208
ARM diagrams	1480
mapping specification	745
Slip_on_jacket_flange	
application object	208
ARM diagrams	1480
mapping specification	748
Socket	
application object	209
ARM diagrams	1482
mapping specification	387
Socket_weld_flange	
application object	210
ARM diagrams	1484
mapping specification	750
Solid_angle_measure	
AIM diagrams	1511
Solid_angle_measure_with_unit	
AIM diagrams	1506
Solid_angle_unit	
AIM diagrams	1507
Solid_model	
AIM diagrams	1523
Solid_of_revolution	
application object	210
ARM diagrams	1457
mapping specification	879
Source	
AIM diagrams	1514
Source_item	
AIM diagrams	1501
Spacer	
application object	210
ARM diagrams	1494
mapping specification	751
Spacer_fitting_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1143
Spare_plant_item_usage	
application object	211
ARM diagrams	1455
mapping specification	972

Spatial configuration	
definition	13
Specialty_item	
application object	211
ARM diagrams	1469
mapping specification	755
Specialty_item_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1143
Spectacle_blind	
application object	211
ARM diagrams	1494
mapping specification	755
Sphere	
AIM diagrams	1520
application object	212, 213
ARM diagrams	1457
mapping specification	880
Spherical_surface	
AIM diagrams	1529
Splitter	
application object	213
ARM diagrams	1492
mapping specification	518
Spring_washer	
application object	213
ARM diagrams	1487
mapping specification	973
Square_to_round	
application object	214
ARM diagrams	1457
mapping specification	880
Stay	
application object	214
ARM diagrams	1479
mapping specification	761
Steam_design_case	
AIM diagrams	1515
Steam_phase	
AIM diagrams	1515
Stopper	
application object	214
ARM diagrams	1479
mapping specification	763
Straight_pipe	
application object	215
ARM diagrams	1469
mapping specification	765
Stream_design_case	
AIM EXPRESS short listing entities.....	1144
application object	216
ARM diagrams	1464
mapping specification	837

ISO 10303-227:2005(E)

Stream_phase	
AIM EXPRESS short listing entities.....	1153
application object	217
ARM diagrams	1464
mapping specification	841
Structural_component	
application object	218
ARM diagrams	1459
mapping specification	976
Structural_load_connector	
application object	218
ARM diagrams	1460
mapping specification	388
Structural_load_connector_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1156
Structural_system	
AIM diagrams	1541
AIM EXPRESS short listing entities.....	1157
application object	219
ARM diagrams	1458
mapping specification	875
Stub_in	
application object	219
ARM diagrams	1482
mapping specification	389
Stud_bolt	
application object	220
ARM diagrams	1487
mapping specification	977
Style_context_select	
AIM diagrams	1548
Styled_item	
AIM diagrams	1547
Sub_plant_relationship	
application object	220
ARM diagrams	1453
mapping specification	876
Subtype_exclusive_characterized_object	
AIM EXPRESS short listing rules	1172
Subtype_exclusive_shape_representation	
AIM EXPRESS short listing rules	1173
Subtype_mandatory_externally_defined_item	
AIM EXPRESS short listing rules	1172
Subtype_mandatory_pre_defined_item	
AIM EXPRESS short listing rules	1173
Supplied_equipment	
application object	220
ARM diagrams	1470
mapping specification	979
Supplier	
application object	221
ARM diagrams	1470

mapping specification	981
Support_component	
application object	221
ARM diagrams	1459
mapping specification	982
Support_constraint_representation	
AIM diagrams	1503
AIM EXPRESS short listing entities.....	1157
Support_constraints	
application object	221
ARM diagrams	1454
mapping specification	983
Support_usage	
application object	222
ARM diagrams	1454
mapping specification	990
Support_usage_connection	
application object	222
mapping specification	991
Supported_item	
AIM diagrams	1512
Surface	
AIM diagrams	1528
application object	222
ARM diagrams	1457
mapping specification	539
Surface_boundary	
AIM diagrams	1526
Surface_curve	
AIM diagrams	1524
Surface_of_linear_extrusion	
AIM diagrams	1528
Surface_of_revolution	
AIM diagrams	1528
Surface_patch	
AIM diagrams	1530
Surface_replica	
AIM diagrams	1528
Survey_point	
application object	222
ARM diagrams	1462
mapping specification	1027
Swage_fitting_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1158
Swept_area_solid	
AIM diagrams	1522
Swept_bend_pipe	
application object	223
ARM diagrams	1469
mapping specification	771
Swept_face_solid	
AIM diagrams	1522

ISO 10303-227:2005(E)

Swept_surface	
AIM diagrams	1528
Symbol_colour	
AIM diagrams	1548
Symbol_representation	
AIM diagrams	1503
Symbol_representation_map	
AIM diagrams	1503
Symbol_representation_relationship	
AIM diagrams	1503
Symbol_style	
AIM diagrams	1548
Symbol_style_select	
AIM diagrams	1548
Symbol_target	
AIM diagrams	1553
Symmetric_shape_aspect	
AIM diagrams	1517
System_class	
AIM diagrams	1510
AIM EXPRESS short listing entities.....	1159
System_space	
AIM diagrams	1517
AIM EXPRESS short listing entities.....	1159
application object	223
ARM diagrams	1454
mapping specification	991
Tee	
application object	223
ARM diagrams	1471
mapping specification	776
Text_literal	
AIM diagrams	1552
Text_literal_with_associated_curves	
AIM diagrams	1552
Text_literal_with_blanking_box	
AIM diagrams	1552
Text_literal_with_delineation	
AIM diagrams	1552
Text_literal_with_extent	
AIM diagrams	1552
Text_path	
AIM diagrams	1552
Text_string_representation	
AIM diagrams	1503
Text_style	
AIM diagrams	1550
Text_style_for_defined_font	
AIM diagrams	1550
Text_style_with_box_characteristics	
AIM diagrams	1550
Text_style_with_mirror	
AIM diagrams	1550

Thermodynamic_temperature_measure	
AIM diagrams	1511
Thermodynamic_temperature_measure_with_unit	
AIM diagrams	1506
Thermodynamic_temperature_unit	
AIM diagrams	1507
Threaded	
application object	225
ARM diagrams	1482
mapping specification	390
Threaded_flange	
application object	226
ARM diagrams	1484
mapping specification	783
Time_measure	
AIM diagrams	1511
Time_measure_with_unit	
AIM diagrams	1506
Time_unit_unit	
AIM diagrams	1507
Title_block	
ARM diagrams	1495
mapping specification	291
Toothed_lock_washer	
application object	226
ARM diagrams	1487
mapping specification	992
Topological_representation_item	
AIM diagrams	1519
Toroidal_surface	
AIM diagrams	1529
Torus	
AIM diagrams	1520
application object	227
ARM diagrams	1457
mapping specification	880
Train	
application object	227
ARM diagrams	1453
mapping specification	876
Transformation	
AIM diagrams	1504
Transition_code	
AIM diagrams	1526
Trimmed Pyramid	
Plant Design CSG Primitive.....	1107
Trimmed Sphere	
Plant Design CSG Primitive.....	1107
Trimmed_block	
application object	227
ARM diagrams	1457
mapping specification	880

ISO 10303-227:2005(E)

Trimmed_cone	
application object	227
ARM diagrams	1457
mapping specification	880
Trimmed_curve	
AIM diagrams	1526
Trimmed_cylinder	
application object	227
ARM diagrams	1457
mapping specification	880
Trimmed_pyramid	
application object	227
ARM diagrams	1457
mapping specification	881
Trimmed_sphere	
application object	227
ARM diagrams	1457
mapping specification	881
Trimmed_torus	
application object	228
ARM diagrams	1457
mapping specification	881
Trimming_preference	
AIM diagrams	1526
Trimming_select	
AIM diagrams	1526
Trunnion	
application object	228
ARM diagrams	1479
mapping specification	995
Two_direction_repeat_factor	
AIM diagrams	1551
Type_qualifier	
AIM diagrams	1538
Uncertainty_measure_with_unit	
AIM diagrams	1506
Uniform_curve	
AIM diagrams	1527
Uniform_surface	
AIM diagrams	1531
Union	
application object	228
ARM diagrams	1471
mapping specification	784
Unit	
AIM diagrams	1507
application object	230
ARM diagrams	1453
mapping specification	877
Unit of functionality	5
UoF	15
User_defined_attribute_value	
application object	230

ARM diagrams	1455, 1494
mapping specification	997
UTM	15
Valid_advanced_csg_tree	
AIM EXPRESS short listing functions	1182
Value_for_application_context	
AIM EXPRESS short listing rules	1174
Value_qualifier	
AIM diagrams	1538
Valve	
application object	230
ARM diagrams	1469
mapping specification	790
Valve_class	
AIM diagrams	1510
AIM EXPRESS short listing entities	1160
Vector	
AIM diagrams	1518
application object	231
ARM diagrams	1457
mapping specification	539
Vector_or_section	
AIM diagrams	1518
Version2_p41_object_role_selection	
AIM EXPRESS short listing rules	1174
Version2_p41_uninstantiable_basic_attributes	
AIM EXPRESS short listing rules	1175
Versioned_action_request	
AIM diagrams	1512
AIM EXPRESS short listing imported entity modifications	1165
Vertex	
AIM diagrams	1519
Vertex_loop	
AIM diagrams	1519
Vertex_shell	
AIM diagrams	1519
View_dependent_annotation_representation	
AIM diagrams	1544
Volume_measure	
AIM diagrams	1511
Washer	
application object	231
ARM diagrams	1487
mapping specification	998
Weld_neck_flange	
application object	231
ARM diagrams	1480
mapping specification	793
Weld_neck_jacket_flange	
application object	231
ARM diagrams	1480
mapping specification	794

ISO 10303-227:2005(E)

Wire_and_surface_element	
application object	232
ARM diagrams	1457
mapping specification	539
Wire_shell	
AIM diagrams	1519
Y_type_lateral	
application object	232
ARM diagrams	1471
mapping specification	796

