INTERNATIONAL STANDARD

ISO 11418-3

Third edition 2016-11-15

Containers and accessories for pharmaceutical preparations —

Part 3:

Screw-neck glass bottles (veral) for solid and liquid dosage forms

Récipients et accessoires pour préparations pharmaceutiques — Partie 3: Flacons en verre à bouchon à vis (veral) pour formes sèches et liquides





COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Ch. de Blandonnet 8 • CP 401 CH-1214 Vernier, Geneva, Switzerland Tel. +41 22 749 01 11 Fax +41 22 749 09 47 copyright@iso.org www.iso.org

Co	ntent	CS .	Page					
Fore	eword		iv					
1	Scope							
2	Normative references							
3	Terms and definitions							
4	Dimensions and designation 4.1 Dimensions 4.2 Designation							
5	Req u 5.1 5.2	uirements Material Performance 5.2.1 Vertical load resistance 5.2.2 Hydrolytic resistance 5.2.3 Thermal shock resistance						
6	Marl	king	2					
Ann	ex A (no	ormative) Neck finishes	5					

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is ISO/TC 76, *Transfusion, infusion and injection, and blood processing equipment for medical and pharmaceutical use.*

This third edition cancels and replaces the second edition (ISO 11418-3:2005), which has been technically revised by

- updating <u>Figure 1</u> on typical screw-neck glass bottle and <u>Table 1</u> on nominal volume, brimful capacity and dimensions of screw-neck glass bottles,
- including a normative annex on neck finishes, and
- editorially revising this document.

A list of all the parts of ISO 11418 can be found on the ISO website.

Containers and accessories for pharmaceutical preparations —

Part 3:

Screw-neck glass bottles (veral) for solid and liquid dosage forms

1 Scope

This document specifies the design, dimensions, material and requirements of screw-neck glass bottles (veral) for pharmaceutical preparations in solid and liquid dosage forms. Screw-neck glass bottles are applicable to primary packs used in direct contact with a drug.

This document is applicable to screw-neck glass bottles (veral) used in pharmacy. Together with the corresponding closure systems, they serve for packaging of pharmaceutical preparations in solid and liquid dosage forms which are not intended for parenteral use.

NOTE The potency, purity, stability and safety of a drug during its manufacture and storage can be strongly affected by the nature and performance of the primary pack.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 719, Glass — Hydrolytic resistance of glass grains at 98 degrees C — Method of test and classification

ISO 720, Glass — Hydrolytic resistance of glass grains at 121 degrees C — Method of test and classification

ISO 1101, Geometrical product specifications (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out

ISO 4802-1, Glassware — Hydrolytic resistance of the interior surfaces of glass containers — Part 1: Determination by titration method and classification

ISO 4802-2, Glassware — Hydrolytic resistance of the interior surfaces of glass containers — Part 2: Determination by flame spectrometry and classification

ISO 7459, Glass containers — Thermal shock resistance and thermal shock endurance — Test methods

ISO 8113, Glass containers — Resistance to vertical load — Test method

3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

4 Dimensions and designation

4.1 Dimensions

The dimensions of screw-neck glass bottles [veral]¹⁾ for pharmaceutical preparations in solid and liquid dosage forms shall be as shown in Figure 1 and as given in Table 1.

The neck finish of screw-neck glass bottles (veral) for solid and liquid dosage shall comply with Figure A.1 or Figure A.2 as appropriate.

Tolerancing of form, orientation, location and run-out not specified in this document shall be in accordance with ISO 1101.

4.2 Designation

Screw-neck glass bottles (veral) for pharmaceutical preparations in solid and liquid dosage forms shall be designated by a reference to this document, followed by the nominal volume, the colour of the glass and bore size.

EXAMPLE A screw-neck glass bottle (veral) of nominal volume 100 ml, made of amber glass (br) of hydrolytic resistance container class ISO 4802-HC 3, in accordance with this document is designated as follows:

Screw-neck glass bottle ISO 11418-3 - 100 - br

5 Requirements

5.1 Material

The material shall be colourless (cl) or amber (br) borosilicate glass (see ISO 4802-1 or ISO 4802-2) or soda-lime-silica glass (see ISO 4802-1 or ISO 4802-2) of hydrolytic resistance grain class ISO 719-HGB 3 or ISO 720-HGA 2.

5.2 Performance

5.2.1 Vertical load resistance

The resistance to vertical load shall be in accordance with ISO 8113.

5.2.2 Hydrolytic resistance

When tested in accordance with ISO 4802-1 and ISO 4802-2, the hydrolytic resistance of the internal surface of the screw-neck glass bottle shall comply with the requirements of the hydrolytic resistance container class ISO 4802-HC 3.


5.2.3 Thermal shock resistance

Screw-neck glass bottles (veral) shall withstand the thermal shock of a temperature difference of 42 $^{\circ}$ C when tested in accordance with the thermal shock resistance test specified in ISO 7459.

6 Marking

The screw-neck glass bottle (veral) shall be marked with the information specified in Figure 1.

¹⁾ From the French term "verre allégé" "lightweight glass".

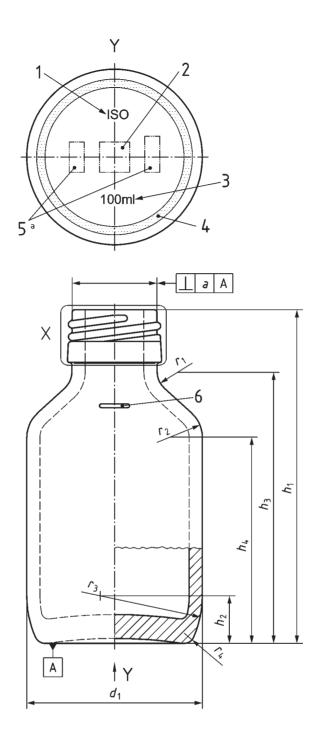

Key

- 1 ISO letters (optional)
- 2 manufacturer's trademark
- 3 nominal volume (optional)
- 4 bottom surface may be granular, flat or riffled
- 5 manufacturer's code/designation of the mould
- The number of the mould may be placed on the curve r_{3} , on the bottom or on the shoulder of the bottle.

Figure 1 — Typical screw-neck glass bottle (veral), showing marking locations

Dimensions in millimetres


Nominal	Minimum brimful capacity	d_1		h_1		,		,					Mass
volume		nom.	tol.	nom.	tol.	h ₂	h_3	h_4	r_1	r_2	r_3	r_4	g
ml	ml					≈	*	≈	~	*	~		≈
30	33,5	34,2	±1	70,5	±1,0	2,0	52,6	38,0	8,0	17,0	2,0	2,0	47
50	58,0	40,5	±1	81,0	±1,0	13,0	62,6	49,5	4,0	6,0	30,0	3,0	55
60	70,5	44,0	±1,1	82,0	±1,0	12,5	64,5	51,0	3,5	8,0	26,0	2,0	63
75	83,8	47,4	±0,8	91,4	±0,8	13,0	73,0	56,5	6,0	9,0	28,0	2,8	86
100	115,0	51,2	±0,8	96,8	±0,9	13,0	78,8	61,5	5,0	9,0	22,0	4,0	86
125	136,0	56,0	±1,2	97,5	±1,0	15,0	79,6	60,5	5,0	10,0	30,0	3,5	102
150	165,0	56,8	±1,2	111,0	±1,1	14,0	89,0	70,0	8,0	12,0	30,0	3,0	115
200	221,5	63,0	±1,3	118,5	±1,1	17,0	100,5	73,5	7,0	14,0	33,0	4,5	125
250	275,0	65,0	±1,3	136,0	±1,2	19,0	118,6	88,0	6,0	15,0	40,0	4,0	160
300	323,0	72,3	±1,2	134,5	±1,2	18,5	117,0	84,5	7,0	16,8	36,0	3,5	200
500	541,0	82,0	±1,5	161,0	±1,3	18,3	143,5	105,3	7,5	18,0	29,3	5,0	285
1 000	1 079,0	100,6	±1,6	206,2	±1,2	24,0	187,5	140,5	10,0	23,0	45,0	5,0	480

Annex A

(normative)


Neck finishes

Neck finishes of screw-neck glass bottles for syrups shall comply with <u>Figure A.1</u> (19,4 mm bore) or <u>Figure A.2</u> (20 mm bore), as appropriate.

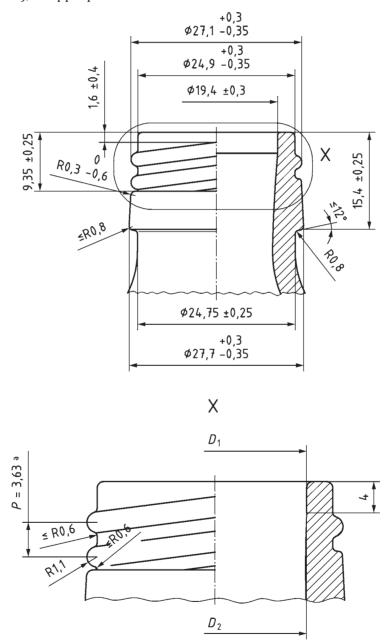

NOTE Diameter d_2 at 4 mm depth and $\geq \emptyset$ 17 mm.

Figure A.1 — 19,4 mm bore - 28 mm Bottle Neck Finish

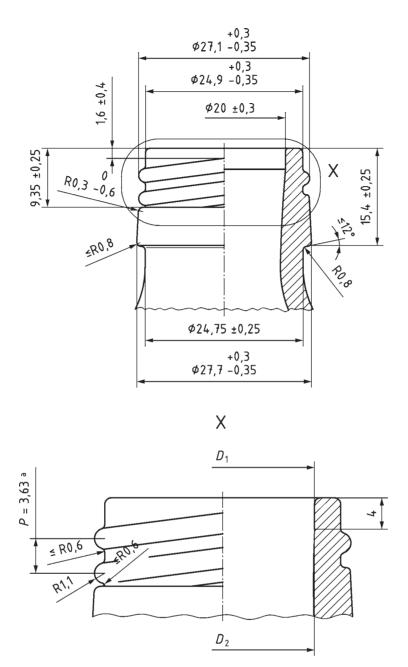

NOTE Diameter d_2 at 4 mm depth and $\geq \emptyset$ 17 mm.

Figure A.2 — 20 mm bore - 28 mm Bottle Neck Finish



105 111120155, 1110