
**Industrial automation systems and
integration — Parts library —**

**Part 511:
Mechanical systems and components for
general use — Reference dictionary for
fasteners**

*Systèmes d'automatisation industrielle et intégration — Bibliothèque de
composants —*

*Partie 511: Systèmes mécaniques et composants pour utilisation
générale — Dictionnaire de référence pour éléments de fixation*



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents	Page
1 Scope	1
2 Normative references	2
3 Terms, definitions, and abbreviations	2
4 Representation of ontology concepts as dictionaries entries	7
4.1 Fastener class	7
4.1.1 Modelled class	7
4.1.2 Referenced classes	9
4.1.3 Used attributes.....	9
4.1.4 Layout	10
4.2 Property DET definitions	12
4.2.1 Modelled data types	12
4.2.2 Imported properties.....	12
4.2.3 Used attributes.....	12
4.2.4 Layout	13
4.3 Data type definitions	14
4.3.1 Data type properties	14
4.3.2 Used attributes.....	15
4.4 Rules for formulating class and property definitions	15
5 Classification principles	15
5.1 Connection to pre-existing classification	15
5.2 Upper level of the hierarchy	15
5.3 Lower level of the hierarchy	15
5.4 Coding style	16
5.5 General and classification property	16
5.5.1 General property.....	16
5.5.2 Classification property.....	16
6 Computer sensible description	17
6.1 External file	17
6.2 Information model and conformance class	17
Annex A (normative) Information object registration	22
A.1 Document identification	22
A.2 Dictionary identification	22
Annex B (normative) Classification tables	23
Annex C (normative) Fastener class definitions	37
Annex D (normative) Fastener property DET definitions	73
D.1. Property DET definition imported from IEC 61360-4	73
D.2. Property DET definition defined in this part of ISO 13584	73
Annex E (normative) Classification mechanism	103

E.1	Classification property DETs and values.....	103
E.2	Classification methodology and property reference mechanism	105
Annex F (normative) Computer sensible representation of the fastener dictionary ..		132
Annex G (informative) Simplified drawings of feature classes, component classes and some properties		133
Bibliography		170
Index.....		176

Figures

Figure 1	— Item_class under fastener class in this part of ISO 13584	8
Figure 2	— The structure of externally threaded fastener class	9
Figure 3	— Layout of class definition	11
Figure 4	— Position and some inherited properties of class P511AAA340	11
Figure 5	— Layout of property DET definition.....	14
Figure 6	— Coding style	16
Figure 7	— External reference mechanism.....	17

Tables

Table B.1	— Classification structure of classes	23
Table E.1	— Classification property DETs and values	103
Table E.2	— Classification methodology and property reference mechanism	105
Table G.1	— Simplified drawings of classes	133

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC directives, Part 2.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 13584-511 was prepared by Technical Committee ISO/TC 184, *Industrial automation systems and integration*, Subcommittee SC 4, *Industrial data*.

ISO 13584 consists of the following parts, under the general title *Industrial automation systems and integration — Parts library*:

- *Part 1: Overview and fundamental principles;*
- *Part 20: Logical resource: Logical model of expressions;*
- *Part 24: Logical resource: Logical model of supplier library;*
- *Part 25: Logical resource: Logical model of supplier library with aggregate values and explicit content;*
- *Part 26: Logical resource: Information supplier identification;*
- *Part 31: Implementation resource: Geometric programming interface;*
- *Part 42: Description methodology: Methodology for structuring part families;*
- *Part 101: Geometric view exchange protocol by parametric program;*
- *Part 102: View exchange protocol by ISO 10303 conforming specification;*
- *Part 501: Reference dictionary for measuring instruments: Registration procedure;*
- *Part 511: Mechanical systems and components for general use: Reference dictionary for fasteners.*

The structure of the ISO 13584 series is described in ISO 13584-1. The numbering of the parts of ISO 13584 reflects its structure:

ISO 13584-511:2006(E)

- Parts 10 to 19 specify the conceptual descriptions;
- Parts 20 to 29 specify the logical resources;
- Parts 30 to 39 specify the implementation resources;
- Parts 40 to 49 specify the description methodology;
- Parts 100 to 199 specify the view exchange protocols;
- Parts 500 to 599 specify the reference dictionaries.

Should further parts of ISO 13584 be published, they will follow the same numbering pattern.

Introduction

ISO 13584 is an International Standard for the computer interpretable representation and exchange of parts library data. The objective is to provide a neutral mechanism capable of transferring parts library data, independent of any application that is using a parts library data system. The nature of this description makes it suitable not only for the exchange of files containing parts, but also as a basis for implementing and sharing databases of parts library data.

This International Standard is organized as a series of parts, each published separately. The parts of ISO 13584 fall into one of the following series: conceptual descriptions, logical resources, implementation resources, description methodology, view exchange protocol, and reference dictionaries. The series are described in ISO 13584-1. This part of ISO 13584 is a member of the reference dictionaries series.

The reference dictionaries series of parts of ISO 13584 specify ontologies for representing the entities of an application domain, together with their descriptive properties and domains of values. Each entity, property or domain of values constitutes an entry of a dictionary that is the formal and computer sensible representation of the specified ontology. It is associated with a computer sensible and human readable definition, and with a computer sensible identification. Identification of a dictionary entry allows for unambiguous reference from any application. Definitions and identifications of dictionary entries consist of instances of the EXPRESS entity data types defined in the common dictionary schema, or in its extensions defined in the logical series of parts of ISO 13584.

This part of ISO 13584 specifies a reference dictionary for representing fasteners with their properties and domains of values, as they are described in the various ISO mechanical fastener standards.

The definitions of classes and properties in this fastener dictionary are referenced from:

- various ISO standards (see Bibliography);
- the Federal Item Identification Guide;
- Machinery's Handbook (26th Edition).

.....

Industrial automation systems and integration — Parts library — Part 511: Mechanical systems and components for general use: Reference dictionary for fasteners

1 Scope

This part of ISO 13584 specifies a reference dictionary for all the parts described in the various ISO mechanical fastener standards, together with their descriptive properties and domains of values.

This part of ISO 13584 specifies a reference dictionary that contains:

- definitions and identifications of the classes of fasteners as they are described in the various ISO mechanical fastener standards, with associated classification schemes;
- definitions and identifications of data element types that represents properties of fasteners, and
- definitions and identifications of domains of values that help to describe the above data element types.

Each class, property or domain of values of this application domain constitutes an entry of the reference dictionary defined in this part of ISO 13584. It is associated with a computer sensible and human-readable definition, and with a computer sensible identification. Identification of a dictionary entry allows for unambiguous reference from any application.

Definitions and identifications of dictionary entries are defined by means of standard data that consist of instances of the EXPRESS entity data types defined in the common dictionary schema, and in its extensions defined in ISO 13584-24 and ISO 13584-25.

The following are within the scope of this part of ISO 13584:

- standard data that represents the classes of fasteners;
- standard data that represents the properties of fasteners;
- standard data that represents domains of values used for properties of fasteners.

The following are outside the scope of this part of ISO 13584:

- methodology for structuring parts families used for specifying standard data defined in this part of ISO 13584;
- implementation method by which the standard data defined in this part of ISO 13584 may be exchanged.

NOTE The structure of the physical file used for exchanging the standard data defined in this part of ISO 13584 is specified in ISO 10303-21. Such a physical file containing all the fastener standard data is also provided as Annex F of this part of ISO 13584.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1891: 1979, *Bolts, screws, nuts and accessories — Terminology and nomenclature*.

ISO/IEC 8824-1, *Information technology — Abstract Syntax Notation One (ASN.1) — Part 1: Specification of basic notation*.

ISO 10303-1:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 1: Overview and fundamental principles*.

ISO 10303-11:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 11: Description methods: The EXPRESS language reference manual*.

ISO 10303-21, *Industrial automation systems and integration — Product data representation and exchange — Part 21: Implementation methods: Clear text encoding of the exchange structure*.

ISO 13584-1:2001, *Industrial automation systems and integration — Parts library — Part 1: Overview and fundamental principles*.

ISO 13584-24:2003, *Industrial automation systems and integration — Parts library — Part 24: Logical resources: Logical model of supplier library*.

ISO 13584-25, *Industrial automation systems and integration — Parts library — Part 25: Logical resources: Logical model of supplier library with aggregate values and explicit content*.

ISO 13584-42:1998, *Industrial automation systems and integration — Parts library — Part 42: Description methodology: Methodology for structuring part families*.

IEC 61360-4:1997, *Standard data element types with associated classification scheme for electric components — Part 4: IEC reference collection of standard data element types and component classes*.

3 Terms, definitions, and abbreviations

For the purposes of this document, the following terms, definitions and abbreviations apply.

Some of these terms and definitions are repeated for convenience from:

- ISO 10303-1:1994;
- ISO 10303-11:1994;
- ISO 13584-1:2001;
- ISO 13584-24:2003;
- ISO 13584-42:1998.

3.1 Terms and definitions

3.1.1

applicable property

a property that is defined for some family of parts and that shall apply to any part that belongs to this family of parts

[ISO 13584-24:2003]

EXAMPLE For a screw generic family of parts, the thread diameter is an applicable property: this characteristic applies to any screw.

3.1.2

basic semantic unit (BSU)

the entity that provides an absolute and universal identification of certain objects of the application domain

[ISO 13584-42:1998]

EXAMPLE Classes, data element types.

3.1.3

characteristic of a part (part characteristic)

a constant property, characteristic of a part, of which the value is fixed once the part is defined

[ISO 13584-24:2003]

NOTE Changing the value of a characteristic of a part would mean changing the part.

EXAMPLE For a washer, the nominal and outside diameters are part characteristics.

3.1.4

common dictionary schema

the information model for a dictionary, using the EXPRESS modelling language, resulting from a joint effort between ISO TC184/SC4/WG2 and IEC SC3D

[ISO 13584-42:1998]

NOTE The common dictionary schema is specified in IEC 61360-2:2004, and its content is provided in ISO 13584-42:1998, Annex D.

3.1.5

data

a representation of facts, concepts or instructions in a formal manner suitable for communication, interpretation, or processing by human beings or computers

[ISO 10303-1:1994]

3.1.6

data element type (DET)

unit of data for which the identification, the description and value representation have been specified

[ISO 13584-42:1998]

3.1.7

data exchange

the storing, accessing, transferring, and archiving of data

[ISO 10303-1:1994]

3.1.8

data type

a domain of values

[ISO 10303-11:1994]

3.1.9

dictionary

a table consisting of a series of entries. One meaning corresponds to each entry in the dictionary and one dictionary entry identifies one single meaning

[ISO 13584-1:2001]

NOTE 1 In ISO 13584, a dictionary is the formal and computer sensible representation of an ontology.

NOTE 2 In ISO 13584, the kinds of meaning intended to constitute dictionary entries are: supplier, class, property, program library, type, table and document.

NOTE 3 In ISO 13584, the information that represents a dictionary entry is split into three entities: a `basic_semantic_unit` (BSU), that provides for reference, a `dictionary_element` that describes the dictionary entry by means of attributes, and, possibly, a `content_item` entity that describes the dictionary entry by describing its content.

3.1.10

dictionary data

the set of data that describes hierarchies of families of parts and properties of these parts

[ISO 13584-42:1998]

3.1.11

dictionary element

the set of attributes that constitutes the dictionary description of certain objects of the application domain

[ISO 13584-42:1998]

EXAMPLE Classes, data element types.

3.1.12

entity

a class of information defined by common properties

[ISO 10303-11:1994]

3.1.13**entity data type**

a representation of an entity. An entity data type establishes a domain of values defined by common attributes and constraints

[ISO 10303-11:1994]

3.1.14**entity (data type) instance**

a named unit of data that represents a unit of information within the class defined by an entity. It is a member of the domain established by an entity data type

[ISO 10303-11:1994]

3.1.15**family of parts**

a simple or generic family of parts

[ISO 13584-42:1998]

3.1.16**generic family of parts**

a grouping of simple or generic families of parts done for purposes of classification or for factoring common information

[ISO 13584-42:1998]

3.1.17**implementation method**

a technique used by computers to exchange data that is described using the EXPRESS data specification language

[ISO 13584-24:2003]

3.1.18**is-case-of relationship**

a relationship providing a formal expression of the fact that an object conforms to the partial specification defined by another object

[ISO 13584-24:2003]

NOTE In ISO 13584, all the families of parts that declare to be case-of the former family can import all the properties and data types visible or applicable for some family of parts. These properties and data types can then be used to describe the latter families.

3.1.19

library integrated information model (LIIM)

an EXPRESS schema that integrates resource constructs from different EXPRESS schemas for representing supplier libraries for the purpose of exchange and that is associated with conformance requirements

[ISO 13584-24:2003]

3.1.20

ontology

explicit and consensual specification of concepts of an application domain independent of any use of these concepts

NOTE In ISO 13584, a dictionary is the formal and computer sensible representation of ontology.

3.1.21

part

material or functional element that is intended to constitute a component of different products

[ISO 13584-1:2001]

3.1.22

property

information that may be represented by a data element type

[ISO 13584-42:1998]

3.1.23

simple family of parts

a set of parts of which each part may be described by the same group of properties

[ISO 13584-42:1998]

3.1.24

visible property

a property that is defined for some family of parts and that may or may not apply to the different parts of this family of parts

[ISO 13584-42:1998]

EXAMPLE For a generic family of screws, the non-threaded length is a visible property: it is clearly defined for any screw, but only those screws with a non-threaded part have a value for this property.

NOTE The code of the class where a property is defined as visible is part of the identification of the data element type that represents this property.

3.1.25

standard data

a requirement on a software system defined by means of EXPRESS entity (data type) instances that are supposed to be recognized by this software system

[ISO 13584-24:2003]

3.2 Abbreviations

For the purposes of this document, the following abbreviations apply.

AP	Applicable Property
BSU	Basic Semantic Unit
DC	Definition Class
DCR	Date of Current Revision
DCV	Date of Current Version
DET	Data Element Type
DOD	Date of Original Definition
DT	Data Type
LIIM	Library Integrated Information Model
PLS	Preferred Letter Symbol
PTC	Property Type Classification
SD	Simplified Drawing
SDD	Source Document of Definition
SSP	Sub-class Selection Properties
VF	Value Format
VP	Visible Property

4 Representation of ontology concepts as dictionaries entries

4.1 Fastener class

4.1.1 Modelled class

4.1.1.1 Fastener class and super class

In this part of ISO 13584, fastener class and thread class are located under the super class -- **mechanical component for general use (see Figure 1)**.

NOTE Besides **fastener** class, some other classes, e.g. bearing or spring, will be put under '**mechanical component for general use**' in the future reference dictionary standardization.

Fastener class is classified into five subclasses -- **externally threaded fastener**, **nut**, **rivet**, **pin**, and **washer**, which refer to fasteners classification of International Classification for Standards (ICS). All the modelled classes are shown in Annex C.

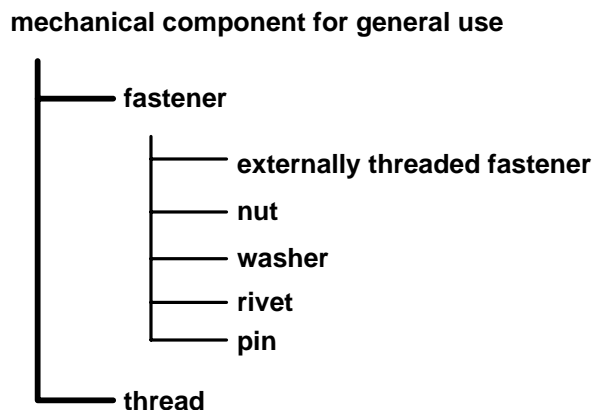


Figure 1 — Item_class under fastener class in this part of ISO 13584

4.1.1.2 Component class

Under top classes, various component classes are defined in this part of ISO 13584 except that **externally threaded fastener** class is classified into two subclasses – **externally threaded fastener component** class and **externally threaded fastener feature** class which describe the components and their geometry features respectively.

EXAMPLE 1 The **externally threaded fastener feature** class is classified into **head**, **shank**, **end**, and **internal drive** class.

All the component classes should be classified into classes of classificatory component, and ulteriorly some corresponding simple family of parts under each classificatory component class. This part of ISO 13584 establishes a mechanism for connecting the component classes to the corresponding feature classes by classification properties and classification property reference properties (see Annex E).

EXAMPLE 2 The **externally threaded fastener component** class is classified into nine component classes — **metric threaded bolt/screw**, **tapping screw**, **wood screw**, **drilling screw**, **set screw**, **stud**, **headless screw with shank**, **stud bolt** and **thread forming screw**.

EXAMPLE 3 The structure of **externally threaded fastener** class is shown in Figure 2.

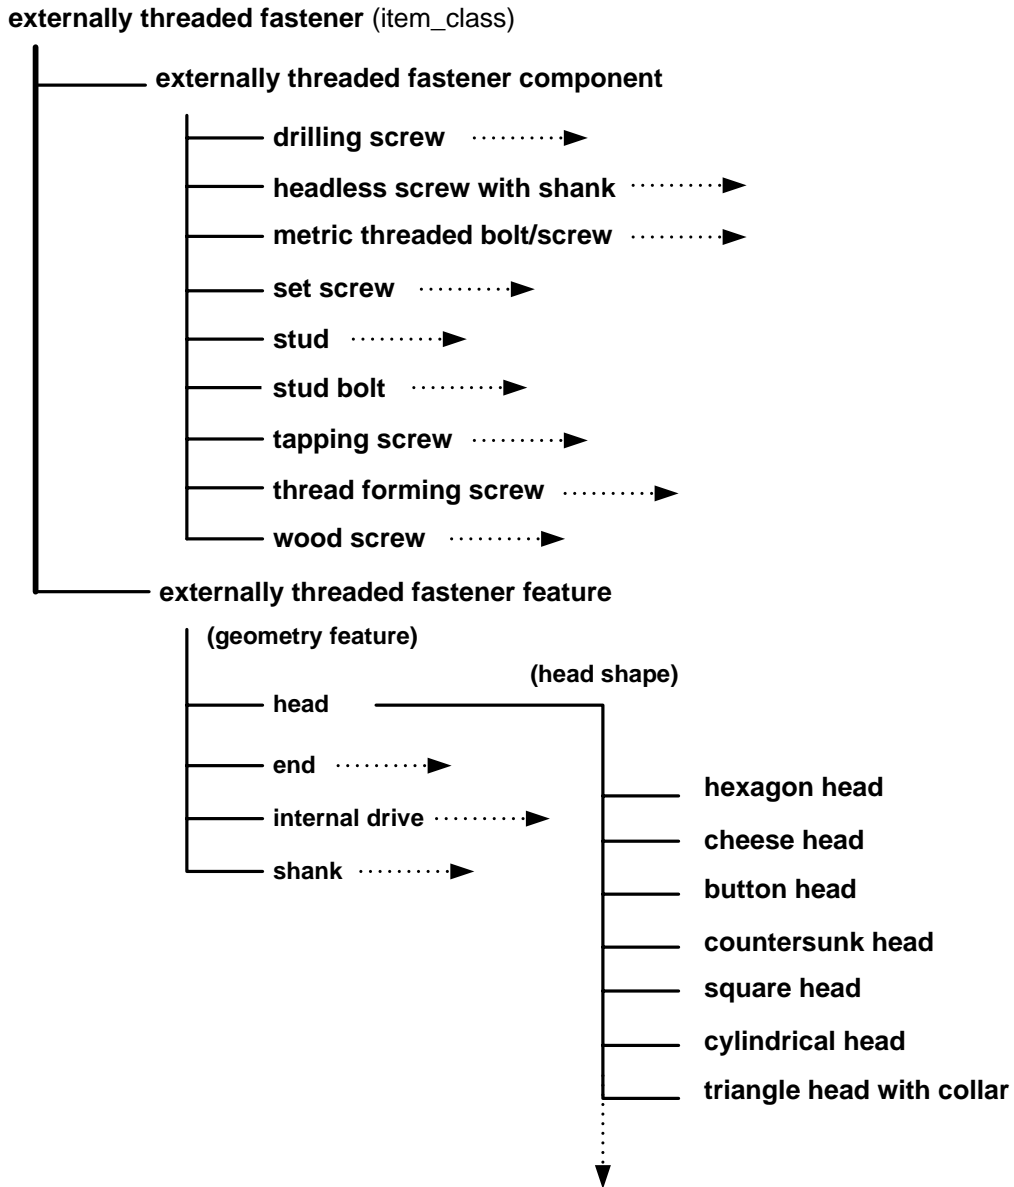


Figure 2 — The structure of externally threaded fastener class

The classification of fasteners is shown in Annex B.

4.1.2 Referenced classes

There is not any referenced class in this part of ISO 13584 from other classifications.

4.1.3 Used attributes

In this part of ISO 13584, classes are defined by means of the following information elements specified in ISO 13584-42:

- Code

ISO 13584-511:2006(E)

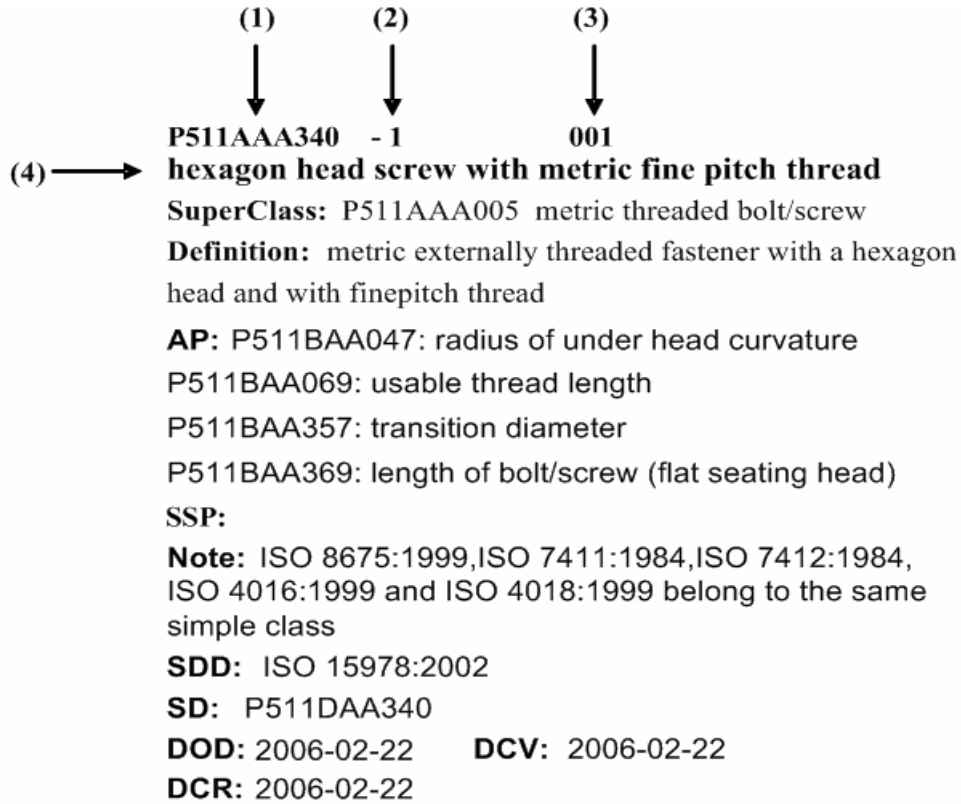
- Super Class
- Preferred Name
- Sub-Class Selection Properties
- Visible Properties
- Applicable Properties
- Class Value Assignment
- Definition
- Source Document of Definition
- Date of Current Version
- Date of Current Revision
- Date of Original Definition
- Note
- Remark
- Version Number
- Revision Number
- Simplified Drawing

The following information elements specified in ISO 13584-42 are not used for defining the classes specified in this part of ISO 13584:

- Short Name
- Synonymous Name
- Visible Types
- Applicable Types

4.1.4 Layout

Class definitions of all fastener parts including all their attributes of the classes are listed in Annex C — fastener class definitions. Figure 3 shows the documentation style of fastener class definition. Figure 4 shows the position and some inherited properties of class P511AAA340 in the hierarchy.



NOTE (1) — Code
 (2) — Version number
 (3) — Revision Number

Figure 3 — Layout of class definition

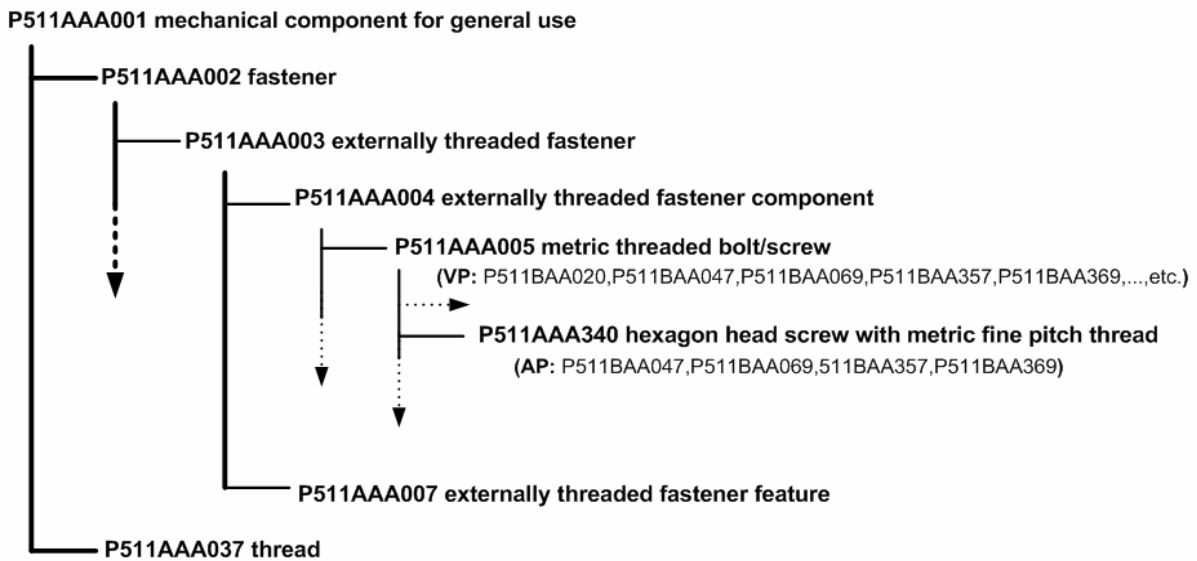


Figure 4 — Position and some inherited properties of class P511AAA340

Layout principle for class definition:

- Abbreviations defined in 3.26 would be used for corresponding attribute names;
- Mandatory attributes should appear in the definition list;
- Optional attributes can be omitted when they are empty;
- Each class indicated in superclass, or property indicated in **applicable property** (AP) or **sub-class selection property** (SSP) should include both its code and preferred name.

4.2 Property DET definitions

4.2.1 Modelled date types

For the purpose of this part of ISO 13584, two different kinds of properties are specified in this part of ISO 13584, **general properties** and **classification properties**.

General properties consist of feature properties and non-feature properties.

Classification properties of which the data type is **non_quantitative_code_type** are only used for **feature classes** to indicate what subclasses belong to the classes of the current level.

NOTE **Feature class** reference properties of which the data type is **class_instance_type** in the component branch are only for connecting each component class to the corresponding referenced **feature class**.

4.2.2 Imported properties

In this part of ISO 13584, the following properties are imported from IEC 61360-4.

- International standard
- Security authentication
- Mass
- National standard

4.2.3 Used attributes

In this part of ISO 13584, property DETs are defined by means of the following information elements specified in ISO 13584-42:

- Code
- Definition Class
- Data Type
- Preferred Name
- Definition
- Preferred Letter Symbol

- Unit
- Format
- Property Type Classification
- Note
- Remark
- Source Document of Definition
- Value Format
- Date of Original Definition
- Date of Current version
- Date of Current revision
- Version Number
- Revision Number

The following information elements specified in ISO 13584-42 are not used for defining the property DETs specified in this part of ISO 13584:

- Condition
- Short Name
- Formula
- Synonymous Letter Symbols
- Synonymous Name

Property DETs are listed in Annex D — Property DET definitions.

4.2.4 Layout

Figure 5 shows the specification for the documentation style of property DET definition.

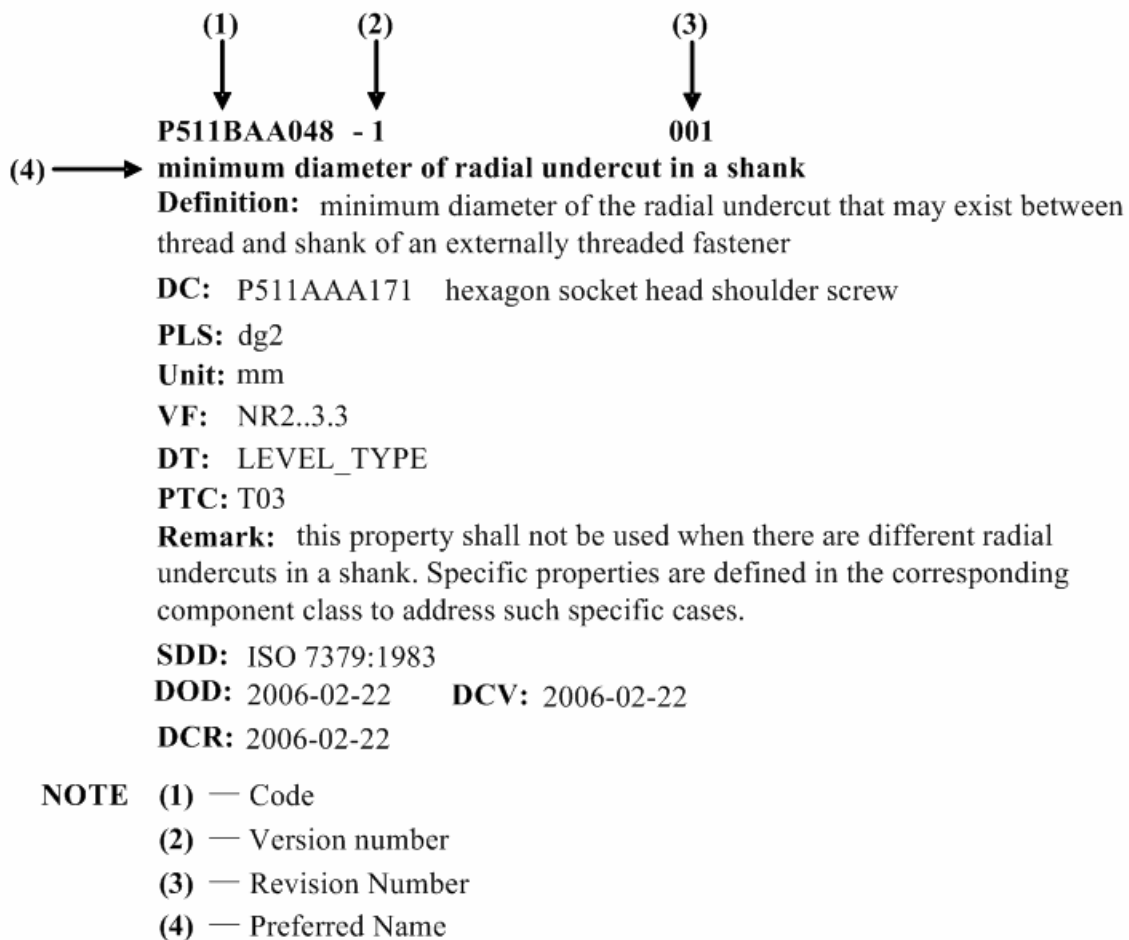


Figure 5 — Layout of property DET definition

Layout principle for property DET definition:

- Abbreviations defined in 3.26 would be used for corresponding attribute names;
- Mandatory attributes should appear in the definition list;
- Optional attributes can be omitted when they are empty;
- The class indicated in class definition (CD) should include both its code and preferred name.

4.3 Data type definitions

4.3.1 Data type properties

Six data types are used for the properties modelled in this part of ISO 13584. They are **real_measure_type** for geometry properties, **non_quantitative_code_type** for code of hardness test method identification, fastener coating code, fastener material identification, thread tolerance properties, property class, and classification properties, **class_instance_type** for reference properties of feature class, **level_type** for value of some hardness properties, **entity_instance_type** for external

picture of non-standardised shape feature properties and **string_type** for other properties that can be described by character string.

4.3.2 Used attributes

This part of ISO 13584 has no used attributes for data type definitions.

4.4 Rules for formulating class and property definitions

Fastener class or property definition shall consist of a single phrase specifying the class or property concept reflecting the position of the concept in the concept system. For the wording of the definition this requirement implies the following rules:

Definition Rule 1 The preferred structure of a definition is a basic part stating the class to which the concept belongs, and another part enumerating the characteristics that distinguish the concept from other members of the class.

Definition Rule 2 The preferred terms defined in other entries of the same document or in other related document shall be used wherever possible. The repetition of other definitions or parts of definitions shall be avoided provided they can be replaced by a preferred term.

Definition Rule 3 Preferred terms used within definitions shall always be given in full as actually occurring.

5 Classification principles

5.1 Connection to pre-existing classification

This part of ISO 13584 has no connection to pre-existing classification except ICS.

NOTE ICS is mainly used for positioning the dictionary defined in this standard with respect to other domain dictionaries defined in other standards. ICS classification does not directly correspond to the internal classification used in this standard which reflects the technical terms used in the fastener field.

5.2 Upper level of the hierarchy

According to the RULE 2 defined in ISO 13584-42: 1998, 6.1.2, the upper level of the hierarchy in this part of ISO 13584 is based on the fasteners hierarchy in the ICS (See 4.1.1 and 4.1.2).

5.3 Lower level of the hierarchy

In order to simplify and reduce the depth of the fasteners classification at the lower level of the hierarchy of this part of ISO 13584, two branches: feature class and component class are branches specified under item class. (See 4.1.1)

In addition to RULE 1 to RULE 8 defined in ISO 13584-42: 1998, the following rules are also applied to this part of ISO 13584.

Additional Rule 1 Define lower level classes only when needed for properties definition. The role of non-leaf (non-property) classes of the lower section ("generic families of parts") is only to precisely define the meaning of each property. Thus, in the lower level of the hierarchy, introduce a new subclass if and only if it is required to define the domain of meaning of a property. No class shall exist which is distinguished from another class only by the values of some properties.

NOTE Non-leaf component class is allowed for the potential user extension in this part of ISO 13584.

Additional Rule 2 All the properties defined in all the ISO fastener standards shall be defined in the dictionary.

Additional Rule 3 If needed, class valued properties (also called classification properties) can take their values several levels below the level where they are defined.

5.4 Coding style

In order to give a universal identification of Class and Property BSU, the coding style has been defined in this section.

Additional Rule 4 The coding style for this part of ISO 13584 (see Figure 6) is as follows:

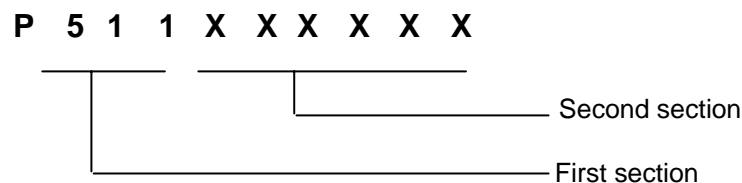


Figure 6 — Coding style

- Totally 10 characters divided into two sections;
- The first section has 4 characters of a constant string 'P511' for fastener dictionary of this part of ISO 13584;
- The second section has 6 characters of a meaningless alphanumeric characters sequence.

EXAMPLE P511AAA003 identifies **externally threaded fastener** class; P511BAA024 identifies **pitch** property.

5.5 General and classification property

For the purpose of this part of ISO 13584, property defined in ISO 13584-42 is divided into two types:

- General property
- Classification property

They have the same attributes as defined in ISO 13584-42, but have different functions.

5.5.1 General property

General properties under one class are the definitions for the class (See 4.2.1). For the layout example of general properties, see 4.2.4.

5.5.2 Classification property

Classification property indicates what subclasses are specified under current class by their values — a set of non_quantitative codes.

Classification properties are normally visible at item class level from which the class will be divided into a feature branch and a component branch and applicable at suitable class level in feature branch and component branch of the hierarchy.

Table E.1 specifies classification properties and their values in this part of ISO 13584.

6 Computer sensible description

6.1 External file

ISO 13584 specifies an external file reference mechanism to assign additional documentation in electronic or non-electronic form to the product, task/activity or definitions of the fasteners dictionary. The mechanism makes it easy for users to access information, which is outside the scope of this international standard.

In this part of ISO 13584, the reference mechanism of the external file for the fasteners dictionary is shown in Figure 7.

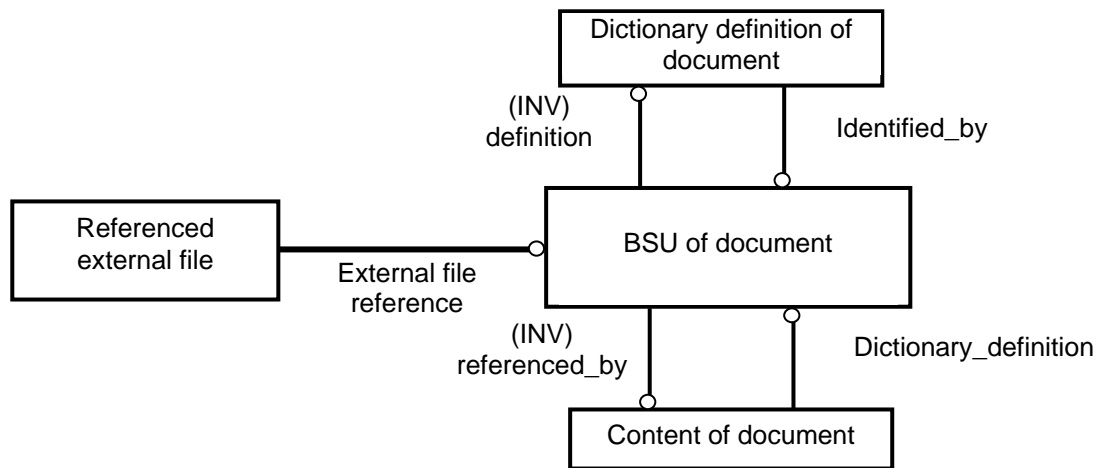


Figure 7 — External reference mechanism

In the fasteners dictionary, one kind of external files is referenced by **referenced_graphics**, which is the subtype of **graphics**, to specify the **simplified_drawing** attributes of the simple family of parts. The domain of the **graphics_reference** attribute of the **referenced_graphics** is **document_BSU**. Based on the **document_BSU**, the computer can find the corresponding **document_element** and **document_content**. So the computer can access and process the document.

EXAMPLE The simplified drawing attribute of the P511AAA015 class (**Round head**) references P511DAA015, which is the code of the external file that represents the round head of bolt/screw. The last five alphanumeric characters of the code are the same as those of the class it belongs.

NOTE All the documents of graphics of parts are provided in this part of ISO 13584 with JPG format.

The description of external file should conform to the **ISO13584_extended_dictionary_schema** and the **ISO13584_external_file_schema** of which EXPRESS specifications are defined in ISO 13584-24: 2003.

6.2 Information model and conformance class

This part of ISO 13584 conforms to the library integrated information model LIIM 25 defined in ISO 13584-25 and the library integrated information model LIIM 24 defined in ISO 13584-24: 2003.

The schema used in this part of ISO 13584 conforms to the conformance class 2 defined in ISO 13584-25. The conformance class 2 addresses those implementations that support conformance class 1 and that support aggregate data types and values. An implementation of conformance class 2 of library integrated information model LIIM 25 shall support the following entities and related constructs.

```
SCHEMA ISO13584_25_IEC61360_5_liim_schema;

USE FROM ISO13584_IEC61360_dictionary_schema
    (axis1_placement_type,
     axis2_placement_2d_type,
     axis2_placement_3d_type,
     boolean_type,
     class_BSU,
     class_instance_type,
     class_value_assignment,
     complex_type,
     component_class,
     condition_DET,
     data_type_BSU,
     data_type_element,
     dates,
     dependent_P_DET,
     dic_unit,
     dic_value,
     entity_instance_type,
     identified_document,
     int_currency_type,
     int_measure_type,
     int_type,
     integer_type,
     item_class,
     item_names,
     label_with_language,
     level_type,
     material_class,
     mathematical_string,
     named_type,
     non_dependent_P_DET,
     non_quantitative_code_type,
     non_quantitative_int_type,
     non_si_unit,
     number_type,
     placement_type,
     property_BSU,
     property_DET,
     real_currency_type,
     real_measure_type,
     real_type,
     string_type,
     supplier_BSU,
     supplier_element,
     value_domain);
```

```

USE FROM ISO13584_IEC61360_language_resource_schema
    (global_language_assignment, present_translations,
     translated_label, translated_text);

USE FROM ISO13584_instance_resource_schema (null_value, primitive_value,
    null_or_primitive_value, simple_value, null_or_simple_value,
    number_value, null_or_number_value, integer_value,
    null_or_integer_value, real_value, null_or_real_value,
    boolean_value, null_or_boolean_value, translatable_string_value,
    translated_string_value, string_value,
    null_or_translatable_string_value, complex_value,
    null_or_complex_value,
    entity_instance_value,
    null_or_entity_instance_value,
    defined_entity_instance_value,
    controlled_entity_instance_value,
    STEP_entity_instance_value,
    PLIB_entity_instance_value,
    property_or_data_type_BSU,
    level_spec_value,
    null_or_level_spec_value,
    int_level_spec_value,
    null_or_int_level_spec_value,
    real_level_spec_value,
    null_or_real_level_spec_value,
    property_value,
    context_dependent_property_value,
    dic_class_instance,
    null_or_dic_class_instance,
    dic_component_instance,
    dic_feature_instance,
    dic_material_instance,
    lib_component_instance,
    lib_feature_instance,
    lib_material_instance,
    dic_f_model_instance,
    lib_f_model_instance);

USE FROM ISO13584_IEC61360_dictionary_aggregate_extension_schema
    (entity_instance_type_for_aggregate, list_type, set_type, bag_type,
     array_type, set_with_subset_constraint_type);

USE FROM ISO13584_extended_dictionary_schema (dictionary,
    dictionary_in_standard_format, library_iim_identification,
    view_exchange_protocol_identification, representation_type,
    geometric_representation_context_type,
    representation_reference_type, program_reference_type,
    program_library_BSU, document_BSU,
    supplier_program_library_relationship, class_document_relationship,
    representation_P_DET, class_related_dictionary_element,
    program_library_element, document_element,

```

```

document_element_with_http_access,
document_element_with_translated_http_access,
referenced_document,
referenced_graphics,
feature_class,
functional_model_class,
fm_class_view_of,
functional_view_class,
non_instantiable_functional_view_class,
view_control_variable_range,
item_class_case_of,
component_class_case_of,
material_class_case_of,
feature_class_case_of,
a_posteriori_case_of,
a_posteriori_view_of);

```

```

USE FROM ISO13584_external_file_schema
(standard_simple_program_protocol,
non_standard_simple_program_protocol,
linked_interface_program_protocol, standard_data_protocol,
non_standard_data_protocol, http_protocol, program_library_content,
document_content, representation_reference, program_reference,
property_value_external_item, message, illustration,
A6_illustration, A9_illustration, translated_external_content,
not_translated_external_content, not_translatable_external_content,
language_specific_content, external_file_unit, http_file,
http_class_directory, simple_program_protocol);

```

```

USE FROM ISO13584_aggregate_value_schema
(aggregate_entity_instance_value, list_value, set_value, bag_value,
array_value, set_with_subset_constraint_value);

```

```

USE FROM ISO13584_library_content_schema (library,
library_in_standard_format, explicit_item_class_extension,
explicit_functional_model_class_extension,
property_classification, property_value_recommended_presentation);

```

```

USE FROM measure_schema (amount_of_substance_measure, area_measure,
context_dependent_measure, context_dependent_unit,
conversion_based_unit, count_measure, derived_unit,
derived_unit_element, dimensional_exponents,
electric_current_measure, global_unit_assigned_context,
length_measure, length_measure_with_unit, length_unit,
luminous_intensity_measure, mass_measure, measure_value,
measure_with_unit, named_unit, numeric_measure, parameter_value,
plane_angle_measure, positive_length_measure,
positive_plane_angle_measure, ratio_measure, si_unit,
solid_angle_measure, thermodynamic_temperature_measure,
time_measure, volume_measure);

```

```
USE FROM person_organization_schema (address, organization, person);

USE FROM date_time_schema (date, date_and_time, local_time,
    calendar_date, ordinal_date, week_of_year_and_day_date);

USE FROM geometry_schema (axis1_placement, axis2_placement_2D,
    axis2_placement_3D, geometric_representation_context, placement);

USE FROM representation_schema
    (representation,
    representation_context,
    representation_item);

USE FROM application_context_schema
    (application_context,
    application_context_element,
    application_protocol_definition);

END_SCHEMA; -- ISO13584_25_IEC61360_5_liim_schema
```

Annex A (normative)

Information object registration

A.1 Document identification

In order to provide for unambiguous identification of an information object in an open system, the object identifier:

{ISO standard 13584 part (511) version (1)}

is assigned to this part of ISO 13584. The meaning of this value is defined in ISO/IEC 8824-1, and is described in ISO 13584-1.

A.2 Dictionary identification

The dictionary defined in this part of ISO 13584 is assigned the object identifier:

{ISO standard 13584 part (511) version (1) object (1) fasteners (1)}

Annex B (normative)

Classification tables

Table B.1 specifies the classification structure and codes of each class defined in this part of ISO 13584.

Table B.1 — Classification structure of classes

Classification Structure					SuperClass	Code
mechanical component for general use						P511AAA001
	fastener				P511AAA001	P511AAA002
		externally threaded fastener			P511AAA002	P511AAA003
			externally threaded fastener component		P511AAA003	P511AAA004
				drilling screw	P511AAA004	P511AAA210
				cross recessed (type H) countersunk head drilling screw	P511AAA210	P511AAA213
				cross recessed (type H) pan head drilling screw	P511AAA210	P511AAA212
				cross recessed (type H) raised countersunk drilling screw	P511AAA210	P511AAA214
				cross recessed (type Z) countersunk head drilling screw	P511AAA210	P511AAA287
				cross recessed (type Z) pan head drilling screw with tapping screw thread	P511AAA210	P511AAA286
				cross recessed (type Z) raised countersunk head drilling screw	P511AAA210	P511AAA288
				hexagon washer head drilling screw	P511AAA210	P511AAA211
				headless screw with shank	P511AAA004	P511AAA354
				slotted headless screw with shank	P511AAA354	P511AAA187

Classification Structure					SuperClass	Code
				metric threaded bolt/screw	P511AAA004	P511AAA005
				countersunk flat head screw with cross recess (type H)	P511AAA005	P511AAA184
				countersunk flat head screw with cross recess (type Z)	P511AAA005	P511AAA281
				cross recessed (type H) cheese head screw	P511AAA005	P511AAA181
				cross recessed (type H) pan head screw	P511AAA005	P511AAA182
				cross recessed (type Z) cheese head screw	P511AAA005	P511AAA279
				cross recessed (type Z) pan head screw	P511AAA005	P511AAA280
				cup head square neck bolt	P511AAA005	P511AAA051
				cup head square neck bolt with large head	P511AAA005	P511AAA158
				hexagon head bolt	P511AAA005	P511AAA156
				hexagon head bolt with flange with fine pitch thread, full shank	P511AAA005	P511AAA081
				hexagon head bolt with flange with fine pitch thread, reduced shank	P511AAA005	P511AAA146
				hexagon head bolt with flange, full shank	P511AAA005	P511AAA047
				hexagon head bolt with flange, reduced shank	P511AAA005	P511AAA157
				hexagon head bolt with metric fine pitch thread	P511AAA005	P511AAA339
				hexagon head screw	P511AAA005	P511AAA169
				hexagon head screw with metric fine pitch thread	P511AAA005	P511AAA340
				hexagon socket button head screw	P511AAA005	P511AAA172

Classification Structure					SuperClass	Code
				hexagon socket countersunk head screw	P511AAA005	P511AAA173
				hexagon socket head cap screw	P511AAA005	P511AAA170
				hexagon socket head cap screw with metric fine pitch thread	P511AAA005	P511AAA342
				hexagon socket head shoulder screw	P511AAA005	P511AAA171
				hexalobular socket cheese head screw	P511AAA005	P511AAA174
				hexalobular socket head cap screw	P511AAA005	P511AAA050
				hexalobular socket pan head screw	P511AAA005	P511AAA175
				hexalobular socket raised countersunk head screw	P511AAA005	P511AAA176
				octagon head bolt	P511AAA005	P511AAA163
				raised countersunk head screw with cross recess (type H)	P511AAA005	P511AAA185
				raised countersunk head screw with cross recess (type Z)	P511AAA005	P511AAA282
				slotted cheese head screw	P511AAA005	P511AAA177
				slotted countersunk flat head screw	P511AAA005	P511AAA179
				slotted pan head screw	P511AAA005	P511AAA178
				slotted raised countersunk head screw	P511AAA005	P511AAA180
				square head bolt	P511AAA005	P511AAA159
				square head bolt with collar	P511AAA005	P511AAA160
				T-head bolt	P511AAA005	P511AAA166
				triangle head bolt	P511AAA005	P511AAA162
				set screw	P511AAA004	P511AAA186

Classification Structure					SuperClass	Code
				hexagon socket set screw with cone point	P511AAA186	P511AAA189
				hexagon socket set screw with cup point	P511AAA186	P511AAA191
				hexagon socket set screw with dog point	P511AAA186	P511AAA190
				hexagon socket set screw with flat point	P511AAA186	P511AAA188
				slotted set screw with cone point	P511AAA186	P511AAA192
				slotted set screw with cup point	P511AAA186	P511AAA195
				slotted set screw with flat point	P511AAA186	P511AAA193
				slotted set screw with long dog point	P511AAA186	P511AAA194
				stud	P511AAA004	P511AAA049
				stud with full shank	P511AAA049	P511AAA091
				waisted stud	P511AAA049	P511AAA071
				stud bolt	P511AAA004	P511AAA099
				tapping screw	P511AAA004	P511AAA196
				cross recessed (type H) countersunk head tapping screw with a cone end	P511AAA196	P511AAA203
				cross recessed (type H) countersunk head tapping screw with a flat end	P511AAA196	P511AAA269
				cross recessed (type H) pan head tapping screw with a cone end	P511AAA196	P511AAA201
				cross recessed (type H) pan head tapping screw with a flat end	P511AAA196	P511AAA270
				cross recessed (type H) raised countersunk head tapping screw with a cone end	P511AAA196	P511AAA204

Classification Structure					SuperClass	Code
				cross recessed (type H) raised countersunk head tapping screw, flat end	P511AAA196	P511AAA244
				cross recessed (type Z) countersunk head tapping screw with a cone end	P511AAA196	P511AAA284
				cross recessed (type Z) countersunk head tapping screw with a flat end	P511AAA196	P511AAA268
				cross recessed (type Z) pan head tapping screw with a cone end	P511AAA196	P511AAA283
				cross recessed (type Z) pan head tapping screw with a flat end	P511AAA196	P511AAA144
				cross recessed (type Z) raised countersunk head tapping screw with a cone end	P511AAA196	P511AAA285
				cross recessed (type Z) raised countersunk head tapping screw with a flat end	P511AAA196	P511AAA267
				hexagon flange head tapping screw with a cone end	P511AAA196	P511AAA202
				hexagon flange head tapping screw with a flat end	P511AAA196	P511AAA271
				hexagon head tapping screw with a cone end	P511AAA196	P511AAA197
				hexagon head tapping screw with a flat end	P511AAA196	P511AAA293
				hexagon washer head tapping screw with a cone end	P511AAA196	P511AAA205
				hexagon washer head tapping screw with a flat end	P511AAA196	P511AAA243
				hexalobular socket countersunk head tapping screw with a cone end	P511AAA196	P511AAA207
				hexalobular socket countersunk head tapping screw with a flat end	P511AAA196	P511AAA226

Classification Structure					SuperClass	Code
				hexalobular socket countersunk head tapping screw with a rounded end	P511AAA196	P511AAA238
				hexalobular socket pan head tapping screw with a cone end	P511AAA196	P511AAA206
				hexalobular socket pan head tapping screw with a flat end	P511AAA196	P511AAA239
				hexalobular socket pan head tapping screw with a rounded end	P511AAA196	P511AAA242
				hexalobular socket raised countersunk head tapping screw with a cone end	P511AAA196	P511AAA208
				hexalobular socket raised countersunk head tapping screw with a flat end	P511AAA196	P511AAA291
				hexalobular socket raised countersunk head tapping screw with a rounded end	P511AAA196	P511AAA292
				slotted countersunk (flat) head tapping screw with a cone end	P511AAA196	P511AAA199
				slotted countersunk(flat) head tapping screw with a flat end	P511AAA196	P511AAA290
				slotted pan head tapping screw with a cone end	P511AAA196	P511AAA198
				slotted pan head tapping screw with a flat end	P511AAA196	P511AAA139
				slotted raised countersunk (oval) head tapping screw with a cone end	P511AAA196	P511AAA200
				slotted raised countersunk(oval) head tapping screw with a flat end	P511AAA196	P511AAA289
				thread forming screw	P511AAA004	P511AAA309
				wood screw	P511AAA004	P511AAA209
				externally threaded fastener feature	P511AAA003	P511AAA007

Classification Structure					SuperClass	Code
				end	P511AAA007	P511AAA028
				as-rolled end	P511AAA028	P511AAA029
				chamfered end	P511AAA028	P511AAA031
				cone end (type C) of tapping screw	P511AAA028	P511AAA130
				cone point	P511AAA028	P511AAA032
				cup point	P511AAA028	P511AAA034
				dog point	P511AAA028	P511AAA035
				drilling point of drilling screw	P511AAA028	P511AAA012
				end of thread forming screw	P511AAA028	P511AAA006
				flat end (type F) of tapping screw	P511AAA028	P511AAA132
				flat point	P511AAA028	P511AAA131
				pilot point	P511AAA028	P511AAA349
				rounded end	P511AAA028	P511AAA030
				rounded end (type R) of tapping screw	P511AAA028	P511AAA138
				scrape point	P511AAA028	P511AAA036
				truncated cone point	P511AAA028	P511AAA033
				truncated pilot point	P511AAA028	P511AAA350
				head	P511AAA007	P511AAA008
				12 point flange head	P511AAA008	P511AAA121
				button head	P511AAA008	P511AAA223
				cheese head	P511AAA008	P511AAA016

Classification Structure					SuperClass	Code
				countersunk head	P511AAA008	P511AAA019
				cup head	P511AAA008	P511AAA353
				cylindrical head	P511AAA008	P511AAA122
				eye shape head	P511AAA008	P511AAA021
				eyelet shape head	P511AAA008	P511AAA022
				head with knurl	P511AAA008	P511AAA351
				head with tommy	P511AAA008	P511AAA046
				head with wings	P511AAA008	P511AAA352
				hexagon head	P511AAA008	P511AAA009
				hexagon head with collar	P511AAA008	P511AAA217
				hexagon head with flange	P511AAA008	P511AAA011
				hexagon head with washer face	P511AAA008	P511AAA010
				octagonal head	P511AAA008	P511AAA120
				pan head	P511AAA008	P511AAA018
				raised cheese head	P511AAA008	P511AAA017
				raised countersunk head	P511AAA008	P511AAA020
				round head	P511AAA008	P511AAA015
				square head	P511AAA008	P511AAA023
				square head with collar	P511AAA008	P511AAA013
				T-head	P511AAA008	P511AAA014
				triangle head with collar	P511AAA008	P511AAA119

Classification Structure					SuperClass	Code
				internal drive	P511AAA007	P511AAA042
				12 point socket	P511AAA042	P511AAA143
				cross hole	P511AAA042	P511AAA147
				cross recess (type H)	P511AAA042	P511AAA045
				cross recess (type Z)	P511AAA042	P511AAA272
				hexagon socket	P511AAA042	P511AAA043
				hexalobular socket	P511AAA042	P511AAA222
				six-spline socket	P511AAA042	P511AAA142
				slot	P511AAA042	P511AAA044
				square socket	P511AAA042	P511AAA141
				triangle socket	P511AAA042	P511AAA140
				shank	P511AAA007	P511AAA024
				fit shank	P511AAA024	P511AAA128
				full shank	P511AAA024	P511AAA125
				reduced shank	P511AAA024	P511AAA126
				shank with square neck	P511AAA024	P511AAA025
				shoulder	P511AAA024	P511AAA129
				waisted shank	P511AAA024	P511AAA127
				nut	P511AAA002	P511AAA052
				cap nut	P511AAA052	P511AAA311
				domed cap(acorn) nut	P511AAA052	P511AAA312

Classification Structure				SuperClass	Code
			hexagon castle nut	P511AAA052	P511AAA229
			hexagon nut (style 1)	P511AAA052	P511AAA313
			hexagon nut with collar	P511AAA052	P511AAA314
			hexagon nut with flange	P511AAA052	P511AAA228
			hexagon nut(style 2)	P511AAA052	P511AAA326
			hexagon thin nut (chamfered)	P511AAA052	P511AAA327
			hexagon thin nut (unchamfered)	P511AAA052	P511AAA338
			octagon nut	P511AAA052	P511AAA323
			pentagon nut	P511AAA052	P511AAA322
			prevailing torque type all-metal hexagon nut (style 1)	P511AAA052	P511AAA330
			prevailing torque type all-metal hexagon nut (style 2)	P511AAA052	P511AAA331
			prevailing torque type all-metal hexagon nut with flange	P511AAA052	P511AAA333
			prevailing torque type hexagon nut with flange, with non-metallic insert	P511AAA052	P511AAA332
			prevailing torque type hexagon nut with non-metallic insert (style 1)	P511AAA052	P511AAA328
			prevailing torque type hexagon nut with non-metallic insert (style 2)	P511AAA052	P511AAA329
			round nut with holes in face	P511AAA052	P511AAA232
			round nut with holes in side	P511AAA052	P511AAA315
			round nut with knurl	P511AAA052	P511AAA318
			round nut with slot in face	P511AAA052	P511AAA316

Classification Structure				SuperClass	Code
			round nut with slots in side	P511AAA052	P511AAA317
			slotted hexagon nut	P511AAA052	P511AAA227
			square nut	P511AAA052	P511AAA319
			square nut with collar	P511AAA052	P511AAA320
			triangle nut with collar	P511AAA052	P511AAA321
			wing nut	P511AAA052	P511AAA324
		pin		P511AAA002	P511AAA098
			clevis pin	P511AAA098	P511AAA355
			clevis pin with head	P511AAA355	P511AAA255
			clevis pin without head	P511AAA355	P511AAA334
			grooved pin	P511AAA098	P511AAA356
			grooved pin with countersunk head	P511AAA356	P511AAA260
			grooved pin with round head	P511AAA356	P511AAA259
			grooved pin, full-length parallel grooved,with chamfer	P511AAA356	P511AAA258
			grooved pin, full-length parallel grooved,with pilot	P511AAA356	P511AAA257
			grooved pin, full-length taper grooved	P511AAA356	P511AAA278
			grooved pin, half-length centre grooved	P511AAA356	P511AAA335
			grooved pin, half-length reverse taper grooved	P511AAA356	P511AAA265
			grooved pin, half-length taper grooved	P511AAA356	P511AAA337
			grooved pin, one-third-length centre grooved	P511AAA356	P511AAA336

Classification Structure				SuperClass	Code
			parallel pin	P511AAA098	P511AAA252
			parallel pin with internal thread	P511AAA252	P511AAA253
			split pin	P511AAA098	P511AAA248
			spring pin	P511AAA098	P511AAA357
			spring-type straight pin, coiled	P511AAA357	P511AAA325
			spring-type straight pin, slotted	P511AAA357	P511AAA261
			taper pin	P511AAA098	P511AAA358
			simple taper pin	P511AAA358	P511AAA249
			taper pin with external thread	P511AAA358	P511AAA251
			taper pin with internal thread	P511AAA358	P511AAA250
			rivet	P511AAA002	P511AAA345
			blind rivet	P511AAA345	P511AAA083
			closed end blind rivet with break pull mandrel and countersunk head	P511AAA083	P511AAA246
			closed end blind rivet with break pull mandrel and protruding head	P511AAA083	P511AAA245
			open end blind rivet with break pull mandrel and countersunk head	P511AAA083	P511AAA082
			open end blind rivet with break pull mandrel and protruding head	P511AAA083	P511AAA093
			full shank rivet	P511AAA345	P511AAA346
			semi tubular rivet	P511AAA345	P511AAA348
			tubular rivet	P511AAA345	P511AAA347
			washer	P511AAA002	P511AAA072

Classification Structure				SuperClass	Code
			lock washer	P511AAA072	P511AAA241
			countersunk lock washer with external teeth	P511AAA241	P511AAA183
			countersunk serrated lock washer with external teeth	P511AAA241	P511AAA218
			lock washer with external teeth	P511AAA241	P511AAA164
			lock washer with internal teeth	P511AAA241	P511AAA168
			serrated lock washer with external teeth	P511AAA241	P511AAA215
			serrated lock washer with internal teeth	P511AAA241	P511AAA216
			plain washer	P511AAA072	P511AAA026
			plain washer with double chamfers	P511AAA026	P511AAA359
			plain washer with outside chamfer	P511AAA026	P511AAA027
			plain washer with square hole	P511AAA026	P511AAA136
			plain washer without chamfer	P511AAA026	P511AAA235
			square washer with round hole	P511AAA026	P511AAA089
			spring washer	P511AAA072	P511AAA236
			conical spring washer	P511AAA236	P511AAA137
			curved spring washer	P511AAA236	P511AAA150
			spring lock washer	P511AAA236	P511AAA148
			wave spring washer	P511AAA236	P511AAA161
			square taper washer	P511AAA072	P511AAA237
			tab washer	P511AAA072	P511AAA240
			external tab washer	P511AAA240	P511AAA221

Classification Structure				SuperClass	Code
			internal tab washer	P511AAA240	P511AAA225
			tab washer with long tab	P511AAA240	P511AAA219
			tab washer with long tab and wing	P511AAA240	P511AAA220
		thread		P511AAA001	P511AAA037
		metric external thread		P511AAA037	P511AAA038
		metric internal thread		P511AAA037	P511AAA344
		tapping screw thread		P511AAA037	P511AAA039
		thread forming screw thread		P511AAA037	P511AAA310
		wood screw thread		P511AAA037	P511AAA041

Annex C (normative)

Fastener class definitions

This annex specifies all definitions of classes defined in this part of ISO 13584.

P511AAA001-1 001

mechanical component for general use

SuperClass:

Definition: at the top of the hierarchy, representing the whole set of the components generally used in mechanical field

AP:

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA002-1 001

fastener

SuperClass: P511AAA001 mechanical component for general use

Definition: covering all types of products designed to mechanically connect two or more structural parts to form a solid or detachable joint or to contribute essentially to establish this function

AP: P511BAA320: fastener material identification

P511BAA322: fastener material name

P511BAA324: fastener coating code

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA003-1 001

externally threaded fastener

SuperClass: P511AAA002 fastener

Definition: fastener with external thread includes bolt, screw and stud

AP:

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA004-1 001

externally threaded fastener component

SuperClass: P511AAA003 externally threaded fastener

Definition: component class which includes all the externally threaded fasteners such as bolt, screw and stud

AP: P511BAA005: manufacturer

P511BAA006: ICD code

P511BAA007: manufacture date

P511BAA008: designation

P511BAA011: EAN/UCC code

P511BAA248: thread tolerance position

P511BAA249: thread tolerance grade

P511BAA256: thread tolerance class

P511BAA319: organization identifier of manufacturer

P511BAA321: steel fastener property class

P511BAA323: stainless steel fastener property class

P511BAA340: thread size

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA005-1 001

metric threaded bolt/screw

SuperClass: P511AAA004 externally threaded fastener component

Definition: headed externally threaded fastener with a cylindrical shank, which may be partly or fully threaded and the head may be furnished with a driving feature

AP: P511BAA103: head shape name

P511BAA104: head shape picture

P511BAA105: shank shape name

P511BAA106: shank shape picture

P511BAA107: end shape name

P511BAA108: end shape picture

P511BAA109: internal drive shape name

P511BAA110: internal drive shape picture

P511BAA243: head properties

P511BAA244: shank properties

P511BAA245: end properties

P511BAA246: thread properties

P511BAA247: internal drive properties

P511BAA303: type of head

P511BAA305: type of shank

P511BAA306: type of end

P511BAA307: type of thread

P511BAA308: type of internal drive

P511BAA326: product grade

SSP: P511BAA303: type of head

P511BAA305: type of shank

P511BAA306: type of end

P511BAA307: type of thread

P511BAA308: type of internal drive

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA006-1 001

end of thread forming screw

SuperClass: P511AAA028 end

Definition: the end of a screw which is able to form its own mating thread

AP:

SDD: ISO 1891:1979 clause 27.1

SD: P511DAA006

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA007-1 001

externally threaded fastener feature

SuperClass: P511AAA003 externally threaded fastener

Definition: feature class describing geometry features for externally threaded fasteners

AP:

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA008-1 001

head

SuperClass: P511AAA007 externally threaded fastener feature

Definition: feature class identifying head geometry features of externally threaded fasteners

AP: P511BAA303: type of head

SSP: P511BAA303: type of head

SDD: ISO 1891:1979

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA009-1 001

hexagon head

SuperClass: P511AAA008 head

Definition: head shape which is hexagon

AP: P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

P511BAA034: head height

P511BAA041: diameter of washer face or bearing face

SDD: ISO 4016:1999

SD: P511DAA009

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA010-1 001

hexagon head with washer face

SuperClass: P511AAA008 head

Definition: head shape which is hexagon with a washer face at the bearing face

AP: P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

P511BAA034: head height

P511BAA041: diameter of washer face or bearing face

P511BAA042: height of bearing element of a bolt or screw or nut

SDD: ISO 4016:1999

SD: P511DAA010

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA011-1 001

hexagon head with flange

SuperClass: P511AAA008 head

Definition: head shape which is hexagon with a flange at the bearing face, in order to reduce the pressure under the head

AP: P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

P511BAA034: head height

P511BAA042: height of bearing element of a bolt or screw or nut

P511BAA044: flange angle

P511BAA045: flange(collar) diameter

SDD: ISO 15071:1999

SD: P511DAA011

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA012-1 001

drilling point of drilling screw

SuperClass: P511AAA028 end

Definition: end of drilling screw having a particular shape which performs the drilling operation

AP: P511BAA093: diameter of drilling point

SDD: ISO 15480:1999

SD: P511DAA012

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA013-1 001

square head with collar

SuperClass: P511AAA008 head

Definition: head shape which is square with a cylindrical collar at the bearing face in order to reduce the pressure under the head

AP: P511BAA032: width across flats

P511BAA033: width across corners

P511BAA034: head height

P511BAA042: height of bearing element of a bolt or screw or nut

P511BAA045: flange(collar) diameter
SDD: ISO 1891:1979 clause 3.6
SD: P511DAA013
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA014-1 001**T-head**

SuperClass: P511AAA008 head
Definition: head shape which is rectangular and flat and designed to fit in a T-slot and hold against turning
AP: P511BAA034: head height
SDD: ISO 1891:1979 clause 3.10
SD: P511DAA014
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA015-1 001**round head**

SuperClass: P511AAA008 head
Definition: head shape which is circular with a domed top surface
AP: P511BAA034: head height
P511BAA051: head diameter
SDD: ISO 1891:1979 clause 3.11
SD: P511DAA015
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA016-1 001**cheese head**

SuperClass: P511AAA008 head
Definition: head shape which is cylindrical or slightly conical with a flat top surface with the upper edge rounded
AP: P511BAA034: head height
P511BAA051: head diameter
SDD: ISO 1891:1979, ISO 1207:1992
SD: P511DAA016
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA017-1 001**raised cheese head**

SuperClass: P511AAA008 head
Definition: head shape which is cylindrical with a domed top surface
AP: P511BAA034: head height
P511BAA051: head diameter
P511BAA060: radius of the raised portion of the head
SDD: ISO 1891:1979 clause 3.14
SD: P511DAA017
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA018-1 001**pan head**

SuperClass: P511AAA008 head
Definition: head shape which is cylindrical with rounded top surface
AP: P511BAA034: head height
P511BAA051: head diameter
P511BAA060: radius of the raised portion of the head
SDD: ISO 1891:1979 clause 3.15, ISO 1580:1994
SD: P511DAA018
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA019-1 001**countersunk head**

SuperClass: P511AAA008 head
Definition: head shape which is circular with a conical bearing surface which is able to fit a countersink
AP: P511BAA034: head height
P511BAA051: head diameter
P511BAA368: head angle (countersunk angle)
SDD: ISO 1891:1979 clause 3.16, ISO 2009:1994
SD: P511DAA019
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA020-1 001**raised countersunk head**

SuperClass: P511AAA008 head
Definition: countersunk head with a domed top surface
AP: P511BAA034: head height
P511BAA051: head diameter
P511BAA060: radius of the raised portion of the head
P511BAA368: head angle (countersunk angle)
P511BAA376: height of the raised portion of raised countersunk head
SDD: ISO 1891:1979 clause 3.17, ISO 2010:1994
SD: P511DAA020
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA021-1 001**eye shape head**

SuperClass: P511AAA008 head
Definition: head has the form of a ring (eye), the axis of which is perpendicular to the bolt axis
AP:
SDD: ISO 1891:1979 clause 19.2
SD: P511DAA021
DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA022-1 001

eyelet shape head

SuperClass: P511AAA008 head

Definition: head shape which is like an open anchor ring, the axis of which is perpendicular to the bolt axis

AP:

SDD: ISO 1891:1979 clause 19.8

SD: P511DAA022

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA023-1 001

square head

SuperClass: P511AAA008 head

Definition: head shape which is square

AP: P511BAA032: width across flats

P511BAA033: width across corners

P511BAA034: head height

SDD: ISO 1891:1979 clause 3.5

SD: P511DAA023

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA024-1 001

shank

SuperClass: P511AAA007 externally threaded fastener feature

Definition: feature class identifying shank geometry features of externally threaded fasteners

AP: P511BAA305: type of shank

SSP: P511BAA305: type of shank

SDD: ISO 1891:1979

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA025-1 001

shank with square neck

SuperClass: P511AAA024 shank

Definition: shank with square part under the head to prevent rotation

AP: P511BAA067: shank diameter

P511BAA071: square neck width

P511BAA072: square neck length

SDD: ISO 1891:1979 clause 4.6, ISO 8677:1986

SD: P511DAA025

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA026-1 001

plain washer

SuperClass: P511AAA072 washer

Definition: washer with parallel flat surfaces

AP: P511BAA326: product grade

P511BAA337: thickness

SDD: ISO 1891:1979 clause 38.1

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA027-1 001

plain washer with outside chamfer

SuperClass: P511AAA026 plain washer

Definition: plain washer with a chamfer at one of the outer edges

AP: P511BAA333: outside diameter

P511BAA334: hole diameter

SDD: ISO 7090:2000

SD: P511DAA027

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA028-1 001

end

SuperClass: P511AAA007 externally threaded fastener feature

Definition: feature class identifying end geometry features of externally threaded fasteners

AP: P511BAA306: type of end

SSP: P511BAA306: type of end

SDD: ISO 1891:1979

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA029-1 001

as-rolled end

SuperClass: P511AAA028 end

Definition: end of externally threaded fastener resulting after thread rolling

AP: P511BAA082: incomplete thread length

SDD: ISO 4753:1999

SD: P511DAA029

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA030-1 001

rounded end

SuperClass: P511AAA028 end

Definition: spherically formed shank end

AP: P511BAA082: incomplete thread length

P511BAA084: radius of rounded end

SDD: ISO 4753:1999

SD: P511DAA030

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA031-1 001

chamfered end

SuperClass: P511AAA028 end
Definition: end of externally threaded fastener which has been chamfered before thread rolling
AP: P511BAA082: incomplete thread length
SDD: ISO 4753:1999
SD: P511DAA031
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA032-1 001
cone point

SuperClass: P511AAA028 end
Definition: end of externally threaded fastener having the shape of a cone
AP: P511BAA082: incomplete thread length
SDD: ISO 4753:1999
SD: P511DAA032
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA033-1 001
truncated cone point

SuperClass: P511AAA028 end
Definition: end of externally threaded fastener having the shape of a truncated cone
AP: P511BAA077: diameter of truncated cone point
 P511BAA082: incomplete thread length
SDD: ISO 4753:1999
SD: P511DAA033
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA034-1 001
cup point

SuperClass: P511AAA028 end
Definition: conical indentation at the end of externally threaded fastener which forms a sharp circular edge at the end face
AP: P511BAA078: diameter of cup point
 P511BAA082: incomplete thread length
SDD: ISO 4753:1999
SD: P511DAA034
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA035-1 001
dog point

SuperClass: P511AAA028 end
Definition: cylindrical projection at the end of externally threaded fastener
AP: P511BAA079: length of point
 P511BAA082: incomplete thread length
 P511BAA085: diameter of dog point or flat point
SDD: ISO 4753:1999
SD: P511DAA035

DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA036-1 001
scrape point

SuperClass: P511AAA028 end
Definition: particular shape thread end with a cutting edge
AP: P511BAA080: diameter of scrape point
 P511BAA081: length of the cone part of the scrape point
 P511BAA083: length of the scrape point
SDD: ISO 4753:1999
SD: P511DAA036
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA037-1 001
thread

SuperClass: P511AAA001 mechanical component for general use
Definition: feature class identifying thread types of mechanical components for general use
AP: P511BAA024: pitch
 P511BAA307: type of thread
SSP: P511BAA307: type of thread
SDD: ISO 1891:1979
SD:
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA038-1 001
metric external thread

SuperClass: P511AAA037 thread
Definition: external thread for general use defined by the metric unit system
AP: P511BAA327: type of pitch
 P511BAA346: major diameter of external thread
 P511BAA347: pitch diameter of external thread
 P511BAA348: minor diameter of external thread
SDD: ISO 68-1:1998
SD: P511DAA038
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA039-1 001
tapping screw thread

SuperClass: P511AAA037 thread
Definition: external thread designed to form its mating thread in thin metallic materials
AP: P511BAA349: outer diameter
 P511BAA350: core diameter
SDD: ISO 1478:1999
SD: P511DAA039

DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA041-1 001
wood screw thread

SuperClass: P511AAA037 thread
Definition: external thread designed to form its mating thread in wooden materials
AP: P511BAA349: outer diameter
P511BAA350: core diameter
SDD: ISO 1891:1979 clause 2.4
SD: P511DAA041
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA042-1 001
internal drive

SuperClass: P511AAA007 externally threaded fastener feature
Definition: driving feature classes like socket, slot or recess at the head or at one end of externally threaded fasteners on which the driving tool is acting
AP: P511BAA308: type of internal drive
SSP: P511BAA308: type of internal drive
SDD: ISO 1891:1979
SD:
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA043-1 001
hexagon socket

SuperClass: P511AAA042 internal drive
Definition: internal drive feature with the shape of a hexagonal indentation
AP: P511BAA032: width across flats
P511BAA098: hexagon socket width across corners
P511BAA101: penetration depth
SDD: ISO 1891:1979 clause 6.6, ISO 4762:2004
SD: P511DAA043
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA044-1 001
slot

SuperClass: P511AAA042 internal drive
Definition: internal drive feature with the shape of a rectangular groove perpendicular to the axis of the externally threaded fastener
AP: P511BAA052: slot width
P511BAA101: penetration depth
SDD: ISO 1891:1979 clause 6.11, ISO 7434:1983
SD: P511DAA044
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA045-1 001
cross recess (type H)

SuperClass: P511AAA042 internal drive
Definition: internal drive with the shape of a cross like indentation where the faces on which the tool forces apply are conical (type H)
AP: P511BAA101: penetration depth
P511BAA102: recess number
SDD: ISO 4757:1983
SD: P511DAA045
Note: as a result of the conical faces an axial force appears which tends to push the tool out of the cross recess but, on the other hand, the cross recess type H is insensible to alignment of screw and driving tool
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA046-1 001
head with tommy

SuperClass: P511AAA008 head
Definition: head with a tommy bar inserted in a cylindrical hole, perpendicular to the bolt or screw axis
AP:
SDD: ISO 1891:1979 clause 6.15
SD: P511DAA046
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA047-1 001
hexagon head bolt with flange, full shank

SuperClass: P511AAA005 metric threaded bolt/screw
Definition: metric externally threaded fastener with hexagon head with a flange and full shank
AP: P511BAA047: radius of curvature under head
P511BAA069: minimum clamp length
P511BAA087: transition length
P511BAA357: transition diameter
P511BAA369: length of bolt/screw (flat seating head)
P511BAA383: transition diameter of axial undercut
SDD: ISO 4162:1990
SD: P511DAA047
Note: ISO 15071:1999 belongs to this simple class
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA049-1 001
stud

SuperClass: P511AAA004 externally threaded fastener component

Definition: headless externally threaded fastener with threads at both ends and an unthreaded shank between the threads

AP: P511BAA028: overall length

P511BAA105: shank shape name

P511BAA106: shank shape picture

P511BAA107: end shape name

P511BAA108: end shape picture

P511BAA244: shank properties

P511BAA245: end properties

P511BAA246: thread properties

P511BAA306: type of end

P511BAA307: type of thread

P511BAA326: product grade

SSP: P511BAA306: type of end

P511BAA307: type of thread

SDD: ISO 1891:1979 clause 21.1

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA050-1 001

hexalobular socket head cap screw

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a cylindrical head with a hexalobular indentation

AP: P511BAA047: radius of curvature under head

P511BAA069: minimum clamp length

P511BAA087: transition length

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 14579:2001

SD: P511DAA050

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA051-1 001

cup head square neck bolt

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a cup head and a square neck under the head

AP: P511BAA047: radius of curvature under head

P511BAA069: minimum clamp length

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 8678:1988

SD: P511DAA051

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA052-1 001

nut

SuperClass: P511AAA002 fastener

Definition: fastener with internal thread enabling it to be screwed onto externally threaded fastener

AP: P511BAA005: manufacturer

P511BAA006: ICD code

P511BAA007: manufacture date

P511BAA008: designation

P511BAA011: EAN/UCC code

P511BAA117: nut height

P511BAA246: thread properties

P511BAA248: thread tolerance position

P511BAA249: thread tolerance grade

P511BAA256: thread tolerance class

P511BAA307: type of thread

P511BAA319: organization identifier of manufacturer

P511BAA321: steel fastener property class

P511BAA323: stainless steel fastener property class

P511BAA326: product grade

P511BAA327: type of pitch

P511BAA340: thread size

P511BAA387: nut name

P511BAA388: nut picture

SSP: P511BAA307: type of thread

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA071-1 001

waisted stud

SuperClass: P511AAA049 stud

Definition: stud with shank diameter less than the minor thread diameter

AP: P511BAA025: thread length of stud metal end

P511BAA030: length of thread run-out

P511BAA371: stud length

SDD: ISO 1891:1979 clause 21.3

SD: P511DAA071

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA072-1 001

washer

SuperClass: P511AAA002 fastener

Definition: fastener used in bolted connections in order to reduce pressure on the bearing surface

AP: P511BAA005: manufacturer

P511BAA006: ICD code

P511BAA007: manufacture date

P511BAA008: designation

P511BAA011: EAN/UCC code

P511BAA319: organization identifier of manufacturer
 P511BAA335: washer name
 P511BAA340: thread size
 P511BAA342: core hardness
 P511BAA343: surface hardness
 P511BAA344: steel fastener hardness class
 P511BAA345: hardness test method

identification

P511BAA351: washer picture
 P511BAA417: stainless steel fastener hardness class

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA081-1 001

hexagon head bolt with flange with fine pitch thread, full shank

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with hexagon head with a flange and full shank and with fine pitch thread

AP: P511BAA047: radius of curvature under head

P511BAA069: minimum clamp length
 P511BAA087: transition length
 P511BAA357: transition diameter
 P511BAA369: length of bolt/screw (flat seating head)

P511BAA382: depth of axial undercut
 P511BAA383: transition diameter of axial undercut

SDD: ISO 15072:1999

SD: P511DAA081

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA082-1 001

open end blind rivet with break pull mandrel and countersunk head

SuperClass: P511AAA083 blind rivet

Definition: blind rivet with an open end and a break pull mandrel and countersunk head

AP: P511BAA191: blind length

P511BAA411: length of rivet with flat seating head (protruding head)

SDD: ISO 15978:2002

SD: P511DAA082

Remark: ISO 15980:2002,ISO 15982:2002,ISO 15984:2002,ISO 16585:2002 belong to this simple class

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA083-1 001

blind rivet

SuperClass: P511AAA345 rivet

Definition: rivet which can be set even though the access for its installation and setting may be limited to one side only

AP: P511BAA013: body material

P511BAA014: mandrel material
 P511BAA189: mandrel protrusion
 P511BAA190: mandrel diameter
 P511BAA254: tensile load
 P511BAA255: mandrel break load
 P511BAA328: rivet head name
 P511BAA329: rivet head picture
 P511BAA415: rivet diameter

SDD: ISO 14588:2000

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA089-1 001

square washer with round hole

SuperClass: P511AAA026 plain washer

Definition: plain washer with square outer shape and central round hole

AP: P511BAA334: hole diameter

SDD: ISO 1891:1979 clause 38.3

SD: P511DAA089

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA091-1 001

stud with full shank

SuperClass: P511AAA049 stud

Definition: stud with shank diameter equal to the nominal thread diameter

AP: P511BAA025: thread length of stud metal end

P511BAA030: length of thread run-out
 P511BAA371: stud length

P511BAA386: thread length of nut end

SDD: ISO 1891:1979 clause 21.1

SD: P511DAA091

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA093-1 001

open end blind rivet with break pull mandrel and protruding head

SuperClass: P511AAA083 blind rivet

Definition: blind rivet with an open end and a break pull mandrel and protruding head

AP: P511BAA191: blind length

P511BAA412: length of the rivet with countersunk head

SDD: ISO 15977:2002

SD: P511DAA093

Remark: ISO 15979:2002,ISO 15981:2002,ISO

15983:2002,ISO 16583:2002 belong to this simple class

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA098-1 001

pin

SuperClass: P511AAA002 fastener

Definition: cylindrical or conical fasteners which are fixed in the components which they are connecting by a "interference fit" or by end features like head and split pin or by split pin on both ends

AP: P511BAA005: manufacturer

P511BAA006: ICD code

P511BAA007: manufacture date

P511BAA008: designation

P511BAA011: EAN/UCC code

P511BAA319: organization identifier of manufacturer

P511BAA342: core hardness

P511BAA343: surface hardness

P511BAA345: hardness test method

identification

P511BAA389: pin head name

P511BAA390: pin head picture

P511BAA391: pin shank name

P511BAA392: pin shank picture

P511BAA393: pin end name

P511BAA394: pin end picture

P511BAA414: pin diameter

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA099-1 001

stud bolt

SuperClass: P511AAA004 externally threaded fastener component

Definition: fastener which is threaded over its total length

AP: P511BAA246: thread properties

P511BAA307: type of thread

P511BAA326: product grade

P511BAA401: length of stud bolt

SDD: ISO 1891:1979 clause 21.6

SD: P511DAA099

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA119-1 001

triangle head with collar

SuperClass: P511AAA008 head

Definition: head shape which is triangle with a cylindrical collar at the bearing face,in order to reduce the pressure under the head

AP: P511BAA034: head height

P511BAA042: height of bearing element of a bolt or screw or nut

P511BAA045: flange(collar) diameter

SDD: ISO 1891:1979 clause 3.7

SD: P511DAA119

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA120-1 001

octagonal head

SuperClass: P511AAA008 head

Definition: head shape which is octagonal

AP: P511BAA033: width across corners

P511BAA034: head height

SDD: ISO 1891:1979 clause 3.8

SD: P511DAA120

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA121-1 001

12 point flange head

SuperClass: P511AAA008 head

Definition: head shape which is like a 12 point star with a flange at the side of the bearing face in order to reduce the pressure under the head

AP: P511BAA034: head height

SDD: ISO 1891:1979 clause 3.9

SD: P511DAA121

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA122-1 001

cylindrical head

SuperClass: P511AAA008 head

Definition: head shape which is cylindrical

AP: P511BAA034: head height

P511BAA051: head diameter

SDD: ISO 4762:2004

SD: P511DAA122

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA125-1 001

full shank

SuperClass: P511AAA024 shank

Definition: shank with nominal diameter equal to the nominal thread diameter

AP: P511BAA054: shank length

P511BAA067: shank diameter

SDD: ISO 4014:1999

SD: P511DAA125

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA126-1 001

reduced shank

SuperClass: P511AAA024 shank

Definition: shank with diameter approximately equal to the pitch diameter of the thread

AP: P511BAA054: shank length

P511BAA067: shank diameter

SDD: ISO 4162:1990

SD: P511DAA126

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA127-1 001

waisted shank

SuperClass: P511AAA024 shank

Definition: shank with diameter less than the minor diameter of the thread

AP:

SDD: ISO 1891:1979 clause 7.8

SD: P511DAA127

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA128-1 001

fit shank

SuperClass: P511AAA024 shank

Definition: shank with diameter greater than the nominal thread diameter

AP:

SDD: ISO 1891:1979 clause 7.4

SD: P511DAA128

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA129-1 001

shoulder

SuperClass: P511AAA024 shank

Definition: increased plain shank with a face, which is jammed against the surface of the part to be fixed

AP: P511BAA038: radius of the undercut under head

P511BAA067: shank diameter

P511BAA365: transition diameter of shoulder

SDD: ISO 7379:1983

SD: P511DAA129

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA130-1 001

cone end (type C) of tapping screw

SuperClass: P511AAA028 end

Definition: self-tapping screw end with the shape of a cone, type C

AP: P511BAA096: length of tapping screw end

SDD: ISO 1478:1999

SD: P511DAA130

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA131-1 001

flat point

SuperClass: P511AAA028 end

Definition: flat end of externally threaded fastener

AP: P511BAA082: incomplete thread length

P511BAA085: diameter of dog point or flat point

SDD: ISO 4753:1999

SD: P511DAA131

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA132-1 001

flat end (type F) of tapping screw

SuperClass: P511AAA028 end

Definition: flat end of self-tapping screw, type F

AP: P511BAA090: diameter of flat end

P511BAA096: length of tapping screw end

SDD: ISO 1478:1999

SD: P511DAA132

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA136-1 001

plain washer with square hole

SuperClass: P511AAA026 plain washer

Definition: plain washer with round outer shape and central square hole

AP: P511BAA333: outside diameter

SDD: ISO 1891:1979 clause 38.4

SD: P511DAA136

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA137-1 001

conical spring washer

SuperClass: P511AAA236 spring washer

Definition: spring washer with a conical shape

AP: P511BAA326: product grade

SDD: ISO 1891:1979 clause 39.6

SD: P511DAA137

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA138-1 001

rounded end (type R) of tapping screw

SuperClass: P511AAA028 end

Definition: self-tapping screw end with the shape of a rounded cone, type R

AP: P511BAA096: length of tapping screw end

SDD: ISO 1478:1999

SD: P511DAA138

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA139-1 001

slotted pan head tapping screw with a flat end**SuperClass:** P511AAA196 tapping screw**Definition:** self-tapping screw with a slotted pan head and flat end**AP:** P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head
P511BAA357: transition diameter
P511BAA369: length of bolt/screw (flat seating head)**SDD:** ISO 1481:1983**SD:** P511DAA139**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA140-1 001****triangle socket****SuperClass:** P511AAA042 internal drive**Definition:** internal drive feature with the shape of triangle socket**AP:** P511BAA101: penetration depth**SDD:** ISO 1891:1979 clause 6.7**SD:** P511DAA140**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA141-1 001****square socket****SuperClass:** P511AAA042 internal drive**Definition:** internal drive feature with the shape of square socket**AP:** P511BAA101: penetration depth**SDD:** ISO 1891:1979 clause 6.8**SD:** P511DAA141**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA142-1 001****six-spline socket****SuperClass:** P511AAA042 internal drive**Definition:** internal drive feature with the shape of a six-spline socket**AP:** P511BAA101: penetration depth**SDD:** ISO 1891:1979 clause 6.9**SD:** P511DAA142**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA143-1 001****12 point socket****SuperClass:** P511AAA042 internal drive**Definition:** internal drive feature with the shape of a 12 point socket**AP:** P511BAA101: penetration depth**SDD:** ISO 1891:1979 clause 6.10**SD:** P511DAA143**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA144-1 001****cross recessed (type Z) pan head tapping screw with a flat end****SuperClass:** P511AAA196 tapping screw**Definition:** self-tapping screw with a pan head with cross recessed (type Z) and with a flat end**AP:** P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 7049:1983**SD:** P511DAA144**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA146-1 001****hexagon head bolt with flange with fine pitch thread, reduced shank****SuperClass:** P511AAA005 metric threaded bolt/screw**Definition:** metric externally threaded fastener with hexagon head bolt with a flange and reduced shank with fine pitch thread**AP:** P511BAA047: radius of curvature under head

P511BAA087: transition length

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

P511BAA383: transition diameter of axial undercut

SDD: ISO 15072:1999**SD:** P511DAA146**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA147-1 001****cross hole****SuperClass:** P511AAA042 internal drive**Definition:** internal drive feature with the shape of a cross hole**AP:****SDD:** ISO 1891:1979 clause 6.18**SD:** P511DAA147**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA148-1 001****spring lock washer****SuperClass:** P511AAA236 spring washer**Definition:** spring washer with the shape of an open ring, which is bent in axial direction

AP:

SDD: ISO 1891:1979 clause 39.1

SD: P511DAA148

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA150-1 001

curved spring washer

SuperClass: P511AAA236 spring washer

Definition: spring washer with the shape of a plain washer, which is bent in axial direction

AP:

SDD: ISO 1891:1979 clause 39.4

SD: P511DAA150

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA156-1 001

hexagon head bolt

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a hexagon head and with plain shank

AP: P511BAA047: radius of curvature under head

P511BAA069: minimum clamp length

P511BAA087: transition length

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 4014:1999

SD: P511DAA156

Note: ISO 7411:1984, ISO 7412:1984 and ISO 4016:1999 belong to the same simple class

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA157-1 001

hexagon head bolt with flange, reduced shank

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with hexagon head with a flange and reduced shank

AP: P511BAA087: transition length

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

P511BAA383: transition diameter of axial undercut

SDD: ISO 4162:1990

SD: P511DAA157

Remark: ISO 15071:1999 belongs to this simple class

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA158-1 001

cup head square neck bolt with large head

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a large cup head and a square neck

AP: P511BAA047: radius of curvature under head

P511BAA069: minimum clamp length

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 8677:1986

SD: P511DAA158

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA159-1 001

square head bolt

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a square head

AP: P511BAA012: thread length

P511BAA047: radius of curvature under head

P511BAA069: minimum clamp length

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 1891:1979

SD: P511DAA159

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA160-1 001

square head bolt with collar

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a square head with collar

AP: P511BAA012: thread length

P511BAA047: radius of curvature under head

P511BAA069: minimum clamp length

P511BAA087: transition length

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 1891:1979

SD: P511DAA160

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA161-1 001

wave spring washer

SuperClass: P511AAA236 spring washer

Definition: spring washer with the shape of a plain washer, which is bent to present more than one wave

AP:**SDD:** ISO 1891:1979 clause 39.5**SD:** P511DAA161**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA162-1 001****triangle head bolt****SuperClass:** P511AAA005 metric threaded bolt/screw**Definition:** metric externally threaded fastener with a triangle head**AP:** P511BAA012: thread length

P511BAA047: radius of curvature under head

P511BAA069: minimum clamp length

P511BAA087: transition length

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 1891:1979**SD:** P511DAA162**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA163-1 001****octagon head bolt****SuperClass:** P511AAA005 metric threaded bolt/screw**Definition:** metric externally threaded fastener with an octagon head**AP:** P511BAA012: thread length

P511BAA047: radius of curvature under head

P511BAA069: minimum clamp length

P511BAA087: transition length

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 1891:1979**SD:** P511DAA163**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA164-1 001****lock washer with external teeth****SuperClass:** P511AAA241 lock washer**Definition:** lock washer with teeth at the outside**AP:****SDD:** ISO 1891:1979 clause 39.7**SD:** P511DAA164**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA166-1 001****T-head bolt****SuperClass:** P511AAA005 metric threaded bolt/screw**Definition:** metric externally threaded fastener

with a T-head designed to fit in a T-slot

AP: P511BAA012: thread length

P511BAA047: radius of curvature under head

P511BAA069: minimum clamp length

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 1891:1979**SD:** P511DAA166**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA168-1 001****lock washer with internal teeth****SuperClass:** P511AAA241 lock washer**Definition:** lock washer with teeth at the inside**AP:****SDD:** ISO 1891:1979 clause 39.8**SD:** P511DAA168**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA169-1 001****hexagon head screw****SuperClass:** P511AAA005 metric threaded bolt/screw**Definition:** metric externally threaded fastener with a hexagon head threaded up to the head**AP:** P511BAA047: radius of curvature under head

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 4017:1999**SD:** P511DAA169**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA170-1 001****hexagon socket head cap screw****SuperClass:** P511AAA005 metric threaded bolt/screw**Definition:** metric externally threaded fastener with a high cylindrical head with a hexagon socket**AP:** P511BAA047: radius of curvature under head

P511BAA069: minimum clamp length

P511BAA087: transition length

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 4762:2004**SD:** P511DAA170**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511AAA171-1 001**

hexagon socket head shoulder screw

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a cylindrical head with a hexagon socket and with a shoulder under the head

AP: P511BAA012: thread length

P511BAA020: minimum diameter of radial undercut

P511BAA022: width of radial undercut

P511BAA037: width of radial undercut in a shank

P511BAA048: minimum diameter of radial undercut in a shank

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

P511BAA383: transition diameter of axial undercut

SDD: ISO 7379:1983

SD: P511DAA171

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA172-1 001

hexagon socket button head screw

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a button head with a hexagon socket

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 7380:2004

SD: P511DAA172

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA173-1 001

hexagon socket countersunk head screw

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a countersunk head with hexagon socket

AP: P511BAA047: radius of curvature under head

P511BAA069: minimum clamp length

P511BAA370: length of countersunk bolt/screw

SDD: ISO 10642:2004

SD: P511DAA173

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA174-1 001

hexalobular socket cheese head screw

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a cheese head with hexalobular socket

AP: P511BAA030: length of thread run-out

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 14580:2001

SD: P511DAA174

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA175-1 001

hexalobular socket pan head screw

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a pan head with hexalobular socket

AP: P511BAA012: thread length

P511BAA030: length of thread run-out

P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 14583:2001

SD: P511DAA175

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA176-1 001

hexalobular socket raised countersunk head screw

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a raised countersunk head with hexalobular socket

AP: P511BAA012: thread length

P511BAA030: length of thread run-out

P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA370: length of countersunk bolt/screw

SDD: ISO 14584:2001

SD: P511DAA176

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA177-1 001

slotted cheese head screw

SuperClass: P511AAA005 metric threaded

bolt/screw

Definition: metric externally threaded fastener with a slotted cheese head

AP: P511BAA030: length of thread run-out
 P511BAA046: distance from the last full form thread to the head bearing face
 P511BAA047: radius of curvature under head
 P511BAA357: transition diameter
 P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 1207:1992

SD: P511DAA177

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA178-1 001

slotted pan head screw

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a slotted pan head

AP: P511BAA012: thread length
 P511BAA030: length of thread run-out
 P511BAA046: distance from the last full form thread to the head bearing face
 P511BAA047: radius of curvature under head
 P511BAA357: transition diameter
 P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 1580:1994

SD: P511DAA178

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA179-1 001

slotted countersunk flat head screw

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a flat slotted countersunk head

AP: P511BAA012: thread length
 P511BAA030: length of thread run-out
 P511BAA046: distance from the last full form thread to the head bearing face
 P511BAA047: radius of curvature under head
 P511BAA370: length of countersunk

bolt/screw

SDD: ISO 2009:1994

SD: P511DAA179

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA180-1 001

slotted raised countersunk head screw

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener

with a slotted raised countersunk head

AP: P511BAA012: thread length
 P511BAA030: length of thread run-out
 P511BAA046: distance from the last full form thread to the head bearing face
 P511BAA047: radius of curvature under head
 P511BAA370: length of countersunk

bolt/screw

SDD: ISO 2010:1994

SD: P511DAA180

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA181-1 001

cross recessed (type H) cheese head screw

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a cross recessed cheese head (type H)

AP: P511BAA012: thread length
 P511BAA030: length of thread run-out
 P511BAA046: distance from the last full form thread to the head bearing face
 P511BAA047: radius of curvature under head
 P511BAA357: transition diameter
 P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 7048:1998

SD: P511DAA181

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA182-1 001

cross recessed (type H) pan head screw

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a cross recessed pan head (type H)

AP: P511BAA012: thread length
 P511BAA030: length of thread run-out
 P511BAA046: distance from the last full form thread to the head bearing face
 P511BAA047: radius of curvature under head
 P511BAA357: transition diameter
 P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 7045:1994

SD: P511DAA182

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA183-1 001

countersunk lock washer with external teeth

SuperClass: P511AAA241 lock washer

Definition: lock washer with external teeth and a conical shape to fit into a countersink

AP:

SDD: ISO 1891:1979 clause 39.9
SD: P511DAA183
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA184-1 001
countersunk flat head screw with cross recess (type H)

SuperClass: P511AAA005 metric threaded bolt/screw
Definition: metric externally threaded fastener with a flat countersunk head with cross recess (type H)
AP: P511BAA012: thread length
P511BAA030: length of thread run-out
P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head
P511BAA370: length of countersunk bolt/screw
SDD: ISO 7046-1:1994
SD: P511DAA184
Remark: ISO 7046-2:1994 belongs to this simple class
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA185-1 001
raised countersunk head screw with cross recess (type H)

SuperClass: P511AAA005 metric threaded bolt/screw
Definition: metric externally threaded fastener with a raised countersunk head and cross recess (type H)
AP: P511BAA012: thread length
P511BAA030: length of thread run-out
P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head
P511BAA370: length of countersunk bolt/screw
SDD: ISO 7047:1994
SD: P511DAA185
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA186-1 001
set screw
SuperClass: P511AAA004 externally threaded fastener component
Definition: fully externally threaded fastener with a driving feature at one end, whereas the other end is designed to apply pressure on the part to be fixed
AP: P511BAA107: end shape name
P511BAA108: end shape picture

P511BAA109: internal drive shape name
P511BAA110: internal drive shape picture
P511BAA245: end properties
P511BAA246: thread properties
P511BAA247: internal drive properties
P511BAA306: type of end
P511BAA307: type of thread
P511BAA308: type of internal drive
P511BAA326: product grade
P511BAA378: diameter of face
P511BAA400: length of set screw
SSP: P511BAA306: type of end
P511BAA307: type of thread
P511BAA308: type of internal drive
SDD: ISO 1891:1979
SD:
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA187-1 001
slotted headless screw with shank
SuperClass: P511AAA354 headless screw with shank
Definition: headless screw with shank with a slot as internal drive
AP: P511BAA402: length of headless screw with shank
SDD: ISO 2342:1972
SD: P511DAA187
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA188-1 001
hexagon socket set screw with flat point
SuperClass: P511AAA186 set screw
Definition: set screw with a hexagon socket and flat point
AP:
SDD: ISO 4026:2003
SD: P511DAA188
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA189-1 001
hexagon socket set screw with cone point
SuperClass: P511AAA186 set screw
Definition: set screw with a hexagon socket and a cone point
AP:
SDD: ISO 4027:2003
SD: P511DAA189
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA190-1 001
hexagon socket set screw with dog point
SuperClass: P511AAA186 set screw

Definition: set screw with a hexagon socket and a dog point

AP:

SDD: ISO 4028:2003

SD: P511DAA190

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA191-1 001

hexagon socket set screw with cup point

SuperClass: P511AAA186 set screw

Definition: set screw with a hexagon socket and a cup point

AP:

SDD: ISO 4029:2003

SD: P511DAA191

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA192-1 001

slotted set screw with cone point

SuperClass: P511AAA186 set screw

Definition: slotted set screw with a cone point

AP:

SDD: ISO 7434:1983

SD: P511DAA192

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA193-1 001

slotted set screw with flat point

SuperClass: P511AAA186 set screw

Definition: slotted set screw with a flat point

AP:

SDD: ISO 4766:1983

SD: P511DAA193

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA194-1 001

slotted set screw with long dog point

SuperClass: P511AAA186 set screw

Definition: slotted set screw with a long dog point

AP:

SDD: ISO 7435:1983

SD: P511DAA194

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA195-1 001

slotted set screw with cup point

SuperClass: P511AAA186 set screw

Definition: slotted set screw with a cup point

AP:

SDD: ISO 7436:1983

SD: P511DAA195

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA196-1 001

tapping screw

SuperClass: P511AAA004 externally threaded fastener component

Definition: externally threaded fastener with a head including a driving feature and with a self-tapping screw thread which is able to form its own mating thread in the metal part to be fastened

AP: P511BAA103: head shape name

P511BAA104: head shape picture

P511BAA107: end shape name

P511BAA108: end shape picture

P511BAA109: internal drive shape name

P511BAA110: internal drive shape picture

P511BAA243: head properties

P511BAA245: end properties

P511BAA246: thread properties

P511BAA247: internal drive properties

P511BAA303: type of head

P511BAA306: type of end

P511BAA307: type of thread

P511BAA308: type of internal drive

P511BAA326: product grade

SSP: P511BAA303: type of head

P511BAA306: type of end

P511BAA307: type of thread

P511BAA308: type of internal drive

SDD: ISO 1891:1979

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA197-1 001

hexagon head tapping screw with a cone end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a hexagon head and a cone end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 1479:1983

SD: P511DAA197

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA198-1 001

slotted pan head tapping screw with a cone end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a slotted pan

head and a cone end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 1481:1983

SD: P511DAA198

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA199-1 001

slotted countersunk (flat) head tapping screw with a cone end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a slotted countersunk (flat) head and a cone end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA370: length of countersunk

bolt/screw

SDD: ISO 1482:1983

SD: P511DAA199

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA200-1 001

slotted raised countersunk (oval) head tapping screw with a cone end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a slotted raised countersunk (oval) head and a cone end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA370: length of countersunk

bolt/screw

SDD: ISO 1483:1983

SD: P511DAA200

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA201-1 001

cross recessed (type H) pan head tapping screw with a cone end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a pan head with cross recess (type H) and with a cone end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 7049:1983

SD: P511DAA201

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA202-1 001

hexagon flange head tapping screw with a cone end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a hexagon flange head and a cone end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 10509:1992

SD: P511DAA202

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA203-1 001

cross recessed (type H) countersunk head tapping screw with a cone end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a countersunk head with cross recess (type H) and with a cone end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA370: length of countersunk

bolt/screw

SDD: ISO 7050:1983

SD: P511DAA203

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA204-1 001

cross recessed (type H) raised countersunk head tapping screw with a cone end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a raised countersunk head with cross recess (type H) and with a cone end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA370: length of countersunk

bolt/screw

SDD: ISO 7051:1983

SD: P511DAA204

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA205-1 001

hexagon washer head tapping screw with a cone end

SuperClass: P511AAA196 tapping screw
Definition: self-tapping screw with a hexagon washer head and with a cone end
AP: P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head
P511BAA369: length of bolt/screw (flat seating head)
SDD: ISO 7053:1992
SD: P511DAA205
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA206-1 001
hexalobular socket pan head tapping screw with a cone end

SuperClass: P511AAA196 tapping screw
Definition: self-tapping screw with a pan head with hexalobular socket and with a cone end
AP: P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head
P511BAA357: transition diameter
P511BAA369: length of bolt/screw (flat seating head)
SDD: ISO 14585:2001
SD: P511DAA206
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA207-1 001
hexalobular socket countersunk head tapping screw with a cone end

SuperClass: P511AAA196 tapping screw
Definition: self-tapping screw with a countersunk head with hexalobular socket and with a cone end
AP: P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head
P511BAA370: length of countersunk bolt/screw
SDD: ISO 14586:2001
SD: P511DAA207
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA208-1 001
hexalobular socket raised countersunk head tapping screw with a cone end

SuperClass: P511AAA196 tapping screw
Definition: self-tapping screw with a raised countersunk head with hexalobular socket and with a cone end
AP: P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head

P511BAA370: length of countersunk bolt/screw
SDD: ISO 14587:2001
SD: P511DAA208
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA209-1 001
wood screw

SuperClass: P511AAA004 externally threaded fastener component
Definition: externally threaded fastener with a head including a driving feature and with a thread, which is able to form its own mating thread in the wooden part to be fastened
AP: P511BAA103: head shape name
P511BAA104: head shape picture
P511BAA105: shank shape name
P511BAA106: shank shape picture
P511BAA107: end shape name
P511BAA108: end shape picture
P511BAA109: internal drive shape name
P511BAA110: internal drive shape picture
P511BAA243: head properties
P511BAA244: shank properties
P511BAA245: end properties
P511BAA246: thread properties
P511BAA247: internal drive properties
P511BAA303: type of head
P511BAA306: type of end
P511BAA307: type of thread
P511BAA308: type of internal drive
P511BAA369: length of bolt/screw (flat seating head)
P511BAA370: length of countersunk bolt/screw
SDD: ISO 1891:1979 clause 2.4
SD: P511DAA209
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA210-1 001
drilling screw

SuperClass: P511AAA004 externally threaded fastener component
Definition: externally threaded fastener with a head including a driving feature and a self-tapping screw thread, the end of which is furnished with a drilling point, which is able to drill a hole and to form its own mating thread in metallic materials
AP: P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head
P511BAA103: head shape name
P511BAA104: head shape picture
P511BAA105: shank shape name

P511BAA106: shank shape picture
 P511BAA107: end shape name
 P511BAA108: end shape picture
 P511BAA109: internal drive shape name
 P511BAA110: internal drive shape picture
 P511BAA243: head properties
 P511BAA245: end properties
 P511BAA246: thread properties
 P511BAA247: internal drive properties
 P511BAA303: type of head
 P511BAA306: type of end
 P511BAA307: type of thread
 P511BAA308: type of internal drive
 P511BAA326: product grade
SSP: P511BAA303: type of head
 P511BAA306: type of end
 P511BAA307: type of thread
 P511BAA308: type of internal drive
SDD: ISO 15480:1999
SD:
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA211-1 001
hexagon washer head drilling screw
SuperClass: P511AAA210 drilling screw
Definition: drilling screw with a hexagon washer head and self-tapping screw thread
AP: P511BAA069: minimum clamp length
 P511BAA369: length of bolt/screw (flat seating head)
SDD: ISO 15480:1999
SD: P511DAA211
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA212-1 001
cross recessed (type H) pan head drilling screw
SuperClass: P511AAA210 drilling screw
Definition: drilling screw with a pan head with cross recess (type H) and with self-tapping screw thread
AP: P511BAA357: transition diameter
 P511BAA369: length of bolt/screw (flat seating head)
SDD: ISO 15481:1999
SD: P511DAA212
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA213-1 001
cross recessed (type H) countersunk head drilling screw
SuperClass: P511AAA210 drilling screw
Definition: drilling screw with a countersunk head with cross recess (type H) and with self-

tapping screw thread
AP: P511BAA069: minimum clamp length
 P511BAA370: length of countersunk bolt/screw
SDD: ISO 15482:1999
SD: P511DAA213
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA214-1 001
cross recessed (type H) raised countersunk drilling screw
SuperClass: P511AAA210 drilling screw
Definition: drilling screw with a raised countersunk head with cross recess (type H) and with self-tapping screw thread
AP: P511BAA069: minimum clamp length
 P511BAA370: length of countersunk bolt/screw
SDD: ISO 15483:1999
SD: P511DAA214
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA215-1 001
serrated lock washer with external teeth
SuperClass: P511AAA241 lock washer
Definition: lock washer with serrated teeth at the outside
AP:
SDD: ISO 1891:1979 clause 39.10
SD: P511DAA215
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA216-1 001
serrated lock washer with internal teeth
SuperClass: P511AAA241 lock washer
Definition: lock washer with serrated teeth at the inside
AP:
SDD: ISO 1891:1979 clause 39.11
SD: P511DAA216
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA217-1 001
hexagon head with collar
SuperClass: P511AAA008 head
Definition: head shape which is hexagon with a cylindrical collar at the bearing face, in order to reduce the pressure under the head
AP: P511BAA031: wrenching height
 P511BAA032: width across flats
 P511BAA033: width across corners
 P511BAA034: head height
 P511BAA042: height of bearing element of a

bolt or screw or nut

P511BAA045: flange(collar) diameter

P511BAA377: radius of curvature at the hexagon / washer junction

SDD: ISO 15480:1999

SD: P511DAA217

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA218-1 001

countersunk serrated lock washer with external teeth

SuperClass: P511AAA241 lock washer

Definition: lock washer with serrated external teeth and a conical shape to fit into a countersink

AP:

SDD: ISO 1891:1979 clause 39.12

SD: P511DAA218

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA219-1 001

tab washer with long tab

SuperClass: P511AAA240 tab washer

Definition: tab washer with a long tab at the outside

AP:

SDD: ISO 1891:1979 clause 40.1

SD: P511DAA219

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA220-1 001

tab washer with long tab and wing

SuperClass: P511AAA240 tab washer

Definition: tab washer with a long tab and a wing at the outside

AP:

SDD: ISO 1891:1979 clause 40.2

SD: P511DAA220

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA221-1 001

external tab washer

SuperClass: P511AAA240 tab washer

Definition: tab washer with a tab at the outside

AP:

SDD: ISO 1891:1979 clause 40.3

SD: P511DAA221

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA222-1 001

hexalobular socket

SuperClass: P511AAA042 internal drive

Definition: internal drive feature with the shape of a hexalobular indentation

AP: P511BAA057: nominal dimension A

P511BAA075: nominal dimension B

P511BAA092: hexalobular socket number

P511BAA101: penetration depth

SDD: ISO 10664:2005

SD: P511DAA222

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA223-1 001

button head

SuperClass: P511AAA008 head

Definition: head shape which is a truncated round head

AP: P511BAA034: head height

P511BAA051: head diameter

SDD: ISO 7380:2004

SD: P511DAA223

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA225-1 001

internal tab washer

SuperClass: P511AAA240 tab washer

Definition: tab washer with a tab at the inside

AP:

SDD: ISO 1891:1979 clause 40.4

SD: P511DAA225

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA226-1 001

hexalobular socket countersunk head

tapping screw with a flat end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a countersunk head with hexalobular socket and with a flat end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA370: length of countersunk

bolt/screw

SDD: ISO 14586:2001

SD: P511DAA226

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA227-1 001

slotted hexagon nut

SuperClass: P511AAA052 nut

Definition: hexagon nut with slots at one face perpendicular to the nut axis

AP: P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners
P511BAA052: slot width
P511BAA053: bottom thickness
P511BAA114: diameter of the countersink

SDD: ISO 1891:1979 clause 34.1

SD: P511DAA227

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA228-1 001

hexagon nut with flange

SuperClass: P511AAA052 nut

Definition: hexagon nut with a flange at the bearing face

AP: P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

P511BAA041: diameter of washer face or bearing face

P511BAA042: height of bearing element of a bolt or screw or nut

P511BAA044: flange angle

P511BAA045: flange(collar) diameter

P511BAA114: diameter of the countersink

SDD: ISO 4161:1999

SD: P511DAA228

Remark: ISO 21670:2003 belongs to this simple class

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA229-1 001

hexagon castle nut

SuperClass: P511AAA052 nut

Definition: hexagon nut with cylindrical slotted projection

AP: P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

P511BAA041: diameter of washer face or bearing face

P511BAA050: castle diameter

P511BAA052: slot width

P511BAA053: bottom thickness

P511BAA114: diameter of the countersink

SDD: ISO 1891:1979, ISO 225:1983

SD: P511DAA229

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA232-1 001

round nut with holes in face

SuperClass: P511AAA052 nut

Definition: nut with cylindrical shape with holes as driving feature at one of the flat faces

AP:

SDD: ISO 1891:1979 clause 36.6

SD: P511DAA232

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA235-1 001

plain washer without chamfer

SuperClass: P511AAA026 plain washer

Definition: plain washer with round outer shape

AP: P511BAA333: outside diameter

P511BAA334: hole diameter

SDD: ISO 887:2000

SD: P511DAA235

Remark: ISO 7089:2000,ISO 7091:2000,ISO 7092:2000,ISO 7093-1:2000,ISO 7093-2:2000,ISO 7094:2000,ISO 7415:1984,ISO 8738:1986,ISO 10669:1999,ISO 10673:1998 belong to this simple class

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA236-1 001

spring washer

SuperClass: P511AAA072 washer

Definition: washer with elastic deformation capability

AP: P511BAA333: outside diameter

P511BAA334: hole diameter

P511BAA336: material thickness

P511BAA338: height of conical spring washer or lock washer

SDD: ISO 1891:1979

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA237-1 001

square taper washer

SuperClass: P511AAA072 washer

Definition: square washer, the bearing faces of which are not parallel

AP: P511BAA334: hole diameter

P511BAA355: mid height

P511BAA356: side length

SDD: ISO 1891:1979 clause 38.5

SD: P511DAA237

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA238-1 001

hexalobular socket countersunk head

tapping screw with a rounded end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a countersunk head with hexalobular socket and with a rounded end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head
P511BAA370: length of countersunk
bolt/screw

SDD: ISO 14586:2001

SD: P511DAA238

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA239-1 001

hexalobular socket pan head tapping screw with a flat end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a pan head with hexalobular socket and with a flat end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 14585:2001

SD: P511DAA239

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA240-1 001

tab washer

SuperClass: P511AAA072 washer

Definition: washer with tab

AP: P511BAA333: outside diameter

P511BAA334: hole diameter

P511BAA336: material thickness

SDD: ISO 1891:1979

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA241-1 001

lock washer

SuperClass: P511AAA072 washer

Definition: washer with a particular shape limiting rotation of associated fastener

AP: P511BAA333: outside diameter

P511BAA334: hole diameter

P511BAA336: material thickness

P511BAA338: height of conical spring washer or lock washer

SDD: ISO 1891:1979

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA242-1 001

hexalobular socket pan head tapping screw with a rounded end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a pan head

with hexalobular socket and with a rounded end
AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 14585:2001

SD: P511DAA242

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA243-1 001

hexagon washer head tapping screw with a flat end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a hexagon washer head and a flat end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 7053:1992

SD: P511DAA243

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA244-1 001

cross recessed (type H) raised countersunk head tapping screw, flat end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a raised countersunk head with cross recess (type H) and with a flat end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA370: length of countersunk bolt/screw

SDD: ISO 7051:1983

SD: P511DAA244

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA245-1 001

closed end blind rivet with break pull mandrel and protruding head

SuperClass: P511AAA083 blind rivet

Definition: blind rivet with a closed end and with a break pull mandrel and a protruding head

AP: P511BAA411: length of rivet with flat seating head (protruding head)

SDD: ISO 15973:2000

SD: P511DAA245

Remark: ISO 15975:2000, ISO 15976:2000 belong to this simple class

DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA246-1 001

closed end blind rivet with break pull mandrel and countersunk head

SuperClass: P511AAA083 blind rivet

Definition: blind rivet with a closed end and with a break pull mandrel and a countersunk head

AP: P511BAA412: length of the rivet with countersunk head

SDD: ISO 15974:2000

SD: P511DAA246

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA248-1 001

split pin

SuperClass: P511AAA098 pin

Definition: pin with half-round section, folded-up in order to form a split shank

AP: P511BAA193: difference of leg lengths

P511BAA195: eyelet height for split pin

P511BAA196: eyelet diameter for split pin

P511BAA367: length of split pin

SDD: ISO 1234:1997, ISO 8749:1986

SD: P511DAA248

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA249-1 001

simple taper pin

SuperClass: P511AAA358 taper pin

Definition: taper pin without a threaded feature

AP: P511BAA198: large rounded end radius for taper pin

P511BAA199: rounded end height

SDD: ISO 2339:1986, ISO 8749:1986

SD: P511DAA249

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA250-1 001

taper pin with internal thread

SuperClass: P511AAA358 taper pin

Definition: taper pin with internal thread

AP: P511BAA199: rounded end height

P511BAA204: countersink diameter of pin

P511BAA205: internal thread length of pin

P511BAA206: depth of hole

P511BAA207: depth of cylindrical countersink

P511BAA231: crown radius

P511BAA340: thread size

P511BAA362: chamfer angle on the end of

pin

SDD: ISO 8736:1986, ISO 8749:1986

SD: P511DAA250

DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA251-1 001

taper pin with external thread

SuperClass: P511AAA358 taper pin

Definition: taper pin with external thread

AP: P511BAA208: length of thread run out to cone

P511BAA209: length of threaded portion

P511BAA210: pilot end length

P511BAA211: diameter of pilot end

P511BAA340: thread size

P511BAA362: chamfer angle on the end of pin

P511BAA395: incomplete thread length of pin with external thread

SDD: ISO 8737:1986, ISO 8749:1986

SD: P511DAA251

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA252-1 001

parallel pin

SuperClass: P511AAA098 pin

Definition: pin with cylindrical shape with specified tolerance of diameter

AP: P511BAA217: chamfer length of pin

P511BAA246: thread properties

P511BAA307: type of thread

P511BAA362: chamfer angle on the end of pin

P511BAA408: length of parallel pin

SSP: P511BAA307: type of thread

SDD: ISO 2338:1997, ISO 8749:1986

SD: P511DAA252

Remark: ISO 8734:1997 belongs to this simple class

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA253-1 001

parallel pin with internal thread

SuperClass: P511AAA252 parallel pin

Definition: pin with cylindrical shape and internal thread

AP: P511BAA202: chamfer width for the end with internal thread

P511BAA204: countersink diameter of pin

P511BAA205: internal thread length of pin

P511BAA206: depth of hole

P511BAA207: depth of cylindrical countersink

P511BAA327: type of pitch

P511BAA340: thread size

SDD: ISO 8733:1997, ISO 8749:1986

SD: P511DAA253

Remark: ISO 8735:1997 belongs to this simple

class

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA255-1 001

clevis pin with head

SuperClass: P511AAA355 clevis pin

Definition: pin with cylindrical shape and cylindrical head with flat seating bearing face

AP: P511BAA217: chamfer length of pin

P511BAA225: head height of pin

P511BAA229: length from split pin hole to the end

P511BAA230: split pin hole diameter

P511BAA237: head diameter of pin

P511BAA396: chamfer height on the head of pin

P511BAA397: chamfer angle on the head of pin

P511BAA403: length of clevis pin with head

SDD: ISO 2341:1986, ISO 8749:1986

SD: P511DAA255

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA257-1 001

grooved pin, full-length parallel grooved,with pilot

SuperClass: P511AAA356 grooved pin

Definition: pin with full length parallel grooved shank and with a pilot at one end

AP: P511BAA199: rounded end height

P511BAA231: crown radius

P511BAA232: pilot length

P511BAA234: expanded diameter

P511BAA235: groove angle

P511BAA353: shear strength,double

P511BAA398: grooving angle of grooved pin

P511BAA405: length of grooved pin without head

SDD: ISO 8739:1997, ISO 8749:1986

SD: P511DAA257

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA258-1 001

grooved pin, full-length parallel grooved,with chamfer

SuperClass: P511AAA356 grooved pin

Definition: pin with full length parallel grooved shank and with a chamfer at one end

AP: P511BAA199: rounded end height

P511BAA231: crown radius

P511BAA234: expanded diameter

P511BAA235: groove angle

P511BAA241: height of crown

P511BAA242: convexity height

P511BAA353: shear strength,double

P511BAA362: chamfer angle on the end of pin

P511BAA398: grooving angle of grooved pin

P511BAA405: length of grooved pin without head

SDD: ISO 8740:1997, ISO 8749:1986

SD: P511DAA258

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA259-1 001

grooved pin with round head

SuperClass: P511AAA356 grooved pin

Definition: pin with a grooved shank and a round head

AP: P511BAA217: chamfer length of pin

P511BAA225: head height of pin

P511BAA234: expanded diameter

P511BAA235: groove angle

P511BAA237: head diameter of pin

P511BAA362: chamfer angle on the end of pin

P511BAA398: grooving angle of grooved pin

P511BAA406: length of grooved pin with flat seating head

SDD: ISO 8746:1997, ISO 8749:1986

SD: P511DAA259

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA260-1 001

grooved pin with countersunk head

SuperClass: P511AAA356 grooved pin

Definition: pin with a grooved shank and a countersunk head

AP: P511BAA217: chamfer length of pin

P511BAA234: expanded diameter

P511BAA235: groove angle

P511BAA237: head diameter of pin

P511BAA362: chamfer angle on the end of pin

P511BAA398: grooving angle of grooved pin

P511BAA399: head angle of grooved pin with countersunk head

P511BAA407: length of grooved pin with countersunk head

SDD: ISO 8747:1997, ISO 8749:1986

SD: P511DAA260

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA261-1 001

spring-type straight pin, slotted

SuperClass: P511AAA357 spring pin

Definition: spring pin with hollow cylinder shape and with a slot in axial direction

AP: P511BAA239: inner diameter
SD: P511DAA261
Remark: ISO 8752:1997, ISO 8749:1986, ISO 13337:1997 belong to this simple class
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA265-1 001
grooved pin, half-length reverse taper grooved
SuperClass: P511AAA356 grooved pin
Definition: pin with a half length reverse taper grooved shank
AP: P511BAA199: rounded end height
P511BAA231: crown radius
P511BAA234: expanded diameter
P511BAA398: grooving angle of grooved pin
P511BAA405: length of grooved pin without head
SDD: ISO 8741:1997, ISO 8749:1986
SD: P511DAA265
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA267-1 001
cross recessed (type Z) raised countersunk head tapping screw with a flat end
SuperClass: P511AAA196 tapping screw
Definition: self-tapping screw with a raised countersunk head with cross recess (type Z) and with a flat end
AP: P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head
P511BAA370: length of countersunk bolt/screw
SDD: ISO 7051:1983
SD: P511DAA267
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA268-1 001
cross recessed (type Z) countersunk head tapping screw with a flat end
SuperClass: P511AAA196 tapping screw
Definition: self-tapping screw with a countersunk head with cross recess (type Z) and with a flat end
AP: P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head
P511BAA370: length of countersunk bolt/screw
SDD: ISO 7050:1983
SD: P511DAA268
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA269-1 001
cross recessed (type H) countersunk head tapping screw with a flat end
SuperClass: P511AAA196 tapping screw
Definition: self-tapping screw with a countersunk head with cross recess (type H) and with a flat end
AP: P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head
P511BAA370: length of countersunk bolt/screw
SDD: ISO 7050:1983
SD: P511DAA269
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA270-1 001
cross recessed (type H) pan head tapping screw with a flat end
SuperClass: P511AAA196 tapping screw
Definition: self-tapping screw with a pan head with cross recess (type H) and with a flat end
AP: P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head
P511BAA357: transition diameter
P511BAA369: length of bolt/screw (flat seating head)
SDD: ISO 7049:1983
SD: P511DAA270
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA271-1 001
hexagon flange head tapping screw with a flat end
SuperClass: P511AAA196 tapping screw
Definition: self-tapping screw with a hexagon flange head and with a flat end
AP: P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head
P511BAA369: length of bolt/screw (flat seating head)
SDD: ISO 10509:1992
SD: P511DAA271
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA272-1 001
cross recess (type Z)
SuperClass: P511AAA042 internal drive
Definition: internal drive with the shape of a cross like indentation where the faces on which the tool forces apply are perpendicular to the

driving force(type Z)

AP: P511BAA101: penetration depth

P511BAA102: recess number

SDD: ISO 4757:1983

SD: P511DAA272

Note: the cross recess type Z does not allow disalignment of screw and driving tool

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA278-1 001

grooved pin, full-length taper grooved

SuperClass: P511AAA356 grooved pin

Definition: pin with a taper grooved shank, and the groove length equals to full length of shank

AP: P511BAA199: rounded end height

P511BAA234: expanded diameter

P511BAA353: shear strength,double

P511BAA398: grooving angle of grooved pin

P511BAA405: length of grooved pin without head

SDD: ISO 8744:1997, ISO 8749:1986

SD: P511DAA278

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA279-1 001

cross recessed (type Z) cheese head screw

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a cheese head with cross recess (type Z)

AP: P511BAA012: thread length

P511BAA030: length of thread run-out

P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 7048:1998

SD: P511DAA279

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA280-1 001

cross recessed (type Z) pan head screw

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a pan head with cross recess (type Z)

AP: P511BAA012: thread length

P511BAA030: length of thread run-out

P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 7045:1994

SD: P511DAA280

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA281-1 001

countersunk flat head screw with cross recess (type Z)

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a countersunk flat head with cross recess (type Z)

AP: P511BAA012: thread length

P511BAA030: length of thread run-out

P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA370: length of countersunk bolt/screw

SDD: ISO 7046-1:1994

SD: P511DAA281

Remark: ISO 7046-2:1994 belongs to this simple class

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA282-1 001

raised countersunk head screw with cross recess (type Z)

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a raised countersunk head with cross recess (type Z)

AP: P511BAA030: length of thread run-out

P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA370: length of countersunk bolt/screw

SDD: ISO 7047:1994

SD: P511DAA282

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA283-1 001

cross recessed (type Z) pan head tapping screw with a cone end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a pan head with cross recess (type Z) and with a cone end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA357: transition diameter
P511BAA369: length of bolt/screw (flat seating head)
SDD: ISO 7049:1983
SD: P511DAA283
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA284-1 001
cross recessed (type Z) countersunk head tapping screw with a cone end
SuperClass: P511AAA196 tapping screw
Definition: self-tapping screw with a countersunk head with cross recess (type Z) and with a cone end
AP: P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head
P511BAA370: length of countersunk bolt/screw
SDD: ISO 7050:1983
SD: P511DAA284
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA285-1 001
cross recessed (type Z) raised countersunk head tapping screw with a cone end
SuperClass: P511AAA196 tapping screw
Definition: self-tapping screw with a raised countersunk head with cross recess (type Z) and with a cone end
AP: P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head
P511BAA370: length of countersunk bolt/screw
SDD: ISO 7051:1983
SD: P511DAA285
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA286-1 001
cross recessed (type Z) pan head drilling screw with tapping screw thread
SuperClass: P511AAA210 drilling screw
Definition: drilling screw with a pan head with a cross recess (type Z) and with self-tapping screw thread
AP: P511BAA069: minimum clamp length
P511BAA357: transition diameter
P511BAA369: length of bolt/screw (flat seating head)
SDD: ISO 15481:1999
SD: P511DAA286
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA287-1 001
cross recessed (type Z) countersunk head drilling screw
SuperClass: P511AAA210 drilling screw
Definition: drilling screw with a countersunk head with a cross recess (type Z) and with self-tapping screw thread
AP: P511BAA069: minimum clamp length
P511BAA370: length of countersunk bolt/screw
SDD: ISO 15482:1999
SD: P511DAA287
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA288-1 001
cross recessed (type Z) raised countersunk head drilling screw
SuperClass: P511AAA210 drilling screw
Definition: drilling screw with a raised countersunk head with a cross recess (type Z) and with self-tapping screw thread
AP: P511BAA069: minimum clamp length
P511BAA370: length of countersunk bolt/screw
SDD: ISO 15483:1999
SD: P511DAA288
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA289-1 001
slotted raised countersunk(oval) head tapping screw with a flat end
SuperClass: P511AAA196 tapping screw
Definition: self-tapping screw with a slotted raised countersunk(oval) head and a flat end
AP: P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head
P511BAA370: length of countersunk bolt/screw
SDD: ISO 1483:1983
SD: P511DAA289
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA290-1 001
slotted countersunk(flat) head tapping screw with a flat end
SuperClass: P511AAA196 tapping screw
Definition: self-tapping screw with a slotted countersunk head with hexalobular socket and with a flat end
AP: P511BAA046: distance from the last full form thread to the head bearing face
P511BAA047: radius of curvature under head

P511BAA370: length of countersunk bolt/screw

SDD: ISO 1482:1983

SD: P511DAA290

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA291-1 001

hexalobular socket raised countersunk head tapping screw with a flat end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a raised countersunk head with hexalobular socket and with a flat end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA370: length of countersunk

bolt/screw

SDD: ISO 14587:2001

SD: P511DAA291

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA292-1 001

hexalobular socket raised countersunk head tapping screw with a rounded end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a raised countersunk head with hexalobular socket and with a rounded end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA370: length of countersunk

bolt/screw

SDD: ISO 14587:2001

SD: P511DAA292

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA293-1 001

hexagon head tapping screw with a flat end

SuperClass: P511AAA196 tapping screw

Definition: self-tapping screw with a hexagon head and a flat end

AP: P511BAA046: distance from the last full form thread to the head bearing face

P511BAA047: radius of curvature under head

P511BAA357: transition diameter

P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 1479:1983

SD: P511DAA293

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA309-1 001

thread forming screw

SuperClass: P511AAA004 externally threaded fastener component

Definition: externally threaded fastener with a thread which is able to form an internal metric thread in the metallic parts to be fastened

AP: P511BAA103: head shape name

P511BAA104: head shape picture

P511BAA105: shank shape name

P511BAA106: shank shape picture

P511BAA107: end shape name

P511BAA108: end shape picture

P511BAA109: internal drive shape name

P511BAA110: internal drive shape picture

P511BAA243: head properties

P511BAA244: shank properties

P511BAA245: end properties

P511BAA246: thread properties

P511BAA247: internal drive properties

P511BAA303: type of head

P511BAA305: type of shank

P511BAA306: type of end

P511BAA307: type of thread

P511BAA308: type of internal drive

P511BAA369: length of bolt/screw (flat seating head)

P511BAA370: length of countersunk

bolt/screw

SDD: ISO 7085:1999

SD:

Remark: ISO 7085:1999 belongs to this class

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA310-1 001

thread forming screw thread

SuperClass: P511AAA037 thread

Definition: thread designed to form its own mating metric screw thread in metallic parts

AP: P511BAA349: outer diameter

P511BAA350: core diameter

SDD: ISO 1891:1979 clause 27.1

SD: P511DAA310

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA311-1 001

cap nut

SuperClass: P511AAA052 nut

Definition: hexagon nut closed at one side by a flat cap

AP: P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

SDD: ISO 1891:1979 clause 35.2

SD: P511DAA311

DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA312-1 001

domed cap(acorn) nut

SuperClass: P511AAA052 nut

Definition: hexagon nut closed at one side by a domed cap

AP: P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

P511BAA416: thread length of nut

SDD: ISO 1891:1979 clause 35.1

SD: P511DAA312

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA313-1 001

hexagon nut (style 1)

SuperClass: P511AAA052 nut

Definition: nut with a hexagon shape and with a height according to style 1

AP: P511BAA032: width across flats

P511BAA033: width across corners

P511BAA041: diameter of washer face or bearing face

P511BAA114: diameter of the countersink

SDD: ISO 4032:1999

SD: P511DAA313

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA314-1 001

hexagon nut with collar

SuperClass: P511AAA052 nut

Definition: hexagon nut with a cylindrical collar

AP: P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

P511BAA042: height of bearing element of a bolt or screw or nut

P511BAA045: flange(collar) diameter

P511BAA114: diameter of the countersink

SDD: ISO 1891:1979 clause 28.3

SD: P511DAA314

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA315-1 001

round nut with holes in side

SuperClass: P511AAA052 nut

Definition: round nut with holes on the circumference in radial direction

AP:

SDD: ISO 1891:1979 clause 36.5

SD: P511DAA315

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA316-1 001

round nut with slot in face

SuperClass: P511AAA052 nut

Definition: round nut with a slot in the face opposite to the bearing face

AP:

SDD: ISO 1891:1979 clause 36.3

SD: P511DAA316

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA317-1 001

round nut with slots in side

SuperClass: P511AAA052 nut

Definition: round nut with slots on the circumference

AP:

SDD: ISO 1891:1979 clause 36.4

SD: P511DAA317

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA318-1 001

round nut with knurl

SuperClass: P511AAA052 nut

Definition: round nut with knurled circumference

AP:

SDD: ISO 1891:1979 clause 36.2

SD: P511DAA318

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA319-1 001

square nut

SuperClass: P511AAA052 nut

Definition: nut with square shape

AP: P511BAA033: width across corners

SDD: ISO 1891:1979 clause 29.1

SD: P511DAA319

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA320-1 001

square nut with collar

SuperClass: P511AAA052 nut

Definition: square nut with a collar

AP: P511BAA032: width across flats

P511BAA041: diameter of washer face or bearing face

P511BAA042: height of bearing element of a bolt or screw or nut

SDD: ISO 1891:1979 clause 29.4

SD: P511DAA320

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA321-1 001

triangle nut with collar

SuperClass: P511AAA052 nut

Definition: triangle nut with a collar

AP: P511BAA041: diameter of washer face or bearing face

P511BAA042: height of bearing element of a bolt or screw or nut

SDD: ISO 1891:1979 clause 30.1

SD: P511DAA321

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA322-1 001

pentagon nut

SuperClass: P511AAA052 nut

Definition: nut with pentagon shape

AP:

SDD: ISO 1891:1979 clause 31.2

SD: P511DAA322

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA323-1 001

octagon nut

SuperClass: P511AAA052 nut

Definition: nut with octagon shape

AP:

SDD: ISO 1891:1979 clause 31.1

SD: P511DAA323

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA324-1 001

wing nut

SuperClass: P511AAA052 nut

Definition: nut with two wings

AP:

SDD: ISO 1891:1979 clause 37.1

SD: P511DAA324

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA325-1 001

spring-type straight pin, coiled

SuperClass: P511AAA357 spring pin

Definition: spring pin formed by coiling of a steel sheet by more than one turn

AP:

SDD: ISO 8748:1997, ISO 8750:1983, ISO 8751:1983, ISO 8749:1986, ISO 8749:1986

SD: P511DAA325

Remark: ISO 8750:1997, ISO 8751:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA326-1 001

hexagon nut(style 2)

SuperClass: P511AAA052 nut

Definition: nut with a hexagon shape and with a height according to style 2

AP: P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

P511BAA041: diameter of washer face or bearing face

P511BAA114: diameter of the countersink

SDD: ISO 4033:1999

SD: P511DAA326

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA327-1 001

hexagon thin nut (chamfered)

SuperClass: P511AAA052 nut

Definition: hexagon nut with small height and chamfered on both sides

AP: P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

P511BAA041: diameter of washer face or bearing face

P511BAA114: diameter of the countersink

P511BAA380: countersink angle

P511BAA381: angle of the nut chamfer

SDD: ISO 4035:1999

SD: P511DAA327

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA328-1 001

prevailing torque type hexagon nut with non-metallic insert (style 1)

SuperClass: P511AAA052 nut

Definition: hexagon nut with a prevailing torque element in the form of an inserted non-metallic ring and a height according to style 1

AP: P511BAA015: insert material

P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

P511BAA041: diameter of washer face or bearing face

P511BAA114: diameter of the countersink

P511BAA380: countersink angle

P511BAA381: angle of the nut chamfer

P511BAA416: thread length of nut

SDD: ISO 7040:1997

SD: P511DAA328

Note: ISO 10512:1997 belongs to this class

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA329-1 001

prevailing torque type hexagon nut with non-metallic insert (style 2)

SuperClass: P511AAA052 nut

Definition: hexagon nut with a prevailing torque element in the form of an inserted non-metallic ring and a height according to style 2

AP: P511BAA015: insert material

P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

P511BAA041: diameter of washer face or bearing face

P511BAA114: diameter of the countersink

P511BAA380: countersink angle

P511BAA381: angle of the nut chamfer

P511BAA416: thread length of nut

SDD: ISO 7041:1997

SD: P511DAA329

Note: ISO 12216:1997 belongs to this class

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA330-1 001

prevailing torque type all-metal hexagon nut (style 1)

SuperClass: P511AAA052 nut

Definition: all metallic hexagon nut with a prevailing torque element in the form of a deformed threaded portion (style 1)

AP: P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

P511BAA041: diameter of washer face or bearing face

P511BAA114: diameter of the countersink

P511BAA380: countersink angle

P511BAA381: angle of the nut chamfer

SDD: ISO 7042:1997

SD: P511DAA330

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA331-1 001

prevailing torque type all-metal hexagon nut (style 2)

SuperClass: P511AAA052 nut

Definition: all metallic hexagon nut with a prevailing torque element in the form of a deformed threaded portion (style 2)

AP: P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

P511BAA041: diameter of washer face or bearing face

P511BAA114: diameter of the countersink

P511BAA380: countersink angle

P511BAA381: angle of the nut chamfer

SDD: ISO 7720:1997

SD: P511DAA331

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA332-1 001

prevailing torque type hexagon nut with flange, with non-metallic insert

SuperClass: P511AAA052 nut

Definition: hexagon nut with a flange, and with a prevailing torque element in the form of an inserted non-metallic ring

AP: P511BAA015: insert material

P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

P511BAA041: diameter of washer face or bearing face

P511BAA042: height of bearing element of a bolt or screw or nut

P511BAA044: flange angle

P511BAA045: flange(collar) diameter

P511BAA114: diameter of the countersink

P511BAA380: countersink angle

P511BAA416: thread length of nut

SDD: ISO 12125:1997

SD: P511DAA332

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA333-1 001

prevailing torque type all-metal hexagon nut with flange

SuperClass: P511AAA052 nut

Definition: all metallic hexagon nut with a flange and prevailing torque element in the form of a deformed threaded portion

AP: P511BAA031: wrenching height

P511BAA032: width across flats

P511BAA033: width across corners

P511BAA041: diameter of washer face or bearing face

P511BAA042: height of bearing element of a bolt or screw or nut

P511BAA044: flange angle

P511BAA045: flange(collar) diameter

P511BAA114: diameter of the countersink

P511BAA416: thread length of nut

SDD: ISO 12126:1997

SD: P511DAA333

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA334-1 001

clevis pin without head

SuperClass: P511AAA355 clevis pin
Definition: pin with cylindrical shape with h-tolerance
AP: P511BAA217: chamfer length of pin
P511BAA229: length from split pin hole to the end
P511BAA230: split pin hole diameter
P511BAA404: length of clevis pin without head
SDD: ISO 2340:1997, ISO 8749:1986
SD: P511DAA334
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA335-1 001
grooved pin, half-length centre grooved
SuperClass: P511AAA356 grooved pin
Definition: pin with a centrally grooved shank, and the groove length equals to half length of shank
AP: P511BAA199: rounded end height
P511BAA231: crown radius
P511BAA234: expanded diameter
P511BAA353: shear strength,double
P511BAA398: grooving angle of grooved pin
P511BAA405: length of grooved pin without head
SDD: ISO 8743:1997, ISO 8749:1986
SD: P511DAA335
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA336-1 001
grooved pin, one-third-length centre grooved
SuperClass: P511AAA356 grooved pin
Definition: pin with a centrally grooved shank, and the groove length equals to one third length of shank
AP: P511BAA199: rounded end height
P511BAA231: crown radius
P511BAA234: expanded diameter
P511BAA353: shear strength,double
P511BAA398: grooving angle of grooved pin
P511BAA405: length of grooved pin without head
SDD: ISO 8742:1997, ISO 8749:1986
SD: P511DAA336
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA337-1 001
grooved pin, half-length taper grooved
SuperClass: P511AAA356 grooved pin
Definition: pin with a taper grooved shank, and the groove length equals to half length of shank
AP: P511BAA199: rounded end height
P511BAA234: expanded diameter
P511BAA353: shear strength,double

P511BAA398: grooving angle of grooved pin
P511BAA405: length of grooved pin without head
SDD: ISO 8745:1997, ISO 8749:1986
SD: P511DAA337
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA338-1 001
hexagon thin nut (unchamfered)
SuperClass: P511AAA052 nut
Definition: hexagon nut with small height and not chamfered at the bearing faces
AP: P511BAA032: width across flats
P511BAA033: width across corners
SDD: ISO 4036:1999
SD: P511DAA338
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA339-1 001
hexagon head bolt with metric fine pitch thread
SuperClass: P511AAA005 metric threaded bolt/screw
Definition: metric externally threaded fastener with a hexagon head, with plain shank and with fine pitch thread
AP: P511BAA047: radius of curvature under head
P511BAA069: minimum clamp length
P511BAA087: transition length
P511BAA357: transition diameter
P511BAA369: length of bolt/screw (flat seating head)
SDD: ISO 8765:1999
SD: P511DAA339
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA340-1 001
hexagon head screw with metric fine pitch thread
SuperClass: P511AAA005 metric threaded bolt/screw
Definition: metric externally threaded fastener with a hexagon head and with fine pitch thread up to the head
AP: P511BAA047: radius of curvature under head
P511BAA357: transition diameter
P511BAA369: length of bolt/screw (flat seating head)
SDD: ISO 8676:1999
SD: P511DAA340
Note: ISO 4018:1999 belongs to the same simple class

DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA342-1 001

hexagon socket head cap screw with metric fine pitch thread

SuperClass: P511AAA005 metric threaded bolt/screw

Definition: metric externally threaded fastener with a cylindrical head with a hexagon socket and with fine pitch thread

AP: P511BAA012: thread length
P511BAA047: radius of curvature under head
P511BAA357: transition diameter
P511BAA369: length of bolt/screw (flat seating head)

SDD: ISO 21269:2004

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA344-1 001

metric internal thread

SuperClass: P511AAA037 thread

Definition: general internal thread defined by the metric unit system

AP: P511BAA358: pitch diameter of internal thread

P511BAA359: minor diameter of internal thread

P511BAA360: major diameter of internal thread

SDD: ISO 68-1:1998

SD: P511DAA344

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA345-1 001

rivet

SuperClass: P511AAA002 fastener

Definition: cylindrical metal fastener with a preformed head at one end, whereas the head at the other end is formed during setting, such creating a non-detachable joint

AP: P511BAA005: manufacturer

P511BAA006: ICD code

P511BAA007: manufacture date

P511BAA008: designation

P511BAA011: EAN/UCC code

P511BAA179: head height of rivet

P511BAA180: head diameter of rivet

P511BAA253: shear load

P511BAA319: organization identifier of manufacturer

P511BAA330: rivet shank name

P511BAA331: rivet shank picture

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA346-1 001

full shank rivet

SuperClass: P511AAA345 rivet

Definition: a rivet with a full shank

AP:

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA347-1 001

tubular rivet

SuperClass: P511AAA345 rivet

Definition: a rivet with a hollow shank like a tube

AP: P511BAA328: rivet head name

P511BAA329: rivet head picture

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA348-1 001

semi tubular rivet

SuperClass: P511AAA345 rivet

Definition: a rivet with a full shank which is hollow (tubular) at the end where the rivet head is formed during setting

AP: P511BAA328: rivet head name

P511BAA329: rivet head picture

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA349-1 001

pilot point

SuperClass: P511AAA028 end

Definition: cylindrical projection at the bolt/screw end to ease screwing into the nut

AP: P511BAA079: length of point

P511BAA082: incomplete thread length

P511BAA364: diameter of the pilot point

SDD: ISO 4753:1999

SD: P511DAA349

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511AAA350-1 001

truncated pilot point

SuperClass: P511AAA028 end

Definition: pilot point with a truncated cone end

AP: P511BAA079: length of point

P511BAA082: incomplete thread length

P511BAA363: length of cone of pilot point with truncated cone

P511BAA364: diameter of the pilot point

SDD: ISO 4753:1999
SD: P511DAA350
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA351-1 001**head with knurl**

SuperClass: P511AAA008 head
Definition: cylindrical head with knurl at the circumference

AP:

SDD: ISO 1891:1979 clause 6.17
SD: P511DAA351
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA352-1 001**head with wings**

SuperClass: P511AAA008 head
Definition: head with two wings

AP:

SDD: ISO 1891:1979 clause 6.14
SD: P511DAA352
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA353-1 001**cup head**

SuperClass: P511AAA008 head
Definition: head shape which is a sphere section

AP: P511BAA034: head height
P511BAA051: head diameter

SDD: ISO 8677:1986
SD: P511DAA353
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA354-1 001**headless screw with shank**

SuperClass: P511AAA004 externally threaded fastener component
Definition: externally threaded fastener without head and with a shank with internal drive

AP: P511BAA012: thread length
P511BAA105: shank shape name
P511BAA106: shank shape picture
P511BAA107: end shape name
P511BAA108: end shape picture
P511BAA109: internal drive shape name
P511BAA110: internal drive shape picture
P511BAA244: shank properties
P511BAA245: end properties
P511BAA246: thread properties
P511BAA247: internal drive properties
P511BAA306: type of end
P511BAA307: type of thread

P511BAA308: type of internal drive
P511BAA326: product grade
SSP: P511BAA306: type of end
P511BAA307: type of thread
P511BAA308: type of internal drive

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA355-1 001**clevis pin**

SuperClass: P511AAA098 pin
Definition: pin with cylindrical shape with or without a cylindrical head with flat seating bearing face

AP: P511BAA362: chamfer angle on the end of pin

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA356-1 001**grooved pin**

SuperClass: P511AAA098 pin
Definition: cylindrical pin with grooved shank with or without a head

AP:**SD:**

DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA357-1 001**spring pin**

SuperClass: P511AAA098 pin
Definition: pin which can be elastically deformed in radial direction

AP: P511BAA215: chamfer diameter
P511BAA216: material thickness
P511BAA217: chamfer length of pin
P511BAA352: duty level
P511BAA353: shear strength, double

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511AAA358-1 001**taper pin**

SuperClass: P511AAA098 pin
Definition: pin with conical shape

AP: P511BAA200: taper

P511BAA246: thread properties
P511BAA307: type of thread
P511BAA410: length of taper pin

SSP: P511BAA307: type of thread

SDD: ISO 2339:1986

SD:

DOD: 2006-02-22 **DCV:** 2006-02-22

ISO 13584-511:2006(E)

DCR: 2006-02-22

P511AAA359-1 001

plain washer with double chamfers

SuperClass: P511AAA026 plain washer

Definition: plain washer with outside and inside chamfers on one of the faces

AP: P511BAA333: outside diameter

P511BAA334: hole diameter

SDD: ISO 7416:1984

SD: P511DAA359

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

Annex D (normative)

Fastener property DET definitions

This annex specifies the property DET definition of properties imported from IEC 61360-4 and properties defined in this part of ISO 13584.

D.1. Property DET definition imported from IEC 61360-4

AAE012-005 02

international standard

Definition: reference to the appropriate international standard

DC: AAA000 IEC reference collection

PLS:

Unit:

VF: M..30

DT: string_type

PTC: A61

Note:

SDD: IEC 61360-4: 1997

DOD: 1997-04-01 **DCV:** 1997-04-01

DCR: 1997-04-01

mass

Definition: the nominal mass of a component

DC: AAA000 IEC reference collection

PLS:

Unit: kg

VF: NR2..3.3

DT: real_measure_type

PTC: K01

Note:

SDD: IEC 61360-4: 1997

DOD: 1997-04-01 **DCV:** 1997-04-01

DCR: 1997-04-01

AAF043-005 03

national standard

Definition: reference to the appropriate national standard

DC: AAA000 IEC reference collection

PLS:

Unit:

VF: M..30

DT: string_type

PTC: A61

Note:

SDD: IEC 61360-4: 1997

DOD: 1997-04-01 **DCV:** 1997-04-01

DCR: 1997-04-01

AAE687-005 01

quality authentication

Definition: the abbreviated name of the office which has tested the quality of fastener

DC: AAA000 IEC reference collection

PLS:

Unit:

VF: M..30

DT: string_type

PTC: A61

Note:

SDD: IEC 61360-4: 1997

DOD: 1997-04-01 **DCV:** 1997-04-01

DCR: 1997-04-01

AAE752-005 01

D.2. Property DET definition defined in this part of ISO 13584

P511BAA005-1 001

manufacturer

Definition: organization who takes the legal responsibility as the producer of the product

DC: P511AAA001 mechanical component for general use

Unit:

VF: M..30

DT: STRING_TYPE

PTC: A11

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA006-1 001

ICD code

Definition: ICD of the organization coding system according to ISO 6523 that identifies the organization who takes the legal responsibility as the producer of the product

DC: P511AAA001 mechanical component for general use

Unit:

VF: M..128

DT: STRING_TYPE

PTC: A52

Remark: ICD means International Code Designator. It is a data element used to uniquely identify an organization identification scheme. If ISO 6523 compliant identification of the organization is defined, it shall be provided using P511BAA006 and P511BAA319. These properties are provided both for those organization that have no ISO6523 compliant identification and for additional use when use of non-standardizes coding system is useful.

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA007-1 001

manufacture date

Definition: date that the component was manufactured

DC: P511AAA001 mechanical component for general use

Unit:

VF: M..30

DT: STRING_TYPE

PTC: A31

SDD: ISO 10303-203:1994

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA008-1 001

designation

Definition: identification of a product with all relevant properties

DC: P511AAA002 fastener

Unit:

VF: M..128

DT: STRING_TYPE

PTC: A51

SDD: ISO 8991:1986

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA011-1 001

EAN/UCC code

Definition: identification number assigned according to EAN International and Uniform

Code Council coding system

DC: P511AAA001 mechanical component for general use

Unit:

VF: M..14

DT: STRING_TYPE

PTC: A51

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA012-1 001

thread length

Definition: length of thread on externally threaded fastener

DC: P511AAA002 fastener

PLS: b

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 225:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA013-1 001

body material

Definition: material used to manufacture the body of blind rivet

DC: P511AAA083 blind rivet

Unit:

VF: M..30

DT: STRING_TYPE

PTC: A51

SDD: ISO 15973:2000

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA014-1 001

mandrel material

Definition: material used to manufacture the mandrel of blind rivet

DC: P511AAA083 blind rivet

Unit:

VF: M..30

DT: STRING_TYPE

PTC: A51

SDD: ISO 15973:2000

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA015-1 001

insert material

Definition: material of the non-metallic ring inserted in the prevailing torque element of a prevailing torque type nut

DC: P511AAA052 nut

Unit:

VF: M..30
DT: STRING_TYPE
PTC: A51
SDD: ISO 7044:1997
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA020-1 001
minimum diameter of radial undercut
Definition: minimum diameter of the radial undercut that may exist on an externally threaded fastener
DC: P511AAA171 hexagon socket head shoulder screw
PLS: dg/dg1
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 4755:1983,ISO 7379:1983
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA022-1 001
width of radial undercut
Definition: width of radial undercut in axial direction that may exist on an externally threaded fastener
DC: P511AAA171 hexagon socket head shoulder screw
PLS: g1
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 4755:1983,ISO 7379:1983
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA024-1 001
pitch
Definition: distance between two adjacent threads for any kind of thread
DC: P511AAA037 thread
PLS: P
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 4759:1978
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA025-1 001
thread length of stud metal end
Definition: length of the thread of the metal end of a stud

DC: P511AAA049 stud
PLS: bm
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 225:1983
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA028-1 001
overall length
Definition: distance between two ends of the stud
DC: P511AAA049 stud
PLS: lf
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 225:1983
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA030-1 001
length of thread run-out
Definition: distance between the start of the thread to the first full thread
DC: P511AAA004 externally threaded fastener component
PLS: x
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 3508:1976
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA031-1 001
wrenching height
Definition: height of portion of hexagon bolt / screw and nut used to match with the wrench, which is within the tolerance limits
DC: P511AAA002 fastener
PLS: kw/mw
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
Note: for bolt/screw kw and for nut mw apply
SDD: ISO 4759-1:2000
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA032-1 001
width across flats

Definition: distance between two opposite flats of a square, hexagon or octagon driving feature

DC: P511AAA002 fastener

PLS: s

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 225:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA033-1 001

width across corners

Definition: distance between two opposite corners of a square, hexagon or octagon driving feature

DC: P511AAA002 fastener

PLS: e

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 225:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA034-1 001

head height

Definition: distance from the bearing face to the top of the head

DC: P511AAA008 head

PLS: k

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 225:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA037-1 001

width of radial undercut in a shank

Definition: width of radial undercut in axial direction that may exist else where than under the head in the shank of an externally threaded fastener

DC: P511AAA171 hexagon socket head shoulder screw

PLS: g2

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

Remark: this property shall not be used when there are different radial undercuts in a shank. Specific properties are defined in the

corresponding component class to address such specific cases.

SDD: ISO 7379:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA038-1 001

radius of the undercut under head

Definition: radius of curvature of the undercut at the head / shank junction

DC: P511AAA024 shank

PLS: r1

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 7379:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA041-1 001

diameter of washer face or bearing face

Definition: outside diameter of the bearing element of a bolt or screw or nut

DC: P511AAA002 fastener

PLS: dw

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

Note: the bearing element may be e.g.: flange, collar, washer face, or any round head shape

SDD: ISO 225:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA042-1 001

height of bearing element of a bolt or screw or nut

Definition: height of the washer face portion or thickness of collar or flange

DC: P511AAA002 fastener

PLS: c

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

Note: the bearing element may be e.g.: flange, collar, washer face

SDD: ISO 225:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA044-1 001

flange angle

Definition: angle formed between the bearing face and the flange surface of a hexagon bolt or

nut with flange

DC: P511AAA002 fastener

PLS: Delta

Unit: Degree

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 225:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA045-1 001

flange(collar) diameter

Definition: diameter of flange or collar, which is part of a head of externally threaded fastener or nut

DC: P511AAA002 fastener

PLS: dc

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 225:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA046-1 001

distance from the last full form thread to the head bearing face

Definition: distance from the last full form thread to the head bearing face of externally threaded bolt/screw which are threaded to the head

DC: P511AAA004 externally threaded fastener component

PLS: a

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 225:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA047-1 001

radius of curvature under head

Definition: radius of curvature at the shank / head junction

DC: P511AAA004 externally threaded fastener component

PLS: r/r1

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 885:2000,ISO 10509:1992

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA048-1 001

minimum diameter of radial undercut in a shank

Definition: minimum diameter of the radial undercut that may exist between thread and shank of an externally threaded fastener

DC: P511AAA171 hexagon socket head shoulder screw

PLS: dg2

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

Remark: this property shall not be used when there are different radial undercuts in a shank. Specific properties are defined in the corresponding component class to address such specific cases.

SDD: ISO 7379:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA050-1 001

castle diameter

Definition: outer diameter of the castle which belongs to castle nut

DC: P511AAA229 hexagon castle nut

PLS: de

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 225:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA051-1 001

head diameter

Definition: diameter of head for externally threaded fastener

DC: P511AAA008 head

PLS: dk

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 225:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA052-1 001

slot width

Definition: width of slot of slotted head screws, slotted set screws, slotted nuts and castle nuts

DC: P511AAA002 fastener

PLS: n
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 225:1983
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA053-1 001
bottom thickness
Definition: distance from the bottom of slot to the bearing face on slotted and castle nut
DC: P511AAA052 nut
PLS: w
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 225:1983
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA054-1 001
shank length
Definition: length of unthreaded shank including rotation prevention, if any
DC: P511AAA024 shank
PLS: ls
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 225:1983
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA057-1 001
nominal dimension A
Definition: outer diameter of the hexalobular socket
DC: P511AAA222 hexalobular socket
PLS: A
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 10664:2005
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA060-1 001
radius of the raised portion of the head
Definition: radius of the raised portion of the head
DC: P511AAA008 head
PLS: rf

Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 225:1983
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA067-1 001
shank diameter
Definition: diameter of the shank of externally threaded fastener
DC: P511AAA024 shank
PLS: ds
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 4014:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA069-1 001
minimum clamp length
Definition: distance from the underside of the head to the last major diameter of the thread of externally threaded fastener with shank
DC: P511AAA004 externally threaded fastener component
PLS: lg
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 225:1983
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA071-1 001
square neck width
Definition: width of square neck of bolt shank
DC: P511AAA025 shank with square neck
PLS: v
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 8677:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA072-1 001
square neck length
Definition: length of square neck of bolt shank
DC: P511AAA025 shank with square neck
PLS: f
Unit: mm

VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 8677:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA075-1 001
nominal dimension B
Definition: inner diameter of hexalobular socket
DC: P511AAA222 hexalobular socket
PLS: B
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 10664:2005
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA077-1 001
diameter of truncated cone point
Definition: smallest diameter of the 'truncated cone point'
DC: P511AAA028 end
PLS: dt
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 4753:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA078-1 001
diameter of cup point
Definition: diameter of cup edge of the 'cup point'
DC: P511AAA028 end
PLS: dz
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 4753:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA079-1 001
length of point
Definition: distance between the thread end and the end of fastener
DC: P511AAA028 end
PLS: z1/z2
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE

PTC: T03
Note: the preferred litter symbol also include z3,z4
SDD: ISO 4753:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA080-1 001
diameter of scrape point
Definition: smallest diameter of the conical end of scrape point
DC: P511AAA028 end
PLS: dn
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 4753:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA081-1 001
length of the cone part of the scrape point
Definition: length of the cone part of the scrape point
DC: P511AAA036 scrape point
PLS: lk
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 4753:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA082-1 001
incomplete thread length
Definition: length of incomplete thread over the end of metric externally threaded fastener
DC: P511AAA028 end
PLS: u
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 4753:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA083-1 001
length of the scrape point
Definition: the length from the beginning of the cutting edge to the end of the fastener" and PLS is "ln"
DC: P511AAA036 scrape point
PLS: ln
Unit: mm

VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 4753:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA084-1 001
radius of rounded end
Definition: radius of the rounded end
DC: P511AAA028 end
PLS: re
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 4753:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA085-1 001
diameter of dog point or flat point
Definition: diameter of dog point or end diameter of flat point
DC: P511AAA028 end
PLS: dp
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 4753:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA087-1 001
transition length
Definition: length of the conical transition from head to shank.
DC: P511AAA004 externally threaded fastener component
PLS: lf
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 225:1983,ISO 4014:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA090-1 001
diameter of flat end
Definition: diameter of flat end of tapping screw
DC: P511AAA132 flat end (type F) of tapping screw
PLS: d3
Unit: mm
VF: NR2..3.3

DT: LEVEL_TYPE
PTC: T03
SDD: ISO 1478:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA092-1 001
hexalobular socket number
Definition: number which defines the size of the hexalobular socket.
DC: P511AAA222 hexalobular socket
Unit:
VF: M..30
DT: STRING_TYPE
PTC: A51
SDD: ISO 10664:2005
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA093-1 001
diameter of drilling point
Definition: diameter of drilling point of drilling screw
DC: P511AAA012 drilling point of drilling screw
PLS: dp
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 15480:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA096-1 001
length of tapping screw end
Definition: distance from the last full thread to the end of tapping screw
DC: P511AAA028 end
PLS: y
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 1478:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA098-1 001
hexagon socket width across corners
Definition: distance between two opposite corners of hexagon socket
DC: P511AAA042 internal drive
PLS: e
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE

PTC: T03
SDD: ISO 4762:2004
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA101-1 001**penetration depth**

Definition: depth of penetration of internal drive

DC: P511AAA042 internal drive

PLS: t

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 7434:1983,ISO 225:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA102-1 001**recess number**

Definition: number which defines the size of cross recess

DC: P511AAA042 internal drive

Unit:

VF: NR2..3.3

DT: REAL_TYPE

PTC: T03

SDD: ISO 7048:1998

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA103-1 001**head shape name**

Definition: name of head of externally threaded fastener

DC: P511AAA004 externally threaded fastener component

Unit:

VF: M..128

DT: STRING_TYPE

PTC: A51

Remark: this property is intended to be used for non-standard head feature

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA104-1 001**head shape picture**

Definition: picture of head of externally threaded fastener

DC: P511AAA004 externally threaded fastener component

Unit:

VF:

ISO13584_25_IEC61360_5_LIBRARY_IMPLICI
T_SCHEMA.PROPERTY_VALUE_EXTERNAL_
ITEM

DT: ENTITY_INSTANCE_TYPE

PTC: A58

Remark: this property is intended to be used for non-standard head feature

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA105-1 001**shank shape name**

Definition: name of shank of externally threaded fastener

DC: P511AAA004 externally threaded fastener component

Unit:

VF: M..128

DT: STRING_TYPE

PTC: A51

Remark: this property is intended to be used for non-standard shank feature

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA106-1 001**shank shape picture**

Definition: picture of shank of externally threaded fastener

DC: P511AAA004 externally threaded fastener component

Unit:

VF:

ISO13584_25_IEC61360_5_LIBRARY_IMPLICI
T_SCHEMA.PROPERTY_VALUE_EXTERNAL_
ITEM

DT: ENTITY_INSTANCE_TYPE

PTC: A58

Remark: this property is intended to be used for non-standard shank feature

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA107-1 001**end shape name**

Definition: name of end of externally threaded fastener

DC: P511AAA004 externally threaded fastener component

Unit:

VF: M..128

DT: STRING_TYPE

PTC: A51

Remark: this property is intended to be used for non-standard end feature

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA108-1 001**end shape picture**

Definition: picture of end of externally threaded fastener

DC: P511AAA004 externally threaded fastener component

Unit:

VF:

ISO13584_25_IEC61360_5_LIBRARY_IMPLICI
T_SCHEMA.PROPERTY_VALUE_EXTERNAL_
ITEM

DT: ENTITY_INSTANCE_TYPE

PTC: A58

Remark: this property is intended to be used for non-standard end feature

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA109-1 001

internal drive shape name

Definition: name of internal drive feature of externally threaded fastener

DC: P511AAA004 externally threaded fastener component

Unit:

VF: M..128

DT: STRING_TYPE

PTC: A51

Remark: this property is intended to be used for non-standard driving feature

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA110-1 001

internal drive shape picture

Definition: picture of internal drive feature of externally threaded fastener

DC: P511AAA004 externally threaded fastener component

Unit:

VF:

ISO13584_25_IEC61360_5_LIBRARY_IMPLICI
T_SCHEMA.PROPERTY_VALUE_EXTERNAL_
ITEM

DT: ENTITY_INSTANCE_TYPE

PTC: A58

Remark: this property is intended to be used for non-standard driving feature

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA114-1 001

diameter of the countersink

Definition: diameter of the countersink at the end of nut thread

DC: P511AAA052 nut

PLS: da

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 225:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA117-1 001

nut height

Definition: overall height of nut

DC: P511AAA052 nut

PLS: m/h

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

Note: h for prevailing torque type nuts

SDD: ISO 225:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA179-1 001

head height of rivet

Definition: height of head of rivet

DC: P511AAA345 rivet

PLS: k

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 14588:2000

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA180-1 001

head diameter of rivet

Definition: head diameter of rivet

DC: P511AAA345 rivet

PLS: dk

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 14588:2000

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA189-1 001

mandrel protrusion

Definition: maximum length of the mandrel shank protrusion from the blind rivet head, prior to setting, measure parallel to the axis of the blind rivet body

DC: P511AAA083 blind rivet

PLS: p

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03
SDD: ISO 14588:2000
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA190-1 001**mandrel diameter**

Definition: diameter of mandrel of blind rivet

DC: P511AAA083 blind rivet

PLS: dm

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 14588:2000

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA191-1 001**blind length**

Definition: distance, measured parallel to the axis of the blind rivet, either from the under head face of the protruding head or from the top face of the countersunk head to the extreme end of the mandrel head

DC: P511AAA083 blind rivet

PLS: b

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

Note: for closed end blind rivets, the blind length is identical to the rivet length.(see ISO 14588)

SDD: ISO 14588:2000

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA193-1 001**difference of leg lengths**

Definition: distance between the two ends of split legs

DC: P511AAA248 split pin

PLS: a

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 1234:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA195-1 001**eyelet height for split pin**

Definition: height of eyelet shape head for split pin

DC: P511AAA248 split pin

PLS: b

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 1234:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA196-1 001**eyelet diameter for split pin**

Definition: diameter of eyelet shape head for split pin

DC: P511AAA248 split pin

PLS: c

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 1234:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA198-1 001**large rounded end radius for taper pin**

Definition: radius of rounded end (at larger end) of taper pin

DC: P511AAA249 simple taper pin

PLS: r2

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 2339:1986

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA199-1 001**rounded end height**

Definition: height of rounded end of taper pin or grooved pin

DC: P511AAA098 pin

PLS: a

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 2339:1986

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA200-1 001**taper**

Definition: reduction in the diameter of a conical part per unit length

DC: P511AAA358 taper pin

Unit:

VF: NR2..3.3

DT: REAL_TYPE
PTC: T03
SDD: ISO 2339:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA202-1 001
chamfer width for the end with internal thread
Definition: width of chamfer at the end with internal thread of parallel pin with internal thread
DC: P511AAA253 parallel pin with internal thread
PLS: c1
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 8733:1997
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA204-1 001
countersink diameter of pin
Definition: diameter of internal thread countersink of pin
DC: P511AAA098 pin
PLS: d3
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 8736:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA205-1 001
internal thread length of pin
Definition: length of internal thread of taper pin or parallel pin
DC: P511AAA098 pin
PLS: t1
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 8736:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA206-1 001
depth of hole
Definition: depth of entire hole of pins with internal thread
DC: P511AAA098 pin
PLS: t2
Unit: mm

VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 8736:1986,ISO 8735:1997
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA207-1 001
depth of cylindrical countersink
Definition: depth of cylindrical part of the countersink of pins with internal thread
DC: P511AAA098 pin
PLS: t3
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 8736:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA208-1 001
length of thread run out to cone
Definition: length of thread run out to cone
DC: P511AAA251 taper pin with external thread
PLS: a
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 8737:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA209-1 001
length of threaded portion
Definition: length of threaded portion (including pilot end) of taper pin with external thread
DC: P511AAA251 taper pin with external thread
PLS: b
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 8737:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA210-1 001
pilot end length
Definition: length of pilot (or extruded) end of taper pin with external thread
DC: P511AAA251 taper pin with external thread
PLS: z

Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 8737:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA211-1 001
diameter of pilot end
Definition: diameter of pilot (or extruded) end of taper pin with external thread
DC: P511AAA251 taper pin with external thread
PLS: d3
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 8737:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA215-1 001
chamfer diameter
Definition: chamfer diameter of spring-type straight pin
DC: P511AAA357 spring pin
PLS: d3/d2
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
Remark: this property is intended to be used for ISO 8752:1997, ISO 8748:1997 etc.
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA216-1 001
material thickness
Definition: thickness of wall of spring type pin (slotted or coiled)
DC: P511AAA098 pin
PLS: s
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
Remark: this property is intended to be used for ISO 8752:1997 etc.
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA217-1 001
chamfer length of pin
Definition: chamfer length at the end of pin
DC: P511AAA098 pin

Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
Note: for parallel pins and clevis pins the symbol is "c", for parallel pins with internal thread different symbols "c1/c2/c/a" are used, and for spring pins the symbol is "a"
Remark: this property is used for ISO 2338:1997, ISO 8733:1997, ISO 8752:1997 etc.
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA225-1 001
head height of pin
Definition: head height of clevis pin and grooved pin
DC: P511AAA098 pin
PLS: k
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 2341:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA229-1 001
length from split pin hole to the end
Definition: length from split pin hole to the end of clevis pin
DC: P511AAA355 clevis pin
PLS: le
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 2340:1986, ISO 2341:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA230-1 001
split pin hole diameter
Definition: diameter of the hole for the split pin in clevis pin
DC: P511AAA355 clevis pin
PLS: d1
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 2340:1986, ISO 2341:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA231-1 001
crow radius

Definition: radius of crown for grooved pin, or radius of smaller crown for taper pin

DC: P511AAA098 pin

PLS: r

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 8739:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA232-1 001

pilot length

Definition: pilot length of grooved pin

DC: P511AAA257 grooved pin, full-length parallel grooved, with pilot

PLS: c

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 8739:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA234-1 001

expanded diameter

Definition: shank diameter of grooved pin measured over the groove edges

DC: P511AAA356 grooved pin

PLS: d2

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 8739:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA235-1 001

groove angle

Definition: angle of groove of grooved pin

DC: P511AAA356 grooved pin

Unit: Degree

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T01

SDD: ISO 8739:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA237-1 001

head diameter of pin

Definition: head diameter of clevis pin and grooved pin

DC: P511AAA098 pin

PLS: dk

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 8746:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA239-1 001

inner diameter

Definition: inner diameter of slotted spring pin

DC: P511AAA261 spring-type straight pin, slotted

PLS: d2

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 8752:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA241-1 001

height of crown

Definition: height including height of convexity and width of chamfer of grooved pin

DC: P511AAA258 grooved pin, full-length parallel grooved, with chamfer

PLS: c2

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 8740:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA242-1 001

convexity height

Definition: height for convexity of one end with chamfer of grooved pin

DC: P511AAA258 grooved pin, full-length parallel grooved, with chamfer

PLS: c1

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 8740:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA243-1 001

head properties

Definition: a feature instance of which the properties allow to characterize the head of an

externally threaded fastener
DC: P511AAA004 externally threaded fastener component
Unit:
VF:
DT: CLASS_INSTANCE_TYPE: P511AAA008
PTC: A52
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA244-1 001
shank properties

Definition: a feature instance of which the properties allow to characterize the shank of an externally threaded fastener
DC: P511AAA004 externally threaded fastener component
Unit:
VF:
DT: CLASS_INSTANCE_TYPE: P511AAA024
PTC: A52
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA245-1 001
end properties

Definition: a feature instance of which the properties allow to characterize the end of an externally threaded fastener
DC: P511AAA004 externally threaded fastener component
Unit:
VF:
DT: CLASS_INSTANCE_TYPE: P511AAA028
PTC: A52
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA246-1 001
thread properties

Definition: a feature instance of which the properties allow to characterize the thread of a threaded fastener
DC: P511AAA002 fastener
Unit:
VF:
DT: CLASS_INSTANCE_TYPE: P511AAA037
PTC: A52
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA247-1 001
internal drive properties

Definition: a feature instance of which the properties allow to characterize the internal drive of an externally threaded fastener
DC: P511AAA004 externally threaded fastener

component
Unit:
VF:
DT: CLASS_INSTANCE_TYPE: P511AAA042
PTC: A52
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA248-1 001
thread tolerance position

Definition: to specify the position of the tolerance field of thread tolerances
DC: P511AAA002 fastener
Unit:
VF: M..30
DT: NON_QUANTITATIVE_CODE_TYPE
 G=G type (positive) fundamental deviation for internal thread
 H=H type (zero) fundamental deviation for internal thread
 e=e type (largest negative) fundamental deviation for external thread
 f=f type (larger negative) fundamental deviation for external thread
 g=g type (small negative) fundamental deviation for external thread
 h=h type (zero) fundamental deviation for external thread
PTC: A59
SDD: ISO 965-1:1998
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA249-1 001
thread tolerance grade

Definition: to specify the size of the tolerance field of thread tolerances
DC: P511AAA002 fastener
Unit:
VF: M..30
DT: NON_QUANTITATIVE_CODE_TYPE
 3=a code of thread tolerance grade defined in ISO 965-1
 4=a code of thread tolerance grade defined in ISO 965-1
 5=a code of thread tolerance grade defined in ISO 965-1
 6=a code of thread tolerance grade defined in ISO 965-1
 7=a code of thread tolerance grade defined in ISO 965-1
 8=a code of thread tolerance grade defined in ISO 965-1
 9=a code of thread tolerance grade defined in ISO 965-1
PTC: A59
Note: ext.=external thread int.= internal thread,

MJD= major diameter, MND=minor diameter,
PD=pitch diameter

SDD: ISO 965-1:1998

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA253-1 001

shear load

Definition: minimum shear load of rivet

DC: P511AAA345 rivet

Unit: N

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 15974:2000

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA254-1 001

tensile load

Definition: minimum tensile load for rivet

DC: P511AAA083 blind rivet

Unit: N

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 15974:2000

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA255-1 001

mandrel break load

Definition: maximum mandrel break load for blind rivet

DC: P511AAA083 blind rivet

Unit: N

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 15974:2000

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA256-1 001

thread tolerance class

Definition: specifies the size and the position of a thread tolerance field

DC: P511AAA002 fastener

Unit:

VF: M..30

DT: NON_QUANTITATIVE_CODE_TYPE

3g=thread tolerance grade 3 and tolerance position g

4G=thread tolerance grade 4 and tolerance position G

4H=thread tolerance grade 4 and tolerance position H

4g=thread tolerance grade 4 and tolerance position g

4h=thread tolerance grade 4 and tolerance position h

5G=thread tolerance grade 5 and tolerance position G

5H=thread tolerance grade 5 and tolerance position H

5g=thread tolerance grade 5 and tolerance position g

5h=thread tolerance grade 5 and tolerance position h

6G=thread tolerance grade 6 and tolerance position G

6H=thread tolerance grade 6 and tolerance position H

6g=thread tolerance grade 6 and tolerance position g

6h=thread tolerance grade 6 and tolerance position h

7G=thread tolerance grade 7 and tolerance position G

7H=thread tolerance grade 7 and tolerance position H

7g=thread tolerance grade 7 and tolerance position g

7h=thread tolerance grade 7 and tolerance position h

8G=thread tolerance grade 8 and tolerance position G

8H=thread tolerance grade 8 and tolerance position H

8g=thread tolerance grade 8 and tolerance position g

8h=thread tolerance grade 8 and tolerance position h

9g=thread tolerance grade 9 and tolerance position g

9h=thread tolerance grade 9 and tolerance position h

PTC: A59

Note: the first number means one of tolerance grade of fastener thread diameter, i.e. 4,5,...etc. The second alphabetic characters G and H used for internal threads, g and h used for external threads.

SDD: ISO 965-1:1998

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA303-1 001

type of head

Definition: classification property to which values (non-quantitative codes) are assigned according to head feature of externally threaded fastener

DC: P511AAA003 externally threaded fastener

Unit:**VF:** M..30**DT:** NON_QUANTITATIVE_CODE_TYPE

12PFL=12 point flange head
 BUT=button head
 CHD=cup head
 CHS=cheese head
 CLD=cylindrical head
 COT=countersunk head
 CRAI=cheese raised head
 ELS=eyelet shape head
 EYS=eye shape head
 HEWF=hexagon head with flange
 HEX=hexagon head
 HEXO=hexagon head with collar
 HEXW=hexagon head with washer face
 HWK=head with knurl
 HWW=head with wings
 OTN=octagonal head
 PAN=pan head
 RADC=raised countersunk head
 ROH=round head
 SQEC=square head with collar
 SQR=square head
 THD=t-head
 TOM=head with tommy
 TRIC=triangle head with collar

PTC: A52**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511BAA305-1 001****type of shank**

Definition: classification property to which values (non-quantitative codes) are assigned according to shank feature of externally threaded fastener

DC: P511AAA003 externally threaded fastener**Unit:****VF:** M..30**DT:** NON_QUANTITATIVE_CODE_TYPE

FIT=fit shank
 FLS=full shank
 RDD=reduced shank
 SHD=shoulder shank
 SQN=shank with square neck
 WID=waisted shank

PTC: A52**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511BAA306-1 001****type of end**

Definition: classification property to which values (non-quantitative codes) are assigned according to end feature of externally threaded fastener

DC: P511AAA003 externally threaded fastener**Unit:****VF:** M..30**DT:** NON_QUANTITATIVE_CODE_TYPE

ARE=as-rolled end
 CET=flat end, type F of tapping screw
 CFE=chamfered end
 CON=cone end, type C of tapping screw
 CPP=cup point
 CPT=cone point
 DGP=dog point
 DRD=drilling point of drilling screw
 EOT=end of thread forming screw
 FLA=flat point
 PIP=pilot point
 RDE=rounded end
 ROU=rounded end, type R of tapping screw
 SCP=scrape point
 TCP=truncated cone point
 TPP=truncated pilot point

PTC: A52**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511BAA307-1 001****type of thread**

Definition: classification property to which values (non-quantitative codes) are assigned according to thread feature of mechanical component for general use

DC: P511AAA001 mechanical component for general use**Unit:****VF:** M..128**DT:** NON_QUANTITATIVE_CODE_TYPE

MEP=thread forming screw thread
 MET=metric external thread
 MIT=metric internal thread
 TST=self-tapping screw thread
 WST=wood screw thread

PTC: A52**DOD:** 2006-02-22 **DCV:** 2006-02-22**DCR:** 2006-02-22**P511BAA308-1 001****type of internal drive**

Definition: classification property to which values (non-quantitative codes) are assigned according to internal drive feature of externally threaded fastener

DC: P511AAA003 externally threaded fastener**Unit:****VF:** M..30**DT:** NON_QUANTITATIVE_CODE_TYPE

12 S=12 point socket
 CRH=cross hole
 CRR=cross recess type H

CZT=cross recess type Z
 HXLS=hexalobular socket
 HXS=hexagon socket
 SLO=slot
 SQS=square socket
 SSS=six-spline socket
 TRS=triangle socket

PTC: A52

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA319-1 001

organization identifier of manufacturer

Definition: identifier of the organization who takes the legal responsibility as the producer of the product in the coding system

DC: P511AAA001 mechanical component for general use

Unit:

VF: M..128

DT: STRING_TYPE

PTC: A21

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA320-1 001

fastener material identification

Definition: identification code representing types of material for fastener

DC: P511AAA002 fastener

Unit:

VF: M..30

DT: NON_QUANTITATIVE_CODE_TYPE

A=Austenitic steel

A1=Austenitic steel grade A1

A2=Austenitic steel grade A2

A3=Austenitic steel grade A3

A4=Austenitic steel grade A4

A5=Austenitic steel grade A5

AL1=AlMg3

AL2=AlMg5

AL3=AlSiMgMn

AL4=AlCu4MgSi

AL5=AlZnMgCu 0,5

AL6=AlZn5,5MgCu

Alloy steel=Alloy steel

C=Martensitic steel

C1=Martensitic steel grade C1

C3=Martensitic steel grade C3

C4=Martensitic steel grade C4

CU1=Cu-ETP or Cu-FRHC

CU2=CuZn37

CU3=CuZn39ph3

CU4=CuSn6

CU5=CuNi1Si

CU6=CuAl10Ni5Fe4

Carbon steel=Carbon steel

F=Ferritic steel

F1=Ferritic steel grade F1

PTC: A59

SDD: ISO 8992:2005, ISO 8839:1999,ISO 3506-1:1997,ISO 3506-2:1997,ISO 3506-3:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA321-1 001

steel fastener property class

Definition: identification code representing all mechanical and physical properties of a steel fastener e.g. tensile strength, yield strength, elongation after fracture, hardness, etc.

DC: P511AAA002 fastener

Unit:

VF: M..30

DT: NON_QUANTITATIVE_CODE_TYPE

04=steel fastener property class 04

05=steel fastener property class 05

10=steel fastener property class 10

10.9=steel fastener property class 10.9

12=steel fastener property class 12

12.9=steel fastener property class 12.9

3.6=steel fastener property class 3.6

4= steel fastener property class 4

4.6=steel fastener property class 4.6

4.8=steel fastener property class 4.8

5= steel fastener property class 5

5.6=steel fastener property class 5.6

5.8=steel fastener property class 5.8

6= steel fastener property class 6

6.8=steel fastener property class 6.8

8= steel fastener property class 8

8.8=steel fastener property class 8.8

9= steel fastener property class 9

9.8=steel fastener property class 9.8

PTC: A59

Note: steel fastener property classes apply to threaded fasteners only.

SDD: ISO 898-1:1997,ISO 898-2:1997,ISO 898-6:1994

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA322-1 001

fastener material name

Definition: name of material for fastener

DC: P511AAA002 fastener

Unit:

VF: M..64

DT: STRING_TYPE

PTC: A51

Remark: ISO 3506-1:1997,ISO 3506-2:1997,ISO 3506-3:1997, ISO 898-1:1999, ISO 898-5:1998,ISO 8839:1999, etc.

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA323-1 001

stainless steel fastener property class

Definition: identification code representing all mechanical and physical properties of a stainless steel fastener e.g. tensile strength, yield strength, elongation after fracture, hardness, etc.

DC: P511AAA002 fastener

Unit:

VF: M..30

DT: NON_QUANTITATIVE_CODE_TYPE

020=stainless steel fastener property class
020

025=stainless steel fastener property class
025

030=stainless steel fastener property class
030

035=stainless steel fastener property class
035

040=stainless steel fastener property class
040

055=stainless steel fastener property class
055

110=stainless steel fastener property class
110

45=stainless steel fastener property class 45

50=stainless steel fastener property class 50

60=stainless steel fastener property class 60

70=stainless steel fastener property class 70

80=stainless steel fastener property class 80

PTC: A59

SDD: ISO 3506-1:1997,ISO 3506-2:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA324-1 001

fastener coating code

Definition: identification code to specify the coating metal, minimum coating thickness, finish, and chromate treatment by using the string structure defined in ISO 4042

DC: P511AAA002 fastener

Unit:

VF: M..64

DT: STRING_TYPE

PTC: A51

SDD: ISO 4042:1999

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA326-1 001

product grade

Definition: to specify the dimensional tolerances and tolerances of shape and position

DC: P511AAA002 fastener

Unit:

VF: M..30

DT: NON_QUANTITATIVE_CODE_TYPE

A=a code for the most precise selection of tolerance

B=a code for the middle precise selection of tolerance

C=a code for the least precise selection of tolerance

PTC: A56

SDD: ISO 4759-1:2000,ISO 4759-3:2000

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA327-1 001

type of pitch

Definition: classification property to specify the pitch of thread which can be coarse or fine pitch

DC: P511AAA001 mechanical component for general use

Unit:

VF: M..30

DT: NON_QUANTITATIVE_CODE_TYPE

COR=coarse pitch

FINE=fine pitch

PTC: A56

SDD: ISO 68-1:1998

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA328-1 001

rivet head name

Definition: name for representing rivet head feature

DC: P511AAA345 rivet

Unit:

VF: M..30

DT: STRING_TYPE

PTC: A51

Remark: this property is intended to be used for non-standard rivet head feature

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA329-1 001

rivet head picture

Definition: picture identification for representing rivet head feature

DC: P511AAA345 rivet

Unit:

VF:

ISO13584_25_IEC61360_5_LIBRARY_IMPLICIT_SCHEMA.PROPERTY_VALUE_EXTERNAL_ITEM

DT: ENTITY_INSTANCE_TYPE

PTC: A58

Remark: this property is intended to be used for

non-standard rivet head feature
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA330-1 001
rivet shank name
Definition: name for representing rivet shank feature
DC: P511AAA345 rivet
Unit:
VF: M..30
DT: STRING_TYPE
PTC: A51
Remark: this property is intended to be used for non-standard rivet shank feature
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA331-1 001
rivet shank picture
Definition: picture identification for representing rivet shank feature
DC: P511AAA345 rivet
Unit:
VF:
 ISO13584_25_IEC61360_5_LIBRARY_IMPLICI
 T_SCHEMA.PROPERTY_VALUE_EXTERNAL_
 ITEM
DT: ENTITY_INSTANCE_TYPE
PTC: A58
Remark: this property is intended to be used for non-standard rivet shank feature
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA333-1 001
outside diameter
Definition: outer diameter of washer
DC: P511AAA072 washer
PLS: d2
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 7091:2000
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA334-1 001
hole diameter
Definition: hole diameter of washer
DC: P511AAA072 washer
PLS: d1
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03

SDD: ISO 7091:2000
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA335-1 001
washer name
Definition: name of washer, especially for non-standardized washer
DC: P511AAA072 washer
Unit:
VF: M..128
DT: STRING_TYPE
PTC: A51
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA336-1 001
material thickness
Definition: material thickness of spring washer or lock washer
DC: P511AAA072 washer
PLS: s
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA337-1 001
thickness
Definition: thickness of plain washer
DC: P511AAA026 plain washer
PLS: h
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA338-1 001
height of conical spring washer or lock washer
Definition: height of non-flat washer in free status (i.e. not under load) e.g. conical spring washer or lock washer
DC: P511AAA072 washer
PLS: h
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA340-1 001

thread size

Definition: non quantitative code which specifies the thread, e.g. M10, ST4.8 etc

DC: P511AAA002 fastener

Unit:

VF: M..30

DT: STRING_TYPE

PTC: T03

SDD: ISO 1479:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA342-1 001**core hardness**

Definition: hardness in the core area of a fastener

DC: P511AAA001 mechanical component for general use

Unit:

VF: NR2 5..3.3

DT: LEVEL_TYPE

PTC: A57

SDD: ISO 6506-1:1999,ISO 6507-1:1999,ISO 6508-1:1999

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA343-1 001**surface hardness**

Definition: hardness in the surface area of a fastener

DC: P511AAA001 mechanical component for general use

Unit:

VF: NR2 5..3.3

DT: LEVEL_TYPE

PTC: A57

SDD: ISO 6506-1:1999,ISO 6507-1:1999,ISO 6508-1:1999

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA344-1 001**steel fastener hardness class**

Definition: identification code representing a hardness range for steel fasteners

DC: P511AAA002 fastener

Unit:

VF: M..30

DT: NON_QUANTITATIVE_CODE_TYPE

14H=steel fastener hardness class 14H

22H=steel fastener hardness class 22H

33H=steel fastener hardness class 33H

45H=steel fastener hardness class 45H

PTC: A57

Note: for washers the hardness class is defined in product standards

SDD: ISO 898-5:1998

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA345-1 001**hardness test method identification**

Definition: alphanumeric code which specifies the hardness test method and its associated characteristics

DC: P511AAA002 fastener

Unit:

VF: M..300

DT: NON_QUANTITATIVE_CODE_TYPE

HBW1/1=Brinell Hardness by: ball Dia.=1 mm, F=9.807 N, time=10 to 15s.

HBW1/10=Brinell Hardness by: ball Dia.=1 mm, F=98.07 N, time=10 to 15s.

HBW1/2.5=Brinell Hardness by: ball Dia.=1 mm, F=24.52 N, time=10 to 15s.

HBW1/30=Brinell Hardness by: ball Dia.=1 mm, F=294.2 N, time=10 to 15s.

HBW1/5=Brinell Hardness by: ball Dia.=1 mm, F=49.03 N, time=10 to 15s.

HBW10/100=Brinell Hardness by: ball Dia.=10 mm, F=980.7N, time=10 to 15s.

HBW10/1000=Brinell Hardness by: ball Dia.=10 mm, F=9807 N, time=10 to 15s.

HBW10/1500=Brinell Hardness by: ball Dia.=10 mm, F=14710 N, time=10 to 15s.

HBW10/250=Brinell Hardness by: ball Dia.=10 mm, F=2452 N, time=10 to 15s.

HBW10/3000=Brinell Hardness by: ball Dia.=10 mm, F=29421 N, time=10 to 15s.

HBW10/500=Brinell Hardness by: ball Dia.=10 mm, F=4903 N, time=10 to 15s.

HBW2.5/15.625=Brinell Hardness by: ball Dia.=2.5 mm, F=153.2 N, time=10 to 15s.

HBW2.5/187.5=Brinell Hardness by: ball Dia.=2.5 mm, F=1839 N, time=10 to 15s.

HBW2.5/31.25=Brinell Hardness by: ball Dia.=2.5 mm, F=306.5 N, time=10 to 15s.

HBW2.5/6.25=Brinell Hardness by: ball Dia.=2.5 mm, F=61.29 N, time=10 to 15s.

HBW2.5/62.5=Brinell Hardness by: ball Dia.=2.5 mm, F=612.9 N, time=10 to 15s.

HBW5/125=Brinell Hardness by: ball Dia.=5 mm, F=1226 N, time=10 to 15s.

HBW5/25=Brinell Hardness by: ball Dia.=5 mm, F=245.2 N, time=10 to 15s.

HBW5/250=Brinell Hardness by: ball Dia.=5 mm, F=2452 N, time=10 to 15s.

HBW5/62.5=Brinell Hardness by: ball Dia.=5 mm, F=612.9 N, time=10 to 15s.

HBW5/750=Brinell Hardness by: ball Dia.=5 mm, F=7355 N, time=10 to 15s.

HR15N=Rockwell hardness, 15N scale, diamond cone indenter.

HR15TS=Rockwell hardness, 15T scale, steel ball indenter.

HR15TW=Rockwell hardness, 15T scale, hardmetal ball indenter.

HR30N=Rockwell hardness, 30N scale, diamond cone indenter.

HR30TS=Rockwell hardness, 30T scale, steel ball indenter.

HR30TW=Rockwell hardness, 30T scale, hardmetal ball indenter.

HR45N=Rockwell hardness, 45N scale, diamond cone indenter.

HR45TS=Rockwell hardness, 45T scale, steel ball indenter.

HR45TW=Rockwell hardness, 45T scale, hardmetal ball indenter.

HRA=Rockwell hardness, A scale, diamond cone indenter.

HRBS=Rockwell hardness, B scale, steel ball indenter.

HRBW=Rockwell hardness, B scale, hardmetal ball indenter.

HRC=Rockwell hardness, C scale, diamond cone indenter.

HRD=Rockwell hardness, D scale, diamond cone indenter.

HRES=Rockwell hardness, E scale, steel ball indenter.

HREW=Rockwell hardness, E scale, hardmetal ball indenter.

HRFS=Rockwell hardness, F scale, steel ball indenter.

HRFW=Rockwell hardness, F scale, hardmetal ball indenter.

HRGS=Rockwell hardness, G scale, steel ball indenter.

HRGW=Rockwell hardness, G scale, hardmetal ball indenter.

HRHS=Rockwell hardness, H scale, steel ball indenter.

HRHW=Rockwell hardness, H scale, hardmetal ball indenter.

HRKS=Rockwell hardness, K scale, steel ball indenter.

HRKW=Rockwell hardness, K scale, hardmetal ball indenter.

HV0.01=Vickers hardness, F=0.09807 N, time=10 to 15s.

HV0.015=Vickers hardness, F=0.1471 N, time=10 to 15s.

HV0.02=Vickers hardness, F=0.1961 N, time=10 to 15s.

HV0.025=Vickers hardness, F=0.2452 N, time=10 to 15s.

HV0.05=Vickers hardness, F=0.4903 N, time=10 to 15s.

HV0.1=Vickers hardness, F=0.9807 N,

time=10 to 15s.

HV0.2=Vickers hardness, F=1.961 N, time=10 to 15s.

HV0.3=Vickers hardness, F=2.942 N, time=10 to 15s.

HV0.5=Vickers hardness, F=4.903 N, time=10 to 15s.

HV1=Vickers hardness, F=9.807 N, time=10 to 15s.

HV10=Vickers hardness, F=98.07 N, time=10 to 15s.

HV100=Vickers hardness, F=980.7 N, time=10 to 15s.

HV2=Vickers hardness, F=19.61 N, time=10 to 15s.

HV20=Vickers hardness, F=196.1 N, time=10 to 15s.

HV3=Vickers hardness, F=29.42 N, time=10 to 15s.

HV30=Vickers hardness, F=294.2 N, time=10 to 15s.

HV5=Vickers hardness, F=49.03 N, time=10 to 15s.

HV50=Vickers hardness, F=490.4 N, time=10 to 15s.

PTC: A57

SDD: ISO 6506-1:1999, ISO 6507-1:1999, ISO 6508-1:1999

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA346-1 001

major diameter of external thread

Definition: diameter of an imaginary cylindrical surface tangent to the crests of an external thread

DC: P511AAA038 metric external thread

PLS: d

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 68-1:1998

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA347-1 001

pitch diameter of external thread

Definition: diameter of an imaginary cylinder, the external surface of which cuts a external thread where the widths of the ridge and the groove of the thread(s) are equal

DC: P511AAA038 metric external thread

PLS: d2

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03
SDD: ISO 68-1:1998
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA348-1 001**minor diameter of external thread**

Definition: diameter of an imaginary cylindrical surface tangent to the roots of an external thread

DC: P511AAA038 metric external thread

PLS: d1

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 68-1:1998

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA349-1 001**outer diameter**

Definition: major diameter of tapping screw thread or wood screw thread (nominal diameter)

DC: P511AAA037 thread

PLS: d1

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 1478:1999

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA350-1 001**core diameter**

Definition: minor diameter of tapping screw thread or wood screw thread (minimum diameter)

DC: P511AAA037 thread

PLS: d2

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 1478:1999

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA351-1 001**washer picture**

Definition: identification of washer picture, especially for non-standardized washer

DC: P511AAA072 washer

Unit:

VF:

ISO13584_25_IEC61360_5_LIBRARY_IMPLICI
T_SCHEMA.PROPERTY_VALUE_EXTERNAL_

ITEM

DT: ENTITY_INSTANCE_TYPE

PTC: A58

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA352-1 001**duty level**

Definition: shear capacity of pin

DC: P511AAA357 spring pin

Unit:

VF: M..30

DT: NON_QUANTITATIVE_CODE_TYPE

HEAVY=Heavy duty

LIGHT=Light duty

NORMAL=Normal duty

PTC: A52

Remark: this property is intended to be used for ISO

8748:1997/ISO8750:1997/ISO8751:1997/ISO8752:1997/ISO 13337:1997 etc.

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA353-1 001**shear strength, double**

Definition: minimum load to fracture when a tested pin is subjected to a double shear load using a suitable test fixture in a testing machine, according to ISO 8749

DC: P511AAA098 pin

Unit: KN

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 8749:1986

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA355-1 001**mid height**

Definition: middle height of square taper washer

DC: P511AAA237 square taper washer

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA356-1 001**side length**

Definition: side length of taper square washer

DC: P511AAA237 square taper washer

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE
PTC: T03
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA357-1 001

transition diameter

Definition: diameter of the bearing face at the transition to the under head radius
DC: P511AAA004 externally threaded fastener component

PLS: da/da1

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 225:1983, ISO 7379:1983

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA358-1 001

pitch diameter of internal thread

Definition: diameter of an imaginary cylinder, the external surface of which cuts a internal thread where the widths of the ridge and the groove of the thread(s) are equal

DC: P511AAA344 metric internal thread

PLS: D2

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 68-1:1998

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA359-1 001

minor diameter of internal thread

Definition: diameter of an imaginary cylindrical surface tangent to the crests of an internal thread

DC: P511AAA344 metric internal thread

PLS: D1

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 68-1:1998

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA360-1 001

major diameter of internal thread

Definition: diameter of an imaginary cylindrical surface tangent to the roots of an internal thread

DC: P511AAA344 metric internal thread

PLS: D

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 68-1:1998

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA362-1 001

chamfer angle on the end of pin

Definition: angle of chamfer on the end of pin

DC: P511AAA098 pin

PLS: alpha

Unit: Degree

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 8746:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA363-1 001

length of cone of pilot point with truncated cone

Definition: length of truncated cone of the pilot point with truncated cone

DC: P511AAA350 truncated pilot point

PLS: z5

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 4753:1999

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA364-1 001

diameter of the pilot point

Definition: diameter of the cylindrical portion of the pilot point

DC: P511AAA028 end

PLS: dx

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 4753:1999

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA365-1 001

transition diameter of shoulder

Definition: diameter of shoulder face at the transition to undercut radius

DC: P511AAA129 shoulder

PLS: da2

Unit: mm

VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 7379:1983
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA367-1 001
length of split pin
Definition: distance between the head and the end of the shorter leg
DC: P511AAA248 split pin
PLS: I
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 1234:1997
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA368-1 001
head angle (countersunk angle)
Definition: angle of conical bearing face
DC: P511AAA008 head
PLS: alpha
Unit: Degree
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 225:1983
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA369-1 001
length of bolt/screw (flat seating head)
Definition: distance between the bearing surface and the end of the bolt/screw
DC: P511AAA004 externally threaded fastener component
PLS: I
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 225:1983
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA370-1 001
length of countersunk bolt/screw
Definition: distance from the top of the head to the end of the bolt/screw
DC: P511AAA004 externally threaded fastener component
PLS: I
Unit: mm

VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 225:1983
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA371-1 001
stud length
Definition: distance from the thread run-out of the metal end to the end of the nut end
DC: P511AAA049 stud
PLS: I
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 225:1983
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA376-1 001
height of the raised portion of raised countersunk head
Definition: height of the raised portion of raised countersunk head
DC: P511AAA020 raised countersunk head
PLS: f
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 15483:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA377-1 001
radius of curvature at the hexagon / washer junction
Definition: radius of curvature at the hexagon / washer (collar) junction
DC: P511AAA217 hexagon head with collar
PLS: r2
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 15480:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA378-1 001
diameter of face
Definition: diameter of face of set screws at the end with internal drive
DC: P511AAA186 set screw
PLS: df

Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 225:1983
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA380-1 001

countersink angle

Definition: countersink angle
DC: P511AAA052 nut
PLS: theta
Unit: Degree
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 7042:1997
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA381-1 001

angle of the nut chamfer

Definition: angle of chamfer of nut face
DC: P511AAA052 nut
PLS: beta
Unit: Degree
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 7042:1997
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA382-1 001

depth of axial undercut

Definition: distance between the bearing face and the bottom of the undercut in the axial direction that may exist in an externally threaded fastener
DC: P511AAA081 hexagon head bolt with flange with fine pitch thread, full shank
PLS: v
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 10644:1998
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA383-1 001

transition diameter of axial undercut

Definition: inner diameter of the bearing face resulting from an axial undercut that may exist in externally threaded fastener
DC: P511AAA005 metric threaded bolt/screw

PLS: da2/da
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 10644:1998, ISO 15072:1999
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA386-1 001

thread length of nut end

Definition: length of the thread of the nut end of a stud
DC: P511AAA049 stud
PLS: b
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 4759:2000
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA387-1 001

nut name

Definition: name of nut, especially for non-standardized nut
DC: P511AAA052 nut
Unit:
VF: M..128
DT: STRING_TYPE
PTC: A51
Remark: this property is intended to be used for non-standard nut
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA388-1 001

nut picture

Definition: identification of nut picture, especially for non-standardized nut
DC: P511AAA052 nut
Unit:
VF:
 ISO13584_25_IEC61360_5_LIBRARY_IMPLICIT_SCHEMA.PROPERTY_VALUE_EXTERNAL_ITEM
DT: ENTITY_INSTANCE_TYPE
PTC: A58
Remark: this property is intended to be used for non-standard nut
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA389-1 001

pin head name

Definition: name of head shape for non-

standardized pin

DC: P511AAA098 pin

Unit:

VF: M..128

DT: STRING_TYPE

PTC: A51

Remark: this property is intended to be used for non-standard pin

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA390-1 001

pin head picture

Definition: head shape picture for non-standardized pin

DC: P511AAA098 pin

Unit:

VF:

ISO13584_25_IEC61360_5_LIBRARY_IMPLICIT_SCHEMA.PROPERTY_VALUE_EXTERNAL_ITEM

DT: ENTITY_INSTANCE_TYPE

PTC: A58

Remark: this property is intended to be used for non-standard pin

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA391-1 001

pin shank name

Definition: name of shank for non-standardized pin

DC: P511AAA098 pin

Unit:

VF: M..128

DT: STRING_TYPE

PTC: A51

Remark: this property is intended to be used for non-standard pin

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA392-1 001

pin shank picture

Definition: shank shape picture for non-standardized pin

DC: P511AAA098 pin

Unit:

VF:

ISO13584_25_IEC61360_5_LIBRARY_IMPLICIT_SCHEMA.PROPERTY_VALUE_EXTERNAL_ITEM

DT: ENTITY_INSTANCE_TYPE

PTC: A58

Remark: this property is intended to be used for non-standard pin

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA393-1 001

pin end name

Definition: name of shape for non-standardized pin

DC: P511AAA098 pin

Unit:

VF: M..128

DT: STRING_TYPE

PTC: A51

Remark: this property is intended to be used for non-standard pin

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA394-1 001

pin end picture

Definition: end shape picture for non-standardized pin

DC: P511AAA098 pin

Unit:

VF:

ISO13584_25_IEC61360_5_LIBRARY_IMPLICIT_SCHEMA.PROPERTY_VALUE_EXTERNAL_ITEM

DT: ENTITY_INSTANCE_TYPE

PTC: A58

Remark: this property is intended to be used for non-standard pin

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA395-1 001

incomplete thread length of pin with external thread

Definition: length of incomplete thread over the end of pin with external thread

DC: P511AAA251 taper pin with external thread

PLS: u

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE

PTC: T03

SDD: ISO 8737:1986, ISO 8749:1986

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA396-1 001

chamfer height on the head of pin

Definition: height of the chamfer on the head of pin

DC: P511AAA255 clevis pin with head

PLS: e

Unit: mm

VF: NR2..3.3

DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 2341:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA397-1 001
chamfer angle on the head of pin
Definition: angle of chamfer on the head of pin
DC: P511AAA255 clevis pin with head
PLS: beta
Unit: Degree
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 2341:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA398-1 001
grooving angle of grooved pin
Definition: angle of the groove on the grooved pin
DC: P511AAA356 grooved pin
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 2341:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA399-1 001
head angle of grooved pin with countersunk head
Definition: angle of conical bearing face of grooved pin with countersunk head
DC: P511AAA260 grooved pin with countersunk head
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 8747:1997, ISO 8749:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA400-1 001
length of set screw
Definition: length of set screw is the overall length (including end)
DC: P511AAA186 set screw
PLS: l
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03

SDD: ISO 4027:2003
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA401-1 001
length of stud bolt
Definition: the length of stud bolt is overall length
DC: P511AAA099 stud bolt
PLS: l
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 1891:1979 clause 21.6
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA402-1 001
length of headless screw with shank
Definition: overall length of headless screw with shank
DC: P511AAA354 headless screw with shank
PLS: l
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 2342:1972
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA403-1 001
length of clevis pin with head
Definition: distance between bearing face and the end of clevis pin
DC: P511AAA355 clevis pin
PLS: l
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 2341:1986, ISO 8749:1986
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA404-1 001
length of clevis pin without head
Definition: overall length of clevis pin
DC: P511AAA355 clevis pin
PLS: l
Unit: mm
VF: NR2..3.3
DT: LEVEL_TYPE
PTC: T03
SDD: ISO 2340:1997, ISO 8749:1986
DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA405-1 001

length of grooved pin without head

Definition: overall length of grooved pin

DC: P511AAA356 grooved pin

PLS: I

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 8744:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA406-1 001

length of grooved pin with flat seating head

Definition: distance between bearing face and the end of grooved pin

DC: P511AAA356 grooved pin

PLS: I

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 8746:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA407-1 001

length of grooved pin with countersunk head

Definition: distance from the top of the head and the end of grooved pin

DC: P511AAA356 grooved pin

PLS: I

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 8747:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA408-1 001

length of parallel pin

Definition: overall length of parallel pin

DC: P511AAA252 parallel pin

PLS: I

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 2338:1997, ISO 8749:1986

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA409-1 001

length of spring pin

Definition: overall length of spring pin

DC: P511AAA357 spring pin

PLS: I

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 8748:1997

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA410-1 001

length of taper pin

Definition: overall length of taper pin

DC: P511AAA358 taper pin

PLS: I

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 2339:1986

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA411-1 001

length of rivet with flat seating head (protruding head)

Definition: distance from head bearing face to the end of rivet shank

DC: P511AAA345 rivet

PLS: I

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 15973:2000

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA412-1 001

length of the rivet with countersunk head

Definition: distance from top of countersunk head to the end of rivet shank

DC: P511AAA345 rivet

PLS: I

Unit: mm

VF: NR2..3.3

DT: LEVEL_TYPE

PTC: T03

SDD: ISO 15974:2000

DOD: 2006-02-22 **DCV:** 2006-02-22

DCR: 2006-02-22

P511BAA414-1 001

pin diameter

Definition: diameter of pin shank

ISO 13584-511:2006(E)

DC: P511AAA098 pin
PLS: d/d1
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 2340:1997
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA415-1 001

rivet diameter

Definition: diameter of rivet shank

DC: P511AAA345 rivet
PLS: d
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
SDD: ISO 15973:2000
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA416-1 001

thread length of nut

Definition: the length of thread

DC: P511AAA052 nut
PLS: m
Unit: mm
VF: NR2..3.3
DT: REAL_MEASURE_TYPE
PTC: T03
Note: in most cases the thread length (m) , which is essential for nut stripping strength, is equal to the nut height (m), however, for prevailing torque type nuts where the thread length (m) is less than the nut height(h)
SDD: ISO 12126:1997
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

P511BAA417-1 001

stainless steel fastener hardness class

Definition: identification code representing a hardness range for stainless steel fasteners

DC: P511AAA002 fastener
Unit:
VF: M..30
DT: NON_QUANTITATIVE_CODE_TYPE
12H=stainless steel fastener hardness class
12H
21H=stainless steel fastener hardness class
21H
PTC: A57
SDD: ISO 3506-3:1997
DOD: 2006-02-22 **DCV:** 2006-02-22
DCR: 2006-02-22

Annex E (normative)

Classification mechanism

E.1 Classification property DETs and values

Table E.1 specifies classification properties and their values used in this part of ISO 13584.

Table E.1 — Classification property DETs and values

Code	Preferred name	Values	Indicated subclasses
P511BAA303	type of head	12PFL	12 point flange head
		BUT	button head
		CHD	cup head
		CHS	cheese head
		CLD	cylindrical head
		COT	countersunk head
		CRAI	cheese raised head
		ELS	eyelet shape head
		EYS	eye shape head
		HEWF	hexagon head with flange
		HEX	hexagon head
		HEXO	hexagon head with collar
		HEXW	hexagon head with washer face
		HWK	head with knurl
		HWW	head with wings
		OTN	octagonal head
PAN	pan head		

Code	Preferred name	Values	Indicated subclasses
		RADC	raised countersunk head
		ROH	round head
		SQEC	square head with collar
		SQR	square head
		THD	t-head
		TOM	head with tommy
		TRIC	triangle head with collar
P511BAA305	type of shank	FIT	fit shank
		FLS	full shank
		RDD	Reduced shank
		SHD	shoulder shank
		SQN	shank with square neck
		WID	waisted shank
P511BAA306	type of end	ARE	as-rolled end
		CET	flat end, type F of tapping screw
		CFE	chamfered end
		CON	cone end, type C of tapping screw
		CPP	cup point
		CPT	cone point
		DGP	dog point
		DRD	drilling point of drilling screw
		EOT	end of thread forming screw
		FLA	flat point
		PIP	pilot point
		RDE	rounded end
		ROU	rounded end, type R of tapping screw
		SCP	scrape point
TCP	truncated cone point		

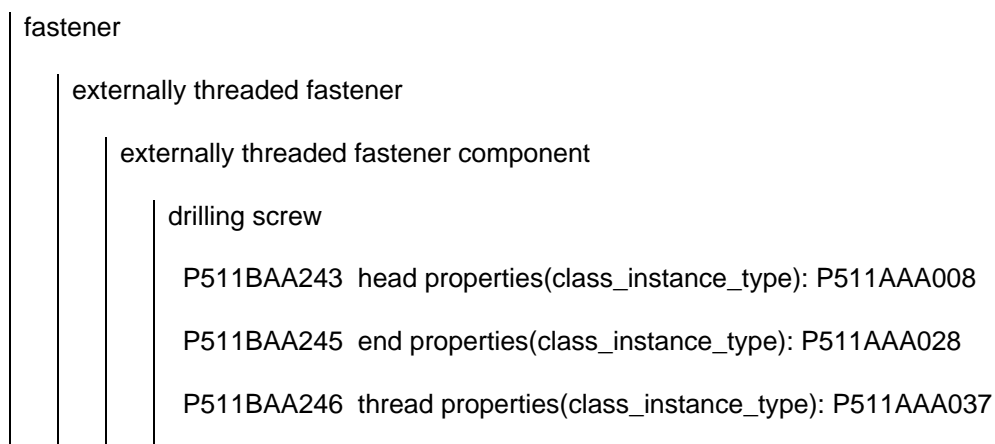
Code	Preferred name	Values	Indicated subclasses
		TPP	truncated pilot point
P511BAA307	type of thread	MEP	thread forming screw thread
		MET	metric external thread
		MIT	metric internal thread
		TST	tapping screw thread
		WST	wood screw thread
P511BAA308	type of internal drive	12 S	12 point socket
		CRH	cross hole
		CRR	cross recess type H
		CZT	cross recess type Z
		HXLS	hexalobular socket
		HXS	hexagon socket
		SLO	slot
		SQS	square socket
		SSS	six-spline socket
		TRS	triangle socket

E.2 Classification methodology and property reference mechanism

Table E.2 specifies the classification methodology by using the reference mechanism provided in ISO 13584-42.

Table E.2 — Classification methodology and property reference mechanism

mechanical component for general use



P511BAA247 internal drive properties(class_instance_type): P511AAA042

cross recessed (type H) countersunk head drilling screw

P511BAA303 type of head=COT

P511BAA306 type of end=DRD

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=CRR

cross recessed (type H) pan head drilling screw

P511BAA303 type of head=PAN

P511BAA306 type of end=DRD

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=CRR

cross recessed (type H) raised countersunk drilling screw

P511BAA303 type of head=RADC

P511BAA306 type of end=DRD

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=CRR

cross recessed (type Z) countersunk head drilling screw

P511BAA303 type of head=COT

P511BAA306 type of end=DRD

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=CZT

cross recessed (type Z) pan head drilling screw with tapping screw thread

P511BAA303 type of head=PAN

P511BAA306 type of end=DRD

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=CZT

cross recessed (type Z) raised countersunk head drilling screw

P511BAA303 type of head=RADC

P511BAA306 type of end=DRD

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=CZT

hexagon washer head drilling screw

P511BAA303 type of head=HEXO

P511BAA306 type of end=DRD

P511BAA307 type of thread=TST

headless screw with shank

P511BAA244 shank properties(class_instance_type): P511AAA024

P511BAA245 end properties(class_instance_type): P511AAA028

P511BAA246 thread properties(class_instance_type): P511AAA037

P511BAA247 internal drive properties(class_instance_type): P511AAA042

slotted headless screw with shank

P511BAA306 type of end=FLA

P511BAA307 type of thread=MET

P511BAA308 type of internal drive=SLO

metric threaded bolt/screw

P511BAA243 head properties(class_instance_type): P511AAA008

P511BAA244 shank properties(class_instance_type): P511AAA024

P511BAA245 end properties(class_instance_type): P511AAA028

P511BAA246 thread properties(class_instance_type): P511AAA037

P511BAA247 internal drive properties(class_instance_type): P511AAA042

countersunk flat head screw with cross recess (type H)

P511BAA303 type of head=COT

P511BAA306 type of end=ARE

P511BAA307 type of thread=MET

P511BAA308 type of internal drive=CRR

countersunk flat head screw with cross recess (type Z)

				P511BAA303 type of head=COT
				P511BAA306 type of end=ARE
				P511BAA307 type of thread=MET
				P511BAA308 type of internal drive=CZT
				cross recessed (type H) cheese head screw
				P511BAA303 type of head=CHS
				P511BAA306 type of end=ARE
				P511BAA307 type of thread=MET
				P511BAA308 type of internal drive=CRR
				cross recessed (type H) pan head screw
				P511BAA303 type of head=PAN
				P511BAA306 type of end=ARE
				P511BAA307 type of thread=MET
				P511BAA308 type of internal drive=CRR
				cross recessed (type Z) cheese head screw
				P511BAA303 type of head=CHS
				P511BAA306 type of end=ARE
				P511BAA307 type of thread=MET
				P511BAA308 type of internal drive=CZT
				cross recessed (type Z) pan head screw
				P511BAA303 type of head=PAN
				P511BAA306 type of end=ARE
				P511BAA307 type of thread=MET
				P511BAA308 type of internal drive=CZT
				cup head square neck bolt
				P511BAA303 type of head=CHD
				P511BAA305 type of shank=SQN
				P511BAA307 type of thread=MET

cup head square neck bolt with large head

P511BAA303 type of head=CHD

P511BAA305 type of shank=SQN

P511BAA306 type of end=FLA

P511BAA307 type of thread=MET

hexagon head bolt

P511BAA303 type of head=HEXW

P511BAA305 type of shank=FLS

P511BAA306 type of end=FLA

P511BAA307 type of thread=MET

hexagon head bolt with flange with fine pitch thread, full shank

P511BAA303 type of head=HEWF

P511BAA305 type of shank=FLS

P511BAA306 type of end=CFE

P511BAA307 type of thread=MET

hexagon head bolt with flange with fine pitch thread, reduced shank

P511BAA303 type of head=HEWF

P511BAA305 type of shank=RDD

P511BAA306 type of end=CFE

P511BAA307 type of thread=MET

hexagon head bolt with flange, full shank

P511BAA303 type of head=HEWF

P511BAA305 type of shank=FLS

P511BAA306 type of end=FLA

P511BAA307 type of thread=MET

hexagon head bolt with flange, reduced shank

P511BAA303 type of head=HEWF

P511BAA305 type of shank=RDD

				P511BAA306 type of end=CFE
				P511BAA307 type of thread=MET
				hexagon head bolt with metric fine pitch thread
				P511BAA303 type of head=HEXW
				P511BAA305 type of shank=FLS
				P511BAA306 type of end=CFE
				P511BAA307 type of thread=MET
				hexagon head screw
				P511BAA303 type of head=HEXW
				P511BAA305 type of shank=FLS
				P511BAA306 type of end=FLA
				P511BAA307 type of thread=MET
				hexagon head screw with metric fine pitch thread
				P511BAA303 type of head=HEXW
				P511BAA305 type of shank=FLS
				P511BAA306 type of end=CFE
				P511BAA307 type of thread=MET
				hexagon socket button head screw
				P511BAA303 type of head=BUT
				P511BAA306 type of end=FLA
				P511BAA307 type of thread=MET
				P511BAA308 type of internal drive=HXS
				hexagon socket countersunk head screw
				P511BAA303 type of head=COT
				P511BAA305 type of shank=FLS
				P511BAA306 type of end=FLA
				P511BAA307 type of thread=MET
				P511BAA308 type of internal drive=HXS

hexagon socket head cap screw

P511BAA303 type of head=CLD

P511BAA305 type of shank=FLS

P511BAA306 type of end=FLA

P511BAA307 type of thread=MET

P511BAA308 type of internal drive=HXS

hexagon socket head cap screw with metric fine pitch thread

P511BAA303 type of head=CLD

P511BAA306 type of end=FLA

P511BAA307 type of thread=MET

P511BAA308 type of internal drive=HXS

hexagon socket head shoulder screw

P511BAA303 type of head=BUT

P511BAA305 type of shank=SHD

P511BAA306 type of end=FLA

P511BAA307 type of thread=MET

P511BAA308 type of internal drive=HXS

hexalobular socket cheese head screw

P511BAA303 type of head=CHS

P511BAA306 type of end=ARE

P511BAA307 type of thread=MET

P511BAA308 type of internal drive=HXLS

hexalobular socket head cap screw

P511BAA303 type of head=CLD

P511BAA305 type of shank=FLS

P511BAA306 type of end=FLA

P511BAA307 type of thread=MET

P511BAA308 type of internal drive=HXLS

			hexalobular socket pan head screw
			P511BAA303 type of head=PAN
			P511BAA306 type of end=ARE
			P511BAA307 type of thread=MET
			P511BAA308 type of internal drive=HXLS
			hexalobular socket raised countersunk head screw
			P511BAA303 type of head=RADC
			P511BAA306 type of end=ARE
			P511BAA307 type of thread=MET
			P511BAA308 type of internal drive=HXLS
			octagon head bolt
			P511BAA303 type of head=OTN
			P511BAA305 type of shank=FLS
			P511BAA306 type of end=FLA
			P511BAA307 type of thread=MET
			raised countersunk head screw with cross recess (type H)
			P511BAA303 type of head=RADC
			P511BAA306 type of end=ARE
			P511BAA307 type of thread=MET
			P511BAA308 type of internal drive=CRR
			raised countersunk head screw with cross recess (type Z)
			P511BAA303 type of head=RADC
			P511BAA306 type of end=ARE
			P511BAA307 type of thread=MET
			P511BAA308 type of internal drive=CZT
			slotted cheese head screw
			P511BAA303 type of head=CHS
			P511BAA306 type of end=ARE

P511BAA307 type of thread=MET

P511BAA308 type of internal drive=SLO

slotted countersunk flat head screw

P511BAA303 type of head=COT

P511BAA306 type of end=ARE

P511BAA307 type of thread=MET

P511BAA308 type of internal drive=SLO

slotted pan head screw

P511BAA303 type of head=PAN

P511BAA306 type of end=ARE

P511BAA307 type of thread=MET

P511BAA308 type of internal drive=SLO

slotted raised countersunk head screw

P511BAA303 type of head=RADC

P511BAA306 type of end=ARE

P511BAA307 type of thread=MET

P511BAA308 type of internal drive=SLO

square head bolt

P511BAA303 type of head=SQR

P511BAA305 type of shank=FLS

P511BAA306 type of end=FLA

P511BAA307 type of thread=MET

square head bolt with collar

P511BAA303 type of head=SQEC

P511BAA305 type of shank=FLS

P511BAA306 type of end=FLA

P511BAA307 type of thread=MET

T-head bolt

P511BAA303 type of head=THD
 P511BAA305 type of shank=FLS
 P511BAA306 type of end=FLA
 P511BAA307 type of thread=MET

triangle head bolt

P511BAA303 type of head=TRIC
 P511BAA305 type of shank=FLS
 P511BAA306 type of end=FLA
 P511BAA307 type of thread=MET

set screw

P511BAA245 end properties(class_instance_type): P511AAA028
 P511BAA246 thread properties(class_instance_type): P511AAA037
 P511BAA247 internal drive properties(class_instance_type): P511AAA042

hexagon socket set screw with cone point

P511BAA306 type of end=TCP
 P511BAA307 type of thread=MET
 P511BAA308 type of internal drive=HXS

hexagon socket set screw with cup point

P511BAA306 type of end=CPP
 P511BAA307 type of thread=MET
 P511BAA308 type of internal drive=HXS

hexagon socket set screw with dog point

P511BAA306 type of end=DGP
 P511BAA307 type of thread=MET
 P511BAA308 type of internal drive=HXS

hexagon socket set screw with flat point

P511BAA306 type of end=FLA
 P511BAA307 type of thread=MET

P511BAA308 type of internal drive=HXS

slotted set screw with cone point

P511BAA306 type of end=TCP

P511BAA307 type of thread=MET

P511BAA308 type of internal drive=SLO

slotted set screw with cup point

P511BAA306 type of end=CPP

P511BAA307 type of thread=MET

P511BAA308 type of internal drive=SLO

slotted set screw with flat point

P511BAA306 type of end=FLA

P511BAA307 type of thread=MET

P511BAA308 type of internal drive=SLO

slotted set screw with long dog point

P511BAA306 type of end=DGP

P511BAA307 type of thread=MET

P511BAA308 type of internal drive=SLO

stud

P511BAA244 shank properties(class_instance_type): P511AAA024

P511BAA245 end properties(class_instance_type): P511AAA028

P511BAA246 thread properties(class_instance_type): P511AAA037

stud with full shank

P511BAA306 type of end=FLA

P511BAA307 type of thread=MET

waisted stud

P511BAA306 type of end=FLA

P511BAA307 type of thread=MET

stud bolt

			P511BAA246 thread properties(class_instance_type): P511AAA037
			tapping screw
			P511BAA243 head properties(class_instance_type): P511AAA008
			P511BAA245 end properties(class_instance_type): P511AAA028
			P511BAA246 thread properties(class_instance_type): P511AAA037
			P511BAA247 internal drive properties(class_instance_type): P511AAA042
			cross recessed (type H) countersunk head tapping screw with a cone end
			P511BAA303 type of head=COT
			P511BAA306 type of end=CON
			P511BAA307 type of thread=TST
			P511BAA308 type of internal drive=CRR
			cross recessed (type H) countersunk head tapping screw with a flat end
			P511BAA303 type of head=COT
			P511BAA306 type of end=CET
			P511BAA307 type of thread=TST
			P511BAA308 type of internal drive=CRR
			cross recessed (type H) pan head tapping screw with a cone end
			P511BAA303 type of head=PAN
			P511BAA306 type of end=CON
			P511BAA307 type of thread=TST
			P511BAA308 type of internal drive=CRR
			cross recessed (type H) pan head tapping screw with a flat end
			P511BAA303 type of head=PAN
			P511BAA306 type of end=CET
			P511BAA307 type of thread=TST
			P511BAA308 type of internal drive=CRR
			cross recessed (type H) raised countersunk head tapping screw with a cone end

P511BAA303 type of head=RADC

P511BAA306 type of end=CON

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=CRR

cross recessed (type H) raised countersunk head tapping screw, flat end

P511BAA303 type of head=RADC

P511BAA306 type of end=CET

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=CRR

cross recessed (type Z) countersunk head tapping screw with a cone end

P511BAA303 type of head=COT

P511BAA306 type of end=CON

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=CZT

cross recessed (type Z) countersunk head tapping screw with a flat end

P511BAA303 type of head=COT

P511BAA306 type of end=CET

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=CZT

cross recessed (type Z) pan head tapping screw with a cone end

P511BAA303 type of head=PAN

P511BAA306 type of end=CON

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=CZT

cross recessed (type Z) pan head tapping screw with a flat end

P511BAA303 type of head=PAN

P511BAA306 type of end=CET

P511BAA307 type of thread=TST

				<p>P511BAA308 type of internal drive=CZT</p> <p>cross recessed (type Z) raised countersunk head tapping screw with a cone end</p> <p>P511BAA303 type of head=RADC</p> <p>P511BAA306 type of end=CON</p> <p>P511BAA307 type of thread=TST</p> <p>P511BAA308 type of internal drive=CZT</p> <p>cross recessed (type Z) raised countersunk head tapping screw with a flat end</p> <p>P511BAA303 type of head=RADC</p> <p>P511BAA306 type of end=CET</p> <p>P511BAA307 type of thread=TST</p> <p>P511BAA308 type of internal drive=CZT</p> <p>hexagon flange head tapping screw with a cone end</p> <p>P511BAA303 type of head=HEWF</p> <p>P511BAA306 type of end=CON</p> <p>P511BAA307 type of thread=TST</p> <p>hexagon flange head tapping screw with a flat end</p> <p>P511BAA303 type of head=HEWF</p> <p>P511BAA306 type of end=CET</p> <p>P511BAA307 type of thread=TST</p> <p>hexagon head tapping screw with a cone end</p> <p>P511BAA303 type of head=HEX</p> <p>P511BAA306 type of end=CON</p> <p>P511BAA307 type of thread=TST</p> <p>hexagon head tapping screw with a flat end</p> <p>P511BAA303 type of head=HEX</p> <p>P511BAA306 type of end=CET</p> <p>P511BAA307 type of thread=TST</p>
--	--	--	--	--

hexagon washer head tapping screw with a cone end

P511BAA303 type of head=HEXO

P511BAA306 type of end=CON

P511BAA307 type of thread=TST

hexagon washer head tapping screw with a flat end

P511BAA303 type of head=HEXO

P511BAA306 type of end=CET

P511BAA307 type of thread=TST

hexalobular socket countersunk head tapping screw with a cone end

P511BAA303 type of head=COT

P511BAA306 type of end=CON

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=HXLS

hexalobular socket countersunk head tapping screw with a flat end

P511BAA303 type of head=COT

P511BAA306 type of end=CET

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=HXLS

hexalobular socket countersunk head tapping screw with a rounded end

P511BAA303 type of head=COT

P511BAA306 type of end=ROU

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=HXLS

hexalobular socket pan head tapping screw with a cone end

P511BAA303 type of head=PAN

P511BAA306 type of end=CON

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=HXLS

hexalobular socket pan head tapping screw with a flat end

P511BAA303 type of head=PAN

P511BAA306 type of end=CET

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=HXLS

hexalobular socket pan head tapping screw with a rounded end

P511BAA303 type of head=PAN

P511BAA306 type of end=ROU

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=HXLS

hexalobular socket raised countersunk head tapping screw with a cone end

P511BAA303 type of head=RADC

P511BAA306 type of end=CON

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=HXLS

hexalobular socket raised countersunk head tapping screw with a flat end

P511BAA303 type of head=RADC

P511BAA306 type of end=CET

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=HXLS

hexalobular socket raised countersunk head tapping screw with a rounded end

P511BAA303 type of head=RADC

P511BAA306 type of end=ROU

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=HXLS

slotted countersunk (flat) head tapping screw with a cone end

P511BAA303 type of head=COT

P511BAA306 type of end=CON

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=SLO

slotted countersunk(flat) head tapping screw with a flat end

P511BAA303 type of head=COT

P511BAA306 type of end=CET

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=SLO

slotted pan head tapping screw with a cone end

P511BAA303 type of head=PAN

P511BAA306 type of end=CON

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=SLO

slotted pan head tapping screw with a flat end

P511BAA303 type of head=PAN

P511BAA306 type of end=CET

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=SLO

slotted raised countersunk (oval) head tapping screw with a cone end

P511BAA303 type of head=RADC

P511BAA306 type of end=CON

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=SLO

slotted raised countersunk(oval) head tapping screw with a flat end

P511BAA303 type of head=RADC

P511BAA306 type of end=CET

P511BAA307 type of thread=TST

P511BAA308 type of internal drive=SLO

thread forming screw

13584-511:2006(E)

P511BAA243 head properties(class_instance_type): P511AAA008
 P511BAA244 shank properties(class_instance_type): P511AAA024
 P511BAA245 end properties(class_instance_type): P511AAA028
 P511BAA246 thread properties(class_instance_type): P511AAA037
 P511BAA247 internal drive properties(class_instance_type): P511AAA042

wood screw

P511BAA243 head properties(class_instance_type): P511AAA008
 P511BAA244 shank properties(class_instance_type): P511AAA024
 P511BAA245 end properties(class_instance_type): P511AAA028
 P511BAA246 thread properties(class_instance_type): P511AAA037
 P511BAA247 internal drive properties(class_instance_type): P511AAA042

externally threaded fastener feature

end

Classification property: P511BAA306 type of end

as-rolled end

P511BAA306 type of end=ARE

chamfered end

P511BAA306 type of end=CFE

cone end (type C) of tapping screw

P511BAA306 type of end=CON

cone point

P511BAA306 type of end=CPT

cup point

P511BAA306 type of end=CPP

dog point

P511BAA306 type of end=DGP

drilling point of drilling screw

P511BAA306 type of end=DRD

end of thread forming screw

P511BAA306 type of end=EOT

flat end (type F) of tapping screw

P511BAA306 type of end=CET

flat point

P511BAA306 type of end=FLA

pilot point

P511BAA306 type of end=PIP

rounded end

P511BAA306 type of end=RDE

rounded end (type R) of tapping screw

P511BAA306 type of end=ROU

scrape point

P511BAA306 type of end=SCP

truncated cone point

P511BAA306 type of end=TCP

truncated pilot point

P511BAA306 type of end=TPP

head

Classification property: P511BAA303 type of head

12 point flange head

P511BAA303 type of head=12PFL

button head

P511BAA303 type of head=BUT

cheese head

P511BAA303 type of head=CHS

countersunk head

P511BAA303 type of head=COT

				cup head
				P511BAA303 type of head=CHD
				cylindrical head
				P511BAA303 type of head=CLD
				eye shape head
				P511BAA303 type of head=EYS
				eyelet shape head
				P511BAA303 type of head=ELS
				head with knurl
				P511BAA303 type of head=HWK
				head with tommy
				P511BAA303 type of head=TOM
				head with wings
				P511BAA303 type of head=HWW
				hexagon head
				P511BAA303 type of head=HEX
				hexagon head with collar
				P511BAA303 type of head=HEXO
				hexagon head with flange
				P511BAA303 type of head=HEWF
				hexagon head with washer face
				P511BAA303 type of head=HEXW
				octagonal head
				P511BAA303 type of head=OTN
				pan head
				P511BAA303 type of head=PAN
				raised cheese head
				P511BAA303 type of head=CRAI

raised countersunk head

P511BAA303 type of head=RADC

round head

P511BAA303 type of head=ROH

square head

P511BAA303 type of head=SQR

square head with collar

P511BAA303 type of head=SQEC

T-head

P511BAA303 type of head=THD

triangle head with collar

P511BAA303 type of head=TRIC

internal drive

Classification property: P511BAA308 type of internal drive

12 point socket

P511BAA308 type of internal drive=12 S

cross hole

P511BAA308 type of internal drive=CRH

cross recess (type H)

P511BAA308 type of internal drive=CRR

cross recess (type Z)

P511BAA308 type of internal drive=CZT

hexagon socket

P511BAA308 type of internal drive=HXS

hexalobular socket

P511BAA308 type of internal drive=HXLS

six-spline socket

P511BAA308 type of internal drive=SSS

			slot
			P511BAA308 type of internal drive=SLO
			square socket
			P511BAA308 type of internal drive=SQS
			triangle socket
			P511BAA308 type of internal drive=TRS
			shank
			Classification property: P511BAA305 type of shank
			fit shank
			P511BAA305 type of shank=FIT
			full shank
			P511BAA305 type of shank=FLS
			reduced shank
			P511BAA305 type of shank=RDD
			shank with square neck
			P511BAA305 type of shank=SQN
			shoulder
			P511BAA305 type of shank=SHD
			waisted shank
			P511BAA305 type of shank=WID
			nut
			P511BAA246 thread properties(class_instance_type): P511AAA037
			cap nut
			P511BAA307 type of thread=MIT
			domed cap(acorn) nut
			P511BAA307 type of thread=MIT
			hexagon castle nut
			P511BAA307 type of thread=MIT

hexagon nut (style 1)

P511BAA307 type of thread=MIT

hexagon nut with collar

P511BAA307 type of thread=MIT

hexagon nut with flange

P511BAA307 type of thread=MIT

hexagon nut(style 2)

P511BAA307 type of thread=MIT

hexagon thin nut (chamfered)

P511BAA307 type of thread=MIT

hexagon thin nut (unchamfered)

P511BAA307 type of thread=MIT

octagon nut

P511BAA307 type of thread=MIT

pentagon nut

P511BAA307 type of thread=MIT

prevailing torque type all-metal hexagon nut (style 1)

P511BAA307 type of thread=MIT

prevailing torque type all-metal hexagon nut (style 2)

P511BAA307 type of thread=MIT

prevailing torque type all-metal hexagon nut with flange

P511BAA307 type of thread=MIT

prevailing torque type hexagon nut with flange, with non-metallic insert

P511BAA307 type of thread=MIT

prevailing torque type hexagon nut with non-metallic insert (style 1)

P511BAA307 type of thread=MIT

prevailing torque type hexagon nut with non-metallic insert (style 2)

P511BAA307 type of thread=MIT

	round nut with holes in face
	P511BAA307 type of thread=MIT
	round nut with holes in side
	P511BAA307 type of thread=MIT
	round nut with knurl
	P511BAA307 type of thread=MIT
	round nut with slot in face
	P511BAA307 type of thread=MIT
	round nut with slots in side
	P511BAA307 type of thread=MIT
	slotted hexagon nut
	P511BAA307 type of thread=MIT
	square nut
	P511BAA307 type of thread=MIT
	square nut with collar
	P511BAA307 type of thread=MIT
	triangle nut with collar
	P511BAA307 type of thread=MIT
	wing nut
	P511BAA307 type of thread=MIT
pin	
	clevis pin
	clevis pin with head
	clevis pin without head
	grooved pin
	grooved pin with countersunk head
	grooved pin with round head
	grooved pin, full-length parallel grooved, with chamfer

grooved pin, full-length parallel grooved, with pilot

grooved pin, full-length taper grooved

grooved pin, half-length centre grooved

grooved pin, half-length reverse taper grooved

grooved pin, half-length taper grooved

grooved pin, one-third-length centre grooved

parallel pin

P511BAA246 thread properties(class_instance_type): P511AAA037

parallel pin with internal thread

P511BAA307 type of thread=MIT

split pin

spring pin

spring-type straight pin, coiled

spring-type straight pin, slotted

taper pin

P511BAA246 thread properties(class_instance_type): P511AAA037

simple taper pin

taper pin with external thread

P511BAA307 type of thread=MET

taper pin with internal thread

P511BAA307 type of thread=MIT

rivet

blind rivet

closed end blind rivet with break pull mandrel and countersunk head

closed end blind rivet with break pull mandrel and protruding head

open end blind rivet with break pull mandrel and countersunk head

open end blind rivet with break pull mandrel and protruding head

full shank rivet

	semi tubular rivet
	tubular rivet
washer	
	lock washer
	countersunk lock washer with external teeth
	countersunk serrated lock washer with external teeth
	lock washer with external teeth
	lock washer with internal teeth
	serrated lock washer with external teeth
	serrated lock washer with internal teeth
	plain washer
	plain washer with double chamfers
	plain washer with outside chamfer
	plain washer with square hole
	plain washer without chamfer
	square washer with round hole
	spring washer
	conical spring washer
	curved spring washer
	spring lock washer
	wave spring washer
	square taper washer
	tab washer
	external tab washer
	internal tab washer
	tab washer with long tab
	tab washer with long tab and wing
thread	

Classification property: P511BAA307 type of thread

metric external thread

P511BAA307 type of thread=MET

metric internal thread

P511BAA307 type of thread=MIT

tapping screw thread

P511BAA307 type of thread=TST

thread forming screw thread

P511BAA307 type of thread=MEP

wood screw thread

P511BAA307 type of thread=WST

Annex F (normative)

Computer sensible representation of the fastener dictionary

A computer sensible representation of the reference dictionary defined in this part of ISO 13584 is provided as an electronic file for computer reference.

This electronic file complies with the library integrated information model 25 defined in ISO 13584-25, conformance class 2. This physical file uses the implementation method defined in ISO 10303-21.

This electronic file can be downloaded from the following Internet location.

CNIS: http://www.cnis.gov.cn/dmis/sc4/plib511/iso13584_p511_fasteners.zip

PLIB Website:
http://www.plib.ensma.fr/plib/datas/p511_fasteners/iso13584_part511_fasteners.zip

SC4ONLINE:
http://www.tc184-sc4.org/parts/iso13584_part511_fasteners.zip

From the computer sensible representation of the dictionary, a DHTML version has been generated. It can be found at the following addresses:

CNIS: http://www.cnis.gov.cn/dmis/sc4/plib511/iso13584_p511_html_viewer.html

PLIB Website:
http://www.plib.ensma.fr/plib/datas/p511_fasteners/viewer/iso13584_part511_html_viewer.html

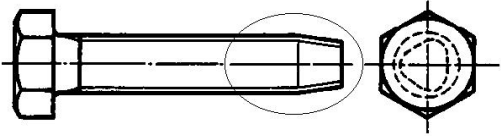
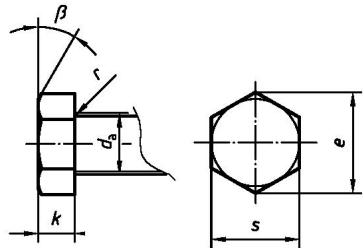
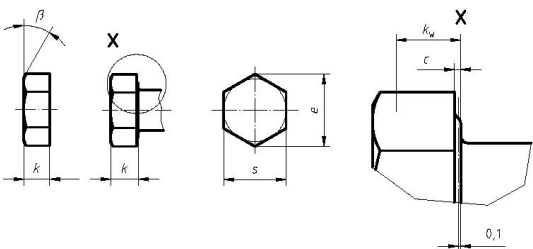
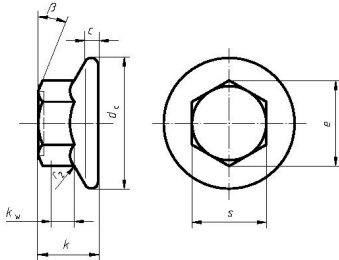
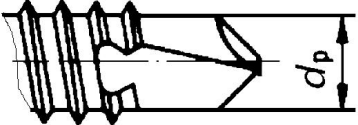
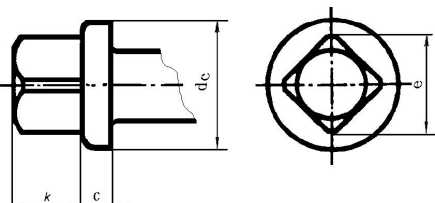
SC4ONLINE:
http://www.tc184-sc4.org/parts/iso13584_part511_html_viewer.html

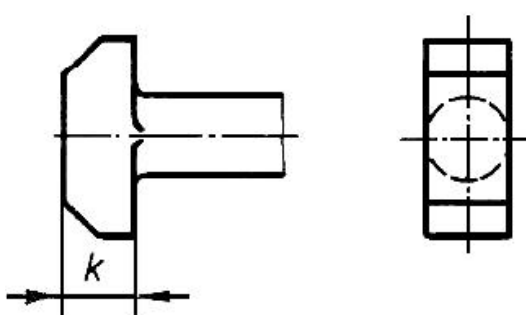
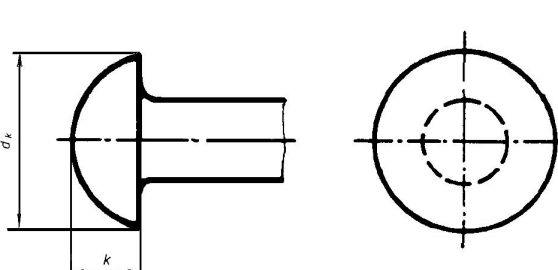
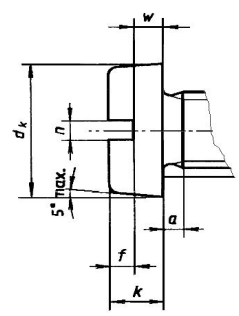
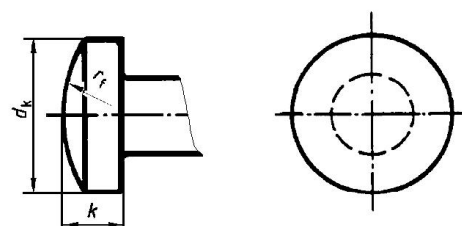
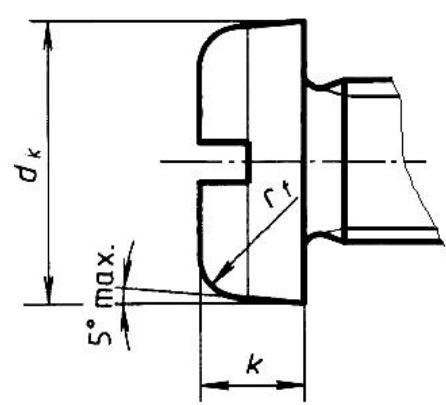
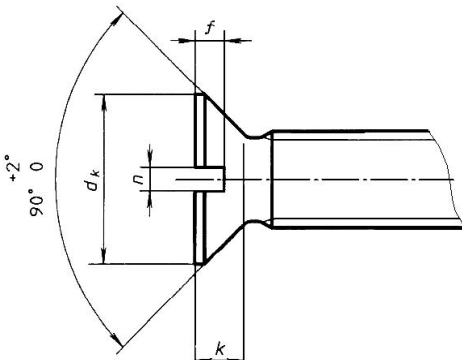
Annex G
(informative)

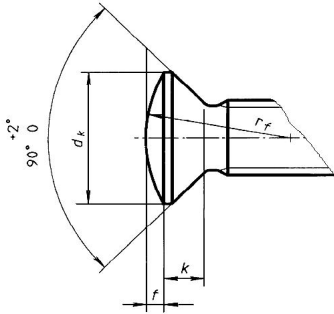
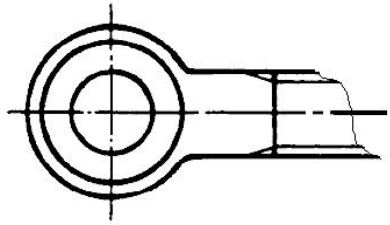
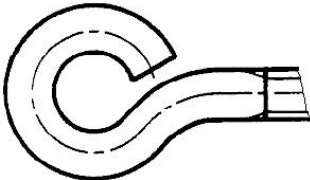
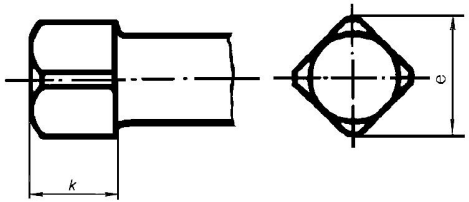
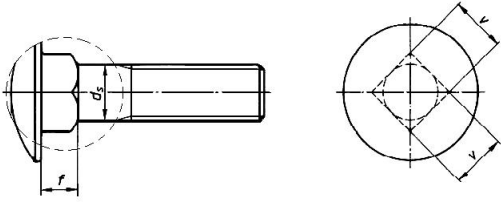
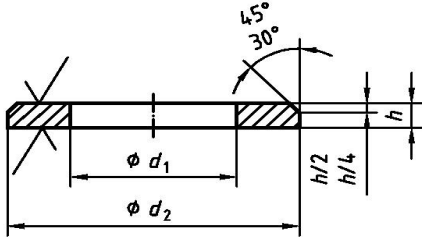
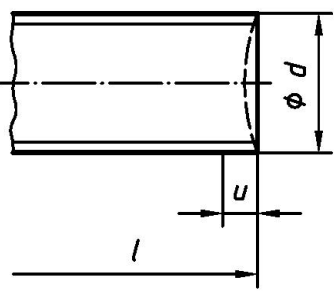
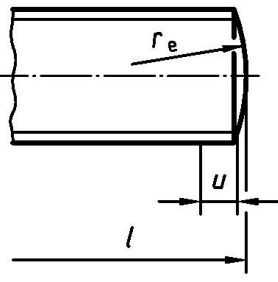
Simplified drawings of feature classes, component classes and some properties

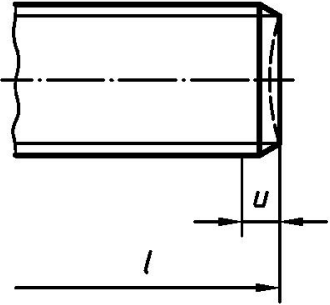
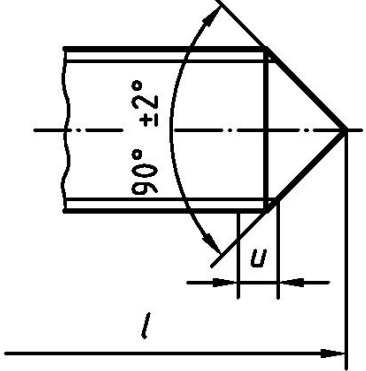
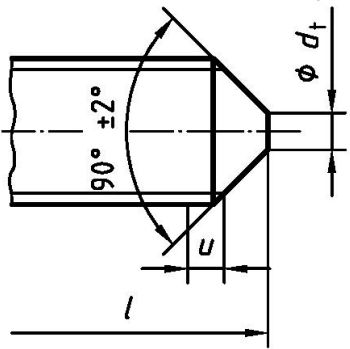
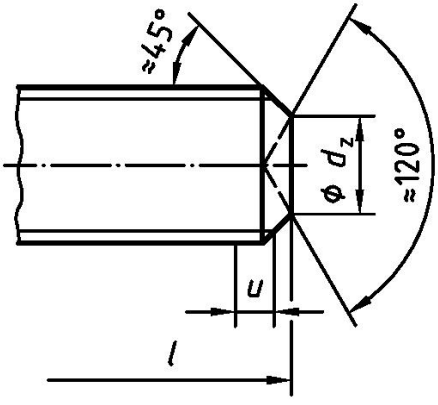
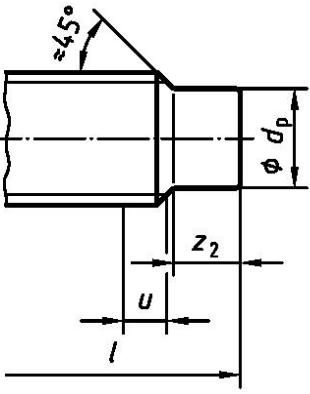
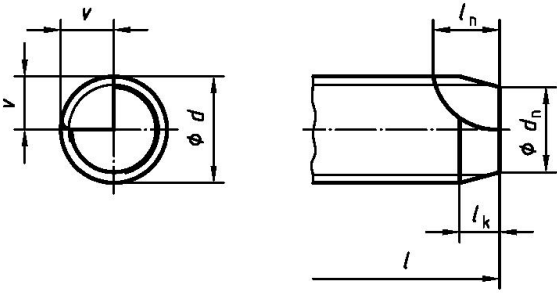
Table G.1 specifies a set of simplified drawings of feature classes, component classes and properties defined in this part of ISO 13584.

Table G.1 — Simplified drawings of classes

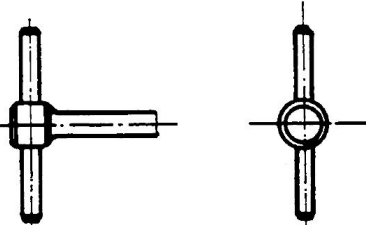
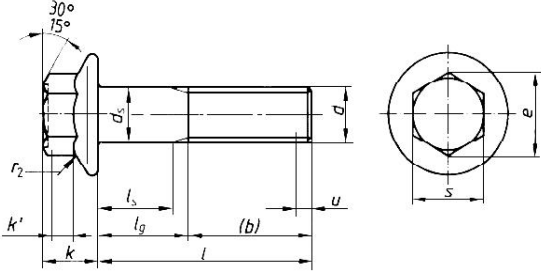
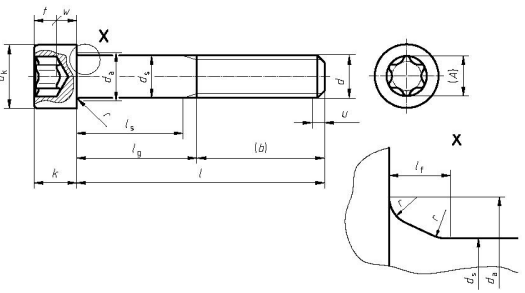
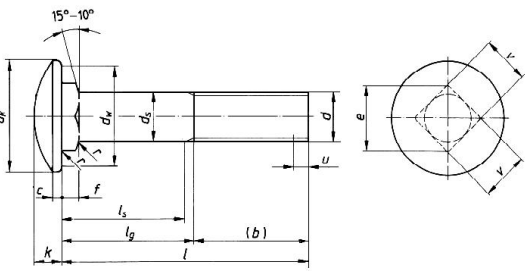
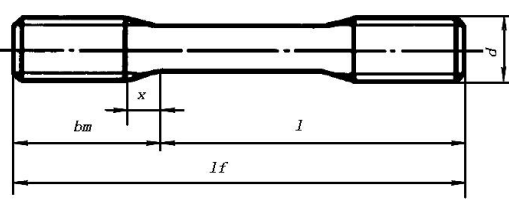
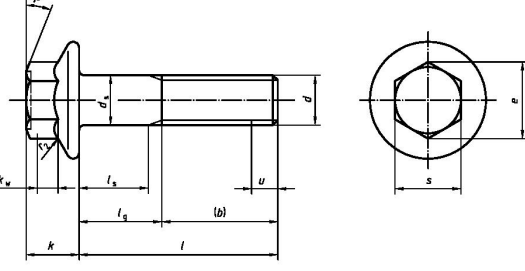
Code	Preferred Name	Code	Preferred Name
P511AAA006	end of thread forming screw	P511AAA009	hexagon head
			
P511AAA010	hexagon head with washer face	P511AAA011	hexagon head with flange
			
P511AAA012	drilling point of drilling screw	P511AAA013	square head with collar
			

Code	Preferred Name	Code	Preferred Name
P511AAA014	T-head	P511AAA015	round head
			
P511AAA016	cheese head	P511AAA017	cheese raised head
			
P511AAA018	pan head	P511AAA019	countersunk head
			

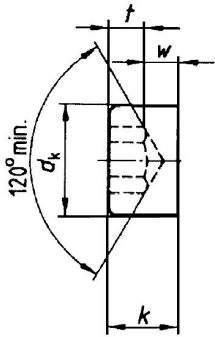
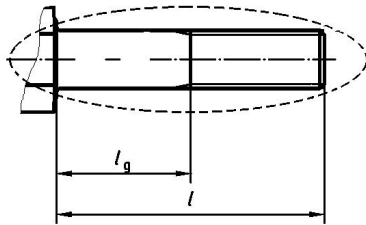
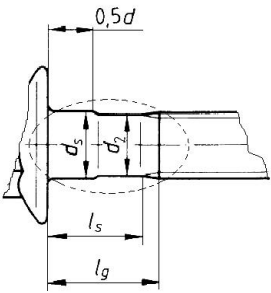
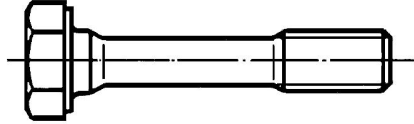
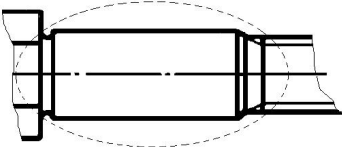
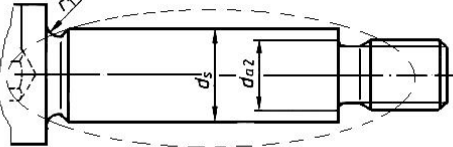
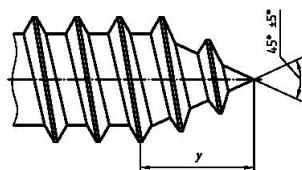
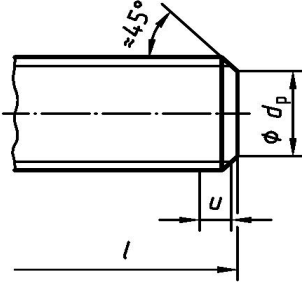
Code	Preferred Name	Code	Preferred Name
P511AAA020	raised countersunk head	P511AAA021	eye shape head
			
P511AAA022	eyelet shape head	P511AAA023	square head
			
P511AAA025	shank with square neck	P511AAA027	plain washer with outside chamfer
			
P511AAA029	as-rolled end	P511AAA030	rounded end
			

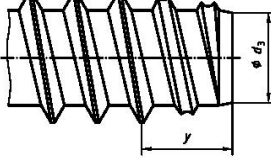
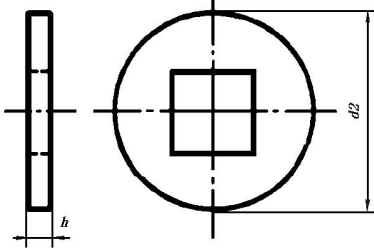
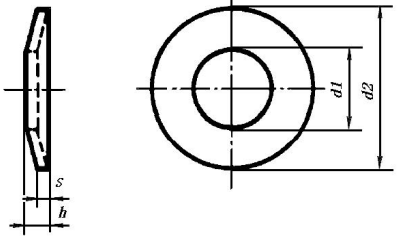
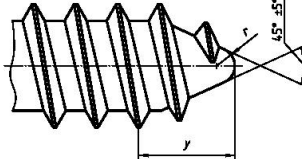
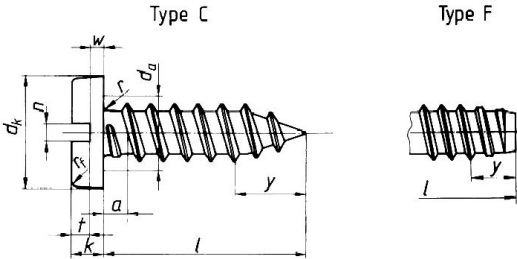
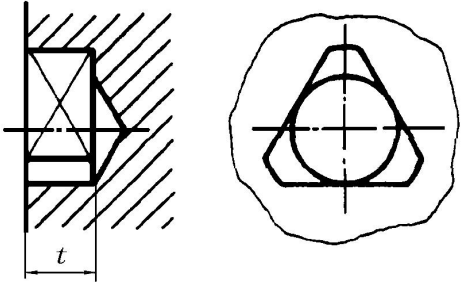
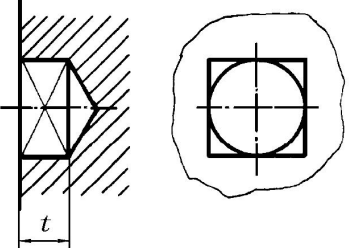
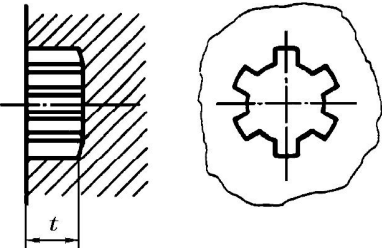
Code	Preferred Name	Code	Preferred Name
P511AAA031	chamfered end	P511AAA032	cone point
			
P511AAA033	truncated cone point	P511AAA034	cup point
			
P511AAA035	dog point	P511AAA036	scrape point
			

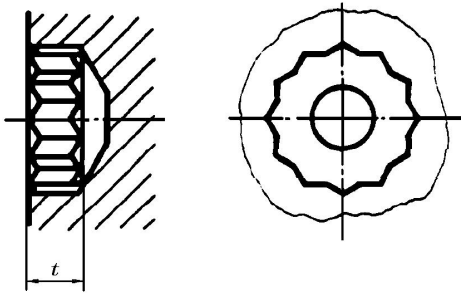
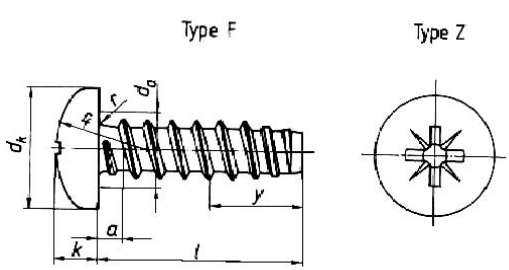
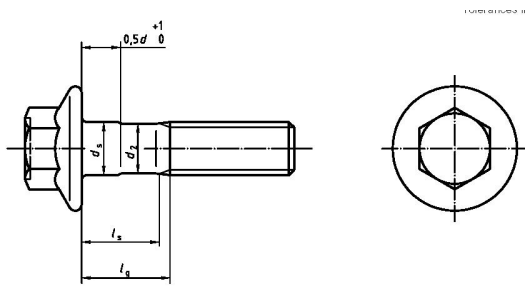
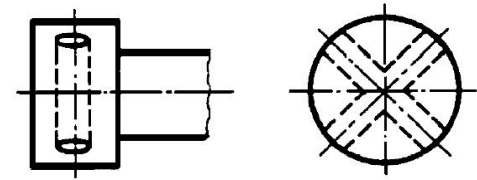
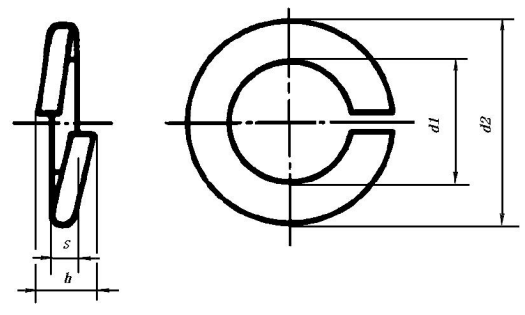
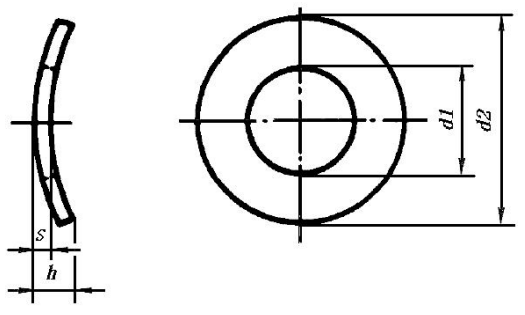
Code	Preferred Name	Code	Preferred Name
P511AAA038	metric external thread	P511AAA039	tapping screw thread
P511AAA041	wood screw thread	P511AAA043	hexagon socket
P511AAA044	slot	P511AAA045	cross recess (type H)

Code	Preferred Name	Code	Preferred Name
P511AAA046	head with tommy	P511AAA047	hexagon head bolt with flange, full shank
			
P511AAA050	hexalobular socket head cap screw	P511AAA051	cup head square neck bolt
			
P511AAA071	waisted stud	P511AAA081	hexagon head bolt with flange with fine pitch thread, full shank
			

Code	Preferred Name	Code	Preferred Name
P511AAA082	open end blind rivet with break pull mandrel and countersunk head	P511AAA089	square washer with round hole
P511AAA091	stud with full shank	P511AAA093	open end blind rivet with break pull mandrel and protruding head
P511AAA099	stud bolt	P511AAA119	triangle head with collar
P511AAA120	octagonal head	P511AAA121	12 point flange head

Code	Preferred Name	Code	Preferred Name
P511AAA122	cylindrical head	P511AAA125	full shank
			
P511AAA126	reduced shank	P511AAA127	waisted shank
			
P511AAA128	fit shank	P511AAA129	shoulder
			
P511AAA130	cone end (type C) of tapping screw	P511AAA131	flat point
			

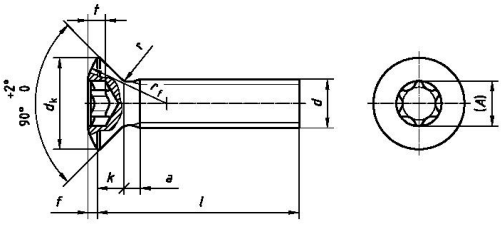
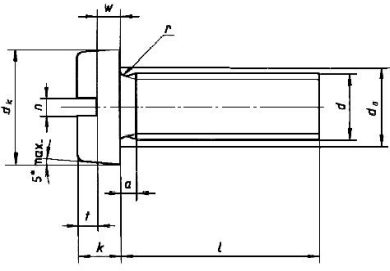
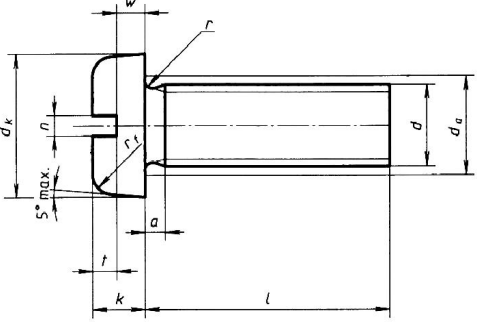
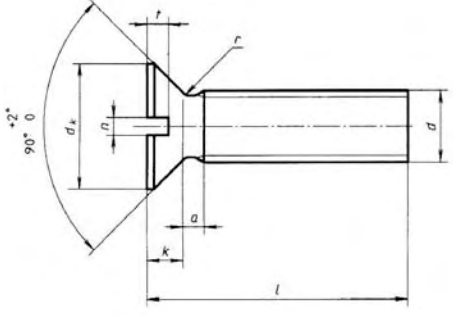
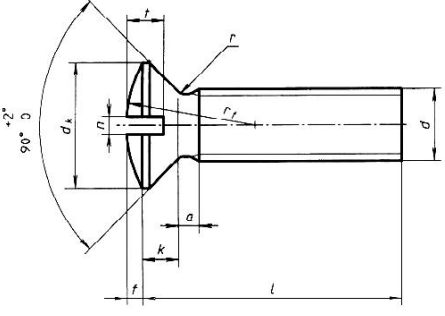
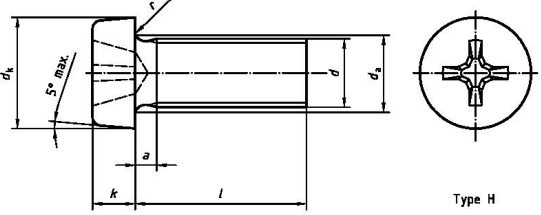
Code	Preferred Name	Code	Preferred Name
P511AAA132	flat end (type F) of tapping screw	P511AAA136	plain washer with square hole
			
P511AAA137	conical spring washer	P511AAA138	rounded end (type R) of tapping screw
			
P511AAA139	slotted pan head tapping screw with a flat end	P511AAA140	triangle socket
			
P511AAA141	square socket	P511AAA142	six-spline socket
			

Code	Preferred Name	Code	Preferred Name
P511AAA143	12 point socket	P511AAA144	cross recessed (type Z) pan head tapping screw with a flat end
			
P511AAA146	hexagon head bolt with flange with fine pitch thread, reduced shank	P511AAA147	cross hole
			
P511AAA148	spring lock washer	P511AAA150	curved spring washer
			

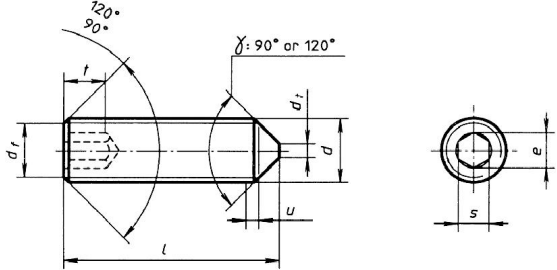
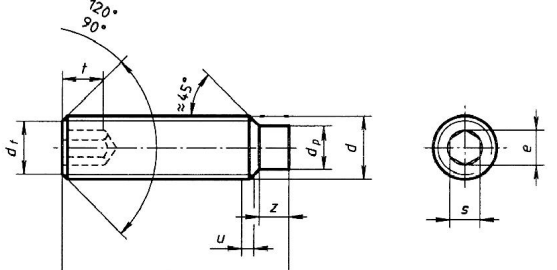
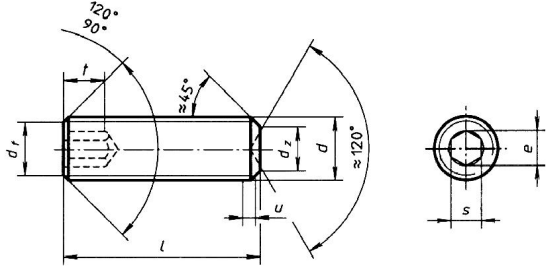
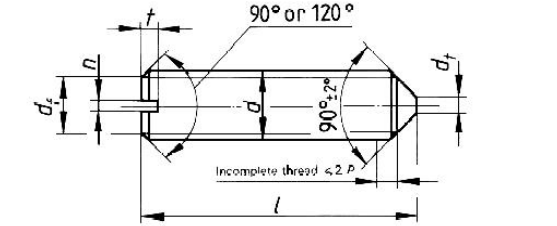
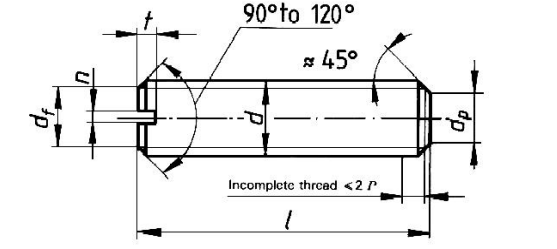
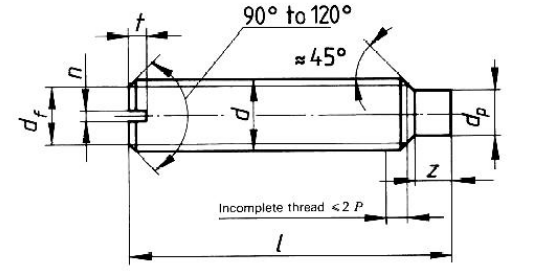
Code	Preferred Name	Code	Preferred Name
P511AAA156	hexagon head bolt	P511AAA157	hexagon head bolt with flange, reduced shank
P511AAA158	cup head square neck bolt with large head	P511AAA159	square head bolt
P511AAA160	square head bolt with collar	P511AAA161	wave spring washer

Code	Preferred Name	Code	Preferred Name
P511AAA162	triangle head bolt	P511AAA163	octagon head bolt
P511AAA164	lock washer with external teeth	P511AAA166	T-head bolt
P511AAA168	lock washer with internal teeth	P511AAA169	hexagon head screw

Code	Preferred Name	Code	Preferred Name
P511AAA170	hexagon socket head cap screw	P511AAA171	hexagon socket head shoulder screw
P511AAA172	hexagon socket button head screw	P511AAA173	hexagon socket countersunk head screw
P511AAA174	hexalobular socket cheese head screw	P511AAA175	hexalobular socket pan head screw

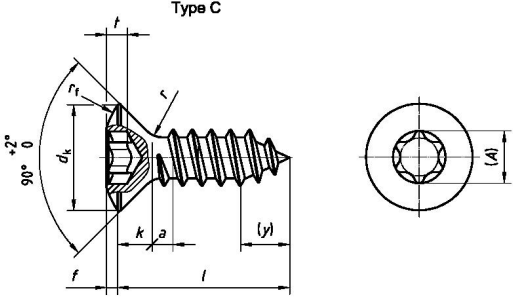
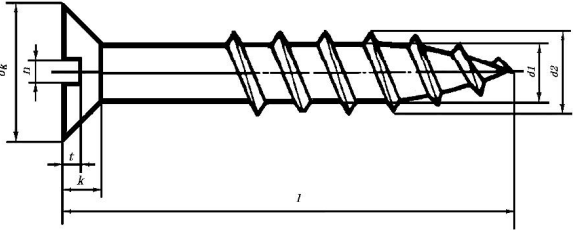
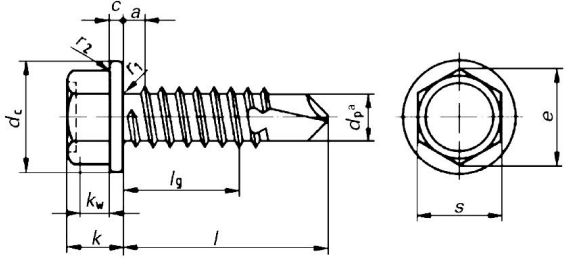
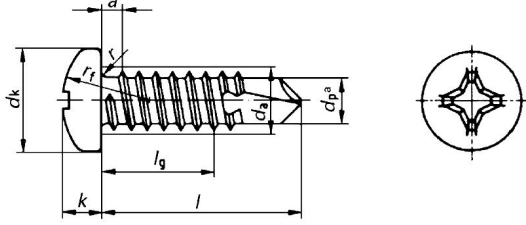
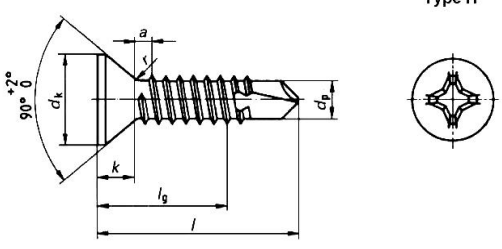
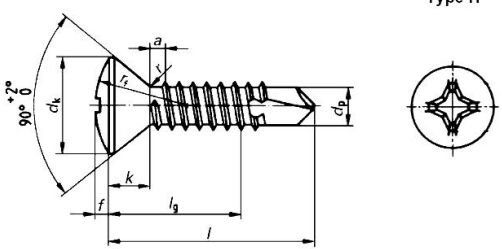
Code	Preferred Name	Code	Preferred Name
P511AAA176	hexalobular socket raised countersunk head screw	P511AAA177	slotted cheese head screw
			
P511AAA178	slotted pan head screw	P511AAA179	slotted countersunk flat head screw
			
P511AAA180	slotted raised countersunk head screw	P511AAA181	cross recessed (type H) cheese head screw
			

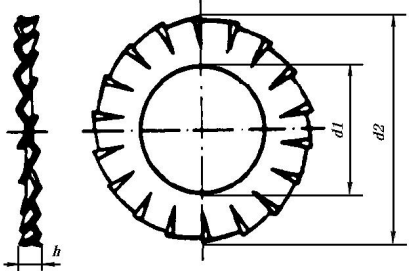
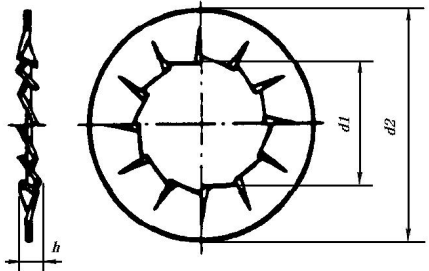
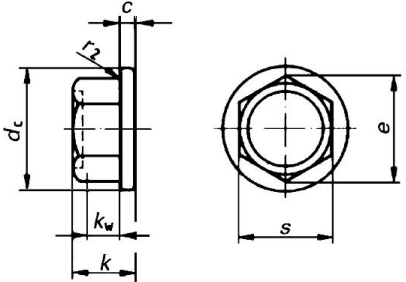
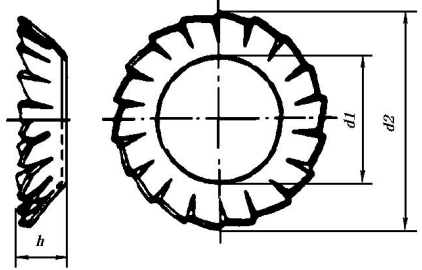
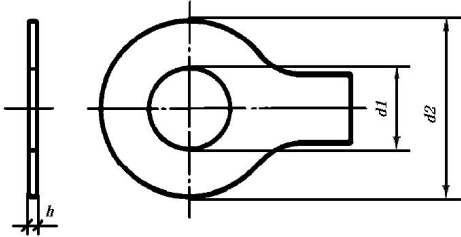
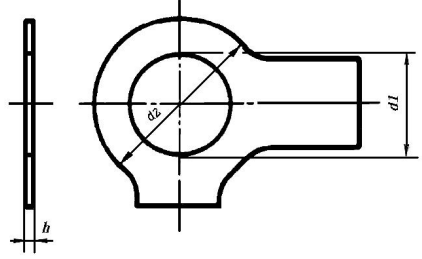
Code	Preferred Name	Code	Preferred Name
P511AAA182	cross recessed (type H) pan head screw	P511AAA183	countersunk lock washer with external teeth
P511AAA184	countersunk flat head screw with cross recess (type H)	P511AAA185	raised countersunk head screw with cross recess (type H)
P511AAA187	slotted headless screw with shank	P511AAA188	hexagon socket set screw with flat point

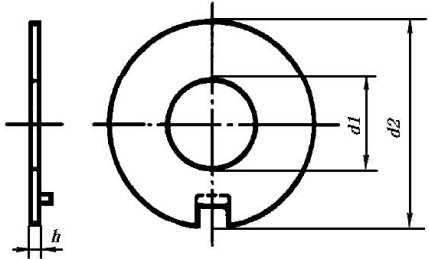
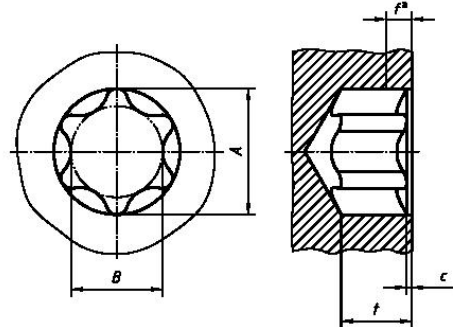
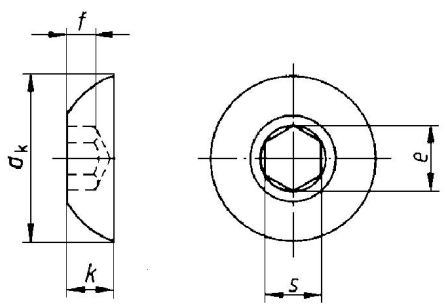
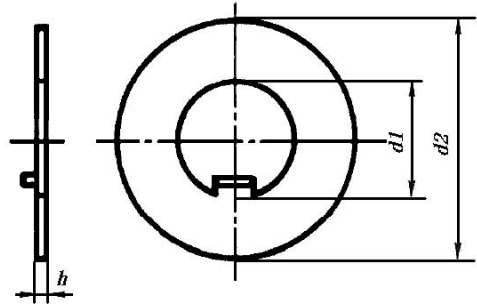
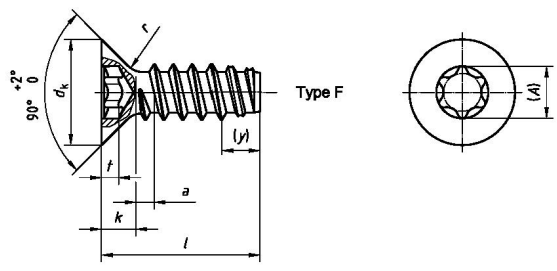
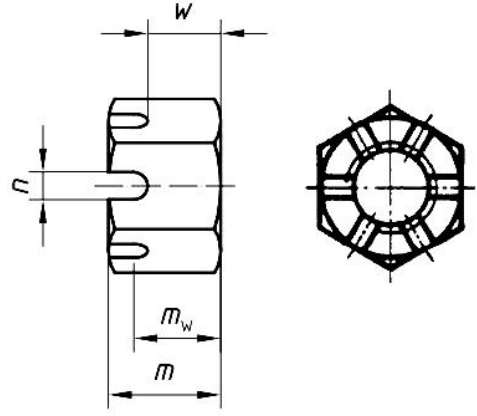
Code	Preferred Name	Code	Preferred Name
P511AAA189	hexagon socket set screw with cone point	P511AAA190	hexagon socket set screw with dog point
			
P511AAA191	hexagon socket set screw with cup point	P511AAA192	slotted set screw with cone point
			
P511AAA193	slotted set screw with flat point	P511AAA194	slotted set screw with long dog point
			

Code	Preferred Name	Code	Preferred Name
P511AAA195	slotted set screw with cup point	P511AAA197	hexagon head tapping screw with a cone end
P511AAA198	slotted pan head tapping screw with a cone end	P511AAA199	slotted countersunk (flat) head tapping screw with a cone end
<p style="text-align: center;">Type C</p>		<p style="text-align: center;">Type C</p>	
P511AAA200	slotted raised countersunk (oval) head tapping screw with a cone end	P511AAA201	cross recessed (type H) pan head tapping screw with a cone end
<p style="text-align: center;">Type C</p>		<p style="text-align: center;">Type H</p>	

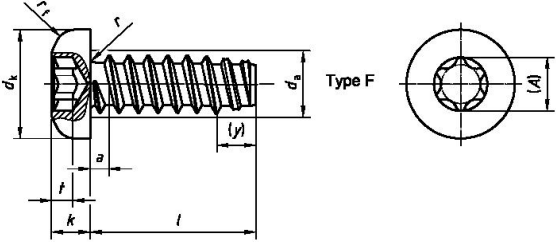
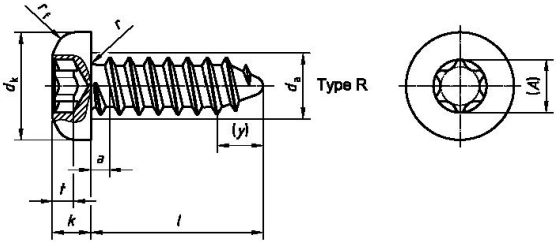
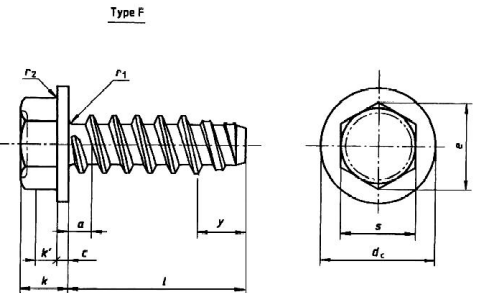
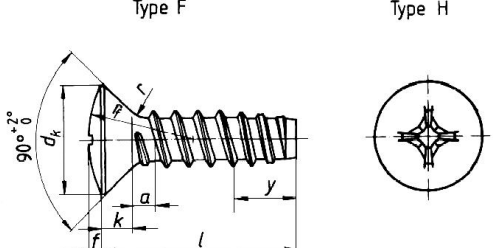
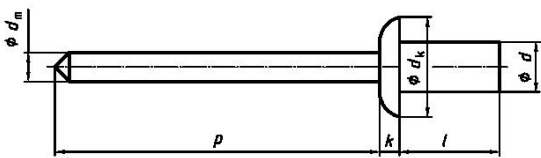
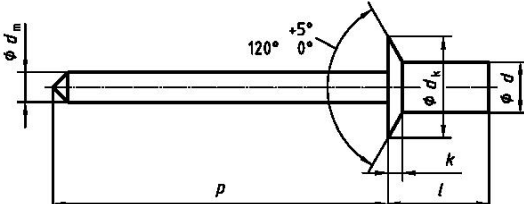
Code	Preferred Name	Code	Preferred Name
P511AAA202	hexagon flange head tapping screw with a cone end	P511AAA203	cross recessed (type H) countersunk head tapping screw with a cone end
P511AAA204	cross recessed (type H) raised countersunk head tapping screw with a cone end	P511AAA205	hexagon washer head tapping screw with a cone end
P511AAA206	hexalobular socket pan head tapping screw with a cone end	P511AAA207	hexalobular countersunk head socket tapping screw with a cone end

Code	Preferred Name	Code	Preferred Name
P511AAA208	hexalobular socket raised countersunk head tapping screw with a cone end	P511AAA209	wood screw
			
P511AAA211	hexagon washer head drilling screw	P511AAA212	cross recessed (type H) pan head drilling screw
			
P511AAA213	cross recessed (type H) countersunk head drilling screw	P511AAA214	cross recessed (type H) raised countersunk drilling screw
			

Code	Preferred Name	Code	Preferred Name
P511AAA215	serrated lock washer with external teeth	P511AAA216	serrated lock washer with internal teeth
			
P511AAA217	hexagon head with collar	P511AAA218	countersunk serrated lock washer with external teeth
			
P511AAA219	tab washer with long tab	P511AAA220	tab washer with long tab and wing
			

Code	Preferred Name	Code	Preferred Name
P511AAA221	external tab washer	P511AAA222	hexalobular socket
			
P511AAA223	button head	P511AAA225	internal tab washer
			
P511AAA226	hexalobular countersunk head tapping screw with a flat end	P511AAA227	slotted hexagon nut
			

Code	Preferred Name	Code	Preferred Name
P511AAA228	hexagon nut with flange	P511AAA229	hexagon castle nut
P511AAA232	round nut with holes in face	P511AAA235	plain washer without chamfer
P511AAA237	square taper washer	P511AAA238	hexalobular countersunk head tapping screw with a rounded end

Code	Preferred Name	Code	Preferred Name
P511AAA239	hexalobular socket pan head tapping screw with a flat end	P511AAA242	hexalobular socket pan head tapping screw with a rounded end
			
P511AAA243	hexagon washer head tapping screw with a flat end	P511AAA244	cross recessed (type H) raised countersunk head tapping screw, flat end
			
P511AAA245	closed end blind rivet with break pull mandrel and protruding head	P511AAA246	closed end blind rivet with break pull mandrel and countersunk head
			

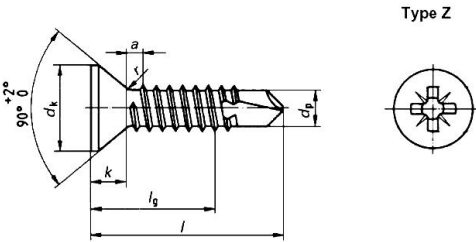
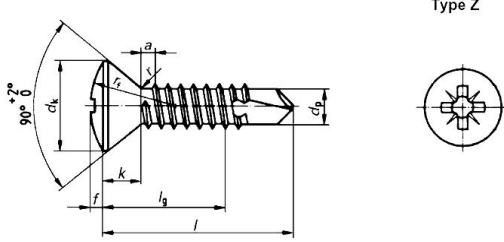
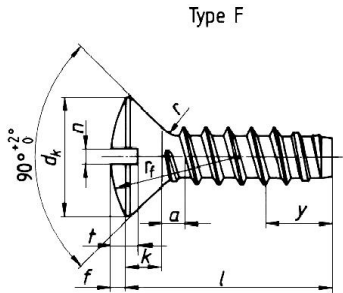
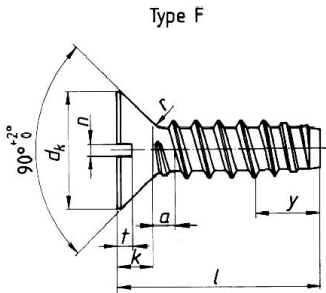
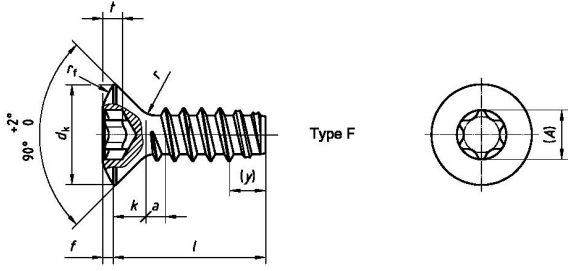
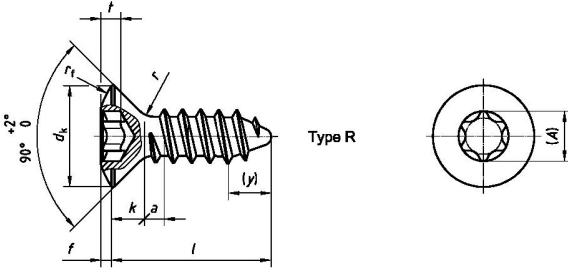
Code	Preferred Name	Code	Preferred Name
P511AAA248	split pin	P511AAA249	simple taper pin
P511AAA250	taper pin with internal thread	P511AAA251	taper pin with external thread
P511AAA252	parallel pin	P511AAA253	parallel pin with internal thread

Code	Preferred Name	Code	Preferred Name
P511AAA255	clevis pin with head	P511AAA257	grooved pin, full-length parallel grooved, with pilot
P511AAA258	grooved pin, full-length parallel grooved, with chamfer	P511AAA259	grooved pin with round head
P511AAA260	grooved pin with countersunk head	P511AAA261	spring-type straight pin, slotted

Code	Preferred Name	Code	Preferred Name
P511AAA265	grooved pin, half-length reverse taper grooved	P511AAA267	cross recessed (type Z) raised countersunk head tapping screw with a flat end
P511AAA268	cross recessed (type Z) countersunk head tapping screw with a flat end	P511AAA269	cross recessed (type H) countersunk head tapping screw with a flat end
P511AAA270	cross recessed (type H) pan head tapping screw with a flat end	P511AAA271	hexagon flange head tapping screw with a flat end

Code	Preferred Name	Code	Preferred Name
P511AAA272	cross recess (type Z)	P511AAA278	grooved pin, full-length taper grooved
P511AAA279	cross recessed (type Z) cheese head screw	P511AAA280	cross recessed (type Z) pan head screw

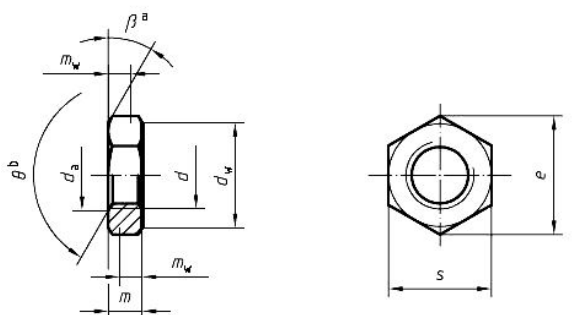
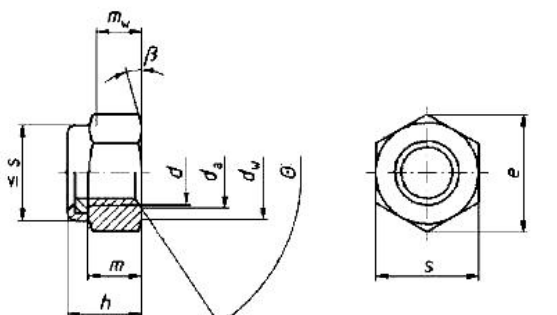
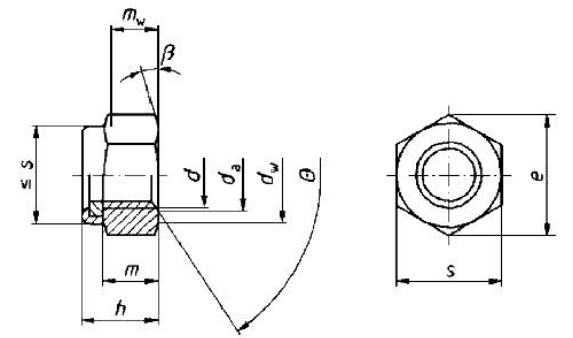
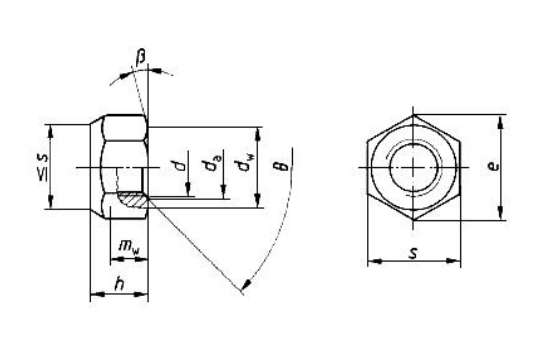
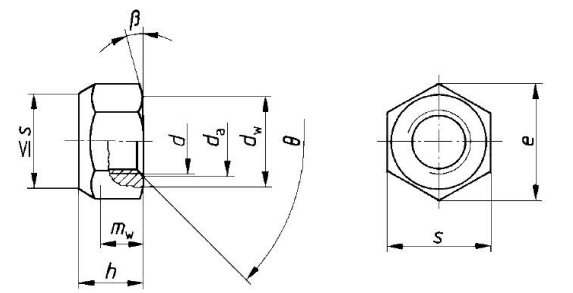
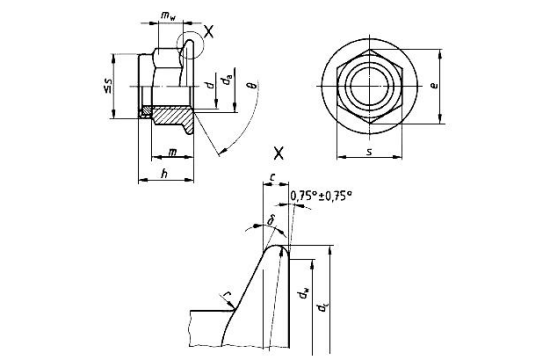
Code	Preferred Name	Code	Preferred Name
P511AAA281	countersunk flat head screw with cross recess (type Z)	P511AAA282	raised countersunk head screw with cross recess (type Z)
P511AAA283	cross recessed (type Z) pan head tapping screw with a cone end	P511AAA284	cross recessed (type Z) countersunk head tapping screw with a cone end
P511AAA285	cross recessed (type Z) raised countersunk head tapping screw with a cone end	P511AAA286	cross recessed (type Z) pan head drilling screw with tapping screw thread

Code	Preferred Name	Code	Preferred Name
P511AAA287	cross recessed (type Z) countersunk head drilling screw	P511AAA288	cross recessed (type Z) raised countersunk head drilling screw
 <p style="text-align: center;">Type Z</p>		 <p style="text-align: center;">Type Z</p>	
P511AAA289	slotted countersunk(oval) raised head tapping screw with a flat end	P511AAA290	slotted countersunk(flat) head tapping screw with a flat end
 <p style="text-align: center;">Type F</p>		 <p style="text-align: center;">Type F</p>	
P511AAA291	hexalobular socket raised countersunk head tapping screw with a flat end	P511AAA292	hexalobular socket raised countersunk head tapping screw with a rounded end
 <p style="text-align: center;">Type F</p>		 <p style="text-align: center;">Type R</p>	

Code	Preferred Name	Code	Preferred Name
P511AAA293	hexagon head tapping screw with a flat end	P511AAA310	thread forming screw thread
<p style="text-align: center;">Type F</p>			
P511AAA311	cap nut	P511AAA312	domed cap(acorn) nut
P511AAA313	hexagon nut (style 1)	P511AAA314	hexagon nut with collar

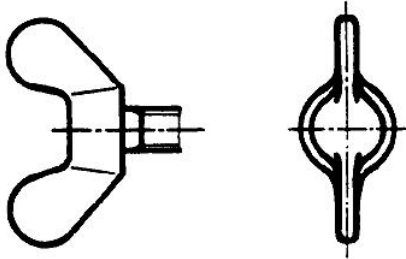
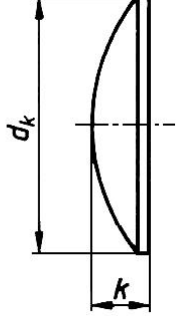
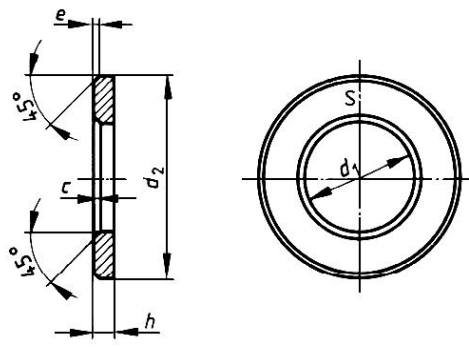
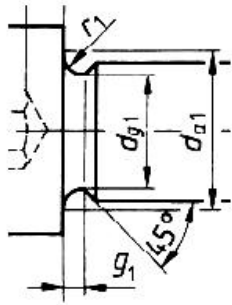
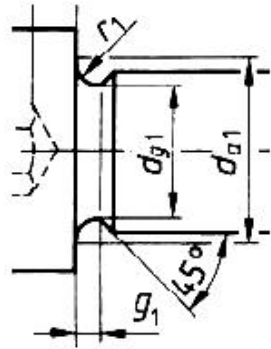
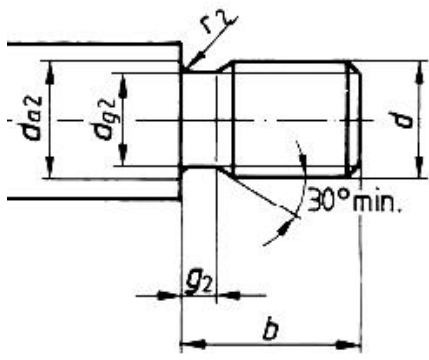
Code	Preferred Name	Code	Preferred Name
P511AAA315	round nut with holes in side	P511AAA316	round nut with slot in face
P511AAA317	round nut with slots in side	P511AAA318	round nut with knurl
P511AAA319	square nut	P511AAA320	square nut with collar

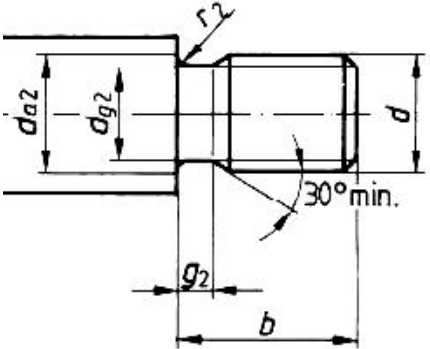
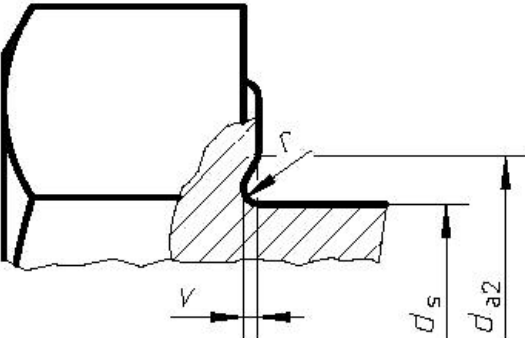
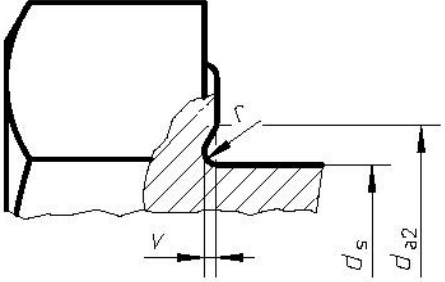
Code	Preferred Name	Code	Preferred Name	
P511AAA321	triangle nut with collar	P511AAA322	pentagon nut	
P511AAA323	octagon nut	P511AAA324	wing nut	
P511AAA325	spring-type coiled	straight pin,	P511AAA326	hexagon nut(style 2)

Code	Preferred Name	Code	Preferred Name
P511AAA327	hexagon thin nut (chamfered)	P511AAA328	prevailing torque type hexagon nut with non-metallic insert (style 1)
			
P511AAA329	prevailing torque type hexagon nut with non-metallic insert (style 2)	P511AAA330	prevailing torque type all-metal hexagon nut (style 1)
			
P511AAA331	prevailing torque type all-metal hexagon nut (style 2)	P511AAA332	prevailing torque type hexagon nut with flange, with non-metallic insert
			

Code	Preferred Name	Code	Preferred Name
P511AAA333	prevailing torque type all-metal hexagon nut with flange	P511AAA334	clevis pin without head
P511AAA335	grooved pin, half-length centre grooved	P511AAA336	grooved pin, one-third-length centre grooved
P511AAA337	grooved pin, half-length taper grooved	P511AAA338	hexagon thin nut (unchamfered)

Code	Preferred Name	Code	Preferred Name
P511AAA339	hexagon head bolt with metric fine pitch thread	P511AAA340	hexagon head screw with metric fine pitch thread
P511AAA344	metric internal thread	P511AAA349	pilot point
P511AAA350	truncated pilot point	P511AAA351	head with knurl

Code	Preferred Name	Code	Preferred Name
P511AAA352	head with wings	P511AAA353	cup head
			
P511AAA359	plain washer with double chamfers	P511BAA020	minimum diameter of radial undercut
		 <p>d_{g1} - Minimum diameter of radial undercut under the head</p>	
P511BAA022	width of radial undercut	P511BAA037	width of radial undercut in a shank
 <p>g_1 - Width of radial undercut under the head</p>		 <p>g_2 - Width of radial undercut in a shank</p>	

Code	Preferred Name	Code	Preferred Name
P511BAA048	minimum diameter of radial undercut in a shank	P511BAA382	depth of axial undercut
 <p data-bbox="295 817 710 884">dg2 - Minimum diameter of radial undercut in a shank</p>		 <p data-bbox="829 840 1204 884">v - Depth of axial undercut</p>	
P511BAA383	transition diameter of axial undercut		
 <p data-bbox="279 1444 678 1489">da2 - Transition diameter of axial undercut</p>			

Bibliography

- [1] ISO 68-1:1998 *ISO general purpose screw threads - Basic profile - Part 1: Metric screw threads*
- [2] ISO 225:1983 *Fasteners - Bolts, screws, studs and nuts - Symbols and designations of dimensions*
- [3] ISO 898-1:1999 *Mechanical properties of fasteners made of carbon steel and alloy steel - Part 1: Bolts, screws and studs*
- [4] ISO 1051:1999 *Rivet shank diameters*
- [5] ISO 1234:1997 *Split pins*
- [6] ISO 1478:1999 *Tapping screws thread*
- [7] ISO 2338:1997 *Parallel pins, of unhardened steel and austenitic stainless steel*
- [8] ISO 2339:1986 *Taper pins, unhardened*
- [9] ISO 2340:1986 *Clevis pins without head*
- [10] ISO 2341:1986 *Clevis pins with head*
- [11] ISO 3269:2000 *Fasteners - Acceptance inspection*
- [12] ISO 4014:1999 *Hexagon head bolts - Product grades A and B*
- [13] ISO 4015:1979 *Hexagon head bolts- Product grade B - Reduced shank (shank diameter approximately equal to pitch diameter)*
- [14] ISO 4016:1999 *Hexagon head bolts - Product grade C*
- [15] ISO 4017:1999 *Hexagon head screws - Product grades A and B*
- [16] ISO 4018:1999 *Hexagon head screws - Product grade C*
- [17] ISO 4026:2003 *Hexagon socket set screws with flat point*
- [18] ISO 4027:2003 *Hexagon socket set screws with cone point*
- [19] ISO 4028:2003 *Hexagon socket set screws with dog point*
- [20] ISO 4029:2003 *Hexagon socket set screws with cup point*
- [21] ISO 4032:1999 *Hexagon nuts, style 1 - Product grades A and B*
- [22] ISO 4033:1999 *Hexagon nuts, style 2 - Product grades A and B*
- [23] ISO 4034:1999 *Hexagon nuts - Product grade C*
- [24] ISO 4035:1999 *Hexagon thin nuts (chamfered) - Product grades A and B*
- [25] ISO 4036:1999 *Hexagon thin nuts (unchamfered) - Product grade B*
- [26] ISO 4161:1999 *Hexagon nuts with flange - Coarse thread*
- [27] ISO 4162:1990 *Hexagon flange bolts - Small series*
- [28] ISO 4753:1999 *Fasteners - Ends of parts with external ISO metric thread*
- [29] ISO 4757:1983 *Cross recesses for screws*
- [30] ISO 4759-1:2000 *Tolerances for fasteners - Part 1: Bolts, screws, studs and nuts - Product grades A, B and C*
- [31] ISO 4759-3:2000 *Tolerances for fasteners - Part 3: Plain washers for bolts, screws and nuts - Product grades A and C*
- [32] ISO 4762:2004 *Hexagon socket head cap screws*

- [33] ISO 4766:1983 *Slotted set screws with flat point*
- [34] ISO 4775:1984 *Hexagon nuts for high-strength structural bolting with large width across flats - Product grade B - Property classes 8 and 10*
- [35] ISO 5408:1983 *Cylindrical screw threads – Vocabular*
- [36] ISO 6157-1:1988 *Fasteners - Surface discontinuities - Part 1: Bolts, screws and studs for general requirements*
- [37] ISO 6157-2:1995 *Fasteners - Surface discontinuities - Part 2: Nuts*
- [38] ISO 6157-3:1988 *Fasteners - Surface discontinuities - Part 3: Bolts, screws and studs for special requirements*
- [39] ISO 6506-1 *Metallic materials - Brinell hardness test - Part 1: Test method*
- [40] ISO 6507-1 *Metallic materials - Vickers hardness test - Part 1: Test method*
- [41] ISO 6508-1 *Metallic materials - Rockwell hardness test - Part 1: Test method (scales A, B, C, D, E, F, G, H, K, N, T)*
- [42] ISO 7040:1997 *Prevailing torque type hexagon nuts (with non-metallic insert), style 1 - Property classes 5, 8 and 10*
- [43] ISO 7041:2002 *Prevailing torque type hexagon nuts (with non-metallic insert), style 2 - Property classes 9 and 12*
- [44] ISO 7042:1997 *Prevailing torque type all-metal hexagon nuts, style 2 - Property classes 5, 8, 10 and 12*
- [45] ISO 7043:1997 *Prevailing torque type hexagon nuts with flange (with non-metallic insert) - Product grades A and B*
- [46] ISO 7044:1997 *Prevailing torque type all-metal hexagon nuts with flange - Product grades A and B*
- [47] ISO 7045:1994 *Pan head screws with type H or type Z cross recess - Product grade A*
- [48] ISO 7046-1:1994 *Countersunk flat head screws (common head style) with type H or type Z cross recess - Product grade A - Part 1: Steel of property class 4.8*
- [49] ISO 7046-2:1990 *Cross-recessed countersunk flat head screws (common head style) - Grade A - Part 2: Steel of property class 8.8, stainless steel and non-ferrous metals*
- [50] ISO 7047:1994 *Countersunk raised head screws (common head style) with type H or type Z cross recess - Product grade A*
- [51] ISO 7048:1998 *Cross recessed cheese head screws*
- [52] ISO 7049:1983 *Cross recessed pan head tapping screws*
- [53] ISO 7050:1983 *Cross recessed countersunk (flat) head tapping screws (common head style)*
- [54] ISO 7051:1983 *Cross recessed raised countersunk (oval) head tapping screws*
- [55] ISO 7053:1992 *Hexagon washer head tapping screws*
- [56] ISO 7085:1999 *Mechanical and performance requirements of case hardened and tempered metric thread rolling screws*
- [57] ISO 7089:2000 *Plain washers - Normal series - Product grade A*
- [58] ISO 7090:2000 *Plain washers, chamfered - Normal series - Product grade A*
- [59] ISO 7091:2000 *Plain washers - Normal series - Product grade C*
- [60] ISO 7092:2000 *Plain washers - Small series - Product grade A*
- [61] ISO 7093-1:2000 *Plain washers - Large series - Part 1: Product grade A*
- [62] ISO 7093-2:2000 *Plain washers - Large series - Part 2: Product grade C*

- [63] ISO 7094:2000 *Plain washers - Extra large series - Product grade C*
- [64] ISO 7378:1983 *Fasteners - Bolts, screws and studs - Split pin holes and wire holes*
- [65] ISO 7379:1983 *Hexagon socket head shoulder screws*
- [66] ISO 7380:2004 *Hexagon socket button head screws*
- [67] ISO 7411:1984 *Hexagon bolts for high-strength structural bolting with large width across flats (thread lengths according to ISO 888) - Product grade C - Property classes 8.8 and 10.9*
- [68] ISO 7412:1984 *Hexagon bolts for high-strength structural bolting with large width across flats (short thread length) - Product grade C - Property classes 8.8 and 10.9*
- [69] ISO 7413:1984 *Hexagon nuts for structural bolting, style 1, hot-dip galvanized (oversize tapped) - Product grades A and B - Property classes 5, 6 and 8*
- [70] ISO 7414:1984 *Hexagon nuts for structural bolting with large width across flats, style 1 - Product grade B - Property class 10*
- [71] ISO 7415:1984 *Plain washers for high-strength structural bolting, hardened and tempered*
- [72] ISO 7416:1984 *Plain washers, chamfered, hardened and tempered for high-strength structural bolting*
- [73] ISO 7417:1984 *Hexagon nuts for structural bolting - Style 2, hot-dip galvanized (oversize tapped) - Product grade A - Property class 9*
- [74] ISO 7434:1983 *Slotted set screws with cone point*
- [75] ISO 7435:1983 *Slotted set screws with long dog point*
- [76] ISO 7436:1983 *Slotted set screws with cup point*
- [77] ISO 7719:1997 *Prevailing torque type all-metal hexagon nuts, style 1 - Property classes 5, 8 and 10*
- [78] ISO 7720:1997 *Prevailing torque type all-metal hexagon nuts, style 2 - Property class 9*
- [79] ISO 7721:1983 *Countersunk head screws - Head configuration and gauging*
- [80] ISO 7721-2:1990 *Countersunk flat head screws - Part 2: Penetration depth of cross recesses*
- [81] ISO 8673:1999 *Hexagon nuts, style 1, with metric fine pitch thread - Product grades A and B*
- [82] ISO 8674:1999 *Hexagon nuts, style 2, with metric fine pitch thread - Product grades A and B*
- [83] ISO 8675:1999 *Hexagon thin nuts (chamfered) with metric fine pitch thread - Product grades A and B*
- [84] ISO 8676:1999 *Hexagon head screws with metric fine pitch thread - Product grades A and B*
- [85] ISO 8678:1988 *Cup head square neck bolts with small head and short neck - Product grade B*
- [86] ISO 8733:1997 *Parallel pins with internal thread, of unhardened steel and austenitic stainless steel*
- [87] ISO 8734:1997 *Parallel pins, of hardened steel and martensitic stainless steel (Dowel pins)*
- [88] ISO 8735:1997 *Parallel pins with internal thread, of hardened steel and martensitic stainless steel*
- [89] ISO 8736:1986 *Taper pins with internal thread, unhardened*
- [90] ISO 8737:1986 *Taper pins with external thread, unhardened*
- [91] ISO 8738:1986 *Plain washers for clevis pins - Product grade A*
- [92] ISO 8739:1997 *Grooved pins -- Full-length parallel grooved, with pilot*
- [93] ISO 8740:1997 *Grooved pins -- Full-length parallel grooved, with chamfer*
- [94] ISO 8741:1997 *Grooved pins -- Half-length reverse-taper grooved*
- [95] ISO 8742:1997 *Grooved pins -- One-third-length centre grooved*

- [96] ISO 8743:1997 *Grooved pins -- Half-length centre grooved*
- [97] ISO 8744:1997 *Grooved pins -- Full-length taper grooved*
- [98] ISO 8745:1997 *Grooved pins -- Half-length taper grooved*
- [99] ISO 8746:1997 *Grooved pins with round head*
- [100] ISO 8747:1997 *Grooved pins with countersunk head*
- [101] ISO 8748:1997 *Spring-type straight pins -- Coiled, heavy duty*
- [102] ISO 8749:1986 *Pins and grooved pins -- Shear test*
- [103] ISO 8750:1997 *Spring-type straight pins -- Coiled, standard duty*
- [104] ISO 8751:1997 *Spring-type straight pins -- Coiled, light duty*
- [105] ISO 8752:1997 *Spring-type straight pins -- Slotted, heavy duty*
- [106] ISO 8765:1999 *Hexagon head bolts with metric fine pitch thread - Product grades A and B*
- [107] ISO 8839:1986 *Mechanical properties of fasteners - Bolts, screws, studs and nuts made of non-ferrous metals*
- [108] ISO 8992:2005 *Fasteners - General requirements for bolts, screws, studs and nuts*
- [109] ISO 10484:1997 *Widening test on nuts*
- [110] ISO 10485:1991 *Cone proof load test on nuts*
- [111] ISO 10509:1992 *Hexagon flange head tapping screws*
- [112] ISO 10510:1999 *Tapping screw and washer assemblies with plain washers*
- [113] ISO 10511:1997 *Prevailing torque type hexagon thin nuts (with non-metallic insert)*
- [114] ISO 10512:1997 *Prevailing torque type hexagon nuts (with non-metallic insert), style 1, with metric fine pitch thread - Property classes 6, 8 and 10*
- [115] ISO 10513:1997 *Prevailing torque type all-metal hexagon nuts, style 2, with metric fine pitch thread - Property classes 8, 10 and 12*
- [116] ISO 10642:2004 *Hexagon socket countersunk head screws*
- [117] ISO 10644:1998 *Screw and washer assemblies with plain washers - Washer hardness classes 200 HV and 300 HV*
- [118] ISO 10663:1999 *Hexagon nuts with flange - Fine pitch thread*
- [119] ISO 10664:2005 *Hexalobular internal drive feature for bolts and screws*
- [120] ISO 10666:1999 *Drilling screws with tapping screw thread - Mechanical and functional properties*
- [121] ISO 10669:1999 *Plain washers for tapping screw and washer assemblies - Normal and large series - Product grade A*
- [122] ISO 10673:1998 *Plain washers for screw and washer assemblies - Small, normal and large series - Product grade A*
- [123] ISO 12125:1997 *Prevailing torque type hexagon nuts with flange (with non-metallic insert) with metric fine pitch thread - Product grades A and B*
- [124] ISO 12126:1997 *Prevailing torque type all-metal hexagon nuts with flange with metric fine pitch thread - Product grades A and B*
- [125] ISO 13337:1997 *Spring-type straight pins -- Slotted, light duty*
- [126] ISO 13584-26:2000 *Industrial automation systems and integration - Parts library - Part 26: Logical resource: Information supplier identification*
- [127] ISO 13918:1998 *Welding - Studs and ceramic ferrules for arc stud welding*
- [128] ISO 14579:2001 *Hexalobular socket head cap screws*

- [129] ISO 14580:2001 *Hexalobular socket cheese head screws*
- [130] ISO 14583:2001 *Hexalobular socket pan head screws*
- [131] ISO 14584:2001 *Hexalobular socket raised countersunk head screws*
- [132] ISO 14585:2001 *Hexalobular socket pan head tapping screws*
- [133] ISO 14586:2001 *Hexalobular socket countersunk head tapping screws*
- [134] ISO 14587:2001 *Hexalobular socket raised countersunk (oval) head tapping screws*
- [135] ISO 14588:2000 *Blind rivets - Terminology and definitions*
- [136] ISO 14589:2000 *Blind rivets - Mechanical testing*
- [137] ISO 15071:1999 *Hexagon bolts with flange - Small series - Product grade A*
- [138] ISO 15072:1999 *Hexagon bolts with flange with metric fine pitch thread - Small series - Product grade A*
- [139] ISO 15480:1999 *Hexagon washer head drilling screws with tapping screw thread*
- [140] ISO 15481:1999 *Cross recessed pan head drilling screws with tapping screw thread*
- [141] ISO 15482:1999 *Cross recessed countersunk head drilling screws with tapping screw thread*
- [142] ISO 15483:1999 *Cross recessed raised countersunk head drilling screws with tapping screw thread*
- [143] ISO 15973:2000 *Closed end blind rivets with break pull mandrel and protruding head - AIA/St*
- [144] ISO 15974:2000 *Closed end blind rivets with break pull mandrel and countersunk head - AIA/St*
- [145] ISO 15975:2002 *Closed end blind rivets with break pull mandrel and protruding head - A/AIA*
- [146] ISO 15976:2002 *Closed end blind rivets with break pull mandrel and protruding head - St/St*
- [147] ISO 15977:2002 *Open end blind rivets with break pull mandrel and protruding head - AIA/St*
- [148] ISO 15978:2002 *Open end blind rivets with break pull mandrel and countersunk head - AIA/St*
- [149] ISO 15979:2002 *Open end blind rivets with break pull mandrel and protruding head - St/St*
- [150] ISO 15980:2002 *Open end blind rivets with break pull mandrel and countersunk head - St/St*
- [151] ISO 15981:2002 *Open end blind rivets with break pull mandrel and protruding head - AIA/AIA*
- [152] ISO 15982:2002 *Open end blind rivets with break pull mandrel and countersunk head - AIA/AIA*
- [153] ISO 15983:2002 *Open end blind rivets with break pull mandrel and protruding head - A2/A2*
- [154] ISO 15984:2002 *Open end blind rivets with break pull mandrel and countersunk head - A2/A2*
- [155] ISO 16582:2002 *Open end blind rivets with break pull mandrel and protruding head - Cu/St or Cu/Br or Cu/SSt*
- [156] ISO 16583:2002 *Open end blind rivets with break pull mandrel and countersunk head - Cu/St or Cu/Br or Cu/SSt*
- [157] ISO 16584:2002 *Open end blind rivets with break pull mandrel and protruding head - NiCu/St or NiCu/SSt*
- [158] ISO 16585:2002 *Closed end blind rivets with pull mandrel and protruding head - A2/SSt*
- [159] ISO 21269:2004 *Hexagon socket head cap screw with metric fine pitch thread*
- [160] ISO 21670:2003 *Hexagon weld nuts with flange*
- [161] IEC 61360-2:2004 *Standard data element types with associated classification scheme for electric components - Part 2: EXPRESS dictionary schema*
- [162] *Federal Item Identification Guide (available on the Internet Official Internet Server at the following URL: <http://www.dlis.dla.mil/FIIGs/>)*

- [163] *International Classification for Standards (ICS)*, available at <<http://www.iso.ch/iso/en/prods-services/otherpubs/>>
- [164] OBERG E., JONES F.D., HORTON H.L., RYFFEL H.H., *Machinery's Handbook (26th Edition)*, Industrial Press, 2000

Index

12 point flange head.....	45
12 point socket	47
angle of the nut chamfer	98
AP	7
Applicable Properties.....	10
applicable property	3, 12
Applicable property.....	3
Applicable Property.....	7
Applicable Types.....	10
as-rolled end.....	40
Basic Semantic Unit.....	7
Basic semantic unit (BSU).....	3
basic_semantic_unit	4
blind length	83
blind rivet	44
body material	74
bottom thickness.....	78
BSU	7
button head.....	57
cap nut.....	65
castle diameter	77
chamfer angle on the end of pin	96
chamfer angle on the head of pin	100
chamfer diameter.....	85
chamfer height on the head of pin	99
chamfer length of pin	85
chamfer width for the end with internal thread.....	84
chamfered end.....	40
characteristic of a part	3
Characteristic of a part (part characteristic)	3
cheese head.....	39
Class Value Assignment.....	10
class_instance_type.....	12, 14
classification properties	12
Classification properties.....	12
Classification property.....	16
clevis pin	71
clevis pin with head.....	61
clevis pin without head	68
closed end blind rivet with break pull mandrel and countersunk head.....	60
closed end blind rivet with break pull mandrel and protruding head	59
code.....	12
Code	9, 12
Common dictionary schema.....	3
component_class	8
component_classes	8
Condition.....	13
cone end (type C) of tapping screw	46
cone point	41
conical spring washer	46
content_item	4
convexity height	86
core diameter	95
core hardness	93
countersink angle.....	98
countersink diameter of pin.....	84
countersunk flat head screw with cross recess (type H).....	52
countersunk flat head screw with cross recess (type Z)	63
countersunk head.....	39

countersunk lock washer with external teeth 51

countersunk serrated lock washer with external teeth 57

cross hole..... 47

cross recess (type H) 42

cross recess (type Z)..... 62

cross recessed (type H) cheese head screw..... 51

cross recessed (type H) countersunk head drilling screw 56

cross recessed (type H) countersunk head tapping screw with a cone end..... 54

cross recessed (type H) countersunk head tapping screw with a flat end 62

cross recessed (type H) pan head drilling screw 56

cross recessed (type H) pan head screw 51

cross recessed (type H) pan head tapping screw with a cone end..... 54

cross recessed (type H) pan head tapping screw with a flat end..... 62

cross recessed (type H) raised countersunk drilling screw 56

cross recessed (type H) raised countersunk head tapping screw with a cone end 54

cross recessed (type H) raised countersunk head tapping screw,flat end 59

cross recessed (type Z) cheese head screw 63

cross recessed (type Z) countersunk head drilling screw..... 64

cross recessed (type Z) countersunk head tapping screw with a cone end 64

cross recessed (type Z) countersunk head tapping screw with a flat end 62

cross recessed (type Z) pan head drilling screw with tapping screw thread..... 64

cross recessed (type Z) pan head screw..... 63

cross recessed (type Z) pan head tapping screw with a cone end 63

cross recessed (type Z) pan head tapping screw with a flat end 47

cross recessed (type Z) raised countersunk head drilling screw 64

cross recessed (type Z) raised countersunk head tapping screw with a cone end 64

cross recessed (type Z) raised countersunk head tapping screw with a flat end 62

crow radius 85

cup head..... 71

cup head square neck bolt 43

cup head square neck bolt with large head 48

cup point 41

curved spring washer 48

cylindrical head 45

Data..... 3

Data Element Type 7

Data element type (DET) 3

data element types 1

Data exchange 4

Data type 4

Data Type 7, 12

Date of Current revision..... 13

Date of Current Revision..... 7, 10

Date of current version 10

Date of Current version..... 13

Date of Current Version 7

Date of Original Definition 7, 10, 13

DC 7

DCR..... 7

DCV 7

Definition..... 10, 12

Definition Class 7, 12

definitions 1

depth of axial undercut 98

depth of cylindrical countersink 84

depth of hole 84

designation 74

DET 7

diameter of cup point 79

diameter of dog point or flat point 80

diameter of drilling point..... 80

diameter of face 97

diameter of flat end 80

diameter of pilot end 85

diameter of scrape point.....	79
diameter of the countersink.....	82
diameter of the pilot point.....	96
diameter of truncated cone point.....	79
diameter of washer face or bearing face	76
Dictionary	4
Dictionary data.....	4
Dictionary element	4
dictionary_element.....	4
difference of leg lengths	83
distance from the last full form thread to the head bearing face	77
document_BSU.....	17
document_content	17
document_element.....	17
DOD	7
dog point	41
domains of values	1
domed cap(acorn) nut.....	66
drilling point of drilling screw	38
drilling screw	8, 55
DT.....	7
duty level.....	95
EAN/UCC code.....	74
end	8, 40
end of thread forming screw	38
end properties.....	87
end shape name	81
end shape picture.....	81
Entity	4
Entity (data type) instance	5
Entity data type.....	5
expanded diameter	86
external tab washer	57
externally threaded fastener.....	8, 37
externally threaded fastener component.....	8, 37
externally threaded fastener feature.....	8, 38
eye shape head.....	39
eyelet diameter for split pin.....	83
eyelet height for split pin	83
eyelet shape head.....	40
Family of parts	5
fastener	7, 37
fastener coating code	91
fastener material identification.....	90
fastener material name	90
Feature class.....	12
feature classes.....	12
fit shank.....	46
flange angle.....	76
flange(collar) diameter	77
flat end (type F) of tapping screw	46
flat point	46
Format	13
Formula	13
full shank.....	45
full shank rivet	70
general properties	12
General property.....	16
Generic family of parts.....	5
graphics	17
graphics_reference	17
groove angle	86
grooved pin.....	71
grooved pin with countersunk head	61

grooved pin with round head	61
grooved pin, full-length parallel grooved,with chamfer	61
grooved pin, full-length parallel grooved,with pilot	61
grooved pin, full-length taper grooved	63
grooved pin, half-length centre grooved	69
grooved pin, half-length reverse taper grooved	62
grooved pin, half-length taper grooved	69
grooved pin, one-third-length centre grooved	69
grooving angle of grooved pin	100
hardness test method identification	93
head	8, 38
head angle (countersunk angle).....	97
head angle of grooved pin with countersunk head	100
head diameter	77
head diameter of pin	86
head diameter of rivet	82
head height	76
head height of pin.....	85
head height of rivet	82
head properties.....	86
head shape name	81
head shape picture	81
head with knurl	71
head with tommy	42
head with wings.....	71
headless screw with shank.....	71
height of bearing element of a bolt or screw or nut	76
height of conical spring washer or lock washer.....	92
height of crown.....	86
height of the raised portion of raised countersunk head	97
hexagon castle nut	58
hexagon flange head tapping screw with a cone end	54
hexagon flange head tapping screw with a flat end	62
hexagon head	38
hexagon head bolt.....	48
hexagon head bolt with flange with fine pitch thread, full shank.....	44
hexagon head bolt with flange with fine pitch thread, reduced shank	47
hexagon head bolt with flange, full shank	42
hexagon head bolt with flange, reduced shank	48
hexagon head bolt with metric fine pitch thread	69
hexagon head screw	49
hexagon head screw with metric fine pitch thread.....	69
hexagon head tapping screw with a cone end.....	53
hexagon head tapping screw with a flat end.....	65
hexagon head with collar.....	56
hexagon head with flange.....	38
hexagon head with washer face.....	38
hexagon nut (style 1).....	66
hexagon nut with collar	66
hexagon nut with flange.....	58
hexagon nut(style 2).....	67
hexagon socket	42
hexagon socket button head screw	50
hexagon socket countersunk head screw.....	50
hexagon socket head cap screw	49
hexagon socket head cap screw with metric fine pitch thread	70
hexagon socket head shoulder screw	50
hexagon socket set screw with cone point	52
hexagon socket set screw with cup point.....	53
hexagon socket set screw with dog point.....	52
hexagon socket set screw with flat point	52
hexagon socket width across corners	80
hexagon thin nut (chamfered)	67
hexagon thin nut (unchamfered).....	69

hexagon washer head drilling screw	56
hexagon washer head tapping screw with a cone end	54
hexagon washer head tapping screw with a flat end	59
hexalobular socket	57
hexalobular socket cheese head screw	50
hexalobular socket countersunk head tapping screw with a cone end	55
hexalobular socket countersunk head tapping screw with a flat end	57
hexalobular socket countersunk head tapping screw with a rounded end.....	58
hexalobular socket head cap screw	43
hexalobular socket number	80
hexalobular socket pan head screw	50
hexalobular socket pan head tapping screw with a cone end.....	55
hexalobular socket pan head tapping screw with a flat end.....	59
hexalobular socket pan head tapping screw with a rounded end.....	59
hexalobular socket raised countersunk head screw.....	50
hexalobular socket raised countersunk head tapping screw with a cone end	55
hexalobular socket raised countersunk head tapping screw with a flat end	65
hexalobular socket raised countersunk head tapping screw with a rounded end	65
hole diameter	92
ICD code.....	74
identifications	1
Implementation method	5
incomplete thread length	79
incomplete thread length of pin with external thread	99
inner diameter.....	86
insert material.....	74
internal drive.....	42
internal drive properties	87
internal drive shape name	82
internal drive shape picture.....	82
internal driving.....	8
internal tab washer.....	57
internal thread length of pin	84
Is-case-of relationship	5
ISO13584_extended_dictionary_schema	17
ISO13584_external_file_schema	17
large rounded end radius for taper pin.....	83
length from split pin hole to the end.....	85
length of bolt/screw (flat seating head).....	97
length of clevis pin with head.....	100
length of clevis pin without head.....	100
length of cone of pilot point with truncated cone.....	96
length of countersunk bolt/screw	97
length of grooved pin with countersunk head	101
length of grooved pin with flat seating head.....	101
length of grooved pin without head	101
length of headless screw with shank	100
length of parallel pin	101
length of point.....	79
length of rivet with flat seating head (protruding head).....	101
length of set screw	100
length of split pin.....	97
length of spring pin	101
length of stud bolt	100
length of taper pin	101
length of tapping screw end.....	80
length of the cone part of the scrape point.....	79
length of the rivet with countersunk head.....	101
length of the scrape point.....	79
length of thread run out to cone	84
length of thread run-out.....	75
length of threaded portion	84
level_type	14
Library Integrated Information Model	7

Library integrated information model (LIIM)	6
LIIM	7
lock washer	59
lock washer with external teeth.....	49
lock washer with internal teeth	49
major diameter of external thread.....	94
major diameter of internal thread.....	96
Mandatory attributes	14
mandrel break load.....	88
mandrel diameter.....	83
mandrel material.....	74
mandrel protrusion.....	82
manufacture date.....	74
manufacturer.....	73
material thickness	85, 92
mechanical component for general use	37
mechanical component in general use.....	7
metric external thread	41
metric internal thread.....	70
metric threaded bolt/screw	37
metric threaded bolts/screw	8
mid height	95
minimum clamp length	78
minimum diameter of radial undercut	75
minimum diameter of radial undercut in a shank.....	77
minor diameter of external thread.....	95
minor diameter of internal thread	96
nominal dimension A	78
nominal dimension B	79
non_quantitative_code_type	12, 14
non_quantitative_codes	16
Note	10, 13
nut.....	43
nut height	82
nut name	98
nut picture	98
octagon head bolt.....	49
octagon nut.....	67
octagonal head	45
open end blind rivet with break pull mandrel and countersunk head	44
open end blind rivet with break pull mandrel and protruding head.....	44
organization identifier of manufacturer	90
outer diameter.....	95
outside diameter	92
overall length	75
pan head.....	39
parallel pin.....	60
parallel pin with internal thread.....	60
Part	6
penetration depth	81
pentagon nut.....	67
pilot end length.....	84
pilot length	86
pilot point	70
pin	45
pin diameter	101
pin end name	99
pin end picture	99
pin head name	98
pin head picture.....	99
pin shank name	99
pin shank picture.....	99
pitch.....	75
pitch diameter of external thread	94

pitch diameter of internal thread.....	96
plain washer.....	40
plain washer with double chamfers.....	72
plain washer with outside chamfer.....	40
plain washer with square hole.....	46
plain washer without chamfer.....	58
PLS.....	7
Preferred Letter Symbol.....	7, 12
Preferred Name.....	10, 12
prevailing torque type all-metal hexagon nut (style 1).....	68
prevailing torque type all-metal hexagon nut (style 2).....	68
prevailing torque type all-metal hexagon nut with flange.....	68
prevailing torque type hexagon nut with flange, with non-metallic insert.....	68
prevailing torque type hexagon nut with non-metallic insert (style 1).....	67
prevailing torque type hexagon nut with non-metallic insert (style 2).....	68
product grade.....	91
properties.....	1
Property.....	6
property DET.....	12, 13
Property DET.....	12
Property Type Classification.....	7, 13
PTC.....	7
radius of curvature at the hexagon / washer junction.....	97
radius of curvature under head.....	77
radius of rounded end.....	80
radius of the raised portion of the head.....	78
radius of the undercut under head.....	76
raised cheese head.....	39
raised countersunk head.....	39
raised countersunk head screw with cross recess (type H).....	52
raised countersunk head screw with cross recess (type Z).....	63
real_measure_type.....	14
recess number.....	81
reduced shank.....	45
reference dictionary.....	1
referenced_graphics.....	17
Remark.....	13
Revision Number.....	10, 13
rivet.....	70
rivet diameter.....	102
rivet head name.....	91
rivet head picture.....	91
rivet shank name.....	92
rivet shank picture.....	92
round head.....	39
round nut with holes in face.....	58
round nut with holes in side.....	66
round nut with knurl.....	66
round nut with slot in face.....	66
round nut with slots in side.....	66
rounded end.....	40
rounded end (type R) of tapping screw.....	46
rounded end height.....	83
scrape point.....	41
SD.....	7
SDD.....	7
semi tubular rivet.....	70
serrated lock washer with external teeth.....	56
serrated lock washer with internal teeth.....	56
set screw.....	8, 52
shank.....	8, 40
shank diameter.....	78
shank length.....	78
shank properties.....	87

shank shape name	81
shank shape picture.....	81
shank with square neck	40
shear load.....	88
shear strength,double.....	95
Short Name	10, 13
shoulder	46
side length.....	95
Simple family of parts	6
simple taper pin.....	60
Simplified Drawing	7, 10
simplified_drawing	17
six-spline socket.....	47
slot	42
slot width.....	77
slotted cheese head screw	50
slotted countersunk (flat) head tapping screw with a cone end	54
slotted countersunk flat head screw	51
slotted countersunk(flat) head tapping screw with a flat end	64
slotted headless screw with shank.....	52
slotted hexagon nut	57
slotted pan head screw	51
slotted pan head tapping screw with a cone end	53
slotted pan head tapping screw with a flat end	47
slotted raised countersunk (oval) head tapping screw with a cone end	54
slotted raised countersunk head screw	51
slotted raised countersunk(oval) head tapping screw with a flat end	64
slotted set screw with cone point	53
slotted set screw with cup point	53
slotted set screw with flat point	53
slotted set screw with long dog point	53
Source Document of Definition	7, 10, 13
split pin.....	60
split pin hole diameter	85
spring lock washer	47
spring pin	71
spring washer	58
spring-type straight pin, coiled	67
spring-type straight pin, slotted.....	61
square head	40
square head bolt.....	48
square head bolt with collar	48
square head with collar.....	38
square neck length.....	78
square neck width	78
square nut	66
square nut with collar	66
square socket	47
square taper washer.....	58
square washer with round hole.....	44
SSP	7
stainless steel fastener hardness class	102
stainless steel fastener property class.....	91
Standard data.....	7
steel fastener hardness class.....	93
steel fastener property class.....	90
string_type	15
stud	8, 42
stud bolt	45
stud length	97
stud with full shank	44
Sub-class Selection Properties	7
Sub-Class Selection Properties	10
sub-class selection property	12

Superclass	10
surface hardness.....	93
Synonymous Letter Symbols	13
Synonymous Name	10, 13
tab washer.....	59
tab washer with long tab.....	57
tab washer with long tab and wing	57
taper.....	83
taper pin	71
taper pin with external thread.....	60
taper pin with internal thread	60
tapping screw	8, 53
tapping screw thread	41
tensile load.....	88
T-head.....	39
T-head bolt	49
thickness.....	92
thread	41
thread forming screw	8, 65
thread forming screw thread	65
thread length.....	74
thread length of nut.....	102
thread length of nut end	98
thread length of stud metal end	75
thread properties	87
thread size.....	93
thread tolerance class.....	88
thread tolerance grade.....	87
thread tolerance position.....	87
transition diameter	96
transition diameter of axial undercut.....	98
transition diameter of shoulder	96
transition length	80
triangle head bolt.....	49
triangle head with collar	45
triangle nut with collar	67
triangle socket	47
truncated cone point.....	41
truncated pilot point.....	70
tubular rivet.....	70
type of end	89
type of head	88
type of internal drive	89
type of pitch	91
type of shank	89
type of thread.....	89
Unit	13
Value Format.....	7, 13
Version Number.....	10, 13
VF.....	7
Visible Properties	10
Visible property	6
Visible Property	7
Visible Types.....	10
VP.....	7
waisted shank	46
waisted stud.....	43
washer	43
washer name.....	92
washer picture	95
wave spring washer	48
width across corners	76
width across flats	75
width of radial undercut.....	75

width of radial undercut in a shank	76
wing nut.....	67
wood screw	8, 55
wood screw thread	42
wrenching height.....	75

ICS 25.040.40

Price based on 185 pages