

First edition
2003-10-15

**Destructive tests on welds in metallic
materials — Etchants for macroscopic
and microscopic examination**

*Essais destructifs des soudures sur matériaux métalliques — Réactifs
pour examens macroscopique et microscopique*



Reference number
ISO/TR 16060:2003(E)

© ISO 2003

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO 2003

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 General	1
4 Etchants for carbon steels and low-alloy steels	1
5 Etchants for stainless steels	1
6 Etchants for nickel and nickel alloys	2
7 Etchants for titanium and titanium alloys	2
8 Etchants for copper and copper alloys	2
9 Etchants for aluminium and aluminium alloys	2
10 Designation	2
Annex A (informative) Etchants for carbon steels and low-alloy steels	3
Annex B (informative) Etchants for stainless steels	10
Annex C (informative) Etchants for nickel and nickel alloys	16
Annex D (informative) Etchants for titanium and titanium alloys	18
Annex E (informative) Etchants for copper and copper alloys	20
Annex F (informative) Etchants for aluminium and aluminium alloys	22
Annex G (informative) List of etchants	27

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

In exceptional circumstances, when a technical committee has collected data of a different kind from that which is normally published as an International Standard ("state of the art", for example), it may decide by a simple majority vote of its participating members to publish a Technical Report. A Technical Report is entirely informative in nature and does not have to be reviewed until the data it provides are considered to be no longer valid or useful.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO/TR 16060 was prepared by Technical Committee ISO/TC 44, *Welding and allied processes*, Subcommittee SC 5, *Testing and inspection of welds*.

Destructive tests on welds in metallic materials — Etchants for macroscopic and microscopic examination

1 Scope

This Technical Report gives a non-exhaustive list of etchants that can be used for the macroscopic and microscopic examination of welds in accordance with ISO 17639 for the following groups of materials:

- carbon steels and low-alloy steels;
- stainless steels;
- nickel and nickel alloys;
- titanium and titanium alloys;
- copper and copper alloys;
- aluminium and aluminium alloys.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 17639, *Destructive tests on welds in metallic materials — Macroscopic and microscopic examination of welds*

3 General

Where details of concentration or waters of crystallization of reagents are not defined in the annexes, Table 1 is applicable. These values should be confirmed by the suppliers of each etchant.

4 Etchants for carbon steels and low-alloy steels

The etchants for carbon and low alloyed steels are given in Annex A.

5 Etchants for stainless steels

The etchants for stainless steels are given in Annex B.

6 Etchants for nickel and nickel alloys

The etchants for nickel and nickel alloys are given in Annex C.

7 Etchants for titanium and titanium alloys

The etchants for titanium and titanium alloys are given in Annex D.

8 Etchants for copper and copper alloys

The etchants for copper and copper alloys are given in Annex E.

9 Etchants for aluminium and aluminium alloys

The etchants for aluminium and aluminium alloys are given in Annex F.

10 Designation

Etchants should be designated either by names or by numbers of tables in accordance with Annex G.

Table 1 — Characteristics of components

Components	Characteristics			Remarks
	Specific gravity g/cm ³	Concentration %	Hydrate	
HCl	1,18 1,16	35 to 38 31,5 to 33	—	
HF	1,13	40	—	
HNO ₃	1,42	69	—	
H ₂ SO ₄	1,84	98	—	
H ₂ O ₂	—	6 % W/V ^a	—	Usually 20 volumes (i.e. 20 volume available O ₂)
H ₃ PO ₄	1,70	85	—	
CH ₃ COOH	1,05	99,1	—	glacial
HBF ₄	1,23	35	—	
C ₂ H ₂ O ₄	—	—	2	
FeCl ₃	—	—	6	
CuCl ₂	—	—	2	
MgCl ₂	—	—	6	
Fe(NO ₃) ₃	—	—	9	

^a W/V means weight by volume.

Annex A (informative)

Etchants for carbon steels and low-alloy steels

See Tables A.1 to A.13.

Table A.1 — Nital

Type of etchant: Macroscopic and microscopic etchant
Composition in volume and in order of mixing: 99 ml to 95 ml industrial methylated spirits* 1 ml to 5 ml nitric acid (HNO ₃) *Ethyl alcohol (C ₂ H ₅ OH), denatured with methyl alcohol (CH ₃ OH) Also methyl alcohol or isoamyl alcohol [(CH ₃) ₂ CH(CH ₂) ₂ OH]
Safe shelf life: Indefinite
Surface preparation: 600 grit or finer (macroetching ≈ 5 % of nitric acid) 3 μm diamond or finer (microetching ≈ 2 % of nitric acid)
Etching temperature: Ambient
Etching time: A few seconds — check by eye
Additional precautions/requirements: Usual precautions for handling and disposal of acids.
Comments: Can increase strength to 15 % for macroetching on ground surface — reveals ferrite boundaries — differentiates ferrite from martensite. Good general purpose etchant. Amyl alcohol is preferable for galvanized steel.

Table A.2 — Picral (4 %)

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 100 ml ethyl alcohol (C ₂ H ₅ OH) 4 g picric acid [C ₆ H ₂ OH(NO ₂) ₃] [+ wetting agent (sodium dodecyl benzene sulphate) (C ₁₈ H ₂₉ NaSO ₄) if required]
Safe shelf life: Indefinite
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: A few seconds — check by eye
Additional precautions/requirements: Usual precautions for handling and disposal of acids.
Comments: Little attack prior austenite boundaries — detects carbides — good resolution with fine pearlite, martensite, tempered martensite and bainitic structures.

Table A.3 — Picric acid solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 1 l saturated aqueous picric acid [C ₆ H ₂ OH(NO ₂) ₃] 10 ml wetting agent (sodium dodecyl benzene sulphate) (C ₁₈ H ₂₉ NaSO ₄)
Safe shelf life: Indefinite
Surface preparation: 3 µm diamond or finer
Etching temperature: 55 °C to 60 °C
Etching time: A few seconds — check by eye
Additional precautions/requirements: Usual precautions for handling and disposal of acids.
Comments: Reveals prior grain boundaries and segregation.

Table A.4 — Picral (15 %)

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 100 ml ethyl alcohol* (C ₂ H ₅ OH) 15 g picric acid [C ₆ H ₂ OH(NO ₂) ₃] *Also methyl alcohol (CH ₃ OH)
Safe shelf life: Indefinite
Surface preparation: 2 µm diamond or finer
Etching temperature: Ambient
Etching time: A few seconds to one minute — check by eye
Additional precautions/requirements: Usual precautions for handling and disposal of acids.
Comments: Reveals general structure. The composition given saturates the solution with picric acid.

Table A.5 — Hydrochloric picric acid solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 100 ml ethyl alcohol (C ₂ H ₅ OH) 1 ml hydrochloric acid (HCl) 4 g picric acid [C ₆ H ₂ OH(NO ₂) ₃]
Safe shelf life: Indefinite
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: 10 s to a few minutes
Additional precautions/requirements: Usual precautions for handling and disposal of acids.
Comments: Microstructural characterization of HAZ, weld and parent metal. Especially effective for very fine structures. Less effective than Nital for the ferrite grain boundaries.

Table A.6 — Ammonium peroxodisulphate solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 100 ml water (H ₂ O) 10 g ammonium peroxodisulphate [(NH ₄) ₂ S ₂ O ₈]
Safe shelf life: Limited
Surface preparation: 6 µm diamond or finer
Etching temperature: Ambient
Etching time: 2 min to 3 min
Additional precautions/requirements: nil
Comments: Reveals extent of HAZ. Microscopic features of multipass welds.

Table A.7 — Alcoholic hydrochloric solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 100 ml ethyl alcohol (C ₂ H ₅ OH) 1 ml to 5 ml hydrochloric acid (HCl)
Safe shelf life: Indefinite
Surface preparation: 3 µm diamond or finer
Etching temperature: 40 °C to 50 °C
Etching time: A few seconds to one minute
Additional precautions/requirements: Usual precautions for handling and disposal of acids. Add HCl to C ₂ H ₅ OH.
Comments: nil

Table A.8 — 120/10/30 etchant

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 120 ml ethyl alcohol (C ₂ H ₅ OH) or methyl alcohol (CH ₃ OH) 10 ml iron (III) chloride (FeCl ₃) (60 % W/V) 30 ml hydrochloric acid (HCl)
Safe shelf life: Indefinite
Surface preparation: 2 µm diamond or finer
Etching temperature: Ambient
Etching time: A few seconds by immersion — check by eye
Additional precautions/requirements: Usual precautions for handling and disposal of acids.
Comments: Good general-purpose etchant.

Table A.9 — Cuprochloric solution 1

Type of etchant: Macroscopic etchant
Composition in volume and in order of mixing: 30 ml water (H ₂ O) 25 ml ethyl alcohol (C ₂ H ₅ OH) 40 ml hydrochloric acid (HCl) 5 g copper (II) chloride (CuCl ₂)
Safe shelf life: 2 h
Surface preparation: 1 000 grit or finer
Etching temperature: Ambient
Etching time: 10 s to 20 s
Additional precautions/requirements: After the etching, the specimen should be washed in order to remove copper deposits. Usual precautions for handling and disposal of acids.
Comments: Reveals cold working strain lines.

Table A.10 — Magneso cuprochloric solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 100 ml ethyl alcohol (C ₂ H ₅ OH) 20 ml water (H ₂ O) 1 ml hydrochloric acid (HCl) 4 g magnesium (II) chloride (MgCl ₂) 1 g copper (II) chloride (CuCl ₂)
Safe shelf life: 2 h
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: 60 s
Additional precautions/requirements: Salts should be dissolved in the smallest amount of hot water, then diluted with ethyl alcohol. A slight polishing (1 µm) after the etching furnishes the best contrast.
Comments: Reveals phosphorus and related segregations. The copper deposits first of all on those areas poorest in phosphorus.

Table A.11 — Adler's etchant

Type of etchant: Macroscopic etchant
Composition in volume and in order of mixing: 25 ml water (H ₂ O) 3 g ammonium tetra chloro diaquo cuprate (II) [(NH ₄) ₂ CuCl ₄ ·2H ₂ O] 50 ml hydrochloric acid (HCl) 15 g iron (III) chloride (FeCl ₃)
Safe shelf life: Months
Surface preparation: 320 grit or finer
Etching temperature: Ambient
Etching time: 5 s to 10 s
Additional precautions/requirements: Add [(NH ₄) ₂ CuCl ₄ ·2H ₂ O] to H ₂ O (a). Add FeCl ₃ to HCl (b). Mix both then add (b) to (a).
Comments: nil

Table A.12 — Heyn's etchant

Type of etchant: Macroscopic etchant
Composition in volume and in order of mixing: 120 ml water (H ₂ O) 10 g ammonium tetra chloro diaquo cuprate (II) [(NH ₄) ₂ CuCl ₄ ·2H ₂ O]
Safe shelf life: Months
Surface preparation: 240 grit or finer
Etching temperature: Ambient
Etching time: 10 s to 1 min
Additional precautions/requirements: Add [(NH ₄) ₂ CuCl ₄ ·2H ₂ O] to H ₂ O.
Comments: Copper deposit shall be removed.

Table A.13 — Ferric chloride solution

Type of etchant: Macroscopic etchant
Composition in volume and in order of mixing: 70 ml water (H ₂ O) 30 ml iron (III) chloride (FeCl ₃) (60 % W/V)
Safe shelf life: Indefinite.
Surface preparation: 1 000 grit or finer
Etching temperature: Ambient
Etching time: A few seconds
Additional precautions/requirements: Usual precaution for handling and disposal of acids.
Comments: 1) Swab the surface; 2) Rinse with water; 3) Swab again the surface; 4) After etching, water rinse, alcohol rinse, dry.

Annex B (informative)

Etchants for stainless steels

See Tables B.1 to B.12.

Table B.1 — Oxalic acid solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 100 ml water (H ₂ O) 10 g oxalic acid (ethanedioic acid) (C ₂ H ₂ O ₄)
Safe shelf life: Indefinite
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: A few seconds — check by eye
Additional precautions/requirements: Usual precautions for handling and disposal of acids.
Comments: Electrolytic 2 V to 6 V. Can reveal sensitivity to inter-crystalline corrosion. Reveals general structure. Reveals carbides at the grain boundaries.

Table B.2 — Thiocyanate solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 80 ml water (H ₂ O) 20 ml sulphuric acid (H ₂ SO ₄) 10 g ammonium thiocyanate (NH ₄ SCN)
Safe shelf life: Indefinite
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: A few seconds — check by eye
Additional precautions/requirements: Usual precautions for handling and disposal of acids.
Comments: Electrolytic 1,5 V to 2,0 V. Good general purpose etchant.

Table B.3 — Acidified ferric chloride solution

Type of etchant: Macroscopic etchant
Composition in volume and in order of mixing: 480 ml water (H ₂ O) 120 ml hydrochloric acid (HCl) 50 g iron (III) chloride (FeCl ₃)
Safe shelf life: Indefinite
Surface preparation: 600 grit or finer
Etching temperature: Ambient
Etching time: A few seconds to one minute — check by eye
Additional precautions/requirements: Usual precautions for handling and disposal of acids.
Comments: Good general purpose macroscopic etchant, for austenitic chromium nickel and other stainless steels.

Table B.4 — Modified Murakami's etchant

Type of etchant: Macroscopic etchant
Composition in volume and in order of mixing: 60 ml water (H ₂ O) 30 g potassium ferricyanide [K ₃ Fe(CN) ₆] 30 g potassium hydroxide (KOH)
Safe shelf life: Fresh solution
Surface preparation: 1 µm diamond or finer
Etching temperature: Temperature of freshly prepared solution (hot)
Etching time: 20 s to 40 s
Additional precautions/requirements: Usual precautions for handling and disposal of caustic solutions.
Comments: Reveals σ phase from δ ferrite and carbides. Austenite matrix is not revealed.

Table B.5 — Cuprochloric solution 2

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 100 ml water(H ₂ O) 100 ml ethyl alcohol (C ₂ H ₅ OH) 100 ml hydrochloric acid (HCl) 5 g copper (II) chloride (CuCl ₂)
Safe shelf life: 2 h
Surface preparation: 1 µm diamond or finer
Etching temperature: Ambient
Etching time: 10 s to a few minutes
Additional precautions/requirements: After etching, the test specimen should be washed in order to remove copper deposits. Usual precautions for handling and disposal of acids.
Comments: Especially for ferritic and martensitic stainless steels, an alternative to electrolytic etching. Less effective for austenitic grain boundaries that can be attacked using longer etching times. Not effective for carbides.

Table B.6 — Chromic acid solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 100 ml water (H ₂ O) 10 g chromium (VI) oxide (CrO ₃)
Safe shelf life: A few days
Surface preparation: 1 µm diamond or finer
Etching temperature: Ambient
Etching time: 10 s to 1 min
Additional precautions/requirements: Usual precautions for handling and disposal of acids.
Comments: Austenitic grain boundaries. Distinguishes σ phase and carbides. Electrolytic etching (3 V) for general purpose etchings. For the analysis of carbides, the etching is carried out in two steps: first with 1 V and afterwards with 3 V.

Table B.7 — Alcoholic hydrochloric solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 100 ml ethyl alcohol (C ₂ H ₅ OH) 1 ml to 5 ml hydrochloric acid (HCl)
Safe shelf life: Indefinite
Surface preparation: 3 µm diamond or finer
Etching temperature: 40 °C to 50 °C
Etching time: A few seconds to one minute
Additional precautions/requirements: Add HCl to C ₂ H ₅ OH. Usual precaution for handling and disposal of acids.
Comments: nil

Table B.8 — Hydrochloric nitric acid solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 39 ml water (H ₂ O) 52 ml hydrochloric acid (HCl) 9 ml nitric acid (HNO ₃), (concentration 65 %)
Safe shelf life: Indefinite
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: A few seconds to a few minutes
Additional precautions/requirements: Always add HCl and HNO ₃ to H ₂ O. Usual precautions for handling and disposal of acids.
Comments: nil

Table B.9 — Adler's etchant

Type of etchant: Macroscopic etchant
Composition in volume and in order of mixing: 25 ml water (H ₂ O) 3 g ammonium tetra chloro diaquo cuprate (II) [(NH ₄) ₂ CuCl ₄ ·2H ₂ O] 50 ml hydrochloric acid (HCl) 15 g iron (III) chloride (FeCl ₃)
Safe shelf life: Months
Surface preparation: 320 grit or finer.
Etching temperature: Ambient
Etching time: 5 s to 10 s
Additional precautions/requirements: Add [(NH ₄) ₂ CuCl ₄ ·2H ₂ O to H ₂ O] (a). Add FeCl ₃ to HCl (b). Mix both then add (b) to (a).
Comments: nil

Table B.10 — Fluonitric acid solution 1

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 50 ml nitric acid (HNO ₃) 50 ml hydrofluoric acid (HF)
Safe shelf life: Do not store after using.
Surface preparation: 2 µm diamond or finer
Etching temperature: Ambient
Etching time: 5 min to 30 min by immersion
Additional precautions/requirements: CAUTION: When handling HF wear hand and eye protection. In the event of bodily contact, wash off skin immediately and seek medical advice. Use receptacles in plastic. Usual precautions for handling and disposal of acids.
Comments: Reveals general structure.

Table B.11 — Fluonitric acid solution 2

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 100 ml water (H ₂ O) 100 ml nitric acid (HNO ₃) 100 ml hydrofluoric acid (HF)
Safe shelf life: Do not store after using.
Surface preparation: 2 µm diamond or finer
Etching temperature: Ambient
Etching time: 1 min to 15 min by immersion
Additional precautions/requirements: CAUTION: When handling HF wear hand and eye protection. In the event of bodily contact, wash off skin immediately and seek medical advice. Use receptacles in plastic. Usual precautions for handling and disposal of acids.
Comments: Reveals grain boundaries.

Table B.12 — Nitric acid solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 50 ml water (H ₂ O) 50 ml nitric acid (HNO ₃)
Safe shelf life: Indefinite
Surface preparation: 2 µm diamond or finer
Etching temperature: Ambient
Etching time: A few seconds
Additional precautions/requirements: Usual precautions for handling and disposal of acids.
Comments: Electrolytic at 3 V to 6 V. Rinse in the solution to remove the film present on the surface.

Annex C (informative)

Etchants for nickel and nickel alloys

See Tables C.1 to C.4.

Table C.1 — Alcoholic hydrochloric acid solution with hydrogen peroxide

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 65 ml ethyl alcohol (C ₂ H ₅ OH) 35 ml hydrochloric acid (HCl) 4 ml hydrogen peroxide (H ₂ O ₂) (20 volumes)
Safe shelf life: Do not store after using.
Surface preparation: 2 µm diamond or finer
Etching temperature: Ambient
Etching time: A few seconds — check by eye
Additional precautions/requirements: Add H ₂ O ₂ just before using. Usual precautions for handling and disposal of acids.
Comments: Good general-purpose etchant.

Table C.2 — Thiocyanate solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 80 ml water (H ₂ O) 20 ml sulfuric acid (H ₂ SO ₄) 10 g ammonia thiocyanate (NH ₄ SCN)
Safe shelf life: Indefinite
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: A few seconds — check by eye
Additional precautions/requirements: Usual precautions for handling and disposal of acids.
Comments: Electrolytic 1,5 V to 2,0 V. Good general-purpose etchant.

Table C.3 — Nitric acetic acid solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 30 ml acetone [(CH ₃) ₂ CO] 30 ml nitric acid (HNO ₃) 30 ml acetic acid (CH ₃ COOH)
Safe shelf life: Do not store after using.
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: few seconds — check by eye
Additional precautions/requirements: Keep cool. Nitrous oxide given off. Usual precautions for handling and disposal of acids.
Comments: Good general-purpose etchant.

Table C.4 — Adler's etchant

Type of etchant: Macroscopic etchant
Composition in volume and in order of mixing: 25 ml water (H ₂ O) 3 g ammonium tetra chloro diaquo cuprate (II) [(NH ₄) ₂ CuCl ₄ ·2H ₂ O] 50 ml hydrochloric acid (HCl) 15 g iron (III) chloride (FeCl ₃)
Safe shelf life: Months
Surface preparation: 320 grit or finer
Etching temperature: Ambient
Etching time: 5 s to 10 s
Additional precautions/requirements: Add [(NH ₄) ₂ CuCl ₄ ·2H ₂ O] to H ₂ O (a). Add FeCl ₃ to HCl (b). Mix both then add (b) to (a).
Comments: nil

Annex D (informative)

Etchants for titanium and titanium alloys

See Tables D.1 and D.2.

Table D.1 — Keller's etchant

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 950 ml water (H ₂ O) 25 ml nitric acid (HNO ₃) 15 ml hydrochloric acid (HCl) 10 ml hydrofluoric acid (HF)
Safe shelf life: Indefinite
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: A few seconds — check by eye
Additional precautions/requirements: CAUTION: When handling HF wear hand and eye protection. In the event of bodily contact, wash off skin immediately and seek medical advice. Use receptacles in plastic. Usual precautions for handling and disposal of acids.
Comments: Good general-purpose etchant.

Table D.2 — Fluonitric acid solution 3

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 880 ml water (H ₂ O) 100 ml nitric acid (HNO ₃) 20 ml hydrofluoric acid (HF)
Safe shelf life: Indefinite
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: A few seconds — check by eye
Additional precautions/requirements: CAUTION: When handling HF wear hand and eye protection. In the event of bodily contact, wash off skin immediately and seek medical advice. Use receptacles in plastic. Usual precautions for handling and disposal of acids.
Comments: Good general-purpose etchant.

Annex E (informative)

Etchants for copper and copper alloys

See Tables E.1 to E.3.

Table E.1 — Alcoholic acidified ferric chloride solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 960 ml industrial methylated spirits* 20 ml hydrochloric acid (HCl) 50 g iron (III) chloride (FeCl ₃) *ethyl alcohol (C ₂ H ₅ OH) denatured with methyl alcohol (CH ₃ OH)
Safe shelf life: Indefinite
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: A few seconds — check by eye
Additional precautions/requirements: Usual precautions for handling and disposal of acids.
Comments: Good general-purpose etchant, especially for high copper content alloys.

Table E.2 — Ammonium peroxodisulfate solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 90 ml water (H ₂ O) 10 mg ammonium peroxodisulfate [(NH ₄) ₂ S ₂ O ₈] 10 ml ammonium hydroxide (ammonia solution) (NH ₃ in H ₂ O) specific gravity 0,880 g/cm ³ .
Safe shelf life: Use fresh. Do not store after using.
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: A few seconds — check by eye
Additional precautions/requirements: Usual precautions for handling and disposal of caustic solutions.
Comments: Good general-purpose etchant.

Table E.3 — Nitric acid with ammonium and ferric nitrate solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 500 ml water (H ₂ O) 2 ml nitric acid (HNO ₃) 2 g ammonium nitrate (NH ₄ NO ₃) 20 g iron (III) nitrate [Fe(NO ₃) ₃]
Safe shelf life: Indefinite
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: A few seconds — check by eye
Additional precautions/requirements: Usual precautions for handling and disposal of acids.
Comments: Good general-purpose etchant.

Annex F (informative)

Etchants for aluminium and aluminium alloys

See Tables F.1 to F.7.

Table F.1 — Sodium hydroxide solution

Type of etchant: Macroscopic etchant
Composition in volume and in order of mixing: 100 ml water (H ₂ O) 15 g sodium hydroxide (NaOH)
Safe shelf life: Do not store after using.
Surface preparation: 600 grit or finer
Etching temperature: Ambient
Etching time: A few seconds — check by eye
Additional precautions/requirements: Usual precautions for handling and disposal of caustic solutions. Use in a fume cupboard.
Comments: Good general-purpose etchant. Can be used in various dilutions.

Table F.2 — Keller's etchant

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 950 ml water (H ₂ O) 25 ml nitric acid (HNO ₃) 15 ml hydrochloric acid (HCl) 10 ml hydrofluoric acid (HF)
Safe shelf life: Indefinite
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: A few seconds — check by eye
Additional precautions/requirements: CAUTION: When handling HF wear hand and eye protection. In the event of bodily contact, wash off skin immediately and seek medical advice. Use receptacles in plastic. Usual precautions for handling and disposal of acids.
Comments: Good general-purpose etchant. Warning: grain boundary attack can look like cracks.

Table F.3 — Hydrochloric nitric hydrofluoric acid solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 350 ml water (H ₂ O) 300 ml hydrochloric acid (HCl) 300 ml nitric acid (HNO ₃) 50 ml hydrofluoric acid (HF)
Safe shelf life: Is indicated by a change of colour to greenish brown and sluggish reaction.
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: 30 s to 60 s after start of reaction.
Additional precautions/requirements: CAUTION: When handling HF wear hand and eye protection. In the event of bodily contact, wash off skin immediately and seek medical advice. Use receptacles in plastic. Usual precautions for handling and disposal of acids.
Comments: Warning: Grain boundary attack can look like cracks.

Table F.4 — Hydrochloric nitric orthophosphoric acid solution

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 480 ml water (H ₂ O) 200 ml hydrochloric acid (HCl) 200 ml nitric acid (HNO ₃) 120 ml orthophosphoric acid (H ₃ PO ₄)
Safe shelf life: Is indicated by a change of colour to greenish brown and sluggish reaction.
Surface preparation: 3 µm diamond or finer
Etching temperature: 30 °C to 40 °C
Etching time: 60 s to 120 s after start of reaction.
Additional precautions/requirements: Usual precautions for handling and disposal of acids.
Comments: Warning: grain boundary attack can look like cracks

Table F.5 — Barker's etchant

Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 940 ml water (H ₂ O) 60 ml fluorobaric acid (HBF ₄)
Safe shelf life: Normally is stable for an unlimited period only.
Surface preparation: 3 µm diamond of finer
Etching temperature: Ambient
Etching time: 40 s to 60 s
Additional precautions/requirements: See in Clause F.1 the description of the "Barker" procedure.
Comments: Warning: grain boundary attack can look like cracks. For examination of grain and/or fibre structures of aluminium and aluminium alloys, the examination of the "Barker" anodized samples under polarized light proved to be successful and produced the required result

Table F.6 — Poulton's etchant

Type of etchant: Macroscopic etchant
Composition in volume and in order of mixing: 50 ml water (H ₂ O) 600 ml hydrochloric acid (HCl) 300 ml nitric acid (HNO ₃) 50 ml hydrofluoric acid (HF)
Safe shelf life: Do not store after using.
Surface preparation: 1 000 grit or finer
Etching temperature: Ambient
Etching time: A few seconds — check by eye
Additional precautions/requirements: CAUTION: When handling HF wear hand and eye protection. In the event of bodily contact, wash off skin immediately and seek medical advice. Use receptacles in plastic. Usual precautions for handling and disposal of acids.
Comments: Reveals general macroscopic structure.

Table F.7 — Kroll's etchant


Type of etchant: Microscopic etchant
Composition in volume and in order of mixing: 960 ml water (H ₂ O) 30 ml nitric acid (HNO ₃) 10 ml hydrofluoric acid (HF)
Safe shelf life: Indefinite
Surface preparation: 3 µm diamond or finer
Etching temperature: Ambient
Etching time: < 5 s
Additional precautions/requirements: CAUTION: When handling HF wear hand and eye protection. In the event of bodily contact, wash off skin immediately and seek medical advice. Use receptacles in plastic. Usual precautions for handling and disposal of acids.
Comments: Warning: grain boundary attack can look like cracks.

F.1 Description of the “Barker” procedure

F.1.1 General

The Barker anodic oxidation procedure should be used (see Table F.5).

A schematic representation of the method is given in Figure F.1.

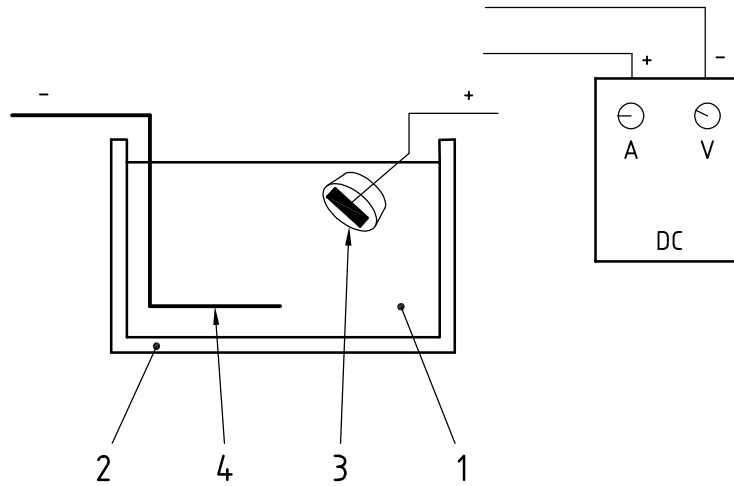

Key

- 1 electrolyte [6 % by volume HBF_4 (35 % by weight) in distilled water]
- 2 plastic container
- 3 anode (test specimen connected to an electrode by a good electrical conductor e.g. aluminium wire)
- 4 cathode (pure aluminium sheet)

Voltage: 25 V to 30 V (D.C)

Time: 40 s to 60 s

Maximum temperature: ambient temperature (stirring or cooling of electrolyte bath)

Figure F.1 — Schematic representation of the “Barker” procedure

F.1.2 Treatment

After the anodic oxidation, wash the test specimen under running water and remove the water using alcohol, dry in hot air.

Do not apply ultrasonic treatments.

F.1.3 Examination

Observe the oxidized surface with polarized light using a light microscope.

Annex G
(informative)

List of etchants

See Tables G.1 and G.2.

Table G.1 — List of etchants classified by groups of material

Name	Table	Type of etchant	Material	
Adler's etchant	A.11	Macroscopic	Carbon steels and low-alloy steels	
Alcoholic hydrochloric solution	A.7	Microscopic		
Ammonium peroxodisulfate solution	A.6			
Cuprochloric solution 1	A.9	Macroscopic		
Ferric chloride solution	A.13			
Heyn's etchant	A.12	Microscopic		
Hydrochloric picric solution	A.5			
Magneso cuprochloric solution	A.10	Macroscopic and microscopic		
Nital	A.1			
Pical (4 %)	A.2	Microscopic		
Pical (15 %)	A.4			
Picric acid solution	A.3			
120/10/30 etchant	A.8			
Acidified ferric chloric solution	B.3			
Adler's etchant	B.9	Macroscopic	Stainless steels	
Alcoholic hydrochloric solution	B.7	Microscopic		
Chromic acid solution	B.6			
Cuprochloric solution 2	B.5			
Fluonitric acid solution 1	B.10			
Fluonitric acid solution 2	B.11			
Hydrochloric nitric acid solution	B.8			
Modified Murakami's etchant	B.4			Macroscopic
Nitric acid solution	B.12			Microscopic
Oxalic acid solution	B.1			
Thiocyanate solution	B.2			

Table G.1 (continued)

Name	Table	Type of etchant	Material
Adler's etchant	C.4	Macroscopic	Nickel and nickel alloys
Alcoholic hydrochloric acid with hydrogen peroxide	C.1	Microscopic	
Nitric acetic acid solution	C.3		
Thiocyanate solution	C.2		
Keller's etchant	D.1		Titanium and titanium alloys
Fluonitric solution 3	D.2		
Alcoholic acidified ferric chloride solution	E.1		Copper and copper alloys
Ammonium peroxodisulfate solution	E.2		
Nitric acid with ammonium and ferric nitrate	E.3		
Barker's etchant	F.5		Aluminium and aluminium alloys
Hydrochloric nitric hydrofluoric acid solution	F.3		
Hydrochloric nitric orthophosphoric acid solution	F.4		
Keller's etchant	F.2		
Kroll's etchant	F.7		
Poulton's etchant	F.6	Macroscopic	
Sodium hydroxide solution	F.1		

Table G.2 — List of etchants by English alphabetical order

Name	Table	Type of etchant ^a	Material
Acidified ferric chloride solution	B.3	A	Stainless steels
	A.11		Carbon steels and low-alloy steels
Adler's etchant	B.9		Stainless steels
	C.4		Nickel and nickel alloys
Alcoholic acidified ferric chloride solution	E.1		Copper and copper alloys
	C.1		Nickel and nickel alloys
Alcoholic hydrochloric acid with hydrogen peroxide	A.7		Carbon steels and low-alloy steels
	B.7		Stainless steels
	E.2		Copper and copper alloys
Ammonium peroxodisulfate solution	A.6		Carbon steels and low-alloy steels
	F.5		Aluminium and aluminium alloys
Barker's etchant	B.6		Stainless steels
Chromic acid solution	A.9	Carbon steels and low-alloy steels	
	B.5	Stainless steels	
Cuprochloric solution 1	A.13	Carbon steels and low-alloy steels	
	B.10	Stainless steels	
Cuprochloric solution 2	B.11	Carbon steels and low-alloy steels	
	D.2	Titanium and titanium alloys	
Ferric chloride solution	A.12	Carbon steels and low-alloy steels	
Fluonitric acid solution 1			
Fluonitric acid solution 2			
Fluonitric acid solution 3			
Heyn's etchant			

^a A = macroscopic etching and I = microscopic etching in accordance with ISO 17639.

Table G.2 (continued)

Name	Table	Type of etchant ^a	Material
Hydrochloric nitric acid solution	B.8		Stainless steels
Hydrochloric nitric hydrofluoric acid solution	F.3		Aluminium and aluminium alloys
Hydrochloric nitric orthophosphoric acid solution	F.4		Carbon steels and low-alloy steels
Hydrochloric picric acid	A.5	I	Titanium and titanium alloys
Keller's etchant	D.1		Aluminium and aluminium alloys
Kroll's etchant	F.2		Carbon steels and low-alloy steels
Kroll's etchant	F.7		Aluminium and aluminium alloys
Magneso cuprochloric solution	A.10		Carbon steels and low-alloy steels
Modified Murakami's etchant	B.4	A	Stainless steels
Nital	A.1	A and I	Carbon steels and low-alloy steels
Nitric acetic acid solution	C.3		Nickel and nickel alloys
Nitric acid with ammonium and ferric nitrate	E.3		Copper and copper alloys
Nitric acid solution	B.12		Stainless steels
Oxalic acid solution	B.1	I	Stainless steels
Picral (4 %)	A.2		Carbon steels and low-alloy steels
Picral (15 %)	A.4		Carbon steels and low-alloy steels
Picric acid solution	A.3		Carbon steels and low-alloy steels
Poulton's etchant	F.6		Aluminium and aluminium alloys
Sodium hydroxide	F.1	A	Aluminium and aluminium alloys
Thiocyanate solution	B.2		Stainless steels
Thiocyanate solution	C.2	I	Nickel and nickel alloys
120/10/30 etchant	A.8		Carbon steels and low-alloy steels

^a A = macroscopic etching and I = microscopic etching in accordance with ISO 17639.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

ICS 25.160.40

Price based on 31 pages