
Stationary training equipment —

Part 8:

**Steppers, stairclimbers and climbers —
Additional specific safety requirements
and test methods**

Équipement d'entraînement fixe —

*Partie 8: Monte-escaliers, escalators et simulateurs d'escalade —
Exigences spécifiques de sécurité et méthodes d'essai supplémentaires*



Reference number
ISO 20957-8:2005(E)

© ISO 2005

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 20957-8 was prepared by CEN (as EN 957-8) and was adopted, under a special “fast-track procedure”, by Technical Committee ISO/TC 83, *Sports and recreational equipment*, in parallel with its approval by the ISO member bodies.

ISO 20957 consists of the following parts, under the general title *Stationary training equipment*:

- *Part 1: General safety requirements and test methods*
- *Part 2: Strength training equipment, additional specific safety requirements and test methods*
- *Part 4: Strength training benches, additional specific safety requirements and test methods*
- *Part 5: Pedal crank training equipment, additional specific safety requirements and test methods*
- *Part 6: Treadmills, additional specific safety requirements and test methods*
- *Part 7: Rowing machines, additional specific safety requirements and test methods*
- *Part 8: Steppers, stairclimbers and climbers — Additional specific safety requirements and test methods*
- *Part 9: Elliptical trainers, additional specific safety requirements and test methods*

Foreword

This European Standard has been prepared by Technical Committee CEN/TC 136 “Sports, playground and other recreational equipment”, the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 1998, and conflicting national standards shall be withdrawn at the latest by December 1998.

This standard EN 957 “Stationary training equipment” consists of the following parts:

- *Part 1: General safety requirements and test methods*
- *Part 2: Strength training equipment, additional specific safety requirements and test methods*
- *Part 4: Strength training benches, additional specific safety requirements and test methods*
- *Part 5: Pedal crank training equipment, additional specific safety requirements and test methods*
- *Part 6: Treadmills, additional specific safety requirements and test methods*
- *Part 7: Rowing machines, additional specific safety requirements and test methods*
- *Part 8: Steppers, stairclimbers and climbers, additional specific safety requirements and test methods*

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

Introduction

This part of EN 957 concerns the safety of steppers, stairclimbers and climbers.

It amends and supplements EN 957-1. The requirements of this specific standard take priority over those in the general standard.

EN 957-8:1998 (E)**1 Scope**

This part of EN 957 specifies safety requirements for stepper, stairclimber and climber machines (hereafter called training equipment) in addition to the general safety requirements of EN 957-1 and should be read in conjunction with it.

This part of EN 957 is applicable to stationary training equipment type stepper, stairclimber and climber training equipment (type 8), within classes S and H and class A for accuracy.

2 Normative references

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

EN 71-1, *Safety of toys — Part 1: Mechanical and physical properties.*

EN 957-1:1996, *Stationary training equipment — Part 1: General safety requirements and test methods.*

ISO 5904, *Gymnastic equipment — Landing mats and surfaces for floor exercises — Determination of resistance to slipping.*

3 Definitions

For the purposes of this standard the definitions of EN 957-1 and the following apply.

**3.1
stepper**
stationary training equipment where the feet move in a reciprocating motion without the foot having to leave the foot pedal (see figure 1)

**3.2
stairclimber**
Stationary training equipment similar to a moving mechanical staircase or escalator (see figure 2)

NOTE Work is carried out by simulating climbing a conventional staircase.

**3.3
Climber**
stationary training equipment that is equipped with feet and hand positions that can be moved in a reciprocating motion (see figure 3)


**3.4
dependent action**
movement of each foot pedal linked directly or indirectly

**3.5
independent action**
movement of each foot pedal not linked


**3.6
step**
downward movement of either foot pedal or stair

**3.7
foot guard**


a raised edge, see figures 1 and 5

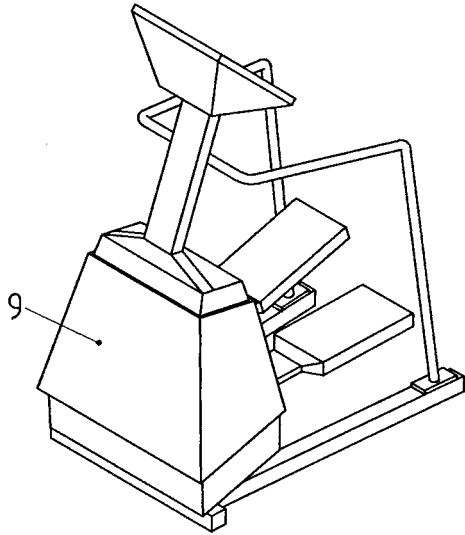

a) Stepper class S

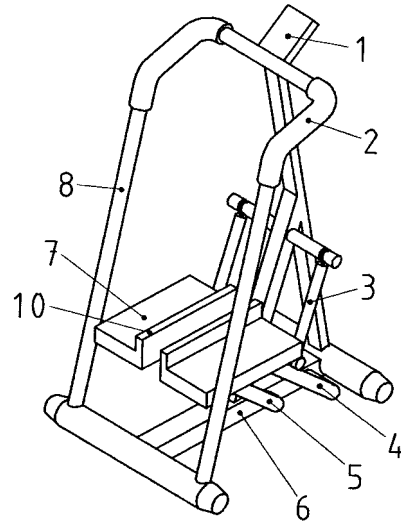

b) Stepper class H




c) Ministepper

Key

- 1 Display
- 2 Hand grip
- 3 Hydraulic piston/resistance
- 4 Lever arm
- 5 Pedal stabilizing arm
- 6 Base frame
- 7 Foot pedal
- 8 Handrail/handlebar
- 9 Housing
- 10 Foot guard

Figure 1 — Examples of steppers


EN 957-8:1998 (E)

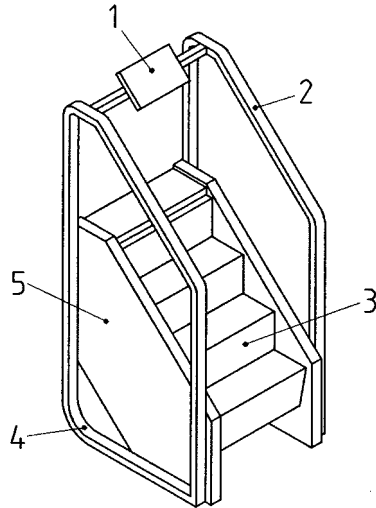

Key

- 1 Display
- 2 Handrail
- 3 Stair
- 4 Base frame
- 5 Housing

Figure 2 — Example of a stairclimber

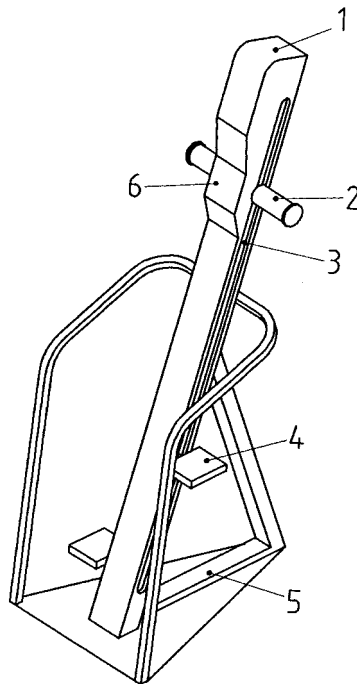

Key

- 1 Display
- 2 Movable handgrip
- 3 Track rail
- 4 Foot pedal
- 5 Base frame
- 6 Resistance adjustment

Figure 3 — Example of a climber

4 Classification

Clause 4 of EN 957-1:1996 applies.

5 Safety requirements

5.1 General

Depending on the design of the piece of equipment the requirements in accordance with 5.2 to 5.8 shall apply as appropriate.

5.2 External construction

5.2.1 Squeeze, shear and reciprocating parts within the accessible area

The distance between movable parts and adjacent movable or rigid parts shall be at least 25 mm if relevant only for fingers, otherwise it shall be 60 mm.

Required stops are excluded (if the user is not put at risk).

The 25 mm and 60 mm do not apply when the squeeze points remain within the user's field of vision (see figure 4) over the full range of movement.

When the training machine is not in use the 25 mm requirement applies.

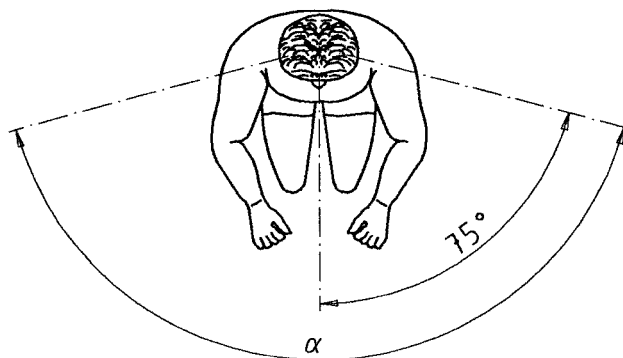



Figure 4 — Field of vision

If the distance between the pedals is more than 60 mm no fence is required on the inside of the foot pedals (see figure 5 a)).

Where the pedals are separated by a fixed part of the machine (e. g. a frame, guard or smooth cover) with a minimum width of 30 mm, there shall be a constant distance of not more than 9,5 mm and no foot guard is required on the inside of the foot pedals (see figure 5 b)).

Where the inside edge of the foot pedals have a foot guard 30 mm high, the distance between the foot pedals can be a minimum of 25 mm (see figure 5 c)).

In all 3 cases there shall be no further projections within the free space, e. g. bolts, beyond the inside edge of the pedals.

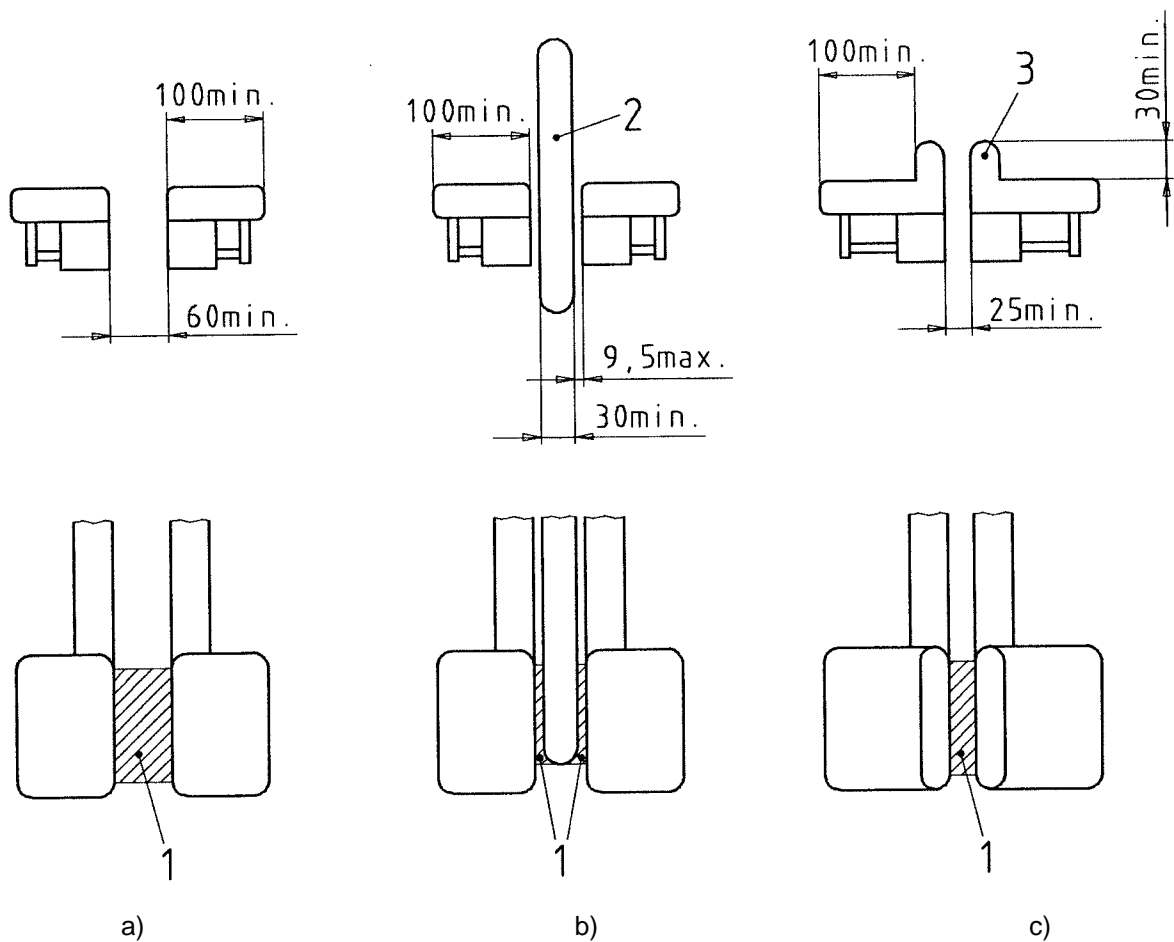**Key**

- 1 free space
- 2 closed flat area with constant distance
- 3 foot guard

Figure 5 — Squeeze points

If the lever arm or foot pedal is used as an accessible stop this stop shall have a flat contact area with a minimum surface area of 800 mm² and edges of the stop shall have a minimum radius of 2,5 mm. The maximum stop load shall not exceed the body weight.

The minimum distance between the base of the foot pedal and the floor or base frame shall be not less than 60 mm, excluding accessible stops.

Test in accordance with 6.2.

5.2.2 Transmission elements and rotating parts

All transmission elements, e. g. fans and flywheels, shall be protected, so that users finger cannot be trapped.

Test in accordance with 6.2.

5.2.3 Temperature rise

Immediately after testing in accordance with 6.3, accessible parts of the equipment shall not exceed a temperature greater than 65 °C.

5.3 Intrinsic loading

5.3.1 Each piece of equipment of **class H** loaded with the user's bodymass shall withstand 2,5 times the bodymass (100 kg) without breakage.

Testing in accordance with 6.4.

5.3.2 Each piece of equipment of **class S** loaded with the user's bodymass shall withstand 2 times the bodymass (100 kg).

When tested according to 6.4, supports (e. g. load bearing surfaces) shall not be deformed by more than $f = 1/100$, cantilever supports (cantilever surfaces) by more than $f = 1/150$ and other dimensions by more than 1 %.

The training equipment shall not break when a static load of 4 times the bodymass is applied.

A body mass of 100 kg is taken as nominal load.

After the test

- supports (e. g. load bearing surfaces) shall not be deformed by more than $f = 1/100$;
- cantilever supports (cantilever surfaces) by more than $f = 1/150$;
- other dimensions by more than $1/100$.

5.4 Handrails/handlebars

If equipped with handrails or handlebars these shall show no permanent deformation of more than 3 % when tested in accordance with 6.5.

All accessible edges shall be rounded with a radius of not less than 2,5 mm.

Test in accordance with 6.5.

5.5 Foot pedals and stairs

All accessible edges of foot pedals and stairs shall be rounded with a radius of not less than 2,5 mm.

When tested in accordance with ISO 5904, the friction factor of the pedal/stair surface shall be more than 0,5.

The minimum width of the foot pedals and stairs excluding the foot guards shall be 100 mm.

5.6 Endurance test

When tested in accordance with 6.6, the training equipment shall withstand

- 12 000 cycles for class H and
- 100 000 cycles for class S.

After the test the training equipment shall be capable to functioning according to the manufacturer's information on the correct use and shall not show any signs of damage, e. g. oil leakage.

5.7 Free wheel

In the case of air fan or flywheel assisted steppers then the transmission assembly should be of a free wheel type.

Testing in accordance with 6.1.2 and 6.1.4.

EN 957-8:1998 (E)**5.8 Additional requirement for class A**

The variation of the indicated or determined power P from the actual power output shall not exceed ± 5 W up to 50 W and ± 10 % over 50 W.

6 Test methods**6.1 General**

- 6.1.1 Dimensional check.
- 6.1.2 Visual examination.
- 6.1.3 Tactile examination.
- 6.1.4 Performance test.

6.2 Testing squeeze, shear and reciprocation points and of transmission elements and rotating parts

Apparatus:

- test finger probe B in accordance with EN 71-1 for class H and
- test finger in accordance with 6.5 of EN 957-1:1996 for class S.

Approach the test fingers from all sides to all moving parts.

Determine whether the finger is trapped.

6.3 Testing of temperature rise

Apparatus: contact thermometer with an accuracy of ± 1 °C.

Carry out these tests using (100 ± 5) kg test subjects.

Operate the training equipment at 60 steps/min ± 10 % for 20 min.

The step height shall be (180 ± 5) mm when measured at the centre of the foot pedal or the maximum possible step height of the equipment if this is not achievable.

The resistance shall be set at the maximum resistance or reduced until 60 steps/min can be maintained without a pause between steps.

Note whether the temperature has exceeded 65 °C.

For speed dependent training machines carry out the test using a 100 kg load and a paddling speed producing a mechanical power of 180 W ± 10 %.

6.4 Testing of intrinsic loading

Set the resistance to a condition which subjects the machine to a maximum stress.

Apply the required test load F for classes H or S without shock for 5 min in the stop position to one pedal over a surface area of 90 mm \times 90 mm.

Remove the applied load and measure the deformation.

Repeat for the other pedal.

When more than one function is tested, which involves the use of common components, e. g. ropes, pulleys, these can be replaced before each separate test.

In order to test the whole drive system, e. g. linkages and frame, place the foot pedal at the mid-point of its range of movement and lock it at the fixing point of the resistance mechanism furthest away from the foot pedal (e. g. for dependant stepper lock the other pedal).

Apply the load F without shock in the most onerous position over a surface area of $90 \text{ mm} \times 90 \text{ mm}$ of the foot pedal or stair so that the whole system is subjected to stress (see figure 6).

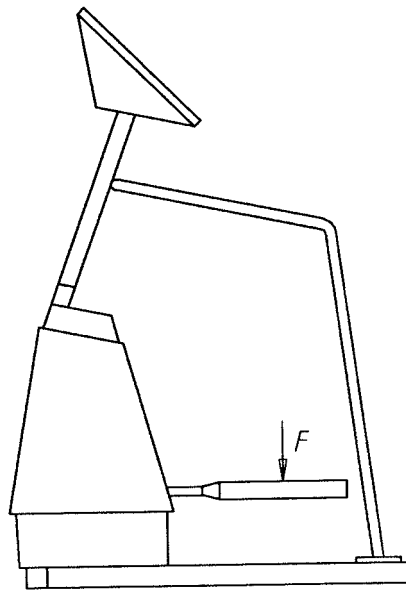


Figure 6 — Test of intrinsic loading

The base frame of training equipment shall not be fixed to the floor during the test unless instructed otherwise in the instructions for use.

6.5 Testing of handrails/handlebars

Apply a force of 1 000 N vertically in the most onerous position of the handrail or handlebar by means of a belt with a width of (80 ± 5) mm for a period of 5 min.

Then apply a force of 500 N horizontally using the belt in the same position as in the vertical test but in the most onerous horizontal direction of the handrails or handlebar for a period of 5 min.

Then determine the permanent deformation.

6.6 Endurance testing

For speed independent steppers carry out the test at $60 \text{ steps/min} \pm 10 \%$ with a step height of 180 mm in the centre of the pedal movement or the maximum possible step height of the equipment if this is not achievable, using a bodymass of 100 kg for each foot pedal or stair.

For speed dependent steppers carry out the test with a step height of (180 ± 5) mm in the centre of the pedal movement or the maximum step height if this is not achievable at a step speed which produces an average of 180 W mechanical power $\pm 10 \%$.

EN 957-8:1998 (E)

Perform the endurance test as follows:

- a) for class H 12 000 cycles working for 15 min and rest time 15 min and continue the same pattern until complete;
- b) for class S 100 000 cycles working for 10 h, cool down to room temperature, then continue for further 10 h and continue this method until test is complete.

Check the training equipment is capable of being used as per manufacturers instructions for use.

6.7 Testing of the additional requirement for class A

Compare the mechanical power input to the power display.

Determine the mechanical power input by calculating the input force over distance (range of movement) and time.

The displayed value shall be within $\pm 10\%$ of this measured value in watts using the test parameters of the manufacturer, see clause 7 c).

The power input shall be an average of an 10 min test period.

The test apparatus for measuring force, distance and time shall be accurate to $\pm 1\%$ for each of the three variables.

7 Additional instructions for use

In addition to EN 957-1 easy-to-understand instructions for use shall be supplied with each stepper, stairclimber and climber.

The instructions for use shall include information on at least the following points, depending on the class

- a) information on the braking system (speed dependent — speed independent)
- b) information on the stepping action (dependent or independent)
- c) for class A the testing parameters to include training speed, resistance setting and range of movement used in the test.

ICS 97.220.30

Price based on 9 pages