
**Electromagnetic compatibility — Product
family standard for lifts, escalators and
moving walks — Emission**

*Compatibilité électromagnétique — Norme pour la famille de produits:
ascenseurs, escaliers mécaniques et trottoirs roulants — Émission*



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.



COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction.....	v
1 Scope	1
2 Normative references	1
3 Terms, definitions and abbreviated terms	2
3.1 Terms and definitions	2
3.2 Abbreviated terms	4
4 Test set-up procedure.....	4
4.1 General	4
4.2 Radiated and conducted radio frequency emissions	4
4.3 Mains supply harmonics	7
5 Applicability of tests	7
6 Emission limits	7
6.1 Enclosure ports — radiative.....	7
6.2 a.c. mains ports — conductive	7
6.3 Output power ports — conductive	7
6.4 Impulse noise.....	8
6.5 Voltage fluctuations	8
6.6 Mains supply current harmonics	8
6.7 Measurement	8
7 Documentation for the installer of the apparatus/assembly of apparatus.....	10
Bibliography.....	11

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 22199 was prepared by Technical Committee ISO/TC 178, *Lifts, escalators and moving walks*.

This second edition cancels and replaces the first edition (ISO 22199:2006), which has been technically revised.

Introduction

ISO 22199 is a type-C standard as stated in ISO 12100-1. When provisions of a type-C standard are different from those which are stated in type-A or type-B standards, the provisions of the type-C standard take precedence over the provisions of the other standards for machines that have been designed and built according to the provisions of the type-C standard.

This International Standard is based on European Standard EN 12015:2004.

EN 12015 specifies new requirements to control the emissions below 30 MHz of the drive to machine/motor connection and mains electricity supply harmonic emissions and voltage fluctuations. The previous edition of this International Standard addressed these requirements. However, as CISPR 11 and CISPR 14-1 have been revised since the publication of the previous edition of this International Standard, the technical requirements of this International Standard are also being revised.

The requirements of this International Standard have been specified so as to ensure a level of electromagnetic emission that causes minimal disturbance to other equipment. The levels, however, do not cover the following cases:

- a) where the probability of an occurrence likely to produce emissions in excess of those which are normally experienced is extremely low, e.g. the emergency stopping of a lift, escalator or passenger conveyor under a fault condition;
- b) where highly susceptible apparatus is used in the close proximity of the equipment covered by this International Standard, in which case further measures might have to be taken to
 - 1) reduce the electromagnetic emission to below the levels specified in this International Standard, or
 - 2) increase the immunity of the affected apparatus.

The emission limits given are on the basis that equipment of the product family range is installed both indoors and outdoors in all types of building, involves the switching of heavy currents and high inductive loads and, generally, is connected to a low-voltage system.

The following explains the rationale for the revision of this International Standard.

Harmonic emission requirements stated by EN 12015 were initially developed on limits defined by a draft version of IEC/TS 61000-3-4 and IEC 77A/169/CDV, which were at that time the only documents (technical reports) available for harmonic emission above 16 A, applicable to three-phase equipment.

In 2000, a harmonic emission standard was created to cover the range of equipment from 16 A to 75 A, namely IEC 61000-3-12. IEC/TS 61000-3-4 remains valid as a technical report for current above 75 A, but it has not been modified or converted into an International Standard, as required by IEC rules.

IEC 61000-3-12 states different limits compared to those stated by EN 12015, which consequently have become obsolete and not consistent with new harmonized limits. The modifications in this edition of this International Standard are the following.

- a) Important changes
 - 1) Requirements to control the emissions below 30 MHz of the drive to machine/motor connection are introduced. The emission limits are independent of the magnitude of the conducted current. Limits and test method are those given in CISPR 14-1. Regarding other ports, the radiated tests above 30 MHz cover the cable connections and there are no known problems below 30 MHz.

- 2) Requirements to control mains electricity supply harmonic emissions and voltage fluctuations are introduced.

NOTE The radiation measurements in Table 1 have been harmonized with CISPR 11.

- 3) The term “installation” has been changed to “system”. This is because official interpretation defines fixed installations as not being covered by the conformity assessment requirements of the electromagnetic compatibility (EMC) Directive, which is valid for apparatus and systems. This International Standard is applicable to the apparatus and assembly of apparatus of lifts and escalators and assembly into systems.

b) Environmental issues

- 1) Lifts, escalators and moving walks are systems whose apparatus and assembly of apparatus are distributed (and some of which move) throughout the building. The definition in EMC terms of the use of the building (residential or industrial) cannot be predetermined or assumed to be fixed. Therefore, to cover requirements in all cases, no differentiation between environments has been made and a single set of limits has been maintained. This set of high-frequency limits is based on the industrial limits of IEC 61000-6-4 and is known to be above the usual limits for the residential environment. This is justified by the experience that systems in compliance with this International Standard have not been known to cause EMC interference with regard to mains and radiated emissions above 30 MHz.
- 2) Regarding conducted limits, these are also based on the fact that the supply cabling is separated from other building supplies at least up to the point of common coupling (PCC). Additionally, system wiring is segregated in accordance with the manufacturer's specifications.
- 3) Concerning radiated emission limits above 30 MHz, the lift, escalator or moving walk area is separated, to a large extent, from domestic appliances.
- 4) All the limits used take into account that systems have to comply with the safety protection requirements regarding earth leakage currents. The application of more stringent limits than have been shown to be adequate would require the use of larger filters (both inductance and capacitance). The use of these will increase the susceptibility of the system to low electricity mains supply conditions and increase earth leakage currents. There is also an increase in power dissipation in the filter, causing (in the general case) increased energy consumption, additional ventilation and cooling requirements for the building. This is especially valid for higher duty systems:

- limits for 5th, 7th harmonic are higher in IEC 61000-3-12:2004, Table 3;
- limits for 11th, 13th harmonic are higher in EN 12015;
- limits for total harmonic distortion (THD) are higher in IEC 61000-3-12:2004, Table 3;
- limits for partial weighted harmonic distortion (PWHD) are higher in IEC 61000-3-12:2004, Table 3;
- no more limits for even harmonics above 12th order because the overall distortion is taken into account in THD and PWHD values in IEC 61000-3-12:2004, Table 3;
- no more limits for odd harmonic orders because the overall distortion is taken into account in THD and PWHD values in IEC 61000-3-12:2004, Table 3;
- no more limits for individual harmonic currents below 1 % in IEC 61000-3-12:2004, 4.2;
- limits for short duration referred to harmonic for the first 10 s during switching on or off are not taken into account in IEC 61000-3-12:2004, 4.2.3.

- 5) Harmonic limits in EN 12015 are referred to a short-circuit power, $R_{s_{ce}} = 250$, which was taken as an average value for lift, escalator and moving walk application (see EN 12015:2004, 4.3); for this reason, harmonic limits should be compared with values referred to $R_{s_{ce}} = 250$ in IEC 61000-3-12.
- 6) Elevator, escalator and moving walk are considered to be a three-phase balanced system when operating at rated current; for this reason, Table 3 of IEC 61000-3-12:2004 should be considered.
- 7) The limits given in this International Standard recognize that the product family covers a total range of lifts, escalators and moving walks used in residential buildings, offices, hospitals, hotels, industrial plants, etc. and that lifts, escalators and passenger conveyors are deemed to have their own dedicated power supply and be connected with the consent of the supply authority to a low impedance source.

The related EMC product family standard for immunity is ISO 22200.

Electromagnetic compatibility — Product family standard for lifts, escalators and moving walks — Emission

1 Scope

This International Standard specifies the emission limits and test conditions for lifts, escalators and passenger conveyors permanently installed in buildings.

NOTE These limits, however, might not provide full protection against disturbances caused by radio and television reception, when such equipment is used within distances given in Table 1.

For conducted phenomena and harmonic distortion, this International Standard is applicable to equipment intended to be connected to low-voltage systems interfacing with the public supply at the low-voltage level. It is not applicable to equipment intended to be connected only to private low-voltage systems interfacing with the public supply only at the medium- or high-voltage level. Where the equipment is intended to be connected only to private systems, it is advisable that the manufacturer state this in the product documentation. Limits of interference within private systems can be negotiated between the affected parties.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

CISPR 11, *Industrial, scientific and medical (ISM) radio-frequency equipment — Electromagnetic disturbance characteristics — Limits and methods of measurement*

CISPR 14-1:2002, *Electromagnetic compatibility — Requirements for household appliances, electric tools and similar apparatus — Part 1 : Emission*

IEC 61000-3-11, *Electromagnetic compatibility (EMC) — Part 3-11: Limits — Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems — Equipment with rated current ≤ 75 A and subject to conditional connection*

IEC 61000-3-12:2004, *Electromagnetic compatibility (EMC) — Part 3-12: Limits — Limits for harmonic currents produced by equipment connected to public low-voltage systems with input current > 16 A and ≤ 75 A per phase*

IEC 61000-6-3, *Electromagnetic compatibility (EMC) — Part 6-3: Generic standards — Emission standard for residential, commercial and light-industrial environments*

IEC 61000-6-4, *Electromagnetic compatibility (EMC) — Part 6-4: Generic standards — Emission standard for industrial environments*

IEC 60050-161, *International Electrotechnical Vocabulary — Chapter 161: Electromagnetic compatibility*

3 Terms, definitions and abbreviated terms

For the purposes of this document, the terms and definitions given in IEC 61000-6-3, IEC 61000-6-4 and IEC 60050-161 and the following apply.

3.1 Terms and definitions

3.1.1 system

lift, escalator or moving walk comprising assembly of apparatus with electrical and electronic equipment and interconnections

See Figures 1 and 2.

3.1.2 assembly of apparatus

arrangement of interconnected apparatus, which can be tested together

See Figures 1 and 2.

3.1.3 apparatus

assembly of components with an intrinsic function as defined by its manufacturer

See Figures 1 and 2.

NOTE Safety components defined by Annex IV of Directive 95/16/EC (the Lifts Directive) are considered as apparatus.

3.1.4 root-mean-square r.m.s

effective value of the current

3.1.5 total harmonic distortion

k_T
THD
ratio of the r.m.s value of the harmonics to the r.m.s value of the fundamental

NOTE THD, k_T , is calculated from Equation (1):

$$k_T = \sqrt{\sum_{n=2}^{40} \left(\frac{I_n}{I_1} \right)^2} \quad (1)$$

where

I_n is the r.m.s value of the current of the nth harmonic;

I_1 is the r.m.s value of the fundamental current.

3.1.6 partial weighted harmonic distortion

k_{PW}
PWHHD
ratio of the r.m.s value of a selected group of higher order harmonics (here beginning from the 14th harmonic), weighted with the harmonic order n , to the r.m.s value of the fundamental

NOTE PWHD, k_{PW} , is calculated from Equation (2):

$$k_{PW} = \sqrt{\sum_{n=14}^{40} n \left(\frac{I_n}{I_1} \right)^2} \quad (2)$$

where

I_n is the r.m.s value of the current of the nth harmonic;

I_1 is the r.m.s value of the fundamental current.

3.1.7

balanced three-phase system

system connected to the three phases and designed in such a way that, for rated conditions, the r.m.s value of the current in each of the three phases differs by not more than 20 %

NOTE The neutral conductor is not used as a current-carrying conductor under normal operating conditions.

3.1.8

point of common coupling

PCC

point in the public mains network which is nearest to the system and to which other equipment may be connected

3.1.9

short-circuit power

S_{sc}

value of the three-phase short-circuit power calculated from nominal voltage of the system, U_n , and impedance, Z , at PCC

NOTE This is given by Equation (3):

$$S_{sc} = \frac{U_n^2}{Z} \quad (3)$$

3.1.10

rated apparent power

S_{equ}

value calculated from the phase-to-phase voltage, U_i , and the rated r.m.s line current, I_{equ} , of the apparatus/assembly of apparatus

NOTE This is given by Equation (4):

$$S_{equ} = \sqrt{3} \times U_i \times I_{equ} \quad (4)$$

3.1.11

short-circuit ratio

R_{sce}

ratio of the short-circuit power of the source to the apparent power of the load(s)

NOTE For apparatus/assembly of apparatus connected to a three-phase electricity supply, it is equal to:

$$R_{sce} = \frac{S_{sc}}{S_{equ}} \quad (5)$$

3.1.12

port

particular interface of the specified apparatus/assembly of apparatus with the external electromagnetic environment

See Figure 3.

3.1.13

enclosure port

boundary of the apparatus/assembly of apparatus through which electromagnetic fields can radiate or impinge

See Figure 3.

3.2 Abbreviated terms

PCC point of common coupling

PWHD partial weighted harmonic distortion

r.m.s root-mean-square

THD total harmonic distortion

4 Test set-up procedure

4.1 General

4.1.1 The measurements shall be made in the operation mode producing the highest emissions consistent with normal applications. An attempt shall be made to maximize the emissions by varying the position of the test sample in the test facility.

4.1.2 It is not always possible to measure emission for every function of the apparatus or assembly of apparatus.

In such cases, the most critical period of operation shall be selected under normal operating modes.

4.1.3 If the CISPR 11 and CISPR 14-1 do not specify any other conditions, the tests shall be carried out at a single set of environmental conditions within the manufacturer's specified operating range of temperature, humidity, pressure and supply voltage.

4.1.4 Measurements shall be taken in well-defined and reproducible conditions for each test. The configuration and mode of operation during measurement shall be precisely recorded.


4.2 Radiated and conducted radio-frequency emissions

4.2.1 The tests, test methods, characteristics of the tests and test set-ups shall be as stated in CISPR 11.

4.2.2 Travelling cables or any other cables likely to be more than 5 m long shall be represented by a sample of at least 5 m long connected to the relevant port for the purpose of testing for radiative emission.

4.2.3 If the apparatus has a large number of similar ports or ports with many similar connections, a sufficient number shall be selected to simulate actual operating conditions and to ensure that all the different types of termination are covered.

4.2.4 Measurement shall be taken at the enclosure ports (radiative), a.c. mains and output power ports (conductive) of the apparatus/assembly of apparatus.

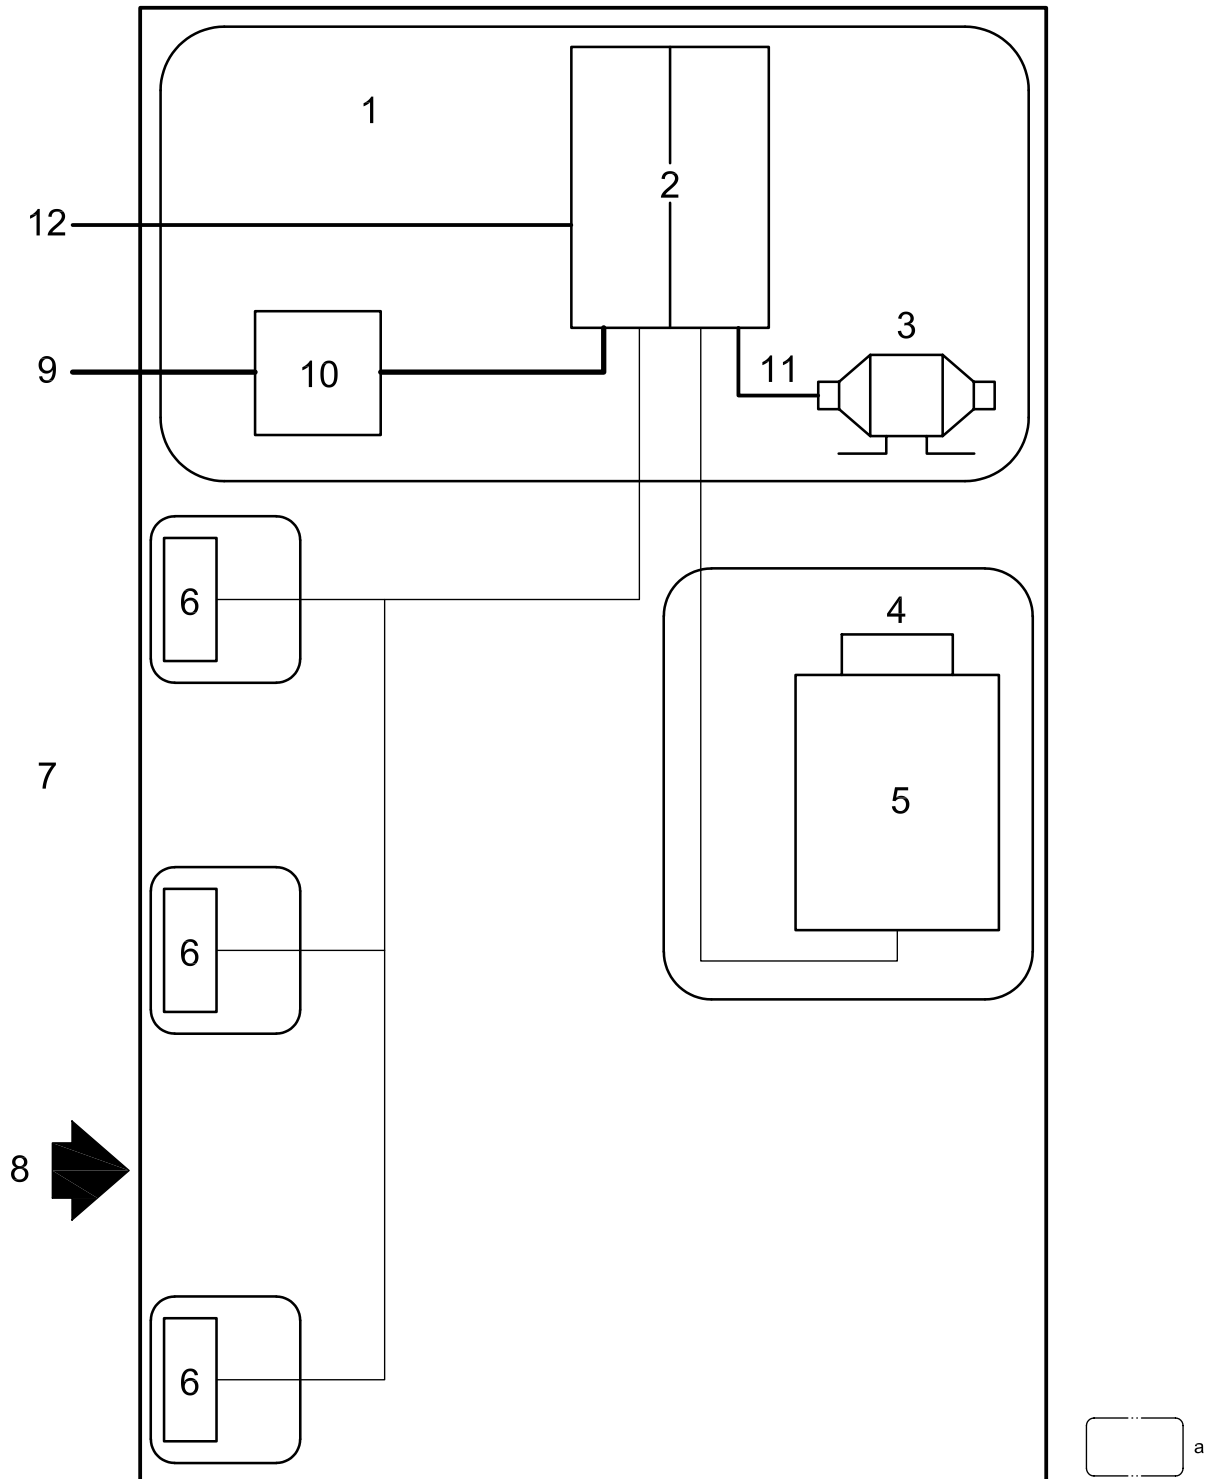


Key

- | | |
|--|-----------------------------|
| 1 machinery space | 7 landings |
| 2 main control/control cabinet | 8 system boundary |
| 3 machine | 9 a.c. and d.c. power ports |
| 4 door control | 10 main switch |
| 5 lift car | 11 output power port |
| 6 apparatus installed at the landing (e.g. push buttons, indicators) | 12 signal and control ports |

^a Assembly of apparatus.

Figure 1 — Example of EMC model (emission) for lift systems

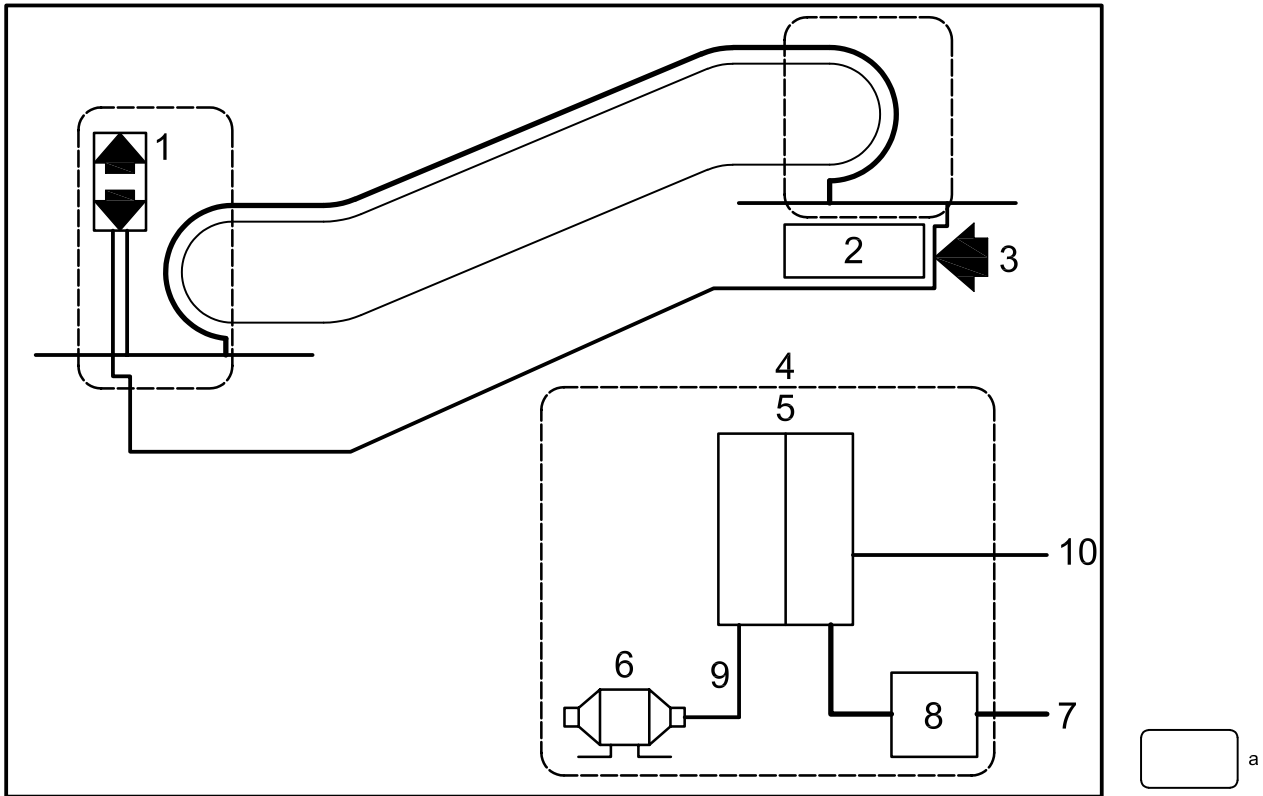

Key

- | | |
|---------------------------------|-----------------------------|
| 1 control panels | 6 machine |
| 2 machinery space (see 4 to 10) | 7 a.c. and d.c. power ports |
| 3 system boundary | 8 main switch |
| 4 machinery space | 9 output power port |
| 5 main control/control cabinet | 10 signal and control ports |
| a Assembly of apparatus. | |

NOTE The machinery space can also be an external room.

Figure 2 — Example of EMC model (emission) for escalator and moving walk systems

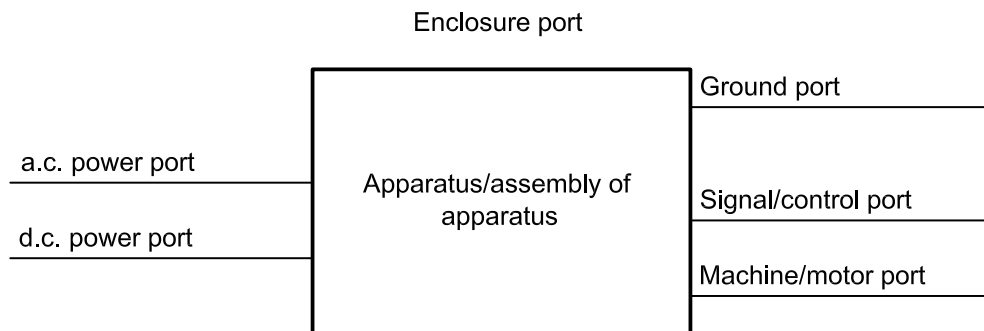


Figure 3 — Examples of ports

4.3 Mains supply harmonics

The tests, test methods, characteristics of the tests and test set-ups shall be as stated in IEC 61000-3-12.

As the supply authorities do not guarantee a defined mains impedance, the mains short-circuit power may vary from location to location. As these parameters are normally not known in advance, a practical assumption shall be made, based on values already known from other lifts/escalators and moving walks already in service.

As a consequence of that fact, a short-circuit ratio $R_{sce} = 250$ is defined as an average value for lifts, escalators and moving walks.

As these are normally within the limits of the definition for a balanced, three-phase system, the values given in Table 4 are taken from the standards related to these kinds of systems.

5 Applicability of tests

The application of tests for evaluation of levels of emission depends on the type of apparatus/assembly of apparatus, its configuration, ports, technology and operating conditions.

5.1 It can be determined from consideration of the electrical characteristics and usage of a particular apparatus/assembly of apparatus that some of the tests are inappropriate and therefore unnecessary. In such a case, the decision and justification not to test shall be recorded.

5.2 Where deviations from the test methods specified in 4.2.1 and 4.3 are applied, such deviations shall be justified and recorded.

6 Emission limits

6.1 Enclosure ports — radiative

The electromagnetic emission levels measured at each enclosure port (radiative) of the apparatus/assembly of apparatus shall not exceed the limits specified in Table 1. These limits are not applicable to *in situ* measurements.

6.2 a.c. mains ports — conductive

6.2.1 The electromagnetic emission levels measured at each a.c. mains port (conductive) of the apparatus/assembly of apparatus operating at less than 1 000 V r.m.s shall not exceed the limits specified in Table 2. Different limits apply to emissions resulting from certain rates of impulse noise, as stated in 6.4.

6.2.2 The harmonics emission levels measured at each a.c. mains port (conductive) of the apparatus/assembly of apparatus, operating at less than or equal to 600 V r.m.s shall not exceed the limits specified in Table 4. Different limits apply to emission resulting from certain operating conditions, also defined in this table.

6.3 Output power ports — conductive

The electromagnetic emission levels at each machine/motor port (conductive) of the apparatus/assembly of apparatus shall not exceed the limits specified in Table 3. If shielded connectors and shielded cables, in accordance with the apparatus/assembly of the apparatus manufacturer's specifications, are used for machine/motor ports, or the cables are less than or equal to 2 m long, measurements at those ports are not necessary.

6.4 Impulse noise

Electromagnetic emission levels resulting from impulse noise (clicks), measured as for 6.2.1, shall not exceed the limits specified in Table 2, if the clicks occur more frequently than 30 times per minute. Electromagnetic emission levels resulting from clicks which occur between 0,2 times and 30 times per minute shall not exceed the limits specified in Table 2 raised by a value of:

$$20 \lg_{10} \frac{30}{N} \text{ dB } (\mu \text{ V}) \quad (6)$$

where N is the number of clicks per minute. These limits do not apply to the exceptions given in CISPR 14-1.

6.5 Voltage fluctuations

The requirements of IEC 61000-3-11 are applicable.

Voltage fluctuations are dependent on the impedance of the mains supply for an individual system and the characteristics of the apparatus/assembly of apparatus. The manufacturer shall document the maximum impedance of the electricity mains supply for the system.

Apparatus/assembly of apparatus using controlled speed drives is known not to be a cause of voltage flicker disturbance. However, direct online or star-delta starting of escalator motors, hoisting and hydraulic pump motors and repetitive direct switching of highly inductive loads (e.g. transformer) should be treated with caution.

6.6 Mains supply current harmonics

The limits of Table 4 apply.

6.7 Measurement

6.7.1 Radiated and conducted radio-frequency emission

To determine conformity to the requirements of 6.1 and 6.2.1, emission levels shall be measured by the methods specified in CISPR 11 and under the conditions specified in Clause 4.

To determine conformity to the requirements of 6.3, the measurement method as defined in CISPR 14-1 for load terminals shall be used.

6.7.2 Mains supply harmonics

If the ratios I_n/I_1 for further evaluation are determined by measurements, they shall be derived from instantaneous values of the fundamental and harmonic currents.

The ratios I_n/I_1 used for comparison with the limits given in Table 4 shall be based on a fundamental current that is at least the rated current of the system defined by the manufacturer.

The limits given in Table 4 apply to equipment when connected to 230 V/400 V, 50 Hz systems. The limits for the other systems will be added in a future edition of this International Standard.

Table 1 — Emission limits for enclosure (radiative) ports

Frequency range MHz	Limit for measurements on a test site at 10 m distance ^a dB(μV/m)
$30 \leq f < 230$	40 quasi peak
$230 \leq f \leq 1\,000$	47 quasi peak

^a These limits are based on those specified in IEC 61000-6-4. Measurements made at a distance of less than 10 m shall be made in accordance with CISPR 11. Measurements shall not be taken at a distance of less than 3 m.

Table 2 — Emission limits for a.c. mains (conductive) ports

Frequency range MHz	Limit dB(μV)		
	Measurement with rated mains input current ^a		
	< 25 A	25 A to 100 A	> 100 A ^c
$0,15 \leq f < 0,5$	79 quasi peak 66 average	100 quasi peak 90 average	130 quasi peak 120 average
$0,5 \leq f < 5,0$	73 quasi peak 60 average	86 quasi peak 76 average	125 quasi peak 115 average
$5,0 \leq f < 30$	73 quasi peak 60 average	90 to 70 ^b quasi peak 80 to 60 ^b average	115 quasi peak 105 average

^a The current for which the apparatus has been designed.
^b Decreasing with logarithm of frequency.
^c This assumes a dedicated power supply from a specific transformer.

Table 3 — Emission limits for output power (conductive) ports

Frequency range MHz	Limit dB(μV)
	Measurement with rated output current
$0,15 \leq f < 0,5$	80 quasi peak 70 average
$0,5 \leq f < 5,0$	74 quasi peak 64 average
$5,0 \leq f < 30$	74 quasi peak 64 average

Table 4 — Harmonic distortion

Environmental phenomenon	Test set-up	Unit %	Limit ^a
Harmonic distortion	IEC 61000-3-12	I_5/I_1 [%]	31
		I_7/I_1 [%]	20
		I_{11}/I_1 [%]	12
		I_{13}/I_1 [%]	7
Harmonic distortion factor	IEC 61000-3-12	THD [%]	37
		PWHD [%]	38
<p>The limits given in this table apply to equipment when connected to 230 V/400 V, 50 Hz systems.</p> <p>The relative values of even harmonics up to order 12 shall not exceed $16/n$ %. Even harmonics above order 12 are taken into account in THD and PWHD in the same way as odd order harmonics.</p>			
<p>^a The given limits are based on IEC 61000-3-12 for $R_{scc} = 250$ (balanced three-phase equipment).</p> <p>^b Individual harmonic currents below 1 % of the reference fundamental current are disregarded.</p>			

7 Documentation for the installer of the apparatus/assembly of apparatus

The installer shall be provided with documentary information and instructions for installation and use, such that compliance with this International Standard is maintained.

This shall include, where applicable:

- a) instructions for assembly and physical arrangement with other apparatus;
- b) instructions and precautions for interconnection to other apparatus;
- c) specifications of interconnection cables and devices, especially about the application of shielded cables;
- d) instructions for commissioning and testing;
- e) guidance on avoiding incorrect actions and assembly of apparatus which are known to cause non-compliance with this International Standard.

Bibliography

- [1] ISO 12100-1, *Safety of machinery — Basic concepts, general principles for design — Part 1: Basic terminology, methodology*
- [2] ISO 22200, *Electromagnetic compatibility — Product family standard for lifts, escalators and moving walks — Immunity*
- [3] EN 12015:2004, *Electromagnetic compatibility — Product family standard for lifts, escalators and moving walks — Emission*
- [4] IEC/TS 61000-3-4, *Electromagnetic compatibility (EMC) — Part 3-4: Limits — Limitation of emission of harmonic currents in low-voltage power supply systems for equipment with rated current greater than 16 A*
- [5] *European Parliament and Council Directive 95/16/EC of 29 June 1995 on the approximation of the laws of the Member States relating to lifts*

