
**Micrographics — Dimensions for reels
used for 16 mm and 35 mm microfilm**

*Micrographies — Dimensions des bobines utilisées pour les microfilms
de 16 mm et de 35 mm*



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 24537 was prepared by Technical Committee ISO/TC 171, *Document management applications*, Subcommittee SC 2, *Application issues*.

Introduction

There is an increasing variety of equipment available to retrieve 16 mm and 35 mm roll microfilm. Some equipment uses conventional threading from the supply reel to the take-up reel in order to drive the microfilm. Other equipment uses automatic threading techniques with reels and an ISO approved cartridge.

This International Standard is intended to provide 16 mm and 35 mm reel dimensions which will allow compatibility with readers using conventional threading, and which can also be used for microfilm storage. If a 16 mm reel is to be used in a cartridge for use in automatic threading equipment, the requirements of ISO 7761 will apply. The requirements for camera spools are specified in ISO 6148.

Micrographics — Dimensions for reels used for 16 mm and 35 mm microfilm

1 Scope

This International Standard covers the essential dimensions of lightweight reels, made of plastic or metal, used for the storage and retrieval of processed 16 mm and 35 mm microfilm that is used in manually threaded equipment.

Reels intended for use in 16 mm automated retrieval systems are outside the scope of this International Standard. The dimensions of these reels are specified in ISO 7761.

Camera spools are also frequently used for storing processed microfilm. The dimensions of these spools are outside the scope of this International Standard, but they are specified in ISO 6148.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6196 (all parts), *Micrographics — Vocabulary*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 6196 (all parts) and the following apply.

3.1

front flange

flange that first engages the equipment spindle

3.2

location surface

portion of the reel which meets the back location stop on the equipment spindle

4 Requirements

4.1 16 mm reels

The inside surface of the front flange, measured within 3,2 mm of the core, shall be in the same plane as the location surface around the square spindle hole. The allowable deviation from this alignment shall be $\pm 0,25$ mm. The minimum diameter of the location surface around the square spindle hole shall be 15,9 mm, and the maximum diameter shall be 17,0 mm.


These specifications apply to front and rear flanges if both have square spindle holes (see Figures 1 and 2).

4.2 35 mm reels

The position of the inside surface of the front flange, measured within 3,2 mm of the core, shall be a further $1,0 \pm 0,5$ mm into the reel with respect to the location surface around the square spindle hole. The minimum diameter of the location surface around the square spindle hole shall be 15,9 mm, and the maximum diameter shall be 17,0 mm.

These specifications apply to front and rear flanges if both have square spindle holes (see Figures 1 and 2).

Dimensions in millimetres

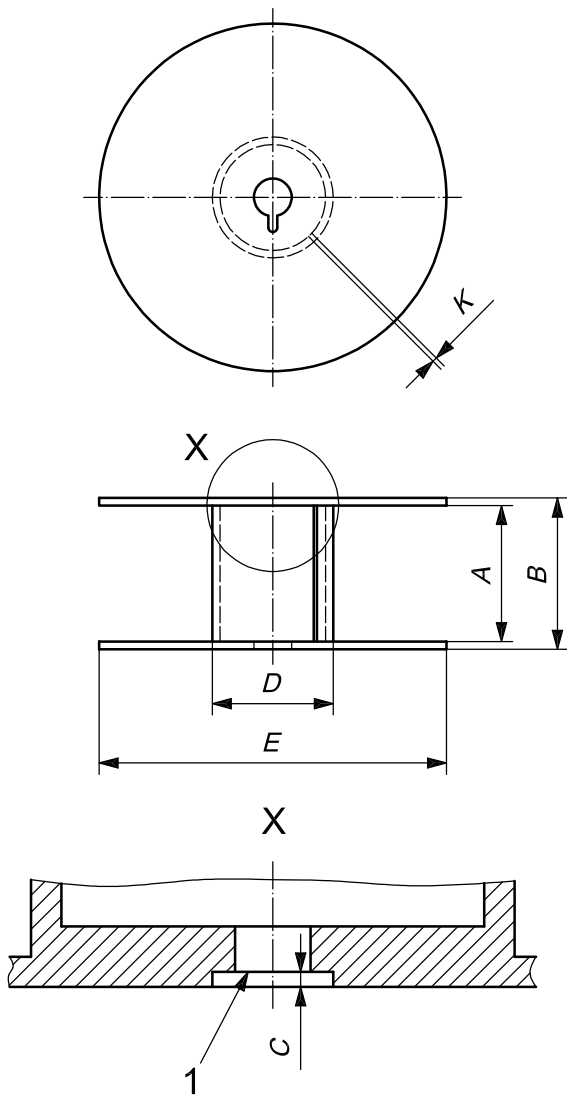

Dimension	16 mm reels	35 mm reels
<i>A</i>	17 ^{+1,5} / _{-0,9}	36 ^{+1,5} / _{-0,9}
<i>B^a</i>	≤ 21,4	≤ 40,2
<i>C</i>	0 + 0,25	1 ± 0,5
<i>D</i>	32 ± 1,0	32 ^{+1,0} / ₀
<i>E</i>	92 ^{+2,0} / _{-1,0}	92 ^{+2,0} / _{-1,0}
<i>K^b</i>	1,3 ^{+1,0} / _{-0,5}	1,3 ^{+1,0} / _{-0,5}

^a Dimension *B* is the width outside the flanges including any embossed area.
^b Optional.

Key

- 1 location surface

Figure 1 — Dimensions of 16 mm and 35 mm reels


4.3 Spindle holes

The permissible designs of spindle holes are shown in Figure 2. For both 16 mm and 35 mm reels, spindle holes are oriented as seen by looking at the outer surface of each flange separately.


The front flange engages the equipment spindle first.

Holes are oriented as seen by looking at the outer surface of each flange separately.


Dimensions in millimetres




a) Style 1^a, rear flange




b) Style 1^a, front flange




c) Style 2^b, rear flange



d) Style 2^b, front flange



e) Style 3^c, rear flange



f) Style 3^c, front flange

Dimension	16 mm reels	35 mm reels
<i>G</i>	3,3 ± 0,2	3,3 ± 0,2
<i>H</i>	8,1 ± 0,5	8,1 ± 0,5
<i>J</i>	8,1 ^{+0,2} / _{-0,5}	8,1 ^{+0,2} / _{-0,5}
<i>S</i>	8,1 ^{+0,2} / _{-0,5}	8,1 ^{+0,2} / _{-0,5}

Key

- a For 16 mm and 35 mm reels.
- b For 35 mm reels.
- c For 16 mm reels.

Figure 2 — Dimensions of spindle holes for 16 mm and 35 mm reels

4.4 Lateral runout

The lateral runout (wobble) of the reel from the intended plane of rotation shall not exceed 1,3 mm. The “intended plane” is a plane perpendicular to the axis of the spindle and coincident with the outer surface of the flange at points adjacent to the spindle. When the reel is rotated on an accurate tight-fitting spindle, the total outward and inward deviation of the flange from this intended plane shall not exceed 1,3 mm.

4.5 Flanges

The flanges may be either solid or spoked (with open areas).

4.6 Finish

The reel shall be free from any flashing or moulding lines on its inner surfaces that would interfere with the film transport or cause damage to the film.

4.7 Optional features

An optional film loading slot is allowed in the reel core. If used, the width of this slot shall conform to dimension K (see Figure 1). An optional film loading slot is also permitted in either one or both flanges. If used, the width of this slot shall also conform to dimension K .

4.8 Colour

Spools may be any colour, or translucent, but shall not be black, in order to avoid confusion with camera reels.

Bibliography

- [1] ISO 6148, *Photography — Micrographic films, spools and cores — Dimensions*
- [2] ISO 7761, *Micrographics — Single-core cartridge for 16 mm processed microfilm — Dimensions and operational constraints*

ICS 37.080

Price based on 5 pages