



Standard Guide for Hardware Implementation for Computerized Systems¹

This standard is issued under the fixed designation F2218; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This guide provides assistance in the choice of computing hardware resources for ship and marine environments and describes:

1.1.1 The core characteristics of interoperable systems that can be incorporated into accepted concepts such as the Open System Interconnection (OSI) model;

1.1.2 Process-based models, such as the Technical Reference Model (TRM), that rely on interoperable computing hardware resources to provide the connection between the operator, network, application, and information; and,

1.1.3 The integrated architecture that can be used to meet minimum information processing requirements for ship and marine environments.

1.2 The use of models such as OSI and TRM provide a structured method for design and implementation of practical shipboard information processing systems and provides planners and architects with a roadmap that can be easily understood and conveyed to implementers. The use of such models permit functional capabilities to be embodied within concrete systems and equipment.

1.3 The information provided in this guide is understood to represent a set of concepts and technologies that have, over time, evolved into accepted standards that are proven in various functional applications. However, the one universal notion that still remains from the earliest days of information processing is that technological change is inevitable. Accordingly, the user of this guide must understand that such progress may rapidly invalidate or supersede the information contained herein. Nonetheless, the concept of implementing ship and marine computing systems based on these functional principles allows for logical and rational development and provides a sound process for eventual upgrade and improvement.

¹ This guide is under the jurisdiction of ASTM Committee F25 on Ships and Marine Technology and is the direct responsibility of Subcommittee F25.05 on Computer Applications.

Current edition approved May 1, 2015. Published June 2015. Originally approved in 2002. Last previous edition approved in 2008 as F2218 – 08. DOI: 10.1520/F2218-02R15.

2. Referenced Documents

2.1 *ASTM Standards*:²

E1013 [Terminology Relating to Computerized Systems \(Withdrawn 2000\)](#)³

F1757 [Guide for Digital Communication Protocols for Computerized Systems](#)

2.2 *ANSI Standards*:⁴

X3.131 [Information Systems—Small Computer Systems Interface-2 \(SCSI-2\)](#)

X3.172 [American National Standard Dictionary for Information Systems](#)

X3.230 [Information Systems—Fibre Channel—Physical and Signaling Interface \(FC-PH\)](#)

X3.232 [Information Technology—SCSI-2 Common Access Method Transport and SCSI Interface Module](#)

X3.253 [Information Systems—SCSI-3 Parallel Interface \(SPI\)](#)

X3.269 [Information Technology—Fibre Channel Protocol for SCSI](#)

X3.270 [Information Technology—SCSI-3 Architecture Model \(SAM\)](#)

X3.276 [Information Technology—SCSI-3 Controller Commands \(SCC\)](#)

X3.277 [Information Technology—SCSI-3 Fast-20](#)

X3.292 [Information Technology—SCSI-3 Interlocked Protocol \(SIP\)](#)

X3.294 [Information Technology—Serial Storage Architecture—SCSI-2 Protocol \(SSA-S2P\)](#)

X3.297 [Information Systems—Fibre Channel—Physical and Signaling Interface-2 \(FC-PH2\)](#)

X3.301 [Information Technology—SCSI-3 Primary Commands \(SPC\)](#)

X3.304 [Information Technology—SCSI-3 Multimedia Commands \(MMC\)](#)

MS58 [Information Technology—Standard Recommended Practice for Implementation of Small Computer Systems](#)

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ The last approved version of this historical standard is referenced on www.astm.org.

⁴ Available from American National Standards Institute (ANSI), 25 W. 43rd St., 4th Floor, New York, NY 10036, <http://www.ansi.org/A>

Interface (SCSI-2), (X3.131.1994) for Scanners
 NCITS 306 Information Technology—Serial Storage
 Architecture—SCSI-3 Protocol (SSA-S3P)
 NCITS 309 Information Technology—SCSI-3 Block Com-
 mands (SBC)

2.3 *IEEE Standards*.⁵

100 Standard Dictionary for Electrical and Electronic Terms
 488 Digital Interface for Programmable Instrumentation
 610.7 Standard Glossary for Computer Networking Termi-
 nology
 796 Microcomputer System Bus
 802.11 Wireless LAN Medium Access Control and Physical
 Layer Specifications
 1003.2d POSIX—Part 2 Shell and Utilities—Amendment:
 Batch Environment
 1003.5 Binding for System Application Program Interface
 (API)
 1003.b Binding for System Application Programming Inter-
 face (API)—Amendment 1: Real-time Extensions
 1014 Versatile Backplane Bus: VMEbus
 1101.10 Additional Mechanical Specifications for Micro-
 computers using the IEEE Std 1101.1 Equipment Practice
 1155 VMEbus Extensions for Instrumentation: VXibus
 1212.1 Communicating Among Processors and Peripherals
 Using Shared Memory (Direct Memory Access DMA)
 1394 High Performance Serial Bus
 1496 Chip and Module Interconnect Bus: Sbus
 1394 32-bit Microprocessor Architecture

2.4 *ISO Standards*.⁴

1155 Portable Operating System Interface for Computer
 Environments (POSIX)
 9945-1 System Application Program Interface (API) [C
 language]
 9945-2 Shell and Utilities

2.5 *TIA/EIA Standard*.⁶

568-A Commercial Building Telecommunications Cabling
 Standard

3. Significance and Use

3.1 This guide is aimed at providing a general understand-
 ing of the various types of hardware devices that form the core
 of information processing systems for ship and marine use.
 Ship and marine information processing systems require spe-
 cific devices in order to perform automated tasks in a special-
 ized environment. In addition to providing information ser-
 vices for each individual installation, these devices are often
 networked and are capable of supplementary functions that
 benefits ship and marine operations.

3.2 A variety of choices exists for deployment of informa-
 tion processing devices and greatly increases the complexity of
 the selection task for ship and marine systems. The choice of a
 particular device or system cannot be made solely on the
 singular requirements of one application or function. Modern

information processing systems are usually installed in a
 complex environment where systems must be made to interact
 with each other. Ship and marine installations add an even
 further layer of complexity to the process of choosing adequate
 computerized systems. This guide aims to alleviate this task by
 giving users specific choices that are proven technologies that
 perform in a complex environment.

3.3 Hardware resources used in ship and marine installa-
 tions are a result of careful consideration of utility and
 function. These resources may require some physical special-
 ization in order to inhabit a particular environment, but they are
 in no way different from equipment used in shore-based
 situations. Ship and marine computer system configurations,
 interconnections, and support services are essentially the same
 as those found in a land-based network environment and as a
 result, the skill sets of ship and marine information processing
 system users, administrators, and support personnel are inter-
 changeable with those of shore-based activities.

4. Standards Profiles

4.1 Standards profiles are sets of specifications bundled
 together to describe the technical standard for a function or a
 service (such as operating systems, network, and data inter-
 change services), and will include minimum criteria for the
 information and technology that support specific functional
 requirements. Profiles equate to the lowest level process, and
 document agreed-to implementation requirements used in
 building and operating systems. Systems using the same
 standards, but different options, will probably not interface
 correctly. The Technical Reference Model (TRM) is useful for
 assembling standards profiles across technology categories of
 Computing Resources, Information Management, and Appli-
 cations.

4.1.1 The TRM identifies and specifies the support services
 (multimedia, communications, and so forth) and interfaces that
 provide a common operating environment and support the flow
 of information among enterprise and common support appli-
 cations. This model represents the computer resources, infor-
 mation management, and applications categories and interfaces
 with the communication and networking technology categories
 that are appropriately represented by the ISO Open System
 Interconnect model. The TRM addresses standard profiles that
 provide seamless application support over widely distributed
 computing resources and attendant interfaces between the
 computing resources and other technologies.

4.2 Computing hardware resources represent generally con-
 sists of Central Processing Unit(s) (CPU), Input and Output
 (I/O) interfaces, main memory, buses, and peripherals. The
 external environment considerations that affect computing
 hardware resource selection are security, communications,
 real-time, and high availability. The computing hardware
 resource provides the environment necessary to support appli-
 cation software. From the perspective of the application
 software, services are provided by the computing resource,
 whether the particular services are provided locally or remotely
 as part of a distributed system.

4.3 The architecture needed to support a typical application
 consists of computers that perform as clients and servers. The

⁵ Available from Institute of Electrical and Electronics Engineers, Inc. (IEEE),
 445 Hoes Ln., P.O. Box 1331, Piscataway, NJ 08854-1331, <http://www.ieee.org>.

⁶ Available from Telecommunications Industry Association (TIA), 1320 North
 Courthouse Road, Suite 200, Arlington, VA 22201, <http://www.tiaonline.org>.

servers host the primary application software and contain the processing power necessary to support multiple users. Servers also host the data needed to support the application. The standard 3-tiered application architecture consists of (1) an application server, (2) a data server, and (3) presentation clients (see Fig. 1).

4.4 In the future, most application processing software will be hosted on the server computers. Clients will use presentation software that connects to the servers using a common interface. At that time, client computers will likely be less expensive and tailored to the user’s individual preference because application interoperability will not be a significant factor.

4.5 Today, however, most application software is hosted on the client and interoperability among clients is a critical factor. Even within the client-server application architecture, application specific software resident on the client is still prevalent. This demands consistency of client workstations across an entire installation to achieve seamless interoperability. Table 1 outlines a rationale for the client-server deployment strategy.

4.6 Driven by the current state of client-server technology, the general philosophy for implementing computing resources is the concept of homogeneous clients and heterogeneous servers. Homogeneous clients facilitate providing a consistent interface between the user and the system and make system support and maintenance less complex. Heterogeneous servers support the various computing requirements of applications needed to support ship and marine operations. The same advantages that homogeneous clients enjoy can be achieved if servers are homogeneous as well. Independent of whether or not the server suite employed is heterogeneous or homogeneous, it is important that they perform their function transparently to the user (that is, the user neither knows nor cares about the location, number, or vendor of the server being

used.) Requiring servers to be homogeneous would restrict the introduction of new server technology, choking innovation and preventing the installation from taking advantage of advances in computing such as massively parallel processors.

5. Computing Hardware

5.1 *Computing Resources*—Computing resources consist of many computing hardware components and configurations of these components. This section covers the various hardware components that make up a computing resource system and examines how these components are commonly configured.

5.2 *Component Technologies*—The major hardware components of Computing Resources are the Central Processing Unit (CPU), one or more backplane buses, main memory (both RAM and cache), Input/Output (I/O) interfaces, and peripherals. This section will examine each of these areas and provide guidance on the selection of these component technologies as part a computing resource system.

5.2.1 *CPU*—The CPU is the “engine” of the computer system and, combined with the OS (operating system), forms the core of the computing resource. Since the OS drives many decisions concerning the computer resource, a CPU that is compatible with the OS becomes an overriding factor in determining the type of CPU. Other than the OS, the main factors to consider in determining the type of CPU for the computer are processing speed (performance) and cost. For computing resources, such as servers and multiprocessors, scalability of the number of processors can be a significant factor in determining CPU.

5.2.2 *Bus*—The computer bus connects the different components of the computer resource together and allows them to pass data between them at high speeds. Computer resource configurations, such as personal workstations, often limit or determine the type of bus that will be used. Often there are

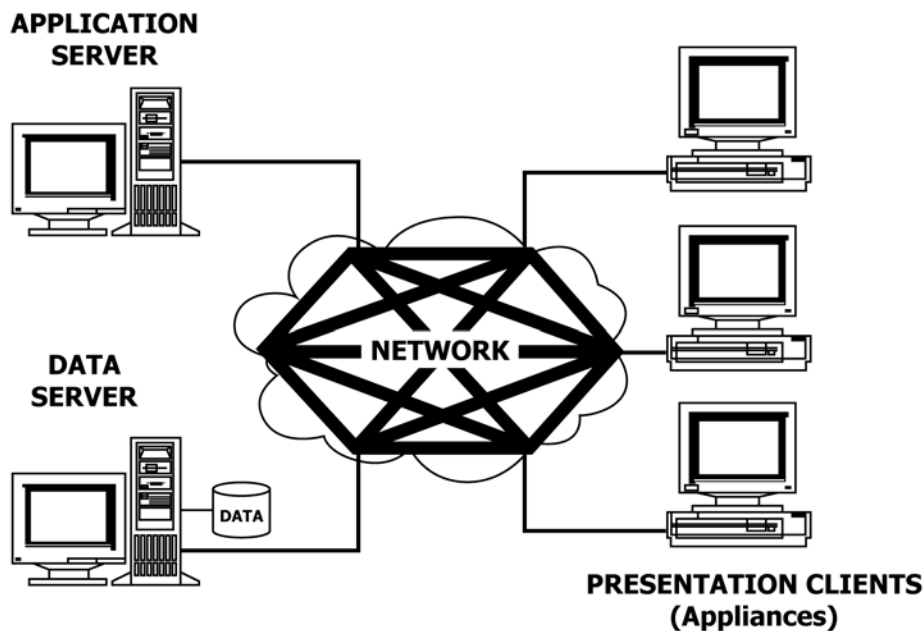


FIG. 1 Three-Tiered Application Architecture

TABLE 1 Client-Server Deployment Rationale

Rationale for Heterogeneous Servers	<p>The server must be tailored to the specific application that may not be supportable by computers most prevalent in the marketplace.</p> <p>Many applications work well in their current computing environment and it is not cost effective to change. It is not practical to have all applications on a common server for multiple reasons including the need to maintain competition between computer developers and vendors.</p> <p>Encourages innovation by not restricting the type of computer used for the development of applications.</p>
Rationale for Homogeneous Clients	<p>Allows for a common, consistent user interface.</p> <p>Maximizes interoperability.</p> <p>Minimizes re-training required as users transfer to different organizations within the enterprise.</p> <p>Maximizes the ability to use common support and maintenance skills, parts and labor; thereby minimizing cost.</p> <p>Maximizes portability of support for applications across the enterprise as well as portability of user skills.</p> <p>Allows for economies of scale in both procurement (volume discounts) and support (more focused skill set for help desk personnel).</p>

TABLE 2 CPU Sample Implementations

Clients, Servers, and Special Purpose
Intel Pentium/Celeron
AMD K6/Athlon/Duron
VIA C3/Cyrix
Motorola PowerPC
Transmeta Crusoe
Servers and Special Purpose
MIPS 32/64
Compaq Alpha
Hewlett Packard PA-RISC
Sun Microsystems SPARC/UltraSPARC
Motorola PowerPC

multiple buses connected together to allow for multiple types of component cards or to extend a non-expandable system bus. Considerations in determining the type of bus to use are: number and type of commercial products compatible with the bus architecture, number of parallel data bit lines, clock speed, and cost. Once the appropriate bus architecture is determined, an important computer resource factor becomes how many interface slots are available on the bus for component cards.

TABLE 3 Sample Bus Implementations

PCI
VME/VXI
SBUS
VXI
CardBus
GPiB/HP-IB
EISA

NOTE 1—Peripheral Connect Interface (PCI) bus is quickly gaining favor as a low-cost preferred system bus architecture. PCI provides the necessary throughput to support the high-end data rates required by many of today's applications. Most commercially available computers come with a PCI bus.

NOTE 2—EISA bus should be used only to accommodate legacy systems.

NOTE 3—Although VME bus is more popular, VXI bus offers a greater degree of standardization and therefore a greater degree of interoperability between vendor's products. These are the buses of choice for embedded systems. IEEE Std 1014 applies to VME and Std 1155 applies to VXI.

NOTE 4—GBIB is the Standardized version (IEEE Std 488) of the HP-IB implementation developed by Hewlett-Packard.

NOTE 5—CardBus is the new 32-bit high performance bus defined by the new PC Card Standard released by the PCMCIA standards body and trade association. The PC Card Standard replaces the outdated PCMCIA version 2.0 and version 2.1 standards.

5.2.2.1 Use buses that provide the necessary performance economically and are compatible with the board level components that are needed to meet requirements. For buses that provide slots for component cards, use standard buses that are supported by multiple vendors providing compatible component cards.

5.2.3 *Main Memory*—Main memory is the storage warehouse of the computer where data and programs are stored for efficient processing. In the context of this section, main memory refers to cache and RAM. The main factor to consider in acquisition of a computer system is the quantity (in megabytes) of RAM. Other considerations are access speed, mounting design, and parity. Computer systems with too little memory run slowly, won't load, and crash often. Mounting designs today generally provide for easily upgradeable Memory Modules. SDRAM (Synchronous Dynamic Random Access Memory) has long been a standard for memory, but more advanced designs such as DDR (Double Data Rate) and Rambus memory offer better speed and throughput and are rapidly gaining wide acceptance. Older architecture memory designs are generally slower and less efficient and should be avoided to the extent possible.

5.2.3.1 Cache is usually hard wired to the motherboard and has a faster access time than RAM. Computer system caches of 512 KB or larger are generally satisfactory.

5.2.3.2 RAM can often be on a separate memory board and is used to store the OS, applications that are running, and data files. The amount of RAM needed for a computer system can vary with the environment and the OS. Servers generally need about an order of magnitude more RAM than personal workstations. For personal workstations with a 16/32 bit operating system, 64 MB or more of RAM is recommended; for workstations with 32/64 bit operating systems, 128 MB or more is recommended. For servers, use the Network Operating System (NOS) guidelines based on the environment. The three major factors used to determine the amount of RAM for a server are number of user connections, number of processes running, and amount of hard drive space.

5.2.4 *Input/Output (I/O) Interfaces*—I/O interfaces allow the computing resource to move data between the "outside world" and the CPU and main memory. Operations like loading a program or file from a floppy or CD, sending and receiving information over the LAN or WAN, or sending a document to the printer to get a hardcopy use I/O interfaces.

TABLE 4 Recommended Memory (RAM) Standards

Dynamic Random Access Memory (DRAM)
Extended Data Output Dynamic Random Access Memory (EDO DRAM)
Synchronous Dynamic Random Access Memory (SDRAM)
Double Data Rate Memory (DDR)
RAMBUS Memory

NOTE 1—Extended Data Out (EDO) DRAM was long a standard for mass-market memory, but Synchronous DRAM (SDRAM) is now the standard for currently installed machines. SDRAM is a memory architecture that incorporates many improvements over traditional DRAM technologies. SDRAM is a new technology that runs at the same clock speed as the microprocessor. The clock on the memory chip is coordinated with the clock of the CPU, so the timing of both the memory and the CPU are “in synch.” This reduces or eliminates wait states, and makes SDRAM significantly more efficient than Fast Page Mode (FPM) or even Extended Data Out (EDO) memory.

NOTE 2—Even more speed and throughput improvements are being realized with Double Data Rate (DDR) and Rambus Memory; selection of a memory architecture will need to be made according to a careful consideration of cost (particularly over the anticipated service life of a system) and performance considerations.

Quite often the information is sent to or received from a peripheral, which is discussed in the next section.

5.2.4.1 Use I/O interfaces that use open access standards, support open device connections, and are platform independent.

5.2.5 *Peripherals*—Peripherals provide data access, input, storage, and connectivity for a computing resource. The number of peripherals available on the commercial market continues to explode, generally driven by processor speeds, memory/storage capacities, and I/O speeds. Although there are many different types of peripherals, such as printers, facsimiles, modems, scanners, video cameras, microphones, speakers, and so forth, the main issue in specifying/procuring these items is the compatibility of their I/O interfaces with the computer (see 5.2.4) and application software. Apart from these compatibility issues, the major considerations for acquiring peripherals are cost and performance (which can include both speed and quality). A major category of peripherals is static storage devices. As distinguished from main memory (covered in 5.2.3), static storage devices retain data when the power is off. The remainder of this section will discuss storage devices. Use peripherals that support standard I/O interfaces and are platform independent.

5.2.5.1 *Storage Device Standards*—Storage refers to the capability to store information outside the central processor.

TABLE 5 Recommended I/O Interface Standards

SCSI-2 USB	SCSI-3 IEEE 1394	FC-PH/FC-AL XIO	ESCON Serial	IPI Parallel	PC Card
---------------	---------------------	--------------------	-----------------	-----------------	---------

NOTE 1—Fibre Channel (FC-PH) is emerging as a host-level interface standard for delivery of high I/O data transfers. FC-PH provides connections for workstation clustering, storage clustering and network-based storage concepts, parallel processing, load leveling, host-to-host or server-to-server communications, host- or server-to-mass storage communications, bulk data transfer, and multimedia. FC-PH is also being used as a system bus at the CPU and memory level as well as a way to cluster multiple systems similar to Non-Uniform Memory Access (NUMA). NUMA describes an architectural approach to clustering multiple systems such that distributed memory appears to the operating system as shared memory. This architectural approach allows a benefit to the user of a shared memory programming model with the scalability of a massively parallel processor’s (MPPs) distributed memory model. FC-PH currently provides up to 1.062 GigaBits Per Second (Gbps) bandwidth using optical fiber.

NOTE 2—FC-PH-based storage subsystems will be supported on mainframes; therefore, the Enterprise Systems Connection or ESCON-based systems will be phased out.

NOTE 3—The Upper Layer Protocol (ULP) over FC-PH from the mainframe will initially deploy as SCSI-2 or SCSI-3 and migrate quickly to Intelligent Peripheral Interface (IPI). IPI will be deployed on large servers before it will be deployed on mainframes. Note that IPI is a protocol only; SCSI is both a protocol and an interface. FC-PH is an interface that can support various ULPs.

NOTE 4—For servers and higher end personal workstations, SCSI is the predominant host-level interface for current disk and peripheral devices. As the demand for higher data transfer rates and expanded connectivity requirements increase, SCSI-2 and SCSI-3 over FC-PH in a PCI form factor will be the appropriate long-term direction.

NOTE 5—Enhanced IDE is the predominant peripheral interface for lower end personal workstations. SCSI is the current interface of choice for high-speed devices, such as high-capacity disk and tape drives and is the appropriate long-term direction for both the commodity level and high capacity devices.

NOTE 6—Personal Computer Memory Card International Association (PCMCIA) announced that PCMCIA cards are now referred to as PC Cards. The PC Card Standard defines a 68-pin interface between the peripheral card and the PC Card “socket” into which it gets inserted. It also defines three standard PC Card sizes, Type I, Type II and Type III. All PC Cards measure the same length and width, roughly the size of a credit card. Where they differ is in their thickness. Type I, the smallest form factor, often used for memory cards, measures 3.3 mm in thickness. Type II, available for those peripherals requiring taller components such as LAN cards and modems, measures 5 mm thick. Type III is the tallest form factor and measures 10.5 mm thick. Type III PC cards can support small rotating disks and other tall components.

NOTE 7—As mentioned under “Bus” (see 1.1.2), CardBus is a new standard introduced as an addendum to the PCMCIA PC Card standard. CardBus is a 32-bit bus-mastering card operating at 33 Mhz transferring data at up to 132 MBytes per second. (The 16-bit PC Card bus data rate is 20 MBytes per second.) Like PC Cards, CardBus uses the 68-pin interface but operates at 3.3 volts versus the 5 volts used by PC Cards. CardBus slots are backward compatible with PC Cards. Card sockets can support PC Cards only or CardBus cards only, but not a mixture of the two.

NOTE 8—Serial I/O refers to standard serial interfaces such as RS 232, 422, 423, and 449.

NOTE 9—Parallel I/O refers to standard parallel interfaces such as micro-Centronix.

NOTE 10—XIO is an emerging I/O solution based on Specialix’ SI controller, and incorporating the high performance I/O processor and communication technology introduced in the RIO range. XIO is ideal for the 16-32 user system where sustaining high performance is essential.

NOTE 11—IEEE 1394, also known as “Firewire,” is a high speed serial I/O that supports data rates up to 400Mbps.

For most computers, the predominant technology for storage has been magnetic disk and will remain so for the next few years.

(1) Storage media is the physical material on which data is stored. The choice of media is usually determined by the application needs in terms of data accessibility, storage density, transfer rates, and reliability. Broad industry standards exist for 3.5-in. magnetic disk, 4-mm digital audio tape (DAT), 8-mm helical tape, digital linear tape (DLT), 1/2-in. tape, and compact disk-read only memory (CD-ROM). However, industry is in the process of agreeing on a standard for Digital Versatile Disk (DVD) which will be able to read CD-ROMs as well as the new DVDs. Standards do exist for write once read many (WORM) optical and magneto-optical (MO) disks. Although the physical medium for optical technologies conforms to an open standard, the device's recording format may not.

(2) Archived data on outdated storage media (for example, 5.25-in. floppy disks) should be transferred to media that is more current to avoid data being "trapped" on obsolete media that cannot be read by devices currently on the market.

(3) As networks proliferate and storage requirements expand, storage technology that uses standard interfaces and promotes hardware and software supplier independence is necessary. This technology will enable us to take advantage of the open systems environment.

(4) Implement storage technology and storage device media that use open access standards, support open device interface standards, and are platform independent.

5.2.5.2 *RAID Technology*—Redundant Array of Independent Disks (RAID) technology protects from data loss by providing a level of redundancy immediately within an array. The array contains removable disk drive modules that are automatically rebuilt in the event of a device failure without causing the system to shut down. When RAID levels other than 0 are used, no downtime is required to replace a failed disk drive. Data is continuously available while reconstruction of the failed disk occurs in the background. Much of the benefit of RAID technology lies in its capability to off-load storage management overhead from the host system. To realize this benefit, RAID developers endow their array controllers with significant levels of intelligence. For instance, Adaptive RAID supports multiple RAID levels based on workload characteristics. Choose the RAID level based on your specific need.

5.3 *System Configurations*—The hardware component technologies mentioned in 5.2 can be configured in many different ways to accomplish different tasks and meet different requirements. This section examines some of the common configurations (Personal Workstations, Servers and Embedded Computers) with guidance on what component technologies to use for each configuration.

5.3.1 *Personal Workstation*—Personal Workstations (PW) are devices that contain at least one CPU (sometimes several) and provide a user interface, typically a GUI, as well as personal productivity tools, local data storage, and a flexible method for accessing and manipulating data. These PWs are commonly known as Personal Computers or PC's, desktop computers, portables (laptops or notebooks), or workstations and use one of several bus architectures. Low-end PWs are

TABLE 6 Storage Device Media

3.5 in. magnetic disk
3.5 in. floppy disk
5.25 in. WORM
5.25 in. MO
ISO 13346
CD-ROM
Flash Memory Removable Devices
Smart cards
DVD
1/2-in. helical tape
4 mm DAT
DLT Tape
3490E cartridge tape

NOTE 1—8-mm helical tape is appropriate for backup and archive use; however, it is slow and unreliable for near-line storage solutions where frequent access is required. 4mm DAT offers a faster, more reliable solution to high-capacity and high-access applications.

NOTE 2—1/2-in. helical tape offers higher storage capacity than 4 mm or 8 mm; however, it is expensive, proprietary, and only Storage Technology supports it.

NOTE 3—3490E square cartridge 1/2-in. tape is predominantly a main-frame technology for off-line data storage.

NOTE 4—High capacity tape applies capacity multipliers of 2x to 4x to current technology. Gains are achieved through increased density factors as well as media length (number of media ft per unit).

NOTE 5—Flash Memory Storage devices are finding wide acceptance in Asia. They can hold as much as 128 MB of data in a keychain form factor that plugs into an available USB port.

NOTE 6—Smart cards are being used in Europe and Asia. Smart cards will be used predominantly as an intelligent storage media for providing services to individuals.

NOTE 7—The Digital Video Disk (DVD, also known as Digital Versatile Disk) allows for dual-sided as well as dual-layered implementations that will increase CD-ROM capacities significantly. In addition, transfer rates may improve to as high as 16 Mega Bits Per Second (Mbps).

used primarily to support the general office work place. More powerful PWs are predominantly used in high-end computer applications such as Computer-Aided Design/Computer-Aided Manufacturing/Computer-Aided Engineering (CAD/CAM/CAE), application development, multimedia, and decision support data analysis presentation.

5.3.1.1 Also included in PWs are handheld computers—Personal Digital Assistants (PDAs), also referred to as Personal Information Managers (PIMs). Handhelds are computer systems that fit in a person's hand and are extremely portable. Handheld systems also tend to have two types of input methods: pen or keyboard. The pen input can be used as digital ink, a mouse, or for handwriting recognition.

5.3.1.2 Combine components that provide flexible, scaleable, and easy-to-use personal workstations that support the Client/Server model of computing, data access, and multimedia. Allow for an external communication device such as a modem or network interface card.

5.3.1.3 Table 9 provides a quick summary of the nominal specifications for Personal Workstation implementation.

5.3.2 *Servers*—Servers are computing resources that can be configured to support groups from small teams (work group servers) to entire ships (campus servers). Work group servers provide support, such as directory, file, print, and authentication services, in a LAN environment. Campus servers may augment and, for many new applications, replace traditional

**TABLE 7 Recommended Personal Workstation (Portable)
Hardware Configuration Guidance**

CPU	Bus	Memory	I/O	Peripherals
Pentium/Celeron	PCI	RAM ≥ 128MB	E/IDE	HD > 10GB
K6/Athlon/Duron		Cache ≥ 512KB	USB	3.5-in. floppy
C3/Cyrix PowerPC Crusoe			PC Card	DVD/CD-ROM

**TABLE 8 Recommended Personal Workstation (Desktop)
Hardware Configuration Guidance**

CPU	Bus	Memory	I/O	Peripherals
Pentium/Celeron	PCI	RAM ≥ 128MB	E/IDE	HD > 10GB
K6/Athlon/Duron	EISA	Cache ≥ 512KB	SCSI-2,3	3.5-in. floppy
C3/Cyrix PowerPC			USB IEEE-1394 PC Card or Cardbus	CD-ROM DVD

NOTE 1—EISA bus should be used only to accommodate legacy systems.

TABLE 9 Personal Workstation Configuration Summary

	Personal Workstation also used as a Server	Desktop	Laptop
Processor	Pentium/Celeron K6/Athlon/ Duron C3/ CyrixPowerPC	Pentium/Celeron K6/Athlon/Duron C3/Cyrix PowerPC	Pentium/Celeron K6/Athlon/Duron C3/Cyrix PowerPC Crusoe PCI
System Bus	PCI	PCI, EISA	PCI
Memory	256 MB SDRAM	256 MB SDRAM	256 MB SDRAM
Input/Output	E/IDE SCSI-3 PC Card X2 Serial Parallel USB IEEE 1394 Dual Network Interface Card (NIC)	E/IDE PC Card X2 Serial Parallel USB IEEE 1394 Modem NIC (Modem and NIC can be on a PC Card)	E/IDE PC Card X2 Serial Parallel USB Modem NIC (Modem and NIC can be on a PC Card)
Storage	3.5-in. floppy CD-ROM 4-mm DAT 40 GB HDD	3.5-in. Floppy CD-ROM 10 GB HDD	3.5-in. Floppy CD-ROM 10 GB HDD
Operating System	64 bit	32 bit	16/32 bit

(1) *Database Servers*—Large databases make extensive use of disk space and processor power and typically require their own dedicated database server hardware. Increasingly these database servers have more than one CPU and more than one network interface channel to keep up with the demands placed upon them by large numbers of simultaneous users.

(2) *Multimedia Servers*—If an installation has a large archive of audio or video data, or if it intends to distribute audio or video data in real-time, it will require a multimedia data server. Archives of audio and video data require huge amounts of disk space. Moving this data over the network (typically through streaming audio or video services and protocols) is also resource intensive. Both requirements typically require the dedicated use of a multimedia server.

(3) *Data Push Servers*—If an installation implements a data push mechanism for distributing information to internal and/or external desktops, it will have to host that push function on a data push server. Depending on the number and volume of channels being pushed, the data push server software may reside on hardware that is also performing other server functionality (typically the web server).

(4) *Application Servers*—One option for centralizing system management and reducing total cost of ownership in a network environment is to run the actual application programs on a few high-powered application servers rather than on the desktop clients. This is a common approach in UNIX-based computing environments through the use of the X Windows graphical interface to open display and control windows on one system for an application running on another system. A new variation of this approach brings current Microsoft Windows applications to systems that are under-powered (old 286 or 386 CPU PCs) or that are not running the 16/32 bit based Windows operating system (UNIX workstations, Java Network Computers). This is made possible by running the applications on shared Windows NT/2000 application servers and just sending the user interface over the network to the user's local system.

(5) *Optical Disk Servers*—With the huge amounts of reference data available on CD ROM and the increasing availability of CD ROM writers for organizations to use to create their own archival data storage on CD ROM, there is a growing need to have multiple CD ROM disks online at once. A new class of hardware, the CD ROM Server, is a stand-alone network device that includes a large number of CD ROM drives which can be made available as shared disks to all users on a network.

(6) *Mail Servers*—In an organization that has a number of networked PW clients, mail servers provide store and forward functions for electronic messages. These servers receive, store, and distribute electronic messages and require a large amount of storage, proportional to the number of e-mail accounts they carry. They also require numerous network connections and modem connections to receive and distribute messages from/to users and other organizations.

5.3.2.2 Evaluate servers for their interoperability, portability, reliability, availability, serviceability, and scalability. The capability to easily upgrade processor performance or to add additional processors, disk storage, and communications support extends the life of the platform and enhances the return on investment. Use hardware components that are standards

mainframes. Selecting systems that address and support features and services of both systems management and reliability, availability, and serviceability is important. Campus servers often implement RAID storage technology to provide services with high reliability and availability (see 5.2.5.2).

5.3.2.1 There are different types of servers, performing more specific functions. Some of these server types include: database servers, multimedia servers, data push server, applications server, optical disk servers, and mail servers. A brief description of these servers follows:

based, primarily those that are compatible with interface bus standards. Select scaleable servers that can increase performance by adding components and by supporting standards-based network protocols. Through the use of a multiprocessing architecture, hardware should be scaleable and should enable parallel processing.

5.3.3 *Embedded Computers*—When readily available computers do not meet the requirements, components must be integrated to form a system. This often involves a design of board level components to perform the necessary functions. The major design consideration is the selection of a back plane bus that will allow all of the components to communicate with each other. This decision can impact dramatically the cost, both in the development and the logistics support of the system. Considerations in determining the bus include availability of components and existing systems bus architectures (to reduce the logistics support costs). Commercially available components should be considered first before custom designing and building the components. When designing embedded computer systems, use industry standard buses and standard components to the maximum extent possible.

6. Cable Plant

6.1 The cable plant includes copper cable and fiber optic cable. Fiber optic cable is the solid media preferred for its current high-capacity (100’s of Mbps), future bandwidth potential (Gbps to Tbps), reliability, reduced susceptibility to Electromagnetic Interference (EMI), and security. (Although fiber cannot be made completely secure without encryption or proper physical protection, it cannot be “tapped” without physical manipulation.)

6.2 Fiber optic cable is required to support voice and high-speed data. Fiber optic cable is recommended in other areas where feasible. If cost limits its use, then fiber optic cable should be run at least in the backbone of the network and to major junction points (telephone closets, for example). A mix of 62.5 mm core/125 mm cladding multimode and 8 mm core/125 mm cladding single-mode fiber should be pulled in jacketed bundles, terminated, and tested. The cost avoidance of installing additional single-mode cable is relatively low compared to the future benefits it presents.

6.3 Copper cabling should be avoided in the backbone because it has inherently low bandwidth over significant distance. If copper is unavoidable, it should be limited to areas that can be easily, and inexpensively, rewired with fiber when

TABLE 11 Embedded Computer Systems Hardware Configuration Guidance

CPU	Bus	Memory	I/O	Peripherals
Pentium/Celeron	VXI	TBD ^A	SCSI-2, 3	Hard Drive
Power PC	VME		FC-PH	3.5-in. floppy
K6/Athlon/Duron	PCI		IPI	CD-ROM
MIPS	GPiB/HP-IB		ESCON	DVD
SPARC	EISA		E/DE	
Alpha	SBUS		Serial	
Crusoe	CardBus		Parallel	
			PC Card or CardBus	

^AVaries widely based upon system requirements.

NOTE 1—Although VME bus is more popular and offers a wider variety of vendor products, VXI bus offers a greater degree of standardization and therefore a greater degree of interoperability among vendors’ products. These are the buses of choice for embedded systems.

NOTE 2—As the popularity of PCI bus rises and the number of available products increases, PCI becomes a more desirable architecture for embedded systems.

appropriate. If copper is used, select only properly terminated and tested Category 5 (“Cat 5”) cable for cable from the telecommunications closet to the desktop. (Unshielded Twisted Pair (UTP) Cat 5 is the copper standard for data rates up to 155 Mbps.) Thin-wire coax, thick-wire coax, RS-232/422, Category 3 and “telephone” wire should be avoided—the minor cost savings is not usually justifiable because of limited data rates and degraded interoperability. (Allowable exceptions are recognized when linking distant, or otherwise limited-access areas, which are already wired.)

6.4 Definitions:

6.4.1 *Trunk Cable*—A trunk cable is a cable that connects two main interconnection boxes or patch panels. It is used to provide connectivity between the service areas of the cable plant.

6.4.2 *Local Cable*—A local cable is a cable that connects a main interconnection box or patch panel to user system equipment or a local breakout box.

6.4.3 *System Specific Cable*—A system specific cable directly connects two pieces of user system equipment, independent of the cable plant. A system specific cable is typically used to connect equipment within the same service area of the cable plant.

6.4.4 *Drop Cable*—A drop cable is a system specific cable between a ready movable piece of user system equipment, such as a PC or printer, and the local breakout box in the area. A drop cable is not considered to be part of the cable plant.

6.5 *Fiber Optic Cable*—Fiber optic cable is the preferred media for all network applications due to its growth potential. (In shipboard and other high Electromagnetic Interference (EMI) environments, fiber optic cable is critical in eliminating the effects of noise.) The backbone network must use fiber optic cabling, as part of the Fiber Optic Cable Plant (FOCP)—twisted pair (shielded or unshielded) or coaxial cable should not be used. Where possible, multimode graded index fiber with a 62.5-micrometre (µm) core/125 µm cladding should be used. Due to the low relative marginal cost, single-mode fiber (8 µm core/125 µm cladding) should be provided in at least the backbone FOCP and preferably to major junction points.

TABLE 10 Server Hardware Configuration Guidance

CPU	Bus	Memory	I/O	Peripherals
Pentium	PCI	RAM ≥	SCSI-2, 3	HD > 40GB ^A
Athlon	VME/VXI	512MB ^A	FC-PH	CD-ROM/ DVD
MIPS	CardBus	Cache ≥	PC Card or	RAID
Alpha	SBUS	2MB ^A	CardBus	1,3,4,5,6
PowerPC	GPiB/HP-IB		IPI	4-mm DAT
PA-RISC	EISA			DLT
UltraSparc				

^A Refer to server OS documentation to determine memory requirements.

NOTE 1—PCI is a system bus architecture and interface standard that will be used to support I/O needs. Unlike SCSI, PCI is not an I/O interface. PCI will likely become the de facto open standard.

6.5.1 Multimode fiber (62.5 μm) is easier to terminate and test, especially in the field. However, there are distance and bandwidth limitations that cannot be overcome and single-mode fiber must be used. (Multimode fiber can support rates of up to 155 Megabits per second (Mbps) at distances up to 2 kilometres (km). It can only support 622 Mbps for hundreds of feet. Single-mode fiber (8 μm), however, can easily support units of Gigabits per second (Gbps) at up to 30 kms. Further, it can support multiple wavelengths, each operating at units of Gbps. Thus today's single-mode fiber can support tens of Gbps for tens of kilometres. Laboratory tests have shown this limit to be at least 2 orders of magnitude higher, namely Terabits per second (Tbps).

6.5.2 *Unshielded Twisted Pair (UTP)*—Category 5 UTP cable may be used only for the cabling between the appliance and the network edge device or between the workstation and other network equipment under certain conditions. Shielded Twisted Pair (STP) cable should not be used. The following factors should be taken into consideration when using Category 5 UTP cable:

6.5.2.1 Mission criticality of the application (The UTP copper cable may exhibit a lower availability than fiber due to EMI problems.)

6.5.2.2 Bandwidth or signaling rate (UTP may be used for short runs of 100BaseT, but should not be used at higher data rates or for long runs.)

6.5.2.3 Security level (UTP is easy to tap if not run in conduit.)

6.5.2.4 Length of cable run (UTP should be limited to intra-compartment runs.)

6.5.2.5 Installation factors (UTP requires exceptional care during installation, and should be thoroughly tested.)

6.5.2.6 *Environmental Factors*—EMI (UTP is subject to interference from radar and nearby high-powered equipment.)

6.5.3 In ship and marine environments, UTP cable should meet general flammability, smoke, acid gas generation, halogen content, and toxicity index requirements. Further, UTP should be limited in critical systems to due to EMI, shock, and vibrations (RJ-45 plastic connectors for UTP are not designed to withstand significant shock loads and may crack or disconnect under long-term vibration conditions).

6.5.4 *Legacy Copper-Media Networks*—For installations with copper-based legacy systems, it is recommended that those systems be selectively upgraded to fully integrate users of the backbone network based on capability requirements and funding availability. In ship and marine environments where upgrade funding availability or system requirements cannot support the decision to upgrade the system, connectivity to the ship's backbone network can be accomplished at either the backbone or workgroup switch, providing that those devices can support the legacy network protocols. In such a configuration, the backbone network switch acts as a gateway between the legacy system and the rest of the backbone. If some limited funding for system upgrade is available, and such upgrades suit the needs of the ship, a lower cost interim upgrade would be to replace the legacy copper links with fiber optic links, and integrate those links into the ship's FOCP. This

interim physical integration will simplify the further upgrade from a separate legacy system to an integrated network application.

6.6 *Patch Panels, Interconnection Boxes, and Connectors:*

6.6.1 *FOCP Interconnection Boxes*—FOCP interconnection boxes and patch panels should hold a minimum of 48 connector pairs. Interconnection boxes should be sized to accommodate all of the fibers (allocated, spare, and growth) that enter the box.

6.6.2 *Local Breakout Boxes*—Local breakout boxes may be used to provide additional flexibility in locating workstations or easily moved equipment. The interconnection box should completely enclose the fiber terminations. Local breakout boxes should not be used as a substitute for rack-mounted patch panels for the interconnection of rack-mounted equipment.

6.6.3 *Location of Tx-Rx Pairs and Optical Crossover*—In FOCP Interconnection Boxes, local breakout boxes, and in rack-mounted patch panels, the pair of ST connectors associated with one full-duplex optical circuit should be located in a vertical line, one above the other, with the transmit (Tx) connector above the receive (Rx) connector. In a complete optical link, there must be one (or an odd number of) crossover(s) in order to connect the optical transmitter at one end to the optical receiver at the other end, and vice versa.

6.7 *Connectors*

6.7.1 *Fiber Optic Cable:*

6.7.1.1 *ST-type*—ST-type connectors were, until recently, the standard for all multimode connections. In commercial applications, SC is rapidly becoming the standard. It is becoming hard to find host network interface cards with ST connectors.

6.7.1.2 *SC-type*—SC-type connectors are becoming the industry standard for both host network interface cards and backbone connections. While this is acceptable for multi-mode fiber, it has debatable merit for single-mode fiber. (Pros: more common connector, easier to insert/remove; Cons: can more easily confuse multi-mode with single-mode fiber, if single-mode transmitter accidentally plugged into multi-mode receiver, the receiver could be permanently damaged.)

6.7.1.3 *FCPC-type*—FCPC-type connectors are the standard for single-mode fiber. Many equipment vendors, however, are beginning to use SC-type connectors. Because the risk of accidentally switching multi-mode and single-mode connections exists when the same connector is used for both, it is recommended that FCPC-type be used for single-mode fiber (see discussion in the previous paragraph).

6.7.1.4 *MIC-type*—MIC-type connectors are not recommended for use within the backbone network. However, if MIC-type connectors are the only available option, it is recommended that a MIC-ST jumper cable be fabricated to allow the MIC connector at the equipment interface, but with an ST connector for connection to the FOCP or rack-mounted patch panel. MIC connectors should not be used within FOCP interconnection boxes.

6.7.1.5 *Heavy-Duty Multiple Terminus*—Heavy-duty multiple terminus connectors are recommended for equipment

interfaces that require a rugged interface that is easily disconnected and reconnected.

6.7.1.6 *Mechanical Splice*—Mechanical splices are recommended only for those applications requiring higher optical performance than is available with ST-type connectors. Mechanical splices may be used in interconnection boxes, and may also be used inside rack-mounted patch panels where needed for higher optical performance.

6.7.2 *Copper Cable:*

6.7.2.1 *RJ-45 Connectors*—Category 5 cable specifications limit the connector type to RJ-45. However there are a number of pin-out standards from which to choose. Because ISDN also specifies the use of RJ-45, the ISDN pin-out specification will be used: ANSI/EIA/TIA-568-1991 Standard, Commercial Building Telecommunications Wiring. This variant is designated EIA/TIA T568A (also called ISDN, previously called EIA).

6.7.3 *Ship and Marine Environment*—In ship and marine environments, ST-type connectors are recommended for all light-duty multi-mode fiber applications. ST-type connectors may be used as the interface to equipment if sufficient cable strain-relief and protection are provided. Failure to provide sufficient strain relief and protection will result in connector breakage or failure.

6.7.3.1 Until such time as SC-type connectors are evaluated against shock, vibration, and wear, they are not recommended for use within the backbone network. However, if SC-type connectors are the only available option associated with the network equipment, it is recommended that an SC-ST jumper cable be fabricated to allow the SC connector at the equipment interface with an ST connector for connection to the FOCP or the rack-mounted patch panel. SC connectors should not be used within FOCP interconnection boxes.

6.8 *Topology, Security, and Integrated Cabling:*

6.8.1 *Basic Topology*—The recommended physical topology is a mesh, as opposed to a ring or star configuration. If a logical ring or star topology is required for near-term cost reasons, the physical mesh cable plant infrastructure can be configured to provide the required logical topology. The mesh physical architecture will support the future expansion or upgrade to a full mesh logical topology.

6.8.2 *Network Node Locations*—Node locations should be selected based on the concentrations of current and planned network users. Nodes should be located in secure areas, to preclude unauthorized access to the equipment. Nodes should also be located in temperature controlled compartments, to optimize equipment reliability. Note that there is a trade-off between the number of nodes and the total quantity of local cable required to connect users. These two parameters should be considered in conjunction with the system requirements for survivability when determining the appropriate number of nodes.

6.8.2.1 Users should be connected to nodes within the same fire zone for survivability. Also, the number of nodes installed should be selected to provide maximum coverage of the ship's fire zones, while minimizing the total network cost.

6.8.3 *Patch Panel and Interconnection Box Locations*—Main interconnection boxes or patch panels should be collo-

cated with the network nodes. For maximum installation and connection flexibility, it is recommended that the patch panels be installed in the same rack as the network node equipment. These rack-mounted patch panels can also be used to provide a convenient means of interconnecting equipment within the same rack, and to provide a simplified disconnect point in the event that racks must be moved.

6.8.3.1 For racks containing connection-intensive network devices, the use of a rack-mounted patch panel should be considered to serve as the interconnection box for that zone.

6.8.4 *Trunk Cable Routing*—In general, trunk cables should be routed along diverse physical paths to ensure a survivable FOCP. The degree of redundant/fail-over equipment is cost-driven but with a proper FOCP mesh, outages can be quickly restored using alternate cable paths.

6.8.4.1 Trunk cables should be routed to provide survivable signal paths between interconnection boxes. In general, each trunk cable should have an identical redundant cable following a separate route between the two interconnection boxes. In addition, the cables should be routed on opposite sides of the ship, with at least two decks separating them vertically.

6.8.5 *Local Cable Distribution*—If a single user has multiple local cables for redundancy or survivability, those local cables should be routed to two different interconnection boxes, and should be separated within 60 ft of the equipment.

6.8.6 *Network Fiber Allocations:*

6.8.6.1 *Inter-node*—Fibers should be allocated for all inter-node connections. The level of inter-node connectivity should be determined based on current technical requirements, future projections of requirements, and overall program cost constraints. In general, it is desirable to include sufficient fiber in the FOCP to allow for full inter-node connectivity in a mesh topology. Any interim logical configurations, such as rings or stars, should also be considered when determining fiber requirements.

6.8.6.2 *Redundancy*—Redundant fibers in survivable separated trunk cables should be provided for each active and spare user system fiber. This is particularly critical in ship and marine environments.

6.8.6.3 *Spare*—Spare fibers should be provided on a 100 % basis; that is, each actively used fiber should have an assigned spare. This is particularly critical in ship and marine environments.

7. **Wireless Networking**

7.1 The establishment of standards such as IEEE 802.11 has created the ability of computers to communicate via network protocols without physical wiring. Commonly known as wireless Local Area Networks, this innovation provides practical interconnectivity without the investment or labor required to establish physical media.

7.2 Wireless networks operate on a range of frequencies and bandwidths, with newer systems functioning at 2.4 GHz frequencies and with a bandwidth of approximately 11 Mbs. These networks operate at a range of up to 90 m indoors, and out of doors can operate up to 300 m. Actual communication methods may vary, however, and care must be exercised to ensure that equipment from various vendors is compatible.

7.3 Workstations equipped with compatible wireless networking cards can operate in a peer-to-peer fashion, but in a larger installation a more reasonable design would be to establish distinct Wireless Access Point (WAP) devices that connect directly to the cable plant and act as gateways to the physically wired network and attached servers. In this scenario, wireless workstations may be moved from location to location within a ship and connect to the network wherever a WAP is established. Laptops and PDAs are particularly well suited to support WAP installations, due to their inherent mobility.

7.4 The ability of a wireless-configured device to easily connect to another wireless device or WAP also highlights one of the disadvantages of wireless networks. Security of operating data, services and systems can be seriously compromised in a wireless installation. The 802.11 standard offers an encryption method known as Wired Equivalent Privacy (WEP) but several flaws may be found in the WEP encryption algorithms. A safer method would also involve the use of Virtual Private Networking (VPN) to establish secure communications with wired servers and systems. VPN methods vary, however, and any implementation should be thoroughly researched to ensure that the solution is applicable for all circumstances (wired/wireless, different Operating Systems) and equipment (Servers, Workstations, Laptops, PDAs).

8. Ship and Marine Facility Requirements

8.1 *Racks*—Ship and marine networking equipment should never be installed by setting them upon desks, tables, filing cabinets, etc. Small equipment can be bulkhead-mounted or hung from the overhead; however, the preferable technique for ship and marine installation of standard information processing equipment is in racks.

8.1.1 Suitable racks can be obtained from a number of vendors. However, heavy duty, industrial grade or ruggedized racks should be used, not lightweight racks intended for shore-based office environments. Standard rack widths are 19 in. and 24 in. Nearly all typical networking equipment is designed to fit into 19-in. wide racks. (Note that these are mounting widths; the overall external width of a 19-in. rack is about 24 in., and the outside width of a 24-in. rack is about 30 in..)

8.1.2 Standard 19-in. racks come in several depths, typically 17 in., 24 in., 29 in., and 36 in.. When deciding on the depth of a rack, remember to allow enough depth for recessing equipment that have front-access cabling, and to allow air exhaust space for equipment with rear-facing fans. Many pieces of networking equipment have modular assemblies that are removed from the front, and the cables attach to these assemblies from the front. This requires that the unit be recessed at least 4 in. to allow a reasonable cable bending radius. (For units that have rear-accessible modules, it is often desirable to mount them in backwards for easier access to removable modules.)

8.1.3 If there is sufficient space in the compartment to mount the racks away from the bulkhead for both front and rear access, a sufficiently deep rack will permit electronics units and fiber patch panels to be placed back-to-back at the same vertical level within the rack.

8.1.4 Consider cable entry when ordering racks. If the rack is to be located on a raised false deck, then the cabling can enter from the bottom. Otherwise the cable should enter the rack from the lower half of the rear panel. For all cable entrances, a minimum of three in. of slack should be provided to allow for movement of the rack under shock and vibration. There should also be a minimum length of 18 in. between the last cable support and the cable's entrance to the equipment.

8.1.5 Racks should be ordered with removable, but lockable, side, front and rear panels for maximum equipment accessibility. Note that the location of louvers in rack panels depends upon the cooling method that is used (see below).

8.1.6 The location of equipment within racks is a trade-off among the often-conflicting parameters of accessibility, weight, and cooling. Heavy equipment should be located low in the rack for stability and ease of removing. Equipment that requires reading of displays, LEDs, or patching should be located at eye level. Heat-dissipation equipment should be located near the air exhaust, not near the cold air inlet, to avoid pre-heating the air flowing over the rest of the equipment.

8.1.7 Heavy equipment should be mounted using front-to-rear angle brackets or slide trays to simplify installation and removal, and to avoid the need to carry the weight of the equipment on the front panel screws.

8.1.8 *Rack Cooling*—Racks that contain equipment whose total power dissipation is more than 100 W should be provided with rack-mounted blowers or fans to augment any cooling that might be provided by fans inside the equipment.

8.1.8.1 The ft³/min (CFM) rating of the rack blower/fans can be estimated from the following equation:

$$CFM = 4P/T \quad (1)$$

where:

CFM = airflow, ft³/min,
P = total rack power dissipation, W, and
T = temperature rise (inlet to outlet), °F.

For example, a rack with 1000 W of electronics will need a 400-CFM blower to limit the temperature rise to 10°F.

8.1.8.2 Since heated air tends to rise, the airflow from fans or blowers should be bottom-to-top. This means placing a blower at the bottom of the rack, or an exhaust fan at the top of the rack. In either case, a washable air filter should be placed at the air entry point. Note that the blower, as opposed to the exhaust fan, has the added advantage of putting a positive pressure within the rack to keep out dust and dirt from unfiltered air entry.

8.1.8.3 If a blower is placed at the bottom of the rack, then the rear or side panels, or both, should have louvers near the top for exhaust air to exit. Do not use fully louvered panels that would short circuit the air flow. If exhaust fans are used, then the doors and panels should have no louvers; the cold air enters from the air filter near the bottom and the warm air exits via the top-mounted exhaust fan.

8.1.9 *Shock Isolation*—Ship and marine equipment racks should not be hard-mounted to deck foundations, but should be shock isolated via coil springs or other acceptable isolation mechanisms. Tall racks (over 1.5 m tall) should also have

shock-isolated anti-sway mounting from the top of the rack to the bulkhead or to the overhead (see 8.5.5).

8.2 *Line Conditioning and UPS*—Ship and marine ac power is often unreliable, noisy, and subject to over-voltage and under voltage conditions that can seriously damage networking equipment. Network equipment should never be connected directly to shipboard power without the protection of a line conditioner and an uninterruptible power supply (UPS). (Printers need not be connected to UPS.)

8.2.1 Line conditioners protect against over/under voltage conditions, and provide some degree of noise suppression, but do not protect against total loss of power. UPSs provide over/under voltage protection, noise suppression, and supply ac power (generated from dc batteries within the UPS) for a limited time. (The loss-of-power protection interval varies with the size of the UPS batteries, but should be designed to operate for a minimum of 30 min when the UPS is operated at the recommended 50 % rated load.)

8.2.2 Unlike shore-based ac distribution systems, ship and marine power uses an ungrounded (floating) neutral. If ordinary line conditioners or UPSs are connected to shipboard power, the grounded neutral will cause a ground-fault indication. Line conditioners and UPSs with floating neutral can be obtained, but they must be special-ordered for ship and marine service.

8.3 *Electrical System Interfaces:*

8.3.1 *Electric Load Analysis*—Prior to installation, an electric load analysis should be performed to calculate the electrical system impact associated with the new equipment, taking into consideration any removed equipment as well.

8.3.2 *Local Distribution*—If adequate electrical distribution is not available to supply the new loads, install additional equipment and cable as required. If the existing electrical distribution system is modified, circuit breakers and cables should be examined for adequacy and modified or replaced as necessary to support the new loads.

8.3.3 *Bonding and Grounding*—Secure electrical information processing equipment and cables should be bonded and grounded.

8.3.4 *Power Source for Backbone Switches*—Backbone switches should be supplied ac power from two independent power sources via an automatic power bus transfer system.

8.4 *Air Conditioning*—Prior to installation, the ability of the existing ship's air conditioning system (High Volume Air Conditioning (HVAC) system) to support the equipment installations in each compartment on the ship must be verified.

8.5 *Special Considerations for Ship and Marine Critical Systems:*

8.5.1 Shock Equipment shall meet grade “A” shock requirements. Equipment shall operate before, during and after shock conditions resulting from high impact shock testing of hardware, mounting rack, and shock mounting devices. For critical signals that cannot accept momentary disruption of a circuit, multi-mode fiber is preferred over single-mode fiber because multi-mode fiber connectors withstand shock more readily than single-mode connectors.

8.5.2 *Humidity*—Using commercially available hardware in environments with condensing 100 % relative humidity can lead to shorting of printed circuit cards which are normally not conformally coated in commercial equipment. One solution to this problem is the use of specially treated equipment rooms (node rooms) or controlled spaces where highly reliable air conditioning is always available.

8.5.3 *Temperature*—Most electronic equipment is designed to temperature ranges of 0 to 30, 40, or 50°C. Ship and marine operation outside of this range can cause failure or improper operation of LED displays, hard drives, and CD-ROM drives at the low temperature extremes, and power supplies and other electronics at the higher temperature extremes. The concept noted in the previous paragraph of air-conditioned node rooms can be used to solve this problem. Temperature testing shall be conducted with the equipment operational in a controlled environment of 0 to 55°C.

8.5.4 *Magnetic Field*—The high magnetic fields caused by ship degaussing can disturb the displays on CRT screens. If critical information needs to be read during degaussing, consider the use of flat-panel displays instead of CRT displays.

8.5.5 *Vibration Equipment* shall be subjected to endurance testing at fixed frequencies based upon the critical frequencies determined from the vibration response testing. When vibration response investigation does not identify any critical frequencies, testing shall be conducted at the maximum vibration frequency of 100 Hz and 0.076 mm vibration amplitude.


8.5.6 *Electromagnetic Susceptibility*—The equipment shall not be susceptible to electromagnetic emission in the room or area in which it is installed.

8.5.7 *Fungus/mold*—The equipment shall not support fungal or mold growth.

8.5.8 *Salt Fog*—Equipment shall be tested to withstand salt fog when used in ship and marine locations that are susceptible to salt fog conditions.

9. Keywords

9.1 bus; client; CPU; fiber optic; I/O; peripherals; RAM; server; UTP; workstation

 **F2218 – 02 (2015)**

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org). Permission rights to photocopy the standard may also be secured from the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, Tel: (978) 646-2600; <http://www.copyright.com/>