BS ISO 9249:2007



BSI Standards Publication

Earth-moving machinery — Engine test code — Net power



BS ISO 9249:2007 BRITISH STANDARD

National foreword

This British Standard is the UK implementation of ISO 9249:2007. It supersedes BS 6911-4:1998 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee B/513/1, Earth moving machinery (International).

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© BSI 2011

ISBN 978 0 580 54514 6

ICS 53.100

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 August 2011.

Amendments issued since publication

Date Text affected

INTERNATIONAL STANDARD

BS ISO 9249:2007 ISO 9249

Third edition 2007-11-01

Earth-moving machinery — Engine test code — Net power

Engins de terrassement — Code d'essai des moteurs — Puissance nette



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.



COPYRIGHT PROTECTED DOCUMENT

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 9249 was prepared by Technical Committee ISO/TC 127, *Earth-moving machinery*, Subcommittee SC 1, *Test methods relating to machine performance*.

This third edition cancels and replaces the second edition (ISO 9249:1997), which has been technically revised. It also incorporates the Technical Corrigendum ISO 9249:1997/Cor 1:1999.

BS ISO 9249:2007 ISO 9249:2007(E)

Introduction

This International Standard is intended to be applied in conjunction with the "core" standard, ISO 15550, in order to define the net power ratings for earth-moving machinery where relevant equipment and accessories that absorb engine power (fan, pumps, air compressors and so forth) are deducted from the engine power rating. The "satellite" standard is therefore not a stand-alone document but is intended to be completed by the requirements laid down in ISO 15550.

ISO 15550 contains the requirements that are common to all engine applications, whereas this International Standard contains only those requirements that are necessary to tailor power measurement and declaration to suit the particular engine application defined in its Scope.

The relationship between this International Standard and ISO 14396 is explained in Annex A.

Earth-moving machinery — Engine test code — Net power

1 Scope

This International Standard specifies a method for testing the net power of internal combustion engines intended for the propulsion of earth-moving machinery as defined in ISO 6165. It is intended to provide a standardized means of reporting net power values to the end user of the earth-moving machines. It is applicable to

- a) RIC spark- or compression-ignition engines but excluding free piston engines,
- b) rotary piston engines.

These engines may be naturally aspirated or pressure-charged using either a mechanical pressure-charger or a turbocharger.

NOTE This International Standard is a companion standard to ISO 14396. The principle differences between the two is the fitting of certain cooling equipment and pressure-charging equipment auxiliaries (fans) for the test. It is possible to deduct the power requirements of equipment and auxiliaries from the engine ratings of ISO 14396 by test or calculation methods. See Annex A for the preferred calculation method for obtaining the net power ratings according to this International Standard. Both the test and the calculation method comply with this International Standard.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6165, Earth-moving machinery — Basic types — Identification and terms and definitions

ISO 14396, Reciprocating internal combustion engines — Determination and method for the measurement of engine power — Additional requirements for exhaust emission tests in accordance with ISO 8178

ISO 15550:2002, Internal combustion engines — Determination and method for the measurement of engine power — General requirements

3 Terms, definitions, symbols and abbreviated terms

For the purposes of this document, the symbols and abbreviated terms given in ISO 15550 and the following terms and definitions apply.

3.1

declared engine speed

engine speed corresponding to the declared power

NOTE In some applications, the declared engine speed is named "rated speed".

[ISO 15550:2002, definition 3.2.4]

3.2

declared power

value of the power, declared by the manufacturer, which an engine will deliver under a given set of circumstances

NOTE In some applications, the declared power is named "rated power".

[ISO 15550:2002, definition 3.3.1]

3.3

engine adjustment

physical procedure of modifying an engine for the purpose of adapting it to deliver a power adjusted to a different set of ambient conditions, such as by moving the limiting fuel stop, re-matching the turbocharger, changing the fuel injection timing or other physical changes

NOTE Once the modifications have been completed the engine is an adjusted engine.

[ISO 15550:2002, definition 3.2.1]

3.4

engine speed

number of revolutions of the crankshaft in a given period of time

[ISO 2710-1:2000, definition 11.1]

3.5

fuel delivery

metered volume (mass) of fuel delivered by a fuel injection system during one working cycle

NOTE Adapted from ISO 7876-1:1990, definition 10.24.

3.6

load

general term describing the magnitude of the "power" or "torque" demanded from the engine by its driven machinery and usually expressed relative to a declared power or torque

NOTE The term "load" is physically imprecise and should be avoided. For quantitative purposes the terms "power" or "torque" should be used, instead of "load", together with a statement of speed.

[ISO 15550:2002, definition 3.3.11]

3.7

net power

power obtained on a test bed at the end of the crankshaft or its equivalent, at the corresponding engine speed, with the equipment and auxiliaries listed in ISO 15550:2002, Table 1, column 2, and required in column 3 (fitted for engine net power test)

NOTE 1 If the power measurement can only be carried out with a mounted gearbox, the losses in the gearbox should be added to the measured power to give the net engine power.

NOTE 2 Adapted from ISO 15550:2002, definition 3.3.3.1.

3.8

net torque

torque transmitted on a test bed at the end of the crankshaft or its equivalent, at the corresponding engine speed, with the equipment and auxiliaries listed in ISO 15550:2002, Table 1, column 2, and required in column 3 (fitted for engine net power test)

NOTE Adapted from ISO 15550:2002, definition 3.3.12.

3.9

power correction

calculation procedure by which a power value determined under engine test conditions is modified so that it represents the power value expected under other operating or reference conditions without any engine adjustment

[ISO 15550:2002, definition 3.3.10]

NOTE In this case, the power and performance parameters may vary as a function of ambient conditions (see ISO 15550:2002, Clause 7).

4 Standard reference conditions

The standard reference conditions shall be in accordance with ISO 15550:2002, Clause 5.

5 Tests

5.1 Test method

The test method shall be test method 2 as specified in ISO 15550:2002, 6.3.

5.2 Test conditions

The test conditions shall be in accordance with ISO 15550:2002, 6.3.4, together with the following:

- a) Equipment and auxiliaries shall be installed in accordance with ISO 15550:2002, Table 1, column 3, including Table 1 footnotes. The fan shall include the entire fan system including the fan and all drive components such as the pump, lines and motor for a hydraulic fan. When the fan system is not fitted for the test then the power absorbed at 25 °C (ambient) shall be determined and subtracted from the measured engine power.
- b) Other machine accessories connected to the engine but that are only necessary for the operation of the machine should be removed for the test. Where accessories cannot be removed, the power absorbed by them in the unloaded condition shall be determined and added to the measured engine power. The following list of examples is non-exhaustive:
 - machine control system(s) hydraulic system pumps;
 - 2) air compressor for machine systems;
 - 3) air-conditioning system compressor;
 - 4) transmission system pump(s);
 - 5) mounted gearbox(es).

Where a disconnectable or progressive fan or blower is incorporated, the test is performed with the fan or blower disconnected or with the progressive fan running at maximum slip, as specified in ISO 15550:2002, Table 1. The intent of this condition is to state net power at the minimum nominal fan system power, when a disconnectable or progressive fan, blower, variable speed fan or ON-OFF fan is incorporated. Measure fan power at the normal operating range of the machine as a function of ambient temperature and load factor (i.e. not at start-up or other machine non-operating range condition).

© ISO 2007 – All rights reserved

6 Method of power correction

The method of power correction shall be in accordance with ISO 15550:2002, Clause 7.

The test may be carried out in an air-conditioned test room where the atmospheric conditions are controlled in order to maintain the correction factor as close to 1,0 as possible. In the case of engines with an automatic air temperature control, if the device is such that, at full load and at standard atmospheric conditions (see ISO 15550:2002, Clause 5), no heated air is added to the inlet air, the test shall be carried out with the device operating normally and the exponent of the temperature term in the correction factor, as specified in ISO 15550:2002, 7.3 or 7.4.2, shall be taken as zero (no temperature correction).

A calculation of the deductions is permissible in place of an actual test. The calculation method shall be accurate such that the engine net power ratings meet the requirements of Clause 9.

7 Test report

The test report shall be in accordance with ISO 15550:2002, 9.2.2.1, 9.2.2.2 and 9.2.2.3, and shall additionally contain information in accordance with Table 1, as applicable.

Table 1 — Test report (information additional to that specified in ISO 15550)

Engine	
Test conditions	
Pressures measured at declared speed:	
a) total barometric pressure	kPa
b) water vapour pressure	kPa
c) exhaust back-pressure	kPa
Location of exhaust back-pressure measurement point:	
Inlet depression:	Pa
Absolute pressure in the inlet ductwork:	Pa
Temperature measured at the declared speed:	
a) inlet air	К
b) engine charge air cooler outlet	К
c) cooling fluid at the engine cooling fluid outlet/reference point in the air cooling case	К
d) lubricating oil:	К
— measurement point:	
e) fuel:	
at the carburettor inlet/fuel injection system inlet	K
in the fuel flow measuring device	K

8 Statement of results as a function of engine speed

The statement of results shall be according to ISO 15550:2002, Table 13, with additional requirements as presented in Table 2 below.

Table 2 — Statement of results

	Result	Unit	
Aux.1		kW	
Aux.2		kW	
Aux.3		kW	
Inlet depression			
Exhaust back-pressure			
Fuel delivery per stroke or cycle ^b			
	Aux.2	Aux.1 Aux.2	

NOTE In addition to the temperature, T, expressed in Kelvin, use can be made of the Celsius temperature, t, defined by the equation: t = T - 273,15. The temperature unit of degrees Celsius can thus be used instead of degrees Kelvin.

9 Measurement accuracy

The measured power of an engine may differ from the power declared by the manufacturer by $\pm 2 \%$ or 0,3 kW, whichever is greater, at the declared engine speed, and by $\pm 4 \%$ at all other speeds.

^a Equipment or auxiliaries not fitted on the engine but required for the engine to perform its intended service (i.e. additional turbo lubrication pump) can use calculations to subtract these power deductions.

b Calculated with corrected power and corrected fuel flow.

Annex A (informative)

Determination of net power using ISO 14396

A.1 General

Like this International Standard, ISO 14396 is a "satellite" to ISO 15550. It is used to specify the method and additional requirements for determining the power of reciprocating internal combustion (RIC) engines when presented for an exhaust emission test in accordance with ISO 8178.

The testing requirements of this International Standard are very similar to those of ISO 14396, as both are based on the "core" standard, ISO 15550. The fundamental difference between them is that the power declared using this International Standard deducts relevant equipment and accessories from the power values of ISO 14396.

A.2 Calculation

For the calculation of net power according to this International Standard, deduct the power absorbed by

- the cooling equipment fan (if equipped),
- the pressure-charging equipment coolant pump or fan (if equipped), and
- equipment and auxiliaries listed in Table 2,

from the corrected engine power measured in accordance with ISO 14396.


The power of the fan(s) and pump shall be determined at the speeds corresponding to the engine speeds used for the measurement of engine power either by calculation from standard characteristics or by practical tests, corrected to the standard atmospheric conditions (see ISO 15550:2002, Clause 5).


The accuracy of the net power ratings shall satisfy the requirements of Clause 9.

An example and consequence of the calculation (using the example of a liquid cooling fan) is given in Table A.1 and shown in Figure A.1.

Table A.1 — Calculation of net power

		Speed ^a r/min					
_		1 000	1 400	1 500	1 800	2 200	2 400
Power (kW)	for ISO 8178 (ISO 14396)	36,7	58,6	62,5	72,4	79,5	80,5
	fan power (absorption)	0,2	0,6	0,7	1,2	2,2	2,8
	net power (this International Standard)	36,5	58,0	61,8	71,2	77,3	77,7
a At speeds corresponding to the engine speeds used for the measurement of engine power according to ISO 8178.							

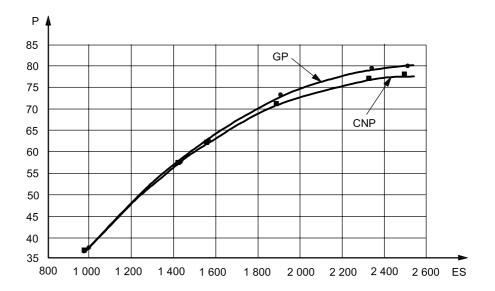



Key

CNP calculated net power, kW

ES engine speed, r/min

FP fan power, kW

GP power, kW (according to ISO 14396, i.e. without cooling equipment fan)

P power, kW

Figure A.1 — Calculation of net power

Bibliography

- [1] ISO 2710-1, Reciprocating internal combustion engines Vocabulary Part 1: Terms for engine design and operation
- [2] ISO 7876-1, Fuel injection equipment Vocabulary Part 1: Fuel injection pumps
- [3] ISO 8178 (all parts), Reciprocating internal combustion engines Exhaust emission measurement

ICS 53.100

Price based on 8 pages



British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards -based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com
Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070 Email: copyright@bsigroup.com

