

**Oil of gum turpentine,
Chinese (mainly from
Pinus massoniana
Lamb.)**

ICS 71.100.60

National foreword

This British Standard reproduces verbatim ISO 21389:2004 and implements it as the UK national standard.

The UK participation in its preparation was entrusted to Technical Committee AW/54, Essential oils, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the ISO title page, pages ii and iii, a blank page, pages 1 to 6, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

Amendments issued since publication

| Amd. No. | Date | Comments |
|----------|------|----------|
| | | |
| | | |
| | | |
| | | |

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 1 July 2004

© BSI 1 July 2004

ISBN 0 580 44007 9

INTERNATIONAL
STANDARD

ISO
21389

First edition
2004-06-15

**Oil of gum turpentine, Chinese (mainly
from *Pinus massoniana* Lamb.)**

*Huile essentielle de térébenthine, type Chine (principalement de la
gomme de Pinus massoniana Lamb.)*



Reference number
ISO 21389:2004(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 21389 was prepared by Technical Committee ISO/TC 54, *Essential oils*.

Oil of gum turpentine, Chinese (mainly from *Pinus massoniana* Lamb.)

1 Scope

This International Standard specifies certain characteristics of the oil of gum turpentine, Chinese (mainly from *Pinus massoniana* Lamb.), in order to facilitate assessment of its quality.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/TR 210, *Essential oils — General rules for packaging, conditioning and storage*

ISO/TR 211, *Essential oils — General rules for labelling and marking of containers*

ISO 212, *Essential oils — Sampling*

ISO 279, *Essential oils — Determination of relative density at 20 °C — Reference method*

ISO 280, *Essential oils — Determination of refractive index*

ISO 592, *Essential oils — Determination of optical rotation*

ISO 875, *Essential oils — Evaluation of miscibility in ethanol*

ISO 1242, *Essential oils — Determination of acid value*

ISO 3405, *Petroleum products — Determination of distillation characteristics at atmospheric pressure*

ISO 4715, *Essential oils — Quantitative evaluation of residue on evaporation*

ISO 11024-1, *Essential oils — General guidance on chromatographic profiles — Part 1: Preparation of chromatographic profiles for presentation in standards*

ISO 11024-2, *Essential oils — General guidance on chromatographic profiles — Part 2: Utilization of chromatographic profiles of samples of essential oils*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

oil of gum turpentine, Chinese

essential oil obtained by steam distillation of the gum resin mainly from *Pinus massoniana* Lamb., of the Pinaceae family, growing in the south of China

NOTE For information on the CAS number, see ISO/TR 21092.

4 Requirements

4.1 Appearance

Clear, transparent, mobile liquid.

4.2 Colour

Colourless.

4.3 Odour

Characteristic of gum turpentine.

4.4 Relative density at 20 °C, d_{20}^{20}

Minimum: 0,850

Maximum: 0,872

4.5 Refractive index at 20 °C

Minimum: 1,465 0

Maximum: 1,473 0

4.6 Optical rotation at 20 °C

Between -35° and -10° .

4.7 Miscibility in ethanol, 90 % (volume fraction), at 20 °C

It shall not be necessary to use more than 7 volumes of ethanol, 90 % (volume fraction), to obtain a clear solution with 1 volume of essential oil.

4.8 Acid value

Maximum: 1,0

4.9 Distillation characteristics

The temperature at the beginning of the distillation shall be higher than 150 °C, and at least 90 % of the distillate shall be obtained at a temperature not exceeding 170 °C.

4.10 Residue on evaporation

Maximum: 2,5 %

4.11 Chromatographic profile

Analysis of the essential oil shall be carried out by gas chromatography. In the chromatogram obtained, the representative and characteristic components shown in Table 1 shall be identified. The proportions of these components, indicated by the integrator, shall be as shown in Table 1. This constitutes the chromatographic profile of the essential oil.

Table 1 — Chromatographic profile

| Component | Minimum % | Maximum % |
|------------------------|--------------|--------------|
| α -Pinene | 65 | 90 |
| Camphene | traces | 2,5 |
| β -Pinene | 3,0 | 18 |
| δ -3-Carene | traces | 0,3 |
| Myrcene | traces | 1,5 |
| Limonene | traces | 5,0 |
| <i>p</i> -Cymene | traces | 2,5 |
| Longifolene | traces | 2,5 |
| β -Caryophyllene | traces | 3,0 |
| Caryophyllene oxide | traces | 0,4 |

NOTE The chromatographic profile is normative, contrary to typical chromatograms given for information in Annex A.

4.12 Flashpoint

Information on the flashpoint is given in Annex B.

5 Sampling

See ISO 212.

Minimum volume of test sample: 150 ml.

NOTE This volume allows each of the tests specified in this International Standard to be carried out at least once.

6 Test methods

6.1 Relative density at 20 °C, d_{20}^{20}

See ISO 279.

6.2 Refractive index at 20 °C

See ISO 280.

6.3 Optical rotation at 20 °C

See ISO 592.

6.4 Miscibility in ethanol, 90 % (volume fraction), at 20 °C

See ISO 875.

6.5 Acid value

See ISO 1242.

6.6 Distillation characteristics

See ISO 3405.

6.7 Residue on evaporation

See ISO 4715.

Test portion: 2,0 g

Evaporation time: 3 h

6.8 Chromatographic profile


See ISO 11024-1 and ISO 11024-2.

7 Packaging, labelling, marking and storage

See ISO/TR 210 and ISO/TR 211.

Annex A (informative)

Typical chromatograms of the analysis by gas chromatography of the essential oil of gum turpentine, Chinese (mainly from *Pinus massoniana* Lamb.)

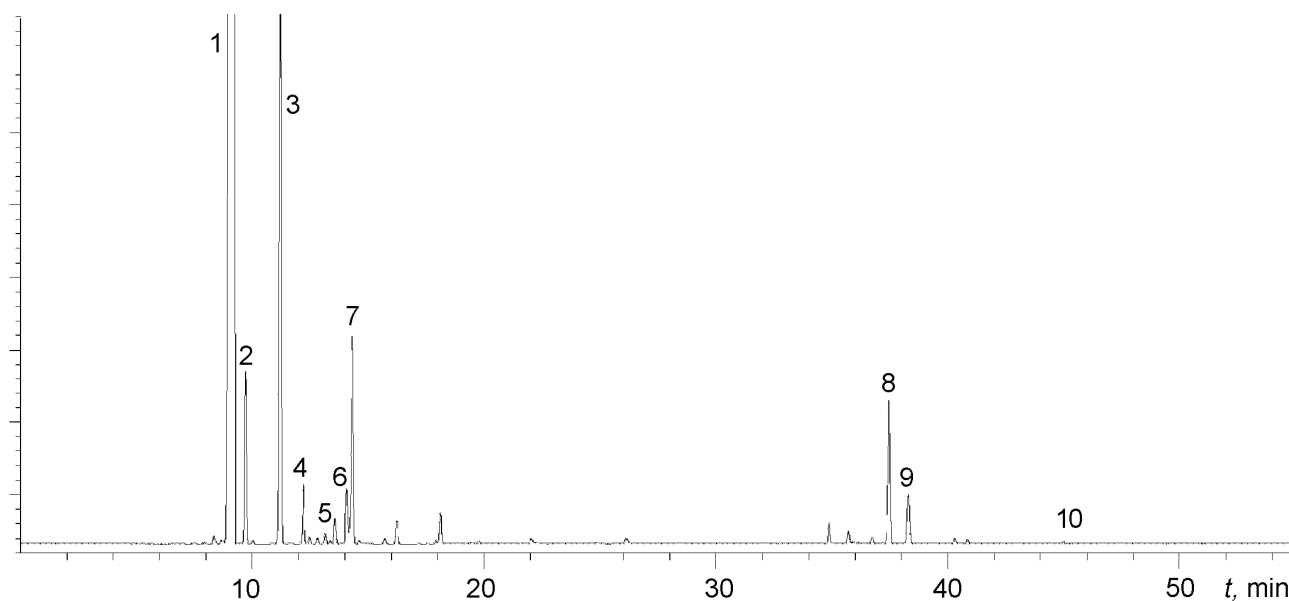

Peak identification

- 1 α -Pinene
- 2 Camphene
- 3 β -Pinene
- 4 Myrcene
- 5 δ -3-Carene
- 6 *p*-Cymene
- 7 Limonene
- 8 Longifolene
- 9 β -Caryophyllene
- 10 Caryophyllene oxide

Operating conditions

Column: fused silica capillary; length 30 m; internal diameter 0,25 mm

Stationary phase: poly(methyl phenyl vinyl siloxane) (SE-54[®])

Film thickness: 0,25 μ m

Oven temperature: isothermal at 50 °C for 5 min, then temperature programming from 50 °C to 80 °C at a rate of 2 °C/min and isothermal at 80 °C for 5 min, then temperature programming from 80 °C to 120 °C at a rate of 4 °C/min and isothermal at 120 °C for 5 min, then temperature programming from 120 °C to 200 °C at a rate of 8 °C/min, and finally isothermal at 200 °C for 5 min

Injector temperature: 250 °C

Detector temperature: 280 °C

Detector: flame ionization type


Carrier gas: nitrogen

Volume injected: 0,2 μ l

Carrier gas flow rate: 1,0 ml/min

Split ratio: 70/1

Figure A.1 — Typical chromatogram taken on an apolar column

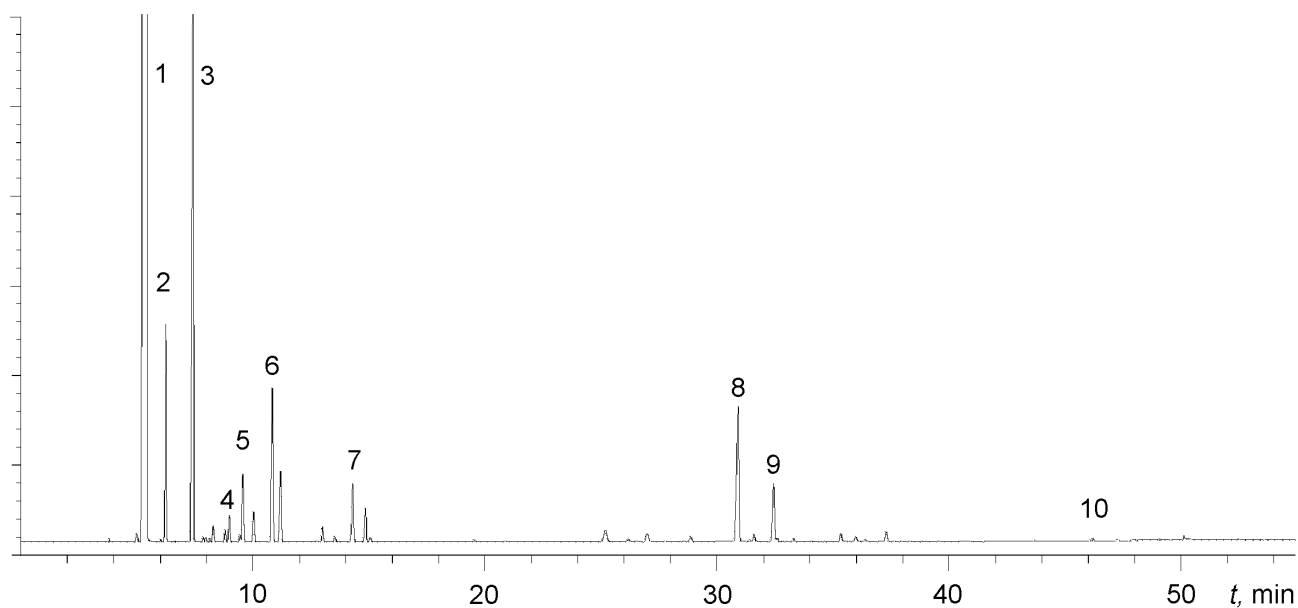

| Peak identification | Operating conditions |
|--------------------------|---|
| 1 α -Pinene | Column: fused silica capillary; length 30 m; internal diameter 0,32 mm |
| 2 Camphene | Stationary phase: poly(ethylene glycol) 20 000/2-nitroterephthalic acid (FFAP [®]) |
| 3 β -Pinene | Film thickness: 0,25 μ m |
| 4 δ -3-Carene | Oven temperature: isothermal at 50 °C for 5 min, then temperature programming from 50 °C to 80 °C at a rate of 2 °C/min and isothermal at 80 °C for 5 min, then temperature programming from 80 °C to 120 °C at a rate of 4 °C/min and isothermal at 120 °C for 5 min, then temperature programming from 120 °C to 200 °C at a rate of 8 °C/min, and finally isothermal at 200 °C for 5 min |
| 5 Myrcene | |
| 6 Limonene | |
| 7 <i>p</i> -Cymene | |
| 8 Longifolene | Injector temperature: 250 °C |
| 9 β -Caryophyllene | Detector temperature: 280 °C |
| 10 Caryophyllene oxide | Detector: flame ionization type |
| | Carrier gas: nitrogen |
| | Volume injected: 0,2 μ l |
| | Carrier gas flow rate: 1,0 ml/min |
| | Split ratio: 70/1 |

Figure A.2 — Typical chromatogram taken on a polar column

Annex B (informative)

Flashpoint

B.1 General information

For safety reasons, transport companies, insurance companies, and people in charge of safety services require information on the flashpoints of essential oils, which in most cases are flammable products.

A comparative study on the relevant methods of analysis (see ISO/TR 11018) concluded that it was difficult to recommend a single apparatus for standardization purposes, given that:

- there is wide variation in the chemical composition of essential oils;
- the volume of the sample needed for certain requirements would be too costly for high-priced essential oils;
- as there are several different types of equipment which can be used for the determination, users cannot be expected to use one specified type only.

Consequently, it was decided to give a mean value for the flashpoint in an informative annex to each International Standard in order to meet the requirements of the interested parties.

The equipment with which this value was obtained should be specified.

For further information, see ISO/TR 11018.

B.2 Flashpoint of the essential oil of gum turpentine, Chinese

The mean value is +38 °C.

NOTE Obtained with “closed cup” equipment.

Bibliography

- [1] ISO/TR 11018:1997, *Essential oils — General guidance on the determination of flashpoint*
- [2] ISO/TR 21092:2004, *Essential oils — Characterization*

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.