PD IEC/TS 62771:2012



BSI Standards Publication

Information model covering the contents of IEC 81346-1 and -2, IEC 61175, IEC 61666 and IEC 81714-3

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW



National foreword

This Published Document is the UK implementation of IEC/TS 62771:2012.

The UK participation in its preparation was entrusted to Technical Committee GEL/3, Documentation and graphical symbols.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2012

Published by BSI Standards Limited 2012

ISBN 978 0 580 77506 2

ICS 01.040.01; 01.040.35

Compliance with a British Standard cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 31 August 2012.

Amendments issued since publication

Amd. No. Date Text affected



IEC/TS 62771

Edition 1.0 2012-08

TECHNICAL SPECIFICATION



Information model covering the contents of IEC 81346-1 and IEC 81346-2, IEC 61175, IEC 61666 and IEC 81714-3

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PRICE CODE

S

ICS 01.040.01; 01.040.35

ISBN 978-2-83220-309-5

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FΟ	REWORD	3
1	Scope	5
	Normative references	
3	Terms and definitions	5
4	General	6
Anı	nex A (normative) Reference information model	7
Anı	nex B (normative) Data Element Type definitions	18
Bib	liography	21
Fig	ure 1 – Graphical presentation of the SCHEMA	
MC	DEL_FOR_DESIGNATION_OF_OBJECTS_AND_TERMINALS	17

INTERNATIONAL ELECTROTECHNICAL COMMISSION

INFORMATION MODEL COVERING THE CONTENTS OF IEC 81346-1 AND IEC 81346-2, IEC 61175, IEC 61666 AND IEC 81714-3

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. In exceptional circumstances, a technical committee may propose the publication of a technical specification when

- the required support cannot be obtained for the publication of an International Standard, despite repeated efforts, or
- the subject is still under technical development or where, for any other reason, there is the future but no immediate possibility of an agreement on an International Standard.

Technical specifications are subject to review within three years of publication to decide whether they can be transformed into International Standards.

IEC 62771, which is a technical specification, has been prepared by IEC technical committee 3: Information structures, documentation and graphical symbols.

The text of this technical specification is based on the following documents:

Enquiry draft	Report on voting
3/1080/DTS	3/1102/RVC

Full information on the voting for the approval of this technical specification can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- transformed into an International standard.
- reconfirmed.
- withdrawn,
- · replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INFORMATION MODEL COVERING THE CONTENTS OF IEC 81346-1 AND IEC 81346-2, IEC 61175, IEC 61666 AND IEC 81714-3

1 Scope

This Technical Specification contains a formal reference information model of the concepts and methods established in IEC 81346-1, IEC 81346-2, IEC 61175, IEC 61666 and IEC 81714-3, which are its normative basis.

The information model is normative with respect to data exchange.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61175:2005, Industrial systems, installations and equipment and industrial products – Designation of signals

IEC 61360-1, Standard data elements types with associated classification scheme for electric items – Part 1: Definitions – Principles and methods

IEC 61360-DB, IEC Common Data Dictionary 1

IEC 61666, Industrial systems, installations and equipment and industrial products – Identification of terminals within a system

IEC 81346-1, Industrial systems, installations and equipment and industrial products – Structuring principles and reference designations – Part 1: Basic rules

IEC 81346-2, Industrial systems, installations and equipment and industrial products – Structuring principles and reference designations – Part 2: Classification of objects and codes for classes

IEC 81714-3, Design of graphical symbols for use in the technical documentation of products – Part 3: Classification of connect nodes, networks and their encoding

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 81346-1, IEC 81346-2, IEC 61175, IEC 61666, and IEC 8174-3 apply.

At the next revision the title of the IEC 61360 series will be modified to: Standard data element types with associated classification scheme for products and services, with Part 1: Definitions, principles and methods, Part 2: EXPRESS Dictionary schema, Part 4: IEC reference collection for products and services used in electrotechnology, and Part 5: Extensions to the EXPRESS dictionary schema. Likewise the title of the database will be: IEC 61360-DB: IEC Common Data Dictionary.

4 General

The standards IEC 81346-1, IEC 81346-2, IEC 61175, IEC 61666 and IEC 81714-3 are interrelated, but the concepts used in these standards have so far only been dealt with separately in the different publications. The purpose of the present technical specification is to illustrate their relations by means of a common reference information model.

When data is transferred or exchanged, the exchange shall conform to this reference model. The model is conceptual and independent from any implementation method.

For the preparation of the information model, the EXPRESS modelling language, described in ISO 10303-11, has been used. The graphical form is presented using EXPRESS-G.

The information model is contained in Annex A.

0 provides an overview by means of a graphical representation of the structure and constraints of the application objects. The computer interpretable textual form is represented in A.3.

A.1 lists the entities and attributes of the information model and A.2 contains the detailed verbal descriptions of the entities and attributes.

The reference information model depicts the requirements set up, using where possible available subsets of application reference models of the ISO 10303 series.

The model is not intended to be complete within the framework of neither integrated resource models nor application reference models developed within the ISO 10303 series. It is complete with respect to the requirements established within this publication.

NOTE 1 For an introduction to EXPRESS-G, see http://tc3.iec.ch/txt/xpress.pdf.

NOTE 2 Annex A is available in the English language only.

Annex B contains a set of source definitions for Data Element Types (DETs) derived from the common reference information model.

Annex A (normative)

Reference information model

A.1 List of entities and attributes

This clause provides an alphabetically ordered list of the entities and attributes of the reference information model described in this Annex.

A.2.1	Domain.		٤.
	A.2.1.1	classified_as S[0:?]	. 8
	A.2.1.2	related_to	. 8
	A.2.1.3	id	. 8
A.2.2	Object		. 8
	A.2.2.1	classified_as S[0:?]	. 9
	A.2.2.2	has_views S[1:?]	. 9
A.2.3	Object_a	spect	. 9
	A.2.3.1	is_a_view_of	. 9
	A.2.3.2	is_aspect	. 9
	A.2.3.3	consists_of S[0:?]	. 9
A.2.4	Object_a	spect_in_object_aspect	. 9
	A.2.4.1	uses	. 9
	A.2.4.2	single_level_reference_designation	. 9
A.2.5	Aspect		10
	A.2.5.1	aspect	10
	A.2.5.2	description	10
	A.2.5.3	prefix	10
A.2.6	Class		10
	A.2.6.1	id	10
	A.2.6.2	description	11
	A.2.6.3	used_classification_system	11
A.2.7	Classific	ation_system	11
	A.2.7.1	id	11
	A.2.7.2	description	11
A.2.8	Terminal		11
	A.2.8.1	classified_as S[0:?]	12
	A.2.8.2	belongs_to	12
	A.2.8.3	(INV) has_views S[1:?]	12
A.2.9	Terminal	_aspect	12
	A.2.9.1	is_aspect	12
	A.2.9.2	is_a_view_of	12
	A.2.9.3	terminal_designation	12
A.2.10	Terminal	_relationship	12
	A.2.10.1	description	12
	A.2.10.2	related_terminal_aspect	13
	A.2.10.3	relating_terminal_aspect	13
A.2.11	Signal		13
	A.2.11.1	variants S[1:?]	13

	A.2.11.2 short_name	13
	A.2.11.3 basic_signal_name	13
	A.2.11.4 classified_as S[0:?]	13
	A.2.11.5 signal_domain	13
A.2.12	Signal_relationship	13
	A.2.12.1 related_signal	14
	A.2.12.2 relating_signal	14
	A.2.12.3 description	14
A.2.13	Signal_variant	14
	A.2.13.1 internal_signal	14
	A.2.13.2 variant_domain	14
	A.2.13.3 terminals_involved_in_signal_transfer S[1:?]	14
	A.2.13.4 id	14
	A.2.13.5 additional_information	14
B.2.1	Definitions of DETs	19
B.2.2	Definitions of classes of DETs	19
B.3.1	General	20
B.3.2	ADA002	20
B.3.3	ADA003	20

A.2 Entity descriptions

A.2.1 Domain

The Domain is a collection of attributes providing information about the context of the identification of an object, in which the identification is unambiguously defined.

The data associated with a Domain are the following:

- classified_as S[0:?];
- related_to;
- id.

A.2.1.1 classified_as S[0:?]

This attribute specifies the relation to a classification code associated to a specific Domain based on a specified classification system.

A.2.1.2 related_to

This attribute establishes the relation to an Object within a given Domain.

A.2.1.3 id

This attribute provides the identification number assigned to a Domain.

A.2.2 Object

The Object entity is a collection of attributes establishing relationships among Object, Domain, Object_aspect, Class, Signal, Signal_variant and Terminal.

The data associated with an Object are the following:

classified_as S[0:?];

has_views S[1:?].

A.2.2.1 classified_as S[0:?]

This attribute specifies the relation to a classification code associated to a specific Object based on a specified classification system.

A.2.2.2 has_views S[1:?]

This attribute lists the different views existing on the Object. At least one view shall be defined.

A.2.3 Object_aspect

The Object_aspect entity represents an aspect of an Object and provides a mechanism for representing the relationship between an Object and its constituent objects within an aspect.

The data associated with an Object aspect are the following:

- is_a_view_of;
- is_aspect;
- consist_of S[0:?].

Constraint: The aspect of the Object_aspect instances being used as constituents of the current instance shall be the same as the aspect of the current instance.

A.2.3.1 is_a_view_of

This attribute specifies the Object of which the current instance represents a view, i.e. an aspect.

A.2.3.2 is_aspect

This attribute specifies the aspect the current instance is representing.

A.2.3.3 consists_of S[0:?]

This attribute lists the instances of Object_aspect_in_object_aspect being constituents of the current instance.

A.2.4 Object_aspect_in_object_aspect

The Object_aspect_in_object_aspect represents the usage of an Object_aspect within an Object_aspect.

The data associated with Object_aspect_in_object_aspect are the following:

- uses;
- single_level_reference_designation.

A.2.4.1 uses

This attribute specifies the Object aspect being used at the current instance.

A.2.4.2 single level reference designation

This attribute provides the reference designation assigned to the current instance with respect to the Object of which the specific Object is a direct constituent in one aspect.

A.2.5 Aspect

The Aspect entity is a collection of attributes describing one view of Objects.

The data associated with an Aspect are the following:

- aspect;
- description;
- prefix.

A.2.5.1 aspect

This attribute specifies the type of aspect, i.e. the kind of view to be applied on an object.

The predefined values of aspect are one of the following:

- function view;
- product_view;
- location_view;
- · other view.

NOTE If the value "other_view" is selected, then its semantical meaning is previously agreed among the involved partners.

A.2.5.2 description

This attribute provides a clear language-bound text description of the aspect associated with the current instance.

The description need not be specified.

A.2.5.3 prefix

This attribute provides the possibility to supply the prefix sign of the associated aspect with the current instance.

The prefix need not be specified.

NOTE Predefined prefixes with their semantical meaning are defined in IEC 81346-1.

Constraint: If in addition to the mandatory Aspect value the optional prefix value will also be provided to the same instance, this may lead to inconsistency. In such cases the Aspect value shall have preference.

A.2.6 Class

The Class entity is a collection of attributes allowing assigning multiple classifications to an item. The data associated with a Class are the following:

- id;
- description;
- used_classification_system.

A.2.6.1 id

This attribute specifies the classification code associated to a specific item based on a specified Classification_system.

NOTE It is generally understood that any classification code as provided in a internationally standardized classification system, e.g. IEC 81346-2, is not translatable and hence language independent.

A.2.6.2 description

This attribute provides a clear language-bound text description of the classification code associated with the current instance based on a given Classification_system.

The description need not be specified.

A.2.6.3 used_classification_system

This attribute specifies the information about the Classification_system applied.

A.2.7 Classification_system

The Classification_system identifies the used_classification_system providing the Classes.

The data associated with a Classification_system are the following:

- id:
- · description.

A.2.7.1 id

This attribute identifies unambiguously the applied Classification_system. The values are either user-defined or predefined.

The predefined values are:

- IEC 81346-2;
- IEC 81714-3;
- IEC 61175:2005, Table 1;
- ..

NOTE The list is an open list and may be expanded. Non-defined values are previously agreed among the involved partners.

A.2.7.1.1 IEC 81346-2

This attribute indicates that the Classification_system is according to IEC 81346-2.

A.2.7.1.2 IEC 81714-3

This attribute indicates that the Classification system is according to IEC 81714-3.

A.2.7.2 description

This attribute provides a clear text description of the used_classification_system.

The description need not be specified.

A.2.8 Terminal

The Terminal is a collection of attributes providing information about the Terminal and its associated Object.

The data associated with a Terminal are the following:

- classified_as S[0:?];
- belongs_to;

• (INV) has_views S[1:?].

A.2.8.1 classified_as S[0:?]

This attribute specifies the relation to a classification code associated to a specific Terminal based on a specified Classification_system.

NOTE IEC 81714-3 provides classification codes for terminals.

A.2.8.2 belongs_to

This attribute provides the relation of a specific Terminal to a given Object.

A.2.8.3 (INV) has_views S[1:?]

This attribute lists the different views existing on the Terminal. At least one view shall be defined.

A.2.9 Terminal_aspect

The Terminal_aspect entity is a collection of attributes providing information about the different views on a Terminal associated with a Terminal.

The data associated with a Terminal aspect are the following:

- is_aspect;
- is_a view_of;
- terminal_designation.

A.2.9.1 is_aspect

This attribute specifies the aspect the current instance is representing.

A.2.9.2 is_a_view_of

This attribute specifies the Terminal of which the current instance represents a view, i.e. an aspect.

A.2.9.3 terminal_designation

This attribute identifies a Terminal with respect to the Object to which it belongs, related to one defined Aspect.

A.2.10 Terminal_relationship

The Terminal_relationship is a collection of attributes providing information about the relations among different terminals.

The data associated with a Terminal_relationship are the following:

- description;
- related_terminal_aspect;
- relating_terminal_aspect.

A.2.10.1 description

This attribute provides human-readable information about the specific Terminal_relationship occurrence.

A.2.10.2 related_terminal_aspect

This attribute specifies the second of the two Terminal_aspects related by the Terminal_relationship.

A.2.10.3 relating_terminal_aspect

This attribute specifies the first of the two Terminal_aspects related by the Terminal_relationship.

A.2.11 Signal

The Signal is a collection of attributes providing information about the units of information conveyed from one object to another.

The data associated with a Signal are the following:

- variants S[1:?];
- short_name;
- basic signal name;
- classified_as S[0:?];
- signal_domain.

A.2.11.1 variants S[1:?]

This attribute provides the different variants of Signals occurring in the different sections of a Signal connection chain on its way from the source to its destination.

NOTE There is always at least one variant in a signal connection chain.

A.2.11.2 short_name

This attribute provides a short textual description of the reporting Object respectively of the controlled Object.

The short name need not be specified.

A.2.11.3 basic_signal_name

This attribute provides a short description of the Signal defining its special function.

NOTE IEC 61175 provides abbreviations recommended to be used as basic signal name.

A.2.11.4 classified_as S[0:?]

This attribute provides the relation to a classification code associated to a specific Signal based on a specified Classification_system.

NOTE IEC 61175:2005, Table 1, provides a classification code for signals.

A.2.11.5 signal_domain

This attribute provides the relation to a specific Object within which the basic Signal name is unambiguously defined.

A.2.12 Signal_relationship

The Signal_relationship is a collection of attributes providing information about the relations among different Signal occurrences.

The data associated with a Signal_relationship are the following:

- related_signal;
- relating_signal;
- · description.

A.2.12.1 related_signal

This attribute specifies the second of the two related_signal provided by the Signal_relationship.

A.2.12.2 relating_signal

This attribute specifies the first of the two related_signal provided by the Signal_relationship.

A.2.12.3 description

This attribute provides human-readable information about the specific Signal_relationship occurrence.

A.2.13 Signal_variant

The Signal_variant is a collection of attributes providing information about a section of the Signal connection chain describing the way of a Signal from source to its destination.

The data associated with a Signal_variant are the following:

- internal_signal;
- variant_domain;
- terminals_involved_in_transfer_of_signal_variant S[1:?];
- id;
- additional_information.

A.2.13.1 internal_signal

This attribute provides the information on whether the relevant Signal_variant is an internal one not being relevant for transmission via other objects.

The internal_signal need not be specified.

A.2.13.2 variant_domain

This attribute provides the identification of an object in which the Signal_variant applies and is unambiguously defined.

A.2.13.3 terminals_involved_in_signal_transfer S[1:?]

This attribute identifies the terminals involved in the transmission of a Signal variant.

A.2.13.4 id

This attribute identifies a variant in a section of a Signal connection chain.

A.2.13.5 additional_information

This attribute provides additional information about the characteristics of a Signal_variant.

The additional_information need not be specified.

A.3 Express source code

Clause A.3 provides the full valid EXPRESS source code. This file is electronically available at http://tc3.iec.ch/stp/IEC62771 SCHEMA.txt for testing purposes.

```
SCHEMA MODEL FOR DESIGNATION OF OBJECTS AND TERMINALS;
TYPE aspect_type = ENUMERATION OF
  (FUNCTION_VIEW,
  PRODUCT_VIEW,
  LOCATION_VIEW,
  OTHER_VIEW);
 END_TYPE;
 ENTITY Object:
   classified_as : SET OF Class;
  INVERSE
   has_views
               : SET [1:?] OF Object aspect FOR is a view of;
 END_ENTITY;
 ENTITY Class;
                               : STRING;
   id
   used_classification_system
                              : Classification system;
                         : OPTIONAL STRING;
   description
 END_ENTITY;
 ENTITY Classification system;
                    : STRING;
   description : OPTIONAL STRING;
 END_ENTITY;
 ENTITY Object aspect;
   is a view of : Object;
   consist of : SET OF Object aspect in object aspect;
   is aspect
               : Aspect:
 END ENTITY;
 ENTITY Object aspect in object aspect;
                                    : Object_aspect;
   single_level_reference_designation : STRING;
 END_ENTITY;
 ENTITY Aspect;
                    : aspect type;
   description : OPTIONAL STRING;
                    : OPTIONAL STRING;
   prefix
 END_ENTITY;
 ENTITY Terminal;
   belongs_to : Object;
   classified_as : SET OF Class;
  INVERSE
   has_views
               : SET [1:?] OF Terminal aspect FOR is a view of;
 END ENTITY;
```

```
ENTITY Terminal_aspect;
   is_a_view_of : Terminal;
   is_aspect
                        : Aspect;
   terminal_designation : STRING;
 END ENTITY;
 ENTITY Terminal relationship;
   relating terminal aspect: Terminal aspect;
   related_terminal_aspect : Terminal_aspect;
   description
                            : STRING;
 END_ENTITY;
 ENTITY Domain;
   related to : Object;
   classified_as : SET OF Class;
   id
                       : STRING;
 END_ENTITY;
 ENTITY Signal;
   signal_domain
                           : Object;
                           : SET [1:?] OF Signal_variant;
   variants
   short_name : SET [1:?] OF Signal_short_name : OPTIONAL STRING; basic_signal_name : STRING; classified_as : SET OF Class;
 END ENTITY;
 ENTITY Signal variant;
   variant domain
                                                          : Object:
   terminals_involved_in_transfer_of_signal_variant
                                                          : SET [1:?] OF Terminal;
                                                          : STRING;
                                                     : OPTIONAL Signal;
   internal signal
   additional information
                                                          : OPTIONAL STRING;
 END_ENTITY;
 ENTITY Signal_relationship;
                   : Signal;
   relating_signal
   related_signal
                      : Signal;
   description
                      : STRING;
 END_ENTITY;
END_SCHEMA;
```

A.4 EXPRESS-G graphical representation

EXPRESS-G is a graphical data modelling language specified in ISO 10303-11. For presentation purposes, the complete model is presented in Figure 1.

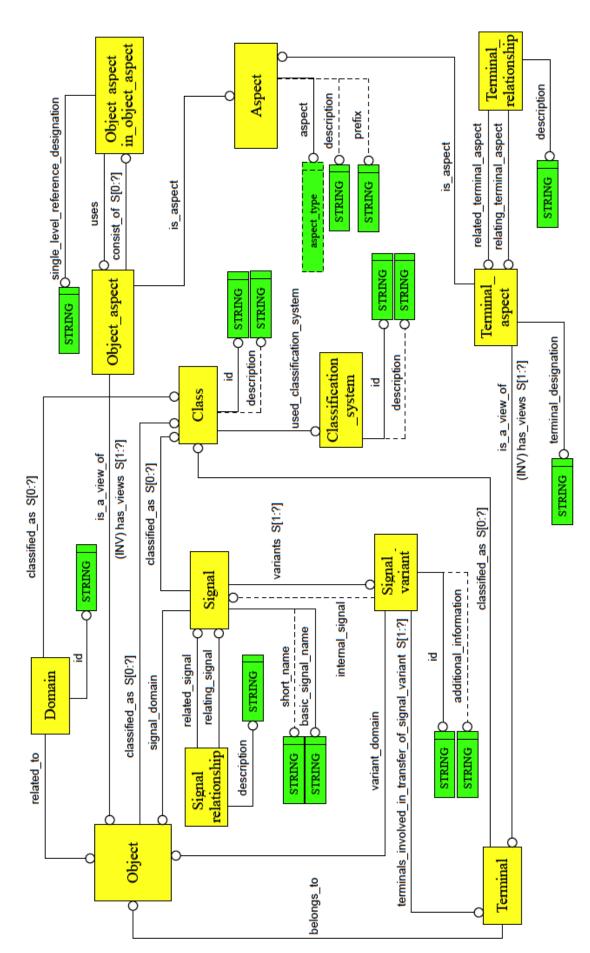


Figure 1 – Graphical presentation of the SCHEMA MODEL_FOR_DESIGNATION_OF_OBJECTS_AND_TERMINALS

Annex B (normative)

Data Element Type definitions

B.1 General

Data Element Types (DETs) (sometimes also called "properties") are used to unambiguously express characteristic properties for objects, especially when information is communicated between computers.

Once a DET is hosted in a dictionary, this can serve as an unambiguous common reference for the communication. This is vital for the support of electronic business.

The standardized full descriptions of DETs, providing all attributes in accordance with IEC 61360-1, are contained in the IEC Common Data Dictionary (IEC CDD), IEC 61360-4DB, available at http://std.iec.ch/iec61360.

The publication in hand is the source for the data element types and classes defined in B.2. For the purpose of this publication only a subset of the full descriptions are provided, containing: *identification number, preferred name* and *definition*.

NOTE 1 The identification number is listed in the IEC CDD as code under which it is stored in the dictionary.

NOTE 2 The attributes *preferred name* and *definition* are provided in the English language only, as the English language is the reference language of the IEC CDD. The IEC CDD allows adding national language variants to the dictionary under the control of the relevant National Committee.

NOTE 3 The DETs defined in this publication have been forwarded for standardization and inclusion in the IEC CDD following the procedure defined in Annex SL of ISO/IEC Directives, IEC Supplement: 2012: *Procedures specific to IEC*. The intent of this procedure is to make the DETs available in the IEC CDD at the time of publication of the present publication.

Other DETs referenced in this publication are listed in Clause B.3. For these DETs the identification number with link is provided. These DETs are listed under their preferred name, with synonyms or short names indicated, if used in this publication.

B.2 Source definitions of DETs and classes of DETs in this publication

B.2.1 Definitions of DETs

Identification number (DET ID)	Preferred name	Definition
AAF527	basic signal name	short description of the active signal defining the special function of the signal, normally using standardized abbreviations or codes
AAF528	short name	short textual description of the reporting object respectively the controlled object
AAF571	signal variant ID	identifier of a section of a path of a group of coherent signal connections belonging to the same signal
		NOTE There is always at least one variant in a signal connection chain.
AAF572	additional information	optional description of the technical characteristics of the signal variant e.g. version, time stamp, system info, limits (level), value and unit
AAF709	class ID	identifier of a class in accordance with the applied classification system
AAF710	classification system	identifier of the documented system in accordance with which classification is made
AAF751	aspect	specified way of viewing an object
AAF754	terminal designation	identifier of a terminal with respect to the object to which it belongs, related to one defined aspect
AAF784	single-level reference designation	reference designation assigned with respect to the object of which the specific object is a direct constituent in one aspect
		NOTE A single-level reference designation does not include any reference designations of upper level or lower level objects.

B.2.2 Definitions of classes of DETs

Identification number (Class ID)	Preferred name	Definition
AAA759	object reference designation	concept for the identification of a specific object formed with respect to the system of which the object is a constituent, based on one or more aspects of that system
		NOTE An object may have more than one object reference designation in accordance with the used aspects.
AAA760	terminal reference designation	concept for the identification of a terminal with respect to the object to which it belongs, related to one defined aspect
		NOTE A terminal may have more than one terminal reference designation in accordance with the used aspects.
AAA761	classification	concept for the association of an object to a class within a documented classification system
		NOTE An object may be multiply classified if different classification systems are applied.
AAF525	signal	concept for the identification of a connection chain within a given domain conveying information from one object to another
		NOTE Messages (units of signals) may be sent in a communication network in the form of telegrams. Such messages may represent one or several signals.
AAF526	signal variant	concept for the identification of a section of a group of coherent signal connections belonging to the same signal on the way from its source to its destination

B.3 Other DETs in this publication with source definitions elsewhere

B.3.1 General

The source references for the following DETs can be found via the links to the IEC CDD, in which the source is indicated by means of the administrative attribute *published in* for each DET.

B.3.2 ADA002

Domain number (synonym: domain ID): ADA002

B.3.3 ADA003

Object number (synonym: object ID): ADA003

Bibliography

ISO 10303 (all parts), Industrial automation systems and integration – Product data representation and exchange

ISO 10303-11, Industrial automation systems and integration – Product data representation and exchange – Part 11: Description methods: The EXPRESS language reference manual

ISO/IEC Directives Supplement:2012, Procedures specific to IEC





British Standards Institution (BSI)

BSI is the independent national body responsible for preparing British Standards and other standards-related publications, information and services. It presents the UK view on standards in Europe and at the international level.

BSI is incorporated by Royal Charter. British Standards and other standardisation products are published by BSI Standards Limited.

Revisions

British Standards and PASs are periodically updated by amendment or revision. Users of British Standards and PASs should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using British Standards would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Similary for PASs, please notify BSI Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

BSI offers BSI Subscribing Members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of British Standards and PASs.

Tel: +44 (0)20 8996 7669 Fax: +44 (0)20 8996 7001 Email: plus@bsigroup.com

Buying standards

You may buy PDF and hard copy versions of standards directly using a credit card from the BSI Shop on the website **www.bsigroup.com/shop.** In addition all orders for BSI, international and foreign standards publications can be addressed to BSI Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001 Email: orders@bsigroup.com

In response to orders for international standards, BSI will supply the British Standard implementation of the relevant international standard, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Knowledge Centre.

Tel: +44 (0)20 8996 7004 Fax: +44 (0)20 8996 7005 Email: knowledgecentre@bsigroup.com

BSI Subscribing Members are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.

Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001 Email: membership@bsigroup.com

Information regarding online access to British Standards and PASs via British Standards Online can be found at

www.bsigroup.com/BSOL

Further information about British Standards is available on the BSI website at www.bsi-group.com/standards

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that own copyright in the information used (such as the international standardisation bodies) has formally licensed such information to BSI for commerical publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained. Details and advice can be obtained from the Copyright & Licensing Department.

Tel: +44 (0)20 8996 7070 Email: copyright@bsigroup.com

BSI

389 Chiswick High Road London W4 4AL UK

Tel +44 (0)20 8996 9001 Fax +44 (0)20 8996 7001 www.bsigroup.com/standards

