INTERNATIONAL STANDARD

ISO 13209-2

First edition 2012-08-15

Road vehicles — Open Test sequence eXchange format (OTX) —

Part 2:

Core data model specification and requirements

Véhicules routiers — Format public d'échange de séquence-tests (OTX) —

Partie 2: Exigences et spécifications du modèle de données central



Reference number ISO 13209-2:2012(E)



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Case postale 56 • CH-1211 Geneva 20 Tel. + 41 22 749 01 11 Fax + 41 22 749 09 47 E-mail copyright@iso.org Web www.iso.org

Published in Switzerland

Contents

Page

Forewo	Forewordv		
Introductionvi			
1	Scope	1	
2	Normative references	1	
3	Terms, definitions and abbreviated terms		
3.1 3.2	Terms and definitions		
4	Requirements		
4 4.1	General		
4.2	Basic principles for requirements definition		
4.3 4.4	Clustering of requirements Requirement priorities		
4.4 4.5	General format and language aspects		
4.6	Test sequence development process support		
4.7	Language feature details	9	
4.8	Boundaries	15	
5	Introduction to modelling in UML and XSD		
5.1	General aspects		
5.2 5.3	Class diagrams		
5.3	Mapping to the XML Schema Definition language (XSD)		
6	OTX principles		
6.1 6.2	GeneralXML format		
6.3	Imperative and structured programming paradigm		
6.4	Graphical authoring of OTX sequences	.24	
6.5	Specification/Realisation concept		
6.6	Modular OTX extension concept and OTX-based runtime architecture		
6.7 6.8	Context concept Validities concept		
6.9	Signature concept		
7	OTX Core data model specification		
7.1	General		
7.2	High-level overview of the OTX Core data model	.32	
7.3	Document root		
7.4	Imports		
7.5 7.6	Global declarations		
7.7	Signatures		
7.8	Procedure signatures		
7.9	Procedures		
7.10	Floating comments		
7.11 7.12	Parameter declarations		
7.12	Nodes		
7.14	Actions	90	
7.15	Terms1		
7.16	Universal types1	40	
Annex	Annex A (normative) OTX data types162		

Annex B (normative)	Scope and memory allocation	166
Annex C (normative)	Comprehensive checker rule listing	168
Annex D (normative)	Extension mechanism	178
Annex E (normative)	Schema annotations for exception handling	181
Annex F (normative)	XML Schemas	182
Bibliography		205

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 13209-2 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronic equipment*.

ISO 13209 consists of the following parts, under the general title *Road vehicles* — *Open Test sequence eXchange format (OTX)*:

- Part 1: General information and use cases
- Part 2: Core data model specification and requirements
- Part 3: Standard extensions and requirements

Introduction

Diagnostic test sequences are utilized whenever automotive components or functions with diagnostic abilities are being diagnosed, tested, reprogrammed or initialised by off-board test equipment. Test sequences define the succession of interactions between the user (i.e. workshop or assembly line staff), the diagnostic application (the test equipment) and the vehicle communication interface as well as any calculations and decisions that have to be carried out. Test sequences provide a means to define interactive, guided diagnostics or similar test logic.

Today, the automotive industry mainly relies on paper documentation and/or proprietary authoring environmments to document and to implement such test sequences for a specific test application. An author who is setting up engineering, assembly line or service diagnostic test applications needs to implement the required test sequences manually, supported by non-uniform test sequence documentation, most likely using different authoring applications and formats for each specific test application. This redundant effort can be greatly reduced if processes and tools support the OTX concept.

ISO 13209 proposes an open and standardized format for the human- and machine-readable description of diagnostic test sequences. The format supports the requirements of transferring diagnostic test sequence logic uniformly between electronic system suppliers, vehicle manufacturers and service dealerships/repair shops.

This part of ISO 13209 represents the requirements and technical specification for the fundament of the OTX format, namely the "OTX Core". The Core describes the basic structure underlying every OTX document. This comprises detailed data model definitions of all required control structures by which test sequence logic is described, but also definitions of the outer, enveloping document structure in which test sequence logic is embedded. To achieve extensibility the core also contains well-defined extension points that allow a separate definition of additional OTX features – without the need to change the core data model.

ISO 13209-3 extends the Core by a set of additional features, using of the Core extension mechanism (which may also be applied for proprietary extensions).

This part of ISO 13209 is the most generic and stand-alone part of ISO 13209. In principle, it is also applicable in other areas for any sequential logic description, even outside the automotive domain. Automotive-specific features are therefore contained solely in ISO 13209-3.

Road vehicles — Open Test sequence eXchange format (OTX) —

Part 2:

Core data model specification and requirements

1 Scope

This part of ISO 13209 defines the OTX Core requirements and data model specifications.

The requirements are derived from the use cases described in ISO 13209-1. They are listed in the requirements section which composes the first major part of this document.

The data model specification aims at an exhaustive definition of all OTX Core features implemented to satisfy the Core requirements. Since OTX is designed for describing test sequences, which themselves represent a kind of program, the Core data model follows the basic concepts common to most programming languages.

Thus, this part of ISO 13209 establishes rules for syntactical entities like parameterised procedures, constant and variable declarations, data types, basic arithmetic, logic and string operations, flow control statements like loop, branch or return, simple statements like assignment or procedure call as well as exception handling mechanisms. Each of these syntactical entities is accompanied by semantic rules which determine how OTX documents are to be interpreted. The syntax rules are provided by UML class diagrams and XML schemas, whereas the semantics are given by UML activity diagrams and prose definitions.

With respect to documentation use cases, special attention is paid to defining a specification/realisation concept (which allows for "hybrid" test sequences: human readable test sequences that are at the same time machine-readable) and so called floating comments (which can refer to more than one node of the sequence).

The Core data model does NOT define any statements, expressions or data types that are dependent on a specific area of application.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 10646:2011, Information technology — Universal Coded Character Set (UCS)

ISO 13209-1, Road vehicles — Open Test sequence eXchange format (OTX) — Part 1: General information and use cases

ISO/IEC 19501:2005, Information technology — Open Distributed Processing — Unified Modeling Language (UML) Version 1.4.2

ISO 22901 (all parts), Road vehicles — Open diagnostic data exchange (ODX)

IEEE 754:2008, IEEE Standard for Floating-Point Arithmetic

RFC 2045, Multipurpose Internet Mail Extensions (MIME) Part One: Format of Internet Message Bodies

RFC 2046, Multipurpose Internet Mail Extensions (MIME) Part Two: Media Types

RFC 4122, A Universally Unique IDentifier (UUID) URN Namespace

W3C XSD:2004, W3C Recommendation: XML Schema (all parts)

W3C XML:2008, W3C Extensible Markup Language (XML) 1.0 (Fifth Edition)

W3C XMLNS:2009, W3C Recommendation: Namespaces in XML 1.0 (Third Edition)

W3C XMLBASE:2009, W3C Recommendation: XML Base (Second Edition)

W3C XLink:2010, W3C Recommendation: XML Linking Language (XLink) Version 1.1

Terms, definitions and abbreviated terms 3

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 13209-1 and the following apply.

3.1.1

attribute

<UML> a property of a UML class

3.1.2

<XSD/XML> named property of an XSD complex type or an XML element

3.1.3

after market

part of the automotive industry concerned with manufacturing, remanufacturing, distribution, retailing, and installation of all vehicle parts, chemicals, tools, equipment and accessories for light and heavy vehicles, after the sale of the automobile by the original equipment manufacturer (OEM) to the consumer

3.1.4

after sales

after sales department

department of an automotive OEM that is concerned with the distribution, retailing, servicing, repair and installation of vehicles of that OEM

3.1.5

constant

identifier of a non-writable memory location

3.1.6

context

environmental circumstances which influence test sequence execution

OTX test sequences can be configured to behave differently according to different context situations. Contextual information depends on factors such as the particular vehicle that is currently attached to the test application (e.g. the current vehicle's model type, the engine type, etc.), on the test application settings (e.g. a setting controlling whether the test sequence shall run in debug mode) or on other factors such as whether the test sequence is running in a manufacturing or a service workshop environment, etc.

3.1.7

engineering

engineering department

department of an automotive OEM which is concerned with the design, development, integration and testing of vehicles of that OEM

3.1.8

expression

syntactical construct which describes a specific computation with a set of arguments and a single return value

3.1.9

identification routine

method or software by which a diagnostic application identifies contextual information

3.1.10

manufacturing

manufacturing department

department of an automotive OEM which is concerned with the production and end-of-line testing of vehicles of that OEM

3.1.11

original equipment manufacturer

OEM

automotive company that engineers, manufactures, sells and services vehicles

3.1.12

OTX Core

most generic and stand-alone part of the overall OTX data model which describes the basic structure underlying every OTX document and comprises detailed data model definitions of all required control structures (loops, branches, ...) by which test sequence logic is described, but also definitions of the outer, enveloping document structure in which test sequence logic is embedded

3.1.13

OTX Extension

OTX Standard Interface Definition

otxIFD

set of OTX data type-, action-, term- and signature-definitions that are tailored for a specific area of application and that are defined aside of the OTX Core

NOTE OTX Extensions model the data types, actions, terms and signatures needed for communication through diverse interfaces. By using these interfaces, calls can be performed to external systems whose internal behaviour does not have to be known to the (client) OTX test sequence/runtime. The system-side interface (server-side) can be proprietary because the adapter design pattern is applied.

3.1.14

procedure signature

description of the interface of an OTX procedure

3.1.15

reference

value which refers to data in memory

3.1.16

session

instance of test sequence execution

3.1.17

term

value described by and computed from an expression

3.1.18

test sequence

test procedure defining a full test

NOTE A test sequence is a procedure also, but not all procedures are test sequences. In an OTX document, the procedure representing a test sequence shall be named "main". By using procedures, a test sequence may be split into several procedure modules. An adequately assembled set of frequently needed procedures may serve as a library which provides procedures that can be called from any other (client) procedure or test sequence.

3.1.19

test procedure

procedure

stand-alone, parameterisable flow of OTX actions that can be called from other OTX procedures

3.1.20

validity

Boolean context variable, global Boolean constant or a named Boolean expression used for activating/deactivating parts of the OTX test sequences according to the current context situation

NOTE Parts of OTX test sequences which are marked with a validity name shall be executed only if the associated Boolean expression is true according to the current context situation.

3.1.21

variable

identifier of a writable memory location

NOTE The term "variable" is used as a collective term for document scope variables, local variables, non-constant parameters and also items in non-constant lists or maps or other compound data structures. In OTX, these can be addressed by giving the identifier of the variable or parameter, optionally accompanied by a path into compound data structures which allows the inner parts of variables or parameters to be addressed.

3.2 Abbreviated terms

API	Application	Programming	Interface
ΔE I	Application	riogramming	IIILEIIALE

IFD Interface Definition (OTX extension)

JRE Java Runtime Environment

NOP No Operation Performed

OEM Original Equipment Manufacturer

OTX Open Test sequence eXchange

UML Unified Modeling Language

XML Extensible Markup Language

XSD XML Schema Definition

4 Requirements

4.1 General

Since OTX is merely a static data format and not a software application, it has to be kept in mind that all following requirements are related to static format features and **not** to the behaviour of any OTX based software product. As a matter of course, all such products are indirectly affected by the requirements given here in so far that they shall be able to write, read or execute valid OTX documents according to the rules given in this document. Aside from that, requirements towards any such product are not in the scope of this specification.

4.2 Basic principles for requirements definition

Basic principles have been established as a guideline to define the OTX requirements:

- a) OTX requirements specify the conditions that the OTX data model and format shall satisfy.
- b) All stakeholders (System Suppliers, OEMs, Tool Suppliers), which offer diagnostic test procedures are expected to implement and follow the requirements of this part of ISO 13209.
- c) The content of OTX documents and the quality of the information is the responsibility of the originator.

4.3 Clustering of requirements

Table 1 provides an overview of the main categories of OTX requirements. Each category may have one or more requirements.

Table 1 — Main requirements clustering

#	Main title of requirement cluster	Brief description
1	general format and language requirements	Requirements regarding the general aspects like the chosen programming paradigm, file format (XML),
2	test sequence development process support	Requirements about different stages in the test procedure authoring process, outlining human-readable (documentation) vs. machine-readable (execution) test procedures.
3	language feature details	Requirements concerning details like declarations, data types, expressions, statements, etc.
4	boundaries	Features that should NOT be part of OTX

4.4 Requirement priorities

Each of the following requirements carries a priority-attribute which can be set to SHALL or SHOULD.

— SHALL:

The requirement represents stakeholder-defined characteristics the absence of which will result in a deficiency that cannot be compensated by other means.

— SHOULD:

If the requirement defined characteristic is not or not fully implemented in the data model, it does not result in a deficiency, because other features in the data model can be used to circumvent this.

General format and language aspects

Core_R01 - Machine readable format

Priority: SHALL

Rationale: The focus of OTX is on the exchange of data between tools in the vehicle diagnostic process. To leverage highest efficiency, the tools shall be able to operate automatically on OTX files (e.g. for importing and exporting of OTX-relevant data)

Description: The OTX format has to be machine-readable to allow a tool to open an existing document for editing, checking, displaying or executing.

Core_R02 - Platform independence

Priority: SHALL

Rationale: If OTX would bind to specific Hardware, Operating System or Application, its potential usages are diminished and applicability of the standard is decreased.

Description: OTX shall not be dependent on any specific hardware or software platform. OTX shall not be bound to any particular hardware, operating system or application.

Core_R03 - Well-defined syntax and semantics

Priority: SHALL

Rationale: OTX shall be a machine-readable data format. This implies an unambiguously defined syntax and semantics.

Description: All OTX elements have to be defined clearly (syntax + semantics). For the syntax definition, XML Schema shall be used. For the behavioural/semantics specification, a prose description shall exist.

Core_R04 - Universal language

Priority: SHALL

Rationale: Diagnostic applications can be seen as domain specific computer programs. These require complex computations and no limits are known or foreseen today that allow OTX to be restricted with respect to Turing-completeness.

Description: OTX shall have the ability to solve any computable problem. (Turing-Completeness)

Legacy sequences can (theoretically) be transformed to OTX and back, if the legacy sequence format and NOTE 1 OTX are Turing-complete.

Core_R05 - Minimal language

Priority: SHOULD

Rationale: Fulfilment of this requirement reduces the implementation effort necessary to integrate OTX into tools and is thus a very relevant market-driving factor for OTX.

Description: OTX should be defined with the minimal set of language elements necessary to reach Turing-Completeness.

NOTE 2 OTX should not be designed for comfort of expressing computational programs (as are programming languages like Java, C++ or Delphi), but rather for effectiveness of transporting diagnostic application knowledge unambiguously between different tools/parties in the diagnostic process.

Core_R06 - Structured programming approach

Priority: SHALL

Rationale: Structured programming can be seen as a subset or sub discipline of procedural programming, one of the major programming paradigms. It removes reliance on the GOTO statement for controlling the flow of a program. Using GOTO statements in programming often leads to a complex, tangled and unreadable control structure, which is clearly not desired in OTX.

Description: OTX shall follow the structured programming approach. Only flow control statements branch, loop return, continue, break and throw may implicitly induce jumps. The behaviour of these jumps shall be well defined in the prose semantic documentation of each of these statements. An explicit GOTO statement which allows to jump anywhere in the procedure **shall not** be supported

Core R07 - Imperative structure

Priority: SHALL

Rationale: Test procedures are usually considered as a procedure of commands that need to be executed one after one by a runtime system. Since the imperative programming paradigm matches exactly for this concept, it is well suited for OTX.

Description: OTX shall only support program structures that can be translated by a compiler into imperative programming languages.

Core_R08 - Extensibility

Priority: SHALL

Rationale: The scope of diagnostic applications in the diagnostic process is wide. Engineering, Production and After Sales applications interface numerous and diverse devices, server applications and modules, which cannot be completely addressed with the first release of the standard and which evolve over time.

Description: OTX shall be extendable to integrate means to access new technology employed within the diagnostic process. It shall be possible to integrate interfaces of various base technologies into OTX.

4.6 Test sequence development process support

Core_R09 - Embed non-machine readable content

Priority: SHALL

Rationale: Use cases will occur where diagnostic applications shall be expressed in OTX but e.g. the interfaces to all used devices are not available (e.g. how to communicate to a nut runner). In this case it would be preferable to express the diagnostic application in OTX and express the non-standardized device access in prose or in pseudo code. An OTX-compliant tool could then import such a file and mark the parts of the diagnostic application that need to be replaced with executable content by a diagnostics engineer.

Description: OTX shall provide means to express parts of a diagnostic application in a non-machine readable format. This non-machine readable content shall be clearly marked so that processes operating on OTX files can identify it.

---,,...,...

Core_R10 - High level test procedure

Priority: SHALL

Rationale: In a step-wise test procedure design process, it might become necessary to specify procedures in prose-form only. Skeletal control structures might already be part if this high-level description, but the details of implementation might not be known at design time (loop conditions, exact service names ...).

Description: It shall be possible to describe test procedures at a high level.

Core_R11 - Exchange high level test procedure

Priority: SHALL

Rationale: A test procedure specified in prose-form only shall nevertheless pose a valid OTX document, even though it is not executable.

Description: It shall be possible to exchange a high-level test plan using a plain text description.

Core_R12 - Exchange a fully functional test procedure

Priority: SHALL

Rationale: A test procedure containing no prose-form, but only implementation details shall nevertheless pose a valid OTX document, even though it is not easily human-readable.

Description: It shall be possible to mix high-level description and implementation details on the same procedure.

Core_R13 - Exchange an intermediate stage test procedure

Priority: SHALL

Rationale: A test procedure containing a mix of prose and fully implemented parts shall nevertheless pose a valid OTX document.

Description: It shall be possible to mix high-level description and implementation details on the same procedure.

Core_R14 - Floating comments

Priority: SHALL

Rationale: Situations will occur where comments are needed that can be freely attached to parts of the flow of commands in a test procedure. Such comments shall not be locally bound or contained within single statements; they shall be defined aside from the flow and only point to parts of it. Comments are purely informational nodes that shall not be relevant for execution of a test procedure.

Description: It shall be possible add floating comments to a test procedure that can refer to one or more statements its flow or its sub-flows at any block depth.

4.7 Language feature details

4.7.1 Declarations

Core_R15 - Declarations

Priority: SHALL

Description: OTX has to support the declaration of constants and variables as well as test procedure parameters. A declaration shall contain a name, a data type, an optional initialisation value and an optional description.

Core_R16 - Initialisation

Priority: SHALL

Rationale: It shall be possible to set the initial value for an identifier to a value other than the default.

Description: OTX shall support the optional initialisation of declared identifiers.

Core_R17 - Constant declarations

Priority: SHALL

Rationale: There will be cases when an OTX author wants to guarantee that the value of an identifier in the test procedure can not be changed. Therefore the author needs to have a means to mark an identifier as a constant. The value of a constant is not allowed to change during the lifetime of the constant.

Description: OTX shall support the declaration of constants. Constants shall be set with the declaration (initialisation is mandatory).

Core_R18 - Variable declaration

Priority: SHALL

Rationale: In order to reflect the fact that an identifier can change its value during procedure execution, a means for marking identifiers as variables is needed. The value of a variable is allowed to change during procedure execution; new values can be assigned to it.

Description: OTX shall support the declaration of variables.

Core_R19 - Input parameter declarations

Priority: SHALL

Rationale: When a test procedure is called, it will occur that information needs to be passed to the called procedure.

Description: OTX shall support declaration of any number of input parameters that are passed to the test procedure from the caller.

Core_R20 – Output parameter declarations

Priority: SHALL

Rationale: When a test procedure is called, it will occur that information needs be retrieved from the called

procedure, after it has executed.

Description: OTX shall support declaration of any number of output parameters. Output parameters shall be

assignable to variables in the calling test procedure.

Core_R21 - Two-way parameter declarations

Priority: SHOULD

Rationale: There are situations when a variable reference shall be passed to a called test sequence, so that

any modifications will be visible to the caller also.

Description: OTX should support declaration of any number of two-way parameters. Any declared two-way parameter is passed from the caller to the test procedure. Any changes of the value of a two-way parameter

can be assigned to variables of the caller test sequence.

NOTE This is the combination of input and output parameters.

4.7.2 Data types

Core_R22 - Strong typing

Priority: SHALL

Rationale: In order to have the possibility to translate into various other languages, OTX shall be strong

typed. This means, the binding of a variable to a data type persists during the variables whole lifetime.

Description: OTX shall be a strong typed, static checked language.

Core R23 - Data types

Priority: SHALL

Rationale: To maintain a state during test procedure execution, information needs to be stored in memory. Since the type and the structure of the stored information needs to be known for a typed language (be it a

string, an integer or a map ...) declared parameters, it shall be possible to mark variables and constants with

the corresponding data type.

Description: OTX shall support a well defined set of data types.

Core R24 – Extension mechanism for data types

Priority: SHALL

Rationale: There will be situations when the predefined set of data types will not be sufficient. Therefore, OTX

shall be extensible by new data types.

Description: It shall be possible to extend the set of data types by new data types. This shall happen by a

well defined extension mechanism.

11

Core_R25 - Raw memory data type

Priority: SHALL

Description: OTX shall support a raw memory data type.

Core_R26 - Integer data type

Priority: SHALL

Description: OTX shall support an integer data type.

Core_R27 - Floating point data type

Priority: SHALL

Description: OTX shall support a floating point data type.

Core_R28 - String data type

Priority: SHALL

Description: OTX shall support a String data type.

Core_R29 - Boolean data type

Priority: SHALL

Description: OTX shall support a Boolean data type.

Core_R30 - Container data type

Priority: SHALL

Description: OTX shall support at least one container data type. It shall be possible to access, dynamically add and remove elements in the container. The elements in the container shall all be of the same data type. Recursive declaration shall be possible (e.g. Container of Containers of Integers).

4.7.3 Expressions

Core_R31 - Expressions

Priority: SHALL

Description: OTX shall support expressions. At runtime, it shall be possible to evaluate such an expression in a well defined way. After evaluation, it has exactly one return value of a defined data type and shall not have any side-effects. This means, no data from the test procedure is allowed to be changed by evaluation of the expression but the variable where the evaluated value will be assigned to.

NOTE 1 In general, OTX expressions correspond to the term "function" in the mathematical sense.

Core_R32 - Extension mechanism for expressions

Priority: SHALL

Description: It shall be possible to extend the set of expressions by new expression types. This shall happen by a well defined extension mechanism.

Core_R33 - Literal expressions

Priority: SHALL

Description: OTX shall support literal expressions defined for each simple data type and for collection types (lists, maps ...). The literal shall represent the value of the literal expression directly.

Core_R34 - Dereferencing expressions

Priority: SHALL

Description: OTX shall support dereferencing expressions. They shall allow reading data referenced by parameter-, variable- or constant-names.

Core_R35 - Combined expressions: functions

Priority: SHALL

Rationale: Allow creation of higher level expressions (functions) that contain other expressions as arguments. The evaluation shall happen recursively.

Description: OTX shall support a well defined set of functions.

NOTE 2 Most programming languages describe very frequently used mostly mathematical functions by operators (+ for add(a,b), * for multiply(a,b) ...) There shall be no special treatment of operators in OTX; they shall rather be described like functions. It is the task of OTX tools to show them as operators, if needed.

Core_R36 - Basic function set

Priority: SHALL

Description: OTX shall support the basic functions:

- mathematical: addition, subtraction, multiplication, division, negation, modulo, power
- bitwise: conjunction, disjunction, negation
- relations: equality, greater than, less than
- logical: conjunction, disjunction, negation
- string: concatenation

Core_R37 - Statements

Priority: SHALL

Rationale: Statements are needed to represent single commands or higher-level control structures in a procedure. In order to achieve Turing-Completeness, a set of basic statements with different semantics has to be part of OTX. Statements are made up out of distinct parts, e.g. in a loop statement, parts are a condition which is a logic expression, and a sub-sequence of commands. A procedure call statement consists of other parts, namely the called procedures name and a list of parameters.

Description: OTX shall support statements.

Core R38- Extension mechanism for statements

Priority: SHALL

Description: It shall be possible to extend the set of statements by new statement types. This shall happen by a well defined extension mechanism.

Core_R39 - Blocks of statements

Priority: SHALL

Rationale: Situations will often occur that a sequence of statements needs to be grouped together. The sequence of grouped statements builds a block. There may also be blocks in blocks recursively. Blocks are needed for defining the body of a loop, branch case, etc., but also for simply providing a better overview in a test procedure.

Description: It shall be possible to define blocks of statements, recursively.

Core_R40 - Block statement

Priority: SHALL

Description: It shall be possible that blocks of statements can be used as statements themselves.

Core_R41 – Assignment statement

Priority: SHALL

Description: OTX shall support an assignment statement for assigning expression values to variables.

Core_R42 - Call procedure statement

Priority: SHALL

Description: OTX shall support a call statement for calling other OTX test procedures with a list of arguments that correspond to the test procedure parameter list. The call shall be synchronous, i.e. the caller shall wait until the called test procedure returns.

13

Core_R43 - Branch statement

Priority: SHALL

Description: OTX shall support a branch statement, which allows reacting to different conditions.

Core R44 - Parallelisation statement

Priority: SHALL

Description: OTX shall support a parallelisation statement, which allows executing two or more blocks at the same time. The sub-sequences shall be embedded within the parallelisation statement.

Core_R45 - Loop statement

Priority: SHALL

Description: OTX shall support a loop statement, which allows executing a block repetitively, as long as a defined condition is met.

Core_R46 - Continue statement

Priority: SHALL

Description: OTX shall support a continue statement. If used within a loop sub-sequence, this shall stop block execution immediately and induce the next iteration. Outside of a loop, it shall have no meaning.

Core_R47 - Break statement

Priority: SHALL

Description: OTX shall support a break statement. If used within a loop block, this shall force the subsequence execution to stop immediately. The outer block shall then be continued at the statement right after the broken loop. Outside of a loop, it shall have no meaning.

Core_R48 - Return statement

Priority: SHALL

Description: OTX shall support a return statement. This shall force the execution of the running test procedure to stop immediately and pass control to the caller.

Core_R49 - Exception handler statement

Priority: SHALL

Rationale: When an exception occurs during test procedure execution, a means is needed to treat such an exception so that execution may still be continued in a controlled manner. It should be possible to define exception-monitored blocks in the procedure, and also to define blocks dedicated to handle a particular exception type.

Description: OTX shall support a statement for exception handling. The statement shall allow reacting to different exceptions in different ways.

Core_R50 - Throw statement

Priority: SHALL

Rationale: Under certain circumstances it is necessary to throw exceptions intentionally.

Description: There shall be a throw statement that allows throwing an exception of a particular type.

Core_R51 - Validity information for statements

Priority: SHALL

Rationale: Enable/disable statements according to validity information.

Description: There shall be a well-defined means to add validity information to any statement in OTX procedures. The validity information defines under which predefined context conditions the statement is valid. Invalid statements are to be skipped at runtime.

4.8 Boundaries

Core_B01 - No graphical procedure layout information

Priority: SHALL

Description: It shall be possible to represent a procedure graphically without the need for supporting geometric information in the exchange format.

NOTE Meta data may be used to transport such information. It is up to the tool where the information is stored, if needed.

Core_B02 - Performance

Priority: SHALL

Rationale: OTX is solely a data format.

Description: No requirements on OTX performance exist.

Core_B03 - No versioning & configuration management

Priority: SHALL

Rationale: The versioning and configuration of OTX files is a process-dependent aspect of using OTX. OTX shall not define or prescribe a process.

Description: OTX shall not comprise data model aspects or techniques that relate to document versioning or configuration management of OTX files.

Core_B04 - Licensing

Priority: SHALL

Rationale: OTX is solely a data format.

Description: OTX shall not be based on any technology that limits its application and distribution or

distribution of files that are OTX-compliant by legal restrictions or licensing cost.

Core_B05 - No explicit memory management

Priority: SHALL

Description: OTX shall not give the possibility to handle memory management, control garbage collectors or

other runtime system tasks which are out of the diagnostic scope.

Core_B06 - No exception handling for environment fail

Priority: SHALL

Description: OTX does not need to define exception handling for environment failure. If the runtime

environment has problems, test sequence execution shall stop.

Core_B07 - No global variables

Priority: SHALL

Description: OTX shall not allow variables with global scope.

Core B08 - No string translation utilities

Priority: SHALL

Description: No string translation utilities are required in the core language. The language is translation-

agnostic.

Core_B09 - No unit localization utilities

Priority: SHALL

Description: No unit localization utilities are available in the core language. The core language is unit-

agnostic.

5 Introduction to modelling in UML and XSD

5.1 General aspects

The Unified Modeling Language (UML, [ISO/IEC 19501:2005]) is used to define the OTX data model formally and unambiguously. It enhances readability by graphical data model diagrams. The ability to create different views onto distinct aspects and parts of the overall OTX data model is a great advantage compared to modeling directly by using the XML Schema Definition Language (XSD, [W3C XSD:2004]). In combination with state-of-the-art UML-to- XSD generator technologies, using UML is a powerful modelling method.

A short introduction to UML is given in this section. For the sake of brevity, only those aspects of UML that are needed for the understanding of the OTX data model are described at this point. This means that, from the large set of available UML diagrams, only the use of class diagrams for OTX modelling and the activity diagrams for specifying OTX behavioural aspects will be exemplified. Special attention will be paid to the use of specific XSD stereotypes which are needed for preparing the UML model precisely towards XSD generation.

5.2 Class diagrams

5.2.1 General

By using UML class diagrams, a set of classes and the structural interdependencies in between those classes can be described graphically. There are two major means of description in class diagrams: Classes with properties representing blueprints for instances of that class, and associations depicting distinct relations in between the classes of the model, like e.g. inheritance or aggregation relations.

5.2.2 Class

The central UML modelling element used for the OTX data model is the *class*. A class represents a set of similar objects. Generally, a class can be instantiated many times. Every instance of a class is called an object.

A class can contain any number of named, typed *attributes* (defining the properties of these objects) and *methods*¹⁾ (defining the actions an object can perform). A class may also have a so called *stereotype*-accretion that indicates the special usage of the class for a particular problem domain.

CAUTION — in UML nomenclature, any kind of class-properties are called "attributes", whereas in XSD there is the distinction between "attribute" and "element" properties. In order to avoid confusions, the term "attribute" is henceforward to be understood as class attribute in the context of UML diagrams, while in the XSD context it is to be perceived as an XSD type attribute.

Classes can also be *abstract* – this means they cannot be instantiated. In the OTX data model, abstract classes are used to transport a common set of properties to child classes (cf. 5.2.3 about inheritance relationships).

Figure 1 shows the representation of a class and its attributes in UML notation. A class is symbolized by a rectangle having up to three fields:

- The top field contains the name of the class, e.g. Contact. For abstract classes, the class name is italic. The stereotype «XSDcomplexType» denotes that this class shall be mapped to a XSD complex type in the corresponding XML schema (stereotypes for the problem domain XSD).
- The second field contains the attributes of the class, e.g. the string labelled contactId, another string labelled name and an integer labelled age. The type descriptor is denoted directly after the colon behind the label. The stereotypes «XSDelement» and «XSDattribute» specify that name and age map to

¹⁾ For the static OTX data model, methods are irrelevant and are not used.

elements, whereas contactId maps to an attribute (in the XSD domain). Each attribute in the class also carries cardinality information in square brackets, e.g. [0..1], [1..*], [2] etc. The cardinality defines how many instances of the attribute may appear in an instance of the class. If there is no cardinality shown, a default cardinality of [1] applies. Furthermore, a default value for the attribute may be specified.

There is no third field here – in others contexts it is used for methods which are irrelevant for the OTX data model.




Figure 1 — UML representation of a class

5.2.3 Inheritance relationships

By using inheritance relationships, classes can inherit attributes from other classes.

In Figure 2, a new class BusinessContact is derived from the class Contact. This means that implicitly the class BusinessContact has all the same attributes as Contact plus those that are defined specifically for the new class BusinessContact, e.g. the string attribute company. Contact is called the parent or super-class; BusinessContact is called the child or sub-class of the inheritance relationship. Because the sub-class adds more detail to the super-class and is thus more specific, inheritance relationships are often called "specializations".




Figure 2 — UML representation of inheritance relationship

Inheritance relationships can be used to build inheritance trees of arbitrary depth. A class in such a tree inherits all attributes from those classes in the transitive closure of all ancestors (parents, grandparents, etc.) in the inheritance tree.

NOTE Concerning the mapping to XSD, it has to be pointed out that XSD only supports single inheritance. As a consequence, UML models containing classes with more than one direct super-class can not be mapped correctly. Apart from that, mapping to XSD is straightforward.

UML diagrams usually show certain aspects or fractions of the overall data model. Therefore, diagrams exist where a super-class of another class is not shown. To still reflect the fact that a class is a child of the hidden super-class, a special notation form has been chosen in this document, as presented in Figure 3: An additional property is shown to the upper right of the class <code>BusinessContact</code>, denoting its super-class named <code>Contact</code>.




Figure 3 — Alternative UML representation of inheritance relationship

5.2.4 Aggregation relationships

Besides the inheritance relationship, a pair of classes may also have an *aggregation*²⁾ relationship. Aggregation relationships are used if an object of one class is contained in an object of another class.

An aggregation relationship is drawn as a line with an unfilled diamond at the end of the containing class. In the OTX data model, the relationship end at the contained class always carries a so called *role* name. A role can be used to distinguish two objects of the same class when describing its use in the context of the association. The role end also carries a cardinality information, e.g. "0..1", "1..*", "2" etc. The cardinality defines how many instances of the associated class may be contained in an instance of the class.



Figure 4 — UML representation of aggregation relationship

Figure 4 gives an example of two classes with aggregation relationships defined. A Contact may have two addresses, that is, two objects of type Address: One of the addresses plays the role called homeAddress, the other plays workAddress. The cardinalities are 1 respectively "0..1". Simply spoken, this has the following semantics: "A contact has exactly one home address and an optional work address".

5.3 Mapping to the XML Schema Definition language (XSD)

5.3.1 General

The OTX target data model format is an XML Schema Definition (XSD). In this paragraph, a very short idea of how the UML model is mapped onto XSD language features is given. It does not claim to be complete, but is only a subsidiary that simplifies the comprehension of the OTX examples given throughout this document.

²⁾ The special case of aggregation, namely *composition*, does not apply in the scope of XSD data model implementation. Composition means that an object may only be contained in exactly one other object. Since in instance XML documents, element snippets can be moved to different places in the document or even in between different XML documents, there is no reason for this restriction. Therefore, only aggregation relationships are used in the OTX data model.

The general rules for mapping are given in the following section; they are accompanied by a UML example together with its corresponding XSD output and a valid XML document according to the XSD.

5.3.2 Mapping rules

The following mapping rules apply:

- A class is mapped onto an XSD complex type with XSD sequence content as a default content type (the order of elements in a XSD sequence is significant (!)). In cases where the stereotype of the class is not «XSDcomplexType», analogous rules are applied and explained in the place needed.
- Attributes of a class are mapped onto attributes of the XSD complex type, if the «XSDattribute» stereotype is defined for the UML attribute. A cardinality of [1] will set the XSD attribute property use="required"; a cardinality of [0..1] will result in use="optional". If there is no cardinality given, the default, use="optional", applies.
- Attributes of a class are mapped onto sub elements of the XSD complex type, if the «XSDelement» stereotype is defined. The cardinality of the attribute is mapped to the cardinality properties of the sub element (XSD element properties minOccurs, maxOccurs). As an example, a cardinality of [1..*] will result in minOccurs="1" and maxOccurs="unbounded". If there is no cardinality given, the default, minOccurs="1" and maxOccurs="1", applies.
- Classes connected to another class via an aggregation relationship are mapped onto sub elements in the corresponding XSD complex type of the containing class by the following rules: The role names at the aggregation (contained end) are mapped onto the sub element name property. The name of a contained class is the type property of the corresponding sub element. The cardinality of an aggregation (contained end) is mapped to the cardinality of the sub element (XSD element properties minOccurs, maxOccurs).
- An inheritance relationship between a super-class super and a child class Child is mapped onto the XSD extension base property of the XSD complex type Child, e.g. base="Super". Multiple inheritance (more than one super-class) cannot be mapped correctly to XSD, because XSD allows single inheritance only.
- An abstract marked class is mapped to a XSD complex type with the property abstract="true".

Throughout the document some other stereotypes are used that have not been explained within this section. These include the following:

- «XSDsequence», «XSDchoice», «XSDall», these are stereotypes for classes representing an XSD sequence, choice or all content-model separately or outside of a XSD complex type;
- «XSDsimpleType» to make a class represent a simple content type, e.g. classes derived from string, integer, etc.;
- «XSDtopLevelElement», this makes a class represent a document root element (Only used once in the OTX data model for the <otx> element definition itself.

5.3.3 Full mapping example

5.3.3.1 UML model example

Consider the example UML data model "Directory" depicted in Figure 5. The example model is designed for describing the structure of XML documents representing a contact-directory.

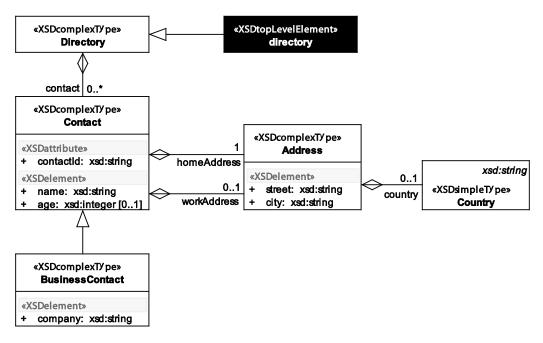


Figure 5 — Mapping example: "Directory" UML model

5.3.3.2 UML to XML translation

The translation of the UML to XML happens like this:

- The root of every such document must be the top-level element <directory>. Since the corresponding directory class is derived from Directory, an unbounded list of <contact> elements is allowed below <directory>.
- The <contact> elements are of Contact type, so each of them has an attribute contactId and the elements <name>, <age> (optional), <homeAddress> and <workAddress> (optional).
- Simple type elements like <name> (of xsd:string type) or <age> (of xsd:integer type) are described implicitly within the aggregating Contact class.
- Features that are complex themselves, like the <homeAddress> (of Address type), are described explicitly by an own Address class, which is connected to Contact by an aggregation relation³⁾
- The elements <homeAddress> and <workAddress> have simple string sub elements <street> and <city> and also <country>.

³⁾ This modelling approach is just a guideline, it is not mandatory – de facto, this could have been modelled alternatively by adding «XSDelement» attributes "homeAddress" and "workAddress" directly to the class "Contact". Both approaches would lead to the same XSD/XML result (compare 5.2.2). However, modelling containment relations explicitly with drawn aggregation relations creates a better overview – especially in larger UML diagrams.

— In UML, <country> is modelled in a special way: In fact, it is just a simple string and could have been modelled as such, but here the alternative display of inheritance relationships shall be exemplified (cf. Figure 3).

5.3.3.3 XSD result

According to the mapping rules given above, an XSD model can be derived from the UML model, as shown in the XSD source code below. With the resulting XSD, any XML document claiming to be a contact-directory can be validated for directory schema compliance.

EXAMPLE Schema "directory.xsd" derived from the "Directory" UML model

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema targetNamespace="http://example.org/directory"</pre>
  xmlns="http://example.org/directory"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  elementFormDefault="qualified">
  <xsd:element name="directory" type="Directory" />
  <xsd:complexType name="Directory">
    <xsd:sequence>
      <xsd:element name="contact" type="Contact" minoccurs="0" maxoccurs="unbounded" />
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="Contact">
      <xsd:element name="name" type="xsd:string" minoccurs="1" maxOccurs="1" />
<xsd:element name="age" type="xsd:integer" minoccurs="0" maxOccurs="1" />
      </xsd:sequence>
    <xsd:attribute name="contactId" use="required" type="xsd:string" />
  </xsd:complexType>
  <xsd:complexType name="Address">
    <xsd:sequence>
      <xsd:element name="street" type="xsd:string" minOccurs="1" maxOccurs="1" />
      <xsd:element name="city" type="xsd:string" minOccurs="1" maxOccurs="1" />
<xsd:element name="country" type="Country" minOccurs="0" maxOccurs="1" />
    </xsd:sequence>
  </xsd:complexType>
  <xsd:simpleType name="Country">
    <xsd:restriction base="xsd:string" />
  </xsd:simpleType>
  <xsd:complexType name="BusinessContact">
    <xsd:complexContent>
      <xsd:extension base="Contact">
        <xsd:sequence>
          <xsd:element name="company" type="xsd:string" minoccurs="1" maxoccurs="1" />
        </xsd:sequence>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
</xsd:schema>
```

Note that the elements of the complex type <code>Directory</code>, <code>Contact</code>, <code>BusinessContact</code> and <code>Address</code> shown above are contained in <code><xsd:sequence></code> tags. In XSD, there are two additional complex content types, namely <code><xsd:choice></code> and <code><xsd:all></code>. In the UML diagrams, the to-be-generated content type is not shown; the default used by the utilized schema generator is <code><xsd:sequence></code>. Only in cases where the other content types apply, it will be pointed out especially in the specification.

5.3.3.4 XML instance document

An XML instance document according to the XSD is given below.

EXAMPLE XML document "contacts.xml" showing some directory entries according to the "directory.xsd" schema.

```
<?xml version="1.0" encoding="UTF-8"?>
<directory
 xmlns="http://example.org/directory"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xsi:schemaLocation="http://example.org/directory directory.xsd">
 <contact contactId="contact1">
   <name>Antje Vanderdam</name>
   <age>27</age>
   <homeAddress>
     <street>Waterkant 23</street>
     <city>Rotterdam</city>
     <country>Netherlands/country>
   </homeAddress>
 </contact>
 <contact contactId="contact2" xsi:type="BusinessContact">
   <name>Peter Piper</name>
   <homeAddress>
     <street>Broad St. 34</street>
     <city>Springfield</city>
     <country>USA</country>
   </homeAddress>
   <workAddress>
     <street>Schema Ave 42
     <city>Validationtown</city>
   </workAddress>
   <company>OTX-Works</company>
 </contact>
</directory>
```

Special attention has to be paid to the xsi:type attribute. This is needed in places where the underlying complex type for an element can be one out of the set of child types. The type chosen is stated by this attribute. Compare this to the example XML document above, where a Contact is cast to the child class BusinessContact.

The OTX data model relies on the xsi:type attribute wherever prospective extensions to the data model are to be expected, whose names are not known at the time of core data model creation.

6 OTX principles

6.1 General

OTX represents a high-level domain-specific language which is especially designed for graphical notation and editing.

The syntax of the language is defined by the UML data model and the corresponding XML schema. The semantics are defined by this document. The general principles followed by OTX are described here.

6.2 XML format

Using XML in combination with XSD enables OTX to benefit from the whole strength of the W3C XML recommendation [W3C XML:2008], with its great number of off-the-shelf solutions, its world-wide acceptance and adoption. XML is the file format of choice also because:

 XML is designed to represent hierarchically structured information, which applies especially for test sequences.

--,,---,,----

- The basic XML rules for well-formedness eliminate the need for defining an own set of such basic grammar rules specific for OTX.
- Checking XML documents for well-formedness is a well-defined task for which a great many number of solutions exist off-the-shelf. Thus, there is no need to implement well-formedness-checkers specifically for OTX
- By modelling the detail correlations of the OTX grammar by using XSD, validity checking can be done by off-the-shelf solutions.
- The interpretation of OTX documents in authoring-, checker- and runtime-applications is assisted by offthe-shelf XML parser frameworks; many of them are schema-driven. This avoids implementations of specific low-level OTX parsers.

6.3 Imperative and structured programming paradigm

OTX follows the paradigm of imperative, structured programming:

- Imperative: OTX procedures define sequences of commands for the computer to perform.
- Structured: There are no explicit jumps allowed in OTX. Instead, branches, loops, exception handlers, return, continue, break and throw statements as well as procedure calls define jumps implicitly and in a controlled manner. Therefore, OTX also defines a block structure, as typically found in all languages that follow the structured programming paradigm.

6.4 Graphical authoring of OTX sequences

In contrast to other programming languages where programs are usually edited in text-based source code editors, OTX aims at sequence editing using graphical authoring tools. This keeps away the cumbersome and error-prone line-by-line source code editing work from the sequence author, a fact that allows XML to be the preferred file format for OTX – even though XML is often denounced to be too verbose. The complexity of managing the OTX XML code shall happen in the background, hidden from the sequence author. On the other hand, the OTX format supports features needed by graphical authoring tools, which are broadly disregarded by source-code edited languages, e.g. explicit specification and realisation compartments in statements, or floating comments that can link to more than one statement, just to mention a few.

6.5 Specification/Realisation concept

The OTX format offers explicit support for a three-stage development of test sequences.

- Specification stage: A test sequence may be described at specification level only. This is helpful for early stages in the test sequence development process, when not all of the details for creating an executable test sequence are known. The specification stage allows the development of test sequences at a prose level, which is human readable, but not fully executable this means, the overall sequence logic may already be there, but single steps in the sequence are filled by prose only, so a runtime interpreter cannot make use out of it. However, starting from this stage, the test sequence can be continuously broken down by the following stages.
- Intermediate stage: OTX also allows intermediate stage test sequences, which occur while transforming a specification stage test sequence towards a realisation stage sequence. Such an intermediate stage test sequence may contain parts that are already fully executable, whereas other parts are still at specification stage. The sequence author uses the human readable information from the specification stage parts and implements those parts following the specification instructions by adding realisation counterparts. At any step in this process, the sequence is validly saveable and exchangeable.

---,,...,,...---,,,,,,,,,,,

— Realisation stage: At this stage, there are no more specification-only parts in the sequence. The sequence is then fully executable. Note that even at this stage, specification parts of the sequence may still be contained, but not without their corresponding realisation. With other words, this coexistence represents an "executable specification".

6.6 Modular OTX extension concept and OTX-based runtime architecture

The OTX data model is structured into a language core and various functional extensions. It is important to note that the OTX Core, as well as the extensions defined by this part of ISO 13209, does only provide syntactical definitions for the elements of test sequences and a functional description of the expected behaviour. The implementation of the runtime behaviour itself is not part of the OTX standard. This is necessary to allow for the needed freedom when implementing OTX runtime components to fit specific use cases. For example, it would be impractical for the OTX standard to define the specific implementation of an HMI library, as the requirements and backend frameworks for HMI functionality will differ for each test environment.

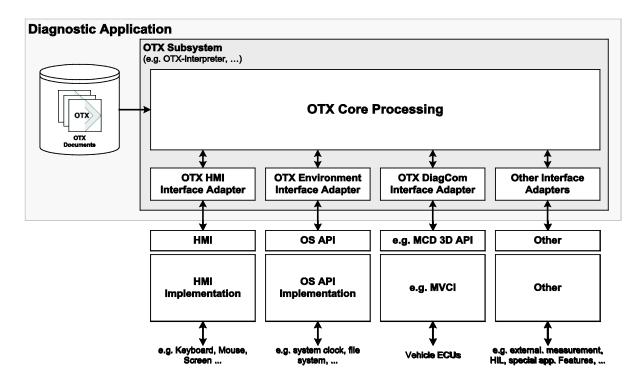


Figure 6 — OTX-based runtime architecture

Figure 6 comprises an overview of the standard extensions specified in [ISO 13209-3]. The following specification of the OTX Core data model touches the extensions only by defining extension interfaces which serve as hooks for the respective extensions. Otherwise, the Core is fully stand-alone.

This separation of OTX structure (intent) and runtime implementation (execution) will allow for OTX to be used as a test sequence exchange format that can be deployed throughout an entire organization, or even across company boundaries. Figure 6 illustrates the architecture of an OTX runtime diagnostic application. The OTX Subsystem that is part of the diagnostic application is interpreting OTX sequences which make use of OTX core data model constructs, as well as of various extension interfaces (HMI, Environment-specifics, vehicle communications and other proprietary functionality).

The actual runtime system implementation knows how to map e.g. an HMI extension action within an OTX sequence to the GUI framework that is used by the diagnostic application. For example, an after-sales application might map an OTX 'ChoiceDialog' construct to a Java Swing dialog entity that allows interaction with the workshop mechanic. The same OTX sequence could also be executed on a manufacturing station, where the diagnostic application implementation would map the 'ChoiceDialog' construct to a state machine connected to manufacturing line measurement equipment instead of a GUI interface.

6.7 Context concept

Diagnostic test sequences require a technique for getting access to a diversity of contextual information. Such information can be e.g. vehicle related, diagnostic application related, user related or application area related. A few instances of contextual information are mentioned here:

- Vehicle related: E.g. data about the currently diagnosed vehicle's model, vendor, identification number, engine-type or other identification data concerning the physical and electronical vehicle configuration.
- Diagnostic application related: E.g. application version, name, used vehicle communication interface type or version or also diverse settings of the application.
- User related: E.g. login name, idle time, user access rights, etc.
- Application area related: e.g. information about the location where the test sequences are applied, to make the difference e.g. between manufacturing, engineering or workshop appliance.

In general, contextual information may be required by heterogeneous subsystems of a diagnostic application. Concerning OTX, only the provision of contextual information to the OTX subsystem is considered.

OTX does not prescribe a set of context items which shall be supplied by every conforming application. Also, OTX does not make any assumptions or rules about the method by which a diagnostic application should identify particular context items (such methods are henceforth called identification routines). Instead, OTX only specifies how context-dependent OTX documents shall declare the particular context items which they require. It is the task of the diagnostic application to connect each context declaration of an OTX document to the specific identification routines yielding the respective context item.

Figure 7 shows a conceptional example of a mapping between context declarations defined by an OTX document and identification routines of a diagnostic application. The implementation of the mapping itself is not specified by this part of ISO 13209. Diagnostic applications are free to implement an appropriate mapping mechanism. Furthermore, the identification routines can be implemented in any programming language appropriate for the respective diagnostic applications. Therefore it is also possible to use OTX again for implementing identification routines. Diagnostic applications should also provide a mechanism which allows for OTX authors to integrate context-dependent OTX documents into the application by adjusting the mapping and adding new identification routines.

From the perspective of an OTX test sequence, contextual information is treated like static information. Contextual information can not simply be set by an OTX test sequence - if this would be possible, a test sequence would be able to set e.g. the engine-type information of the currently diagnosed vehicle to "Diesel", despite the fact that the concrete vehicle is gasoline driven. Consequently, OTX test sequences shall only be able to read contextual information by indirectly utilising the identification routines provided by the diagnostic application.

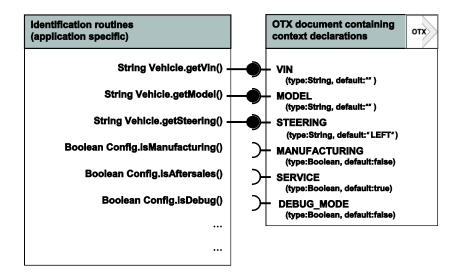


Figure 7 — Mapping context declarations to identification routines

The OTX context concept has several advantages:

- Transparency: Working with context data is almost similar to working with global constants for OTX authors.
- Compatibility: Integrating OTX into existing diagnostic applications does not require a change of the original context identification/management strategy of the application or the diagnostic session management, etc.
- Exchangeability: Since OTX documents declare each context item they require explicitly and in a well-defined place, using an OTX sequence originating from a foreign diagnostic application only requires an adjustment of the mapping between context declarations and identification routines (and possibly the implementation of new identification routines). In this way a context-dependent OTX document can be "docked" to heterogeneous diagnostic applications.
- Cooperation: By agreeing upon an OTX-file or a set of OTX-files declaring commonly used context data, two or more parties can improve their cooperation concerning OTX test sequence development.
- Simulation: Various context situations can be simulated by e.g. feeding simulated data to identification routines.
- Aside from the above topics, the context concept is crucial for the validities concept which is described in the following.

6.8 Validities concept

Based on the context concept described above, OTX offers the validities concept which allows for configuring test sequences for varying runtime contexts. The behaviour of such a configured test sequence changes according to the context it is running in. An OTX author can use this to configure and prepare generic purpose test sequences for different scenarios. At runtime, the test sequence adapts its behaviour according to the configuration.

To achieve this ability, an OTX author first needs to define *validities*: A validity is either a Boolean context item, a Boolean constant or a compound logical expression (called *validity term*) which combines different context items and/or global constants. The OTX author may use the declared validities for marking parts of his test sequence to be valid only if a connected validity is true at runtime. An invalid part will not be executed at runtime – like this, the author can activate and deactivate parts of the sequence in a context-driven manner.

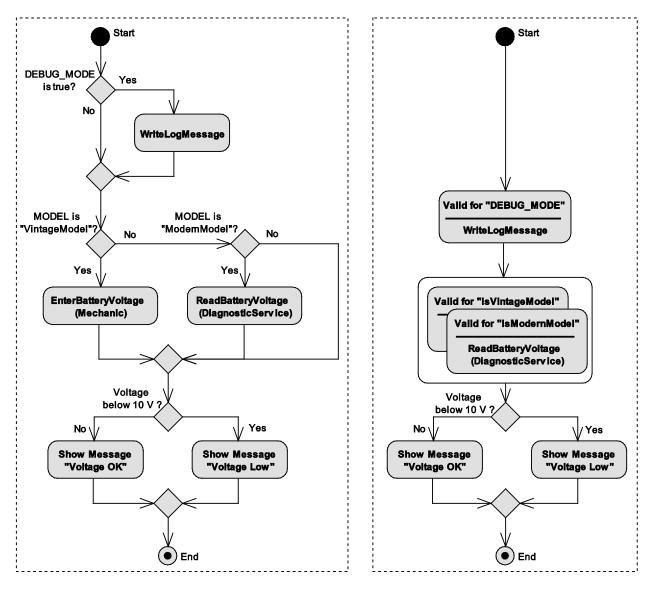


Figure 8 — Validities concept, example of use

Consider the example test sequence to the left of Figure 8. This sequence does **not** use validities. It is designed to do the following:

- a) If the diagnostic application's runtime system is in debug mode, it shall write a log message.
- b) The battery voltage of a vehicle shall be measured. According to the type of vehicle under test (a vintage model, a modern model or neither of these, e.g. a bicycle), this has to happen in different ways:
 - 1) Vintage model: The voltage has to be measured and entered into the system manually.
 - Modern model: The voltage can be queried automatically (by using a diagnostic service).
 - 3) It is some other type of vehicle with no battery; nothing can be measured.
- c) If the measured voltage is too low, a message "voltage low" shall be shown, otherwise "voltage OK".

The test sequence to the right of Figure 8 does (superficially) the same, but it uses validities in every place where context-dependent decisions are taken:

- a) The step "WriteLogMessage" is marked to be valid for "DEBUG_MODE" only. It will be inactive if the Boolean value of the context item "DEBUG_MODE" is false.
- b) The step for measuring the voltage comes in two different flavours: One is valid only for "isVintageModel", the other only for "isModernModel". If none is valid, no action is specified (there is some other type of vehicle). The validities "isVintageModel" and "isModernModel" are validity terms analyzing the current value of the "MODEL" context item.
- c) The voltage value is dynamic: It is neither predictable at authoring time nor depending on the context. It is only known at runtime. It is not a configuration. That is why validities are not used here.

The context items "MODEL" and "DEBUG_MODE", and the validity terms "isModernModel" and "isVintageModel" can be defined e.g. in a central document and be *reused* by all OTX authors who want to configure their test sequences towards the same context situations.

The advantages of this approach are obvious:

- A distinction is drawn between decisions based on static context data (e.g. enumerations of expected context values known at authoring time) and dynamic data (which is computed at runtime).
- Validity information controls the flow implicitly regarding context, not explicitly by normal dynamic branch conditions. This fact is also reflected in the more compact way of representation, the "pure" test sequence logic becomes more apparent.
- Sets of commonly used validities can be stored separately, in a central place. This avoids a lot of redundancy, since authors can reuse preconfigured validities for their test sequences. This also improves maintainability.
- Filtering: OTX authoring system may allow the author to configure certain context situations in a simulated environment. This produces very compact views of test sequences for a given context (mask steps that are not valid).
- Filtered test sequences may be extracted and/or exported. This results in test sequences which are tailored for a specific context.
- Enables the signature concept which is described later in this document.

Figure 9 shows the filtering of test sequences according to simulated contexts. In the left context, debug mode is on, the model is a vintage car. In the right context, debug mode is off, the model is a modern car.

The example is of course naïve, it serves only for comprehension. In real world test sequences, the validity concept can be used for various purposes, for example to configure sequences for different vehicle type series, ECU variants, vehicle configuration codes, different operating systems, different application areas like in a repair workshop or an assembly line, etc.

Especially concerning graphical OTX authoring environments, the validity concept supports the compact and at the same time flexible representation of test sequences.

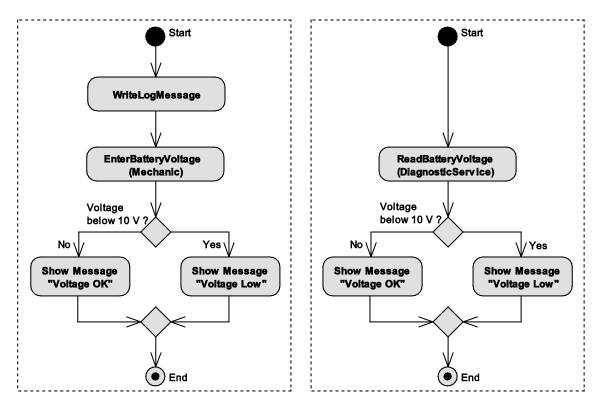


Figure 9 — Validities concept, filtering

6.9 Signature concept

The OTX signature concept is designed to support dynamic linking:

The concept allows for defining prototype procedures called *signatures*. A signature is like a procedure but without programme content (implementation); it consists only of a name, a set of parameter declarations and a prose specification. Procedures that *implement* a signature contain the same set of parameters like the signature and they have to implement a programme that accomplishes the task that was specified in prose in the signature. Hence, a signature defines an *interface* which implementing procedures have to obey. If this precondition is met, implementing procedures can be called indirectly via a signature – the caller only needs to know the parameters and the specification of the signature, the caller does not need to know implementation details which are hidden in the implementing procedures (in simple words: "I want you to accomplish this, but I don't care how you accomplish it").

Signatures are especially suited for cases where a task has to be carried out differently depending on the context, but superficially it is still the same task. The variant in which the task is carried out is chosen dynamically at runtime, when the context becomes known. At authoring time, this is left open. This allows writing *generic* test sequences that do not need to be changed as long as used interfaces (the called signatures) do not change.

The signature concept is closely linked to the validities concept (see above). Consider the example in Figure 10. The generic procedure "Voltage_Test" needs to read the current battery voltage of a vehicle. In the example, there are two kinds of vehicles: A vintage model where the voltage needs to be measured manually by a mechanic and a modern model where the voltage can be read automatically by electronic test equipment. Since the author of the generic procedure does not know how to actually measure the voltage in the different cases, he leaves the work up to colleagues who implement the signature "ReadBatteryVoltage" that he provides. The output are two procedures, "Manual_ReadVoltage" which works for the vintage model, and "Auto_ReadVoltage" which works for the modern model. Both procedures obey to the signature, they do the same job (returning the voltage) by different means.

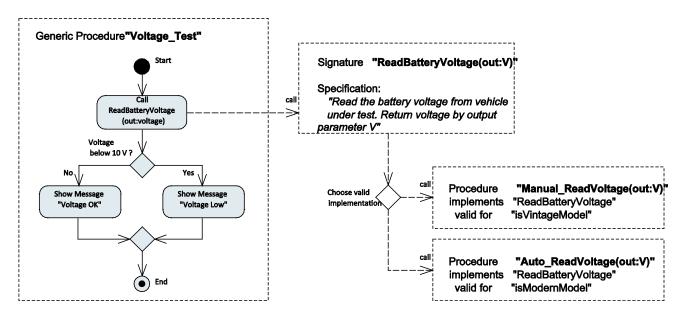


Figure 10 — Signatures concept

At runtime, the procedure call is redirected dynamically to the implementing procedure which is valid with respect to the current context (validities "isVintageModel" or "isModernModel").

The advantage of this approach is that the generic procedure is stable; it does not have to be changed even if there is a new context situation to be considered (e.g. a new high voltage battery which requires a third variant of voltage reading). This improves maintainability and long-time availability of generic test sequences. Also, this supports cases where test sequence modules are developed by more than one party; the signature concept is a way to define clear and formal interfaces between these distributed parties.

Since the signature concept is dynamic (the effective procedure that will be carried out is in general not known until runtime), special arrangements in the OTX runtime application are required. The indirection via the signature to the actually called procedure has to be resolved. For this task a mapping is needed which allows looking up a valid procedure implementing a given signature. Details on this topic are specified in 7.14.5 concerning the ProcedureCall action.

7 OTX Core data model specification

7.1 General

The following represents the full data model specification of the OTX Core, data model version "1.0.0".

For each OTX feature, syntax and semantic definitions are provided. The syntax definition will specify the exact XML structure of the feature, whereas the semantics definition specifies how the feature shall be interpreted (by OTX runtime systems or graphical OTX authoring tools).

The specification aims at describing the data model in a hierarchical way, following the document structure from top to bottom, starting at the <otx> root element. Commonly used features that appear in more than one place in the structure are described in 7.16.

The OTX Core data model specification is accompanied by additional normative information given in the annexes:

- Annex A specifies the OTX data types.
- Annex B specifies the runtime behaviour concerning scope and memory allocation of OTX constants and variables

ISO 13209-2:2012(E)

- Annex C contains a comprehensive listing of all checker rules. The rules are needed because some constraints existing on OTX documents cannot be ensured by XSD validation alone. These constraints need to be checked by additional checker applications.
- Annex D provides an overview about the extensibility of the OTX Core data model. By the creation of OTX extensions new features can be added to the format. Nevertheless there are well defined extension rules which have to be adhered by every correct OTX extension.
- Annex E describes the special schema annotations for exceptions.
- Annex F contains the XML Schema definition for the OTX standard.

7.2 High-level overview of the OTX Core data model

Figure 11 shows a high-level overview of the OTX Core data model. It only contains a subset of types, attributes and relationships of the overall model; nonetheless it reflects the idea of the essential structure of OTX documents. Details are given in later clauses; this is a guick walk-through.

OTX documents contain header information like the document name, meta-data or imports and other global scope information like global declarations and *validities* followed by a list of so called *OTX procedures* and a list of procedure *signatures* (for brevity, not all of these properties are shown in the diagram).

Validities are named Boolean terms which can be used for configuring context-dependant procedure behaviour.

A procedure itself contains a procedure name, a specification and a realisation section needed for the concept described in 6.5. The realisation of the procedure contains parameter and local variable declaration blocks as well as a *flow* of nodes representing the procedure logic. It may also contain a list of comments that may be linked to various places in the flow.

In a procedure parameters declaration block, in-, out- and inout-parameters can be declared (not shown in the diagram). Local variables and constants are declared in the declarations block (not shown in the diagram). Each declaration (parameter, constant or variable) has a data type chosen from a list of OTX data types. Semantically, the declared identifiers are visible to all nodes in the procedure flow.

The heart of every procedure is represented by its flow element. It contains a list of nodes that shall be executed sequentially. There are different kinds of nodes: simple nodes representing single commands to be carried out (Action, Return, Continue, Break, Throw and TerminateLanes) and compound nodes that may themselves embed flows (Group, Loop, Branch, Parallel, MutexGroup and Handler). OTX flows are comparable to the block concept as used by other programming languages.

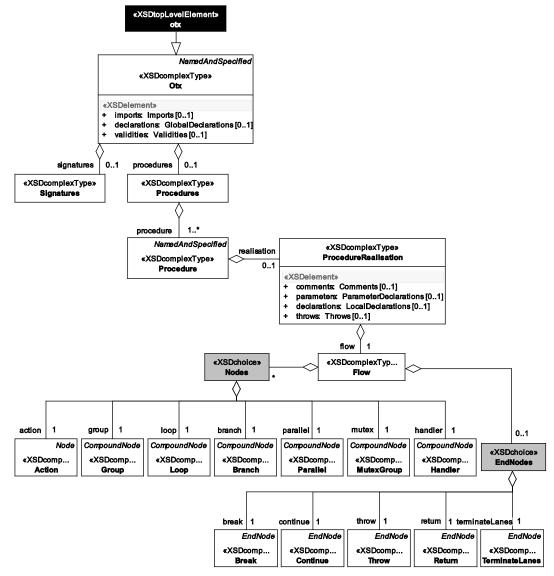


Figure 11 — High-level overview of the OTX Core data model

7.3 Document root

7.3.1 Description

This element stands for the document root of OTX documents. It serves as the "entry point" for any OTX parsing application and constitutes a kind of envelope around the test sequence logic itself.

It mainly comprises header information for packaging, naming and versioning of an OTX document and about the links to other OTX documents (import information). It is also the parent for all global entities defined in a document, namely global constants, document variables, contexts, validities, signatures and procedures.

7.3.2 Syntax

Every OTX document starts with the document root element <otx> which is derived from the complex type otx. The syntax is shown in Figure 12.

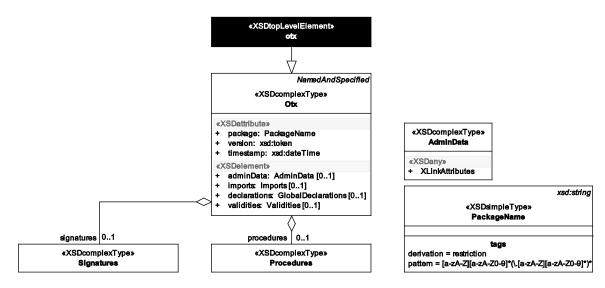


Figure 12 — Data model view: OTX document root

7.3.3 Semantics

The Otx type is derived from NamedAndSpecified (see 7.16.4). It contains attributes concerning the overall document in general:

— id : OtxId [1] (derived from NamedAndSpecified, see 7.16.4)

This represents the <otx> element's id. It shall be unique among all other ids in a document. Please refer to 7.16.4 for details concerning ids in OTX documents.

— name: OtxName [1] (derived from NamedAndSpecified, see 7.16.4)

This attribute shall contain the name of the OTX document. The name must match the file name, which simplifies finding an OTX document by name. Among all the OTX documents defined within the same package, the document name must be unique in order to avoid ambiguities. This is crucial for locating OTX documents, e.g. when calling a procedure defined in another OTX document (see 7.9 and 7.14.5).

Associated checker rules:

- Core Chk001 document name matches file name
- Core_Chk002 package-wide uniqueness of document names
- package : PackageName [1]

This attribute shall represent the package which the OTX document belongs to.

The PackageName type is a pattern-restriction of the xsd:string simple type. The value space of the attribute is restricted by a regular expression which enforces a dotted notation of package names, e.g. "com.myCompany.myOtxDocuments" (see 7.16.2 for the PackageName type).

Recommendations:

OTX documents can be stored in a file system or in a database. If stored in a file system, certain constraints on the organisation of files and folders allow a simple implementation to find OTX documents easily. The same applies to the uniqueness of file names, which is ensured automatically by the file system if the OTX-files reside within a folder dedicated to their common package. The package name (in dotted notation) can simply be translated into a directory path or vice versa, whereas the OTX document name can be translated directly to the file name. This practice is strongly

recommended. It is an analogy to the file system organisation of packages and classes recommended by $\S7.2$ of *The Java*TM *Language Specification* [1].

- For the transport of larger OTX projects consisting out of numerous interlinked OTX-files and packages, the usage of the PDX archive format specified by [ISO 22901] is strongly recommended. In the case of an MVCI/ODX based system, this allows transporting OTX data along with the ODX data required by the OTX sequences.
- Alternatively (if the latter recommendation is not applicable), the Java JAR file format is recommended. It represents a simple and popular archiving method. It is like PDX based on the ZIP archive format. Therefore, both approaches PDX and JAR could even be combined in one project file.

IMPORTANT — OTX documents are unambiguously identified with the combination of packagename and their own name. This allows for having equal document names in different OTX packages and avoiding ambiguity.

IMPORTANT — Global entities (global constants, procedures, validities, etc.) contained in the OTX document are unambiguously identified with the combination of package- and document-name, and their name. This allows for having equal global names in different OTX files and avoiding ambiguity.

— xmlns[:prefix] : anyURI [0..1] (standard XML attribute)

The special purpose attribute **xmlns** is specified in [W3C XMLNS:2009]. It defines the XML schema namespace to which an XML document complies to. The information is used by XSD validation for testing document compliance to corresponding schema(s).

With regards to OTX, the attribute shall associate the XSD namespace "http://iso.org/OTX/1.0.0" to the <otx> document root element, which can then be tested by validation for compliance to the OTX XSD.

NOTE The OTX data model version (1.0.0) to which this specification adheres is included in the OTX namespace URI "http://iso.org/OTX/1.0.0". For future versions of the standard the version number in the URI will be adapted accordingly. With this technique, the correct XSD version to be used for validation of an OTX document can be identified unambiguously.

If any OTX extension features are used in the document, the XSD namespaces of the respective extension schema shall be associated by using the xmlns attribute as well (extension namespaces are defined by the schemas specified by ISO 13209-3).

If the xmime:contentType attribute is used in <metaData> elements of an OTX document, the namespace "http://www.w3.org/2005/05/xmlmime" shall be associated by xmlns also.

For making the the xsi:type and the xsi:schemaLocation attributes available in OTX documents, the "XML Schema instance" namespace "http://www.w3.org/2001/XMLSchema-instance" needs to be associated [W3C XSD:2004].

Overview of common XML namespace associations used for OTX:

- xmlns="http://iso.org/OTX/1.0.0"
- xmlns:diag="http://iso.org/OTX/1.0.0/DiagCom"
- xmlns:hmi="http://iso.org/OTX/1.0.0/HMI"
- xmlns:myext="(custom OTX extension namespace)"
- xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
- xmlns:xmime="http://www.w3.org/2005/05/xmlmime"

ISO 13209-2:2012(E)

The prefixes used as abbreviations for the lengthy namespace qualifiers can be chosen freely. Each prefix provided must be unique in the scope of the document (this is enforced automatically by XSD validation).

version : xsd:token [1]

This attribute shall contain the version of the OTX document (for supporting versioning systems).

NOTE 2 OTX does not prescribe any rules for versioning. It just defines a location where simple versioning information can be put, if needed. For more complex versioning tasks, the meta-data elements can be used.

timestamp : xsd:dateTime [1]

This attribute shall contain the document creation timestamp. Further information regarding document history is also described by the <adminData> element, see below.

<metaData> : MetaData [0..1] (derived from NamedAndSpecified, see 7.16.4)

This optional element shall contain meta information concerning the OTX document as a whole. For a description of MetaData refer to 7.16.5.

<specification> : xsd:string [0..1] (derived from NamedAndSpecified, See 7.16.4)

The static string content of this optional element shall be used to describe the purpose of the OTX document in simple prose.

<adminData> : AdminData [0..1]

This optional element shall be used for linking to document history information via XLink attributes, as specified by [W3C XLink:2010]. The history information shall be structured according to the ADMINDATA element as specified in [ISO 22901]. The linked information should be located in the top-level <metaData> element of the OTX document (see above), but it may also be stored externally.

<imports> : Imports [0..1]

Contains a list of <import> elements for importing external OTX documents (see 7.4).

<declarations> : GlobalDeclarations [0..1]

Element representing the global declaration block. This is the place where global constants shall be defined. Except for the global scope, the semantics are equivalent to locally declared procedure constants. The type is not further specified here, see 7.5 for details.

<validities> : Validities [0..1]

A list of global scope validity terms shall be defined here (see 7.6).

<signatures> : Signatures [0..1]

This optional element shall contain a list of <signature> elements. The complex type Signature is specified in 7.7.

cedures> : Procedures [0..1]

This optional element shall contain a list of cedure> elements. The complex type Procedure is specified in 7.9.

7.3.4 Example

The example below contains a skeletal OTX document. The example does not use the <adminData>, <imports>, <metadata>, <validities>, cedures> or <signatures> elements, but it contains a <specification> element. Examples for the missing elements are given in following sub clauses.

EXAMPLE Sample of OTX-file "DocumentRootExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="1"
    name="bocumentRootExample"
    package="org.iso.otx.examples"
    version="1.0"
    timestamp="2010-03-18T14:40:10"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="http://iso.org/OTX/1.0.0 Core/otx.xsd" >
    <specification>Example for showing the OTX document root structure</specification></otx>
```

NOTE The xsi:schemaLocation attribute is only a local, in-document hint for XML parsers (validators) which maps each used XML namespace to an absolute or relative path (URL) where the corresponding XSD files are located. XML parsers may use alternative techniques for resolving corresponding XSD files, e.g. an XML catalogue. The xsi:schemaLocation attribute is optional and will therefore not appear in all further OTX examples.

Following the recommendation for OTX packages given above, the full file system path to the example file is "[OTX Base Directory]/org/iso/otx/examples/DocumentRootExample.otx". Here, the chosen format for the package value allows a simple translation from logical namespace to physical location of the OTX document. By contrast, in a data base the namespace and the document name can be used as primary keys to access the document.

7.4 Imports

7.4.1 Description

The top-level <imports> section contains a list of <import> elements. They are used by an OTX document to import global names defined in other OTX documents. Imported names are all visible procedure-, signature- and validity-identifiers as well as all visible identifiers declared in the global declaration block. They can be referenced from the importing document by using OtxLink type attributes, as will be specified later.

7.4.2 Syntax

Figure 13 shows the syntax of the Imports type.




Figure 13 — Data model view: Imports

7.4.3 Semantics

The <import> element has the following semantics:

- package : PackageName [1]
 - Contains the package which the imported document belongs to (see 7.16.2 for the PackageName type).
- document : OtxName [1]

Contains the document name of the document which shall be imported (see 7.16.3 for the OtxName type).

-1,,111,,,,1111-1-1,,1,,1,,1,,1,,1---

prefix : OtxName [1]

Defines a prefix which serves as an alias for the imported document. It shall be used in all places where an imported name from the imported document is accessed. For accessing, the counterpart of OtxName called OtxLink is used (see 7.16.3 for the OtxName and OtxLink types).

The prefix name can be chosen freely insofar it complies with the syntax enforced by OtxName. Another restriction is that a prefix shall be unique among all other import prefixes defined in the same document (this is enforced by an xsd:key restriction in the OTX schema).

Associated checker rules:

- Core Chk003 no dead import links
- Core_Chk004 no unused imports
- Core_Chk006 match of imported document's data model version

7.4.4 Example

The example below shows an OTX document importing two other OTX documents. The first imported document named "Signatures" of package "org.iso.otx.examples" gets the prefix "sig". The other document named "Validities" of the same package gets the prefix "val". The use of the prefixes is shown in the procedure "test", which refers to a signature "sig:mySignature" and to a validity "val:myValidity". Both identifiers "mySignature" and "myValidity" have to be declared in the document identified by the respective prefixes (for the sake of brevity, imported documents are not shown here).

EXAMPLE Sample of OTX-file "ImportsExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="2"
 name = "ImportsExample"
 package="org.iso.otx.examples"
 version="1.0
 timestamp="2010-11-11T14:40:10" >
 <imports>
   <import package="org.iso.otx.examples" document="Signatures" prefix="sig"/>
   <import package="org.iso.otx.examples" document="Validities" prefix="val"/>
 </imports>
  <specification>A test procedure./specification>
   </procedure>
 </procedures>
```

7.5 Global declarations

7.5.1 Description


The global declaration block is the place where global identifiers for constants, document scope variables and context variables shall be declared. For each type of global declaration special rules apply as specified in the following. Globally declared identifiers shall be visible for every procedure and validity term defined in the same document, but they can also be imported by external documents for cross-document usage (see <imports> element, 7.4).

The counterparts of the global declaration block are the local parameter declaration block used by signatures and procedures (see 7.11) and the local declaration block used by procedures (see 7.12).

Concerning scope and memory allocation, special rules shall apply for global declarations. Please refer to Annex B for further specifications.

7.5.2 Syntax

The global <declarations> block is enclosed top-level by the <otx> element (see 7.3.2). Figure 14 shows the syntax of the GlobalDeclarations type.

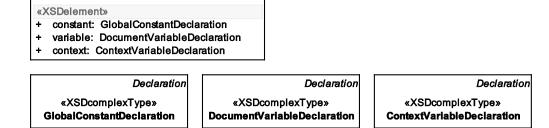

«XSDattribute»

Figure 14 — Data model view: GlobalDeclarations

visibility: Visibility [0..1]

«XSDattribute»

visibility: Visibility [0..1]

7.5.3 Semantics

«XSDattribute»

visibility: Visibility [0..1]

All of the three global declaration types have properties inherited from their common base type Declaration and NamedAndSpecified. For the semantics of inherited properties see 7.16.7. Only the specific semantic properties of each type of Declaration are described here. GlobalDeclarations allows for declaring an arbitrary number of global constants, document variables and context variables (by utilizing <xsd:choice> with choice cardinality [1..*]):

— <constant> : GlobalConstantDeclaration

«XSDcomplexType» GlobalDeclarations

Declares a global constant identifier. The value of a constant is fixed at declaration time – it is not allowed to be changed.

— visibility : Visibility={PRIVATE|PACKAGE|PUBLIC} [0..1]

The attribute is a visibility modifier. The visibility levels are described by the **Visibility** enumeration (cf. 7.16.8), which allows the following attribute values:

- "PRIVATE": The constant shall be used only from procedures or validities defined in the same document. This means that the constant shall be invisible for other OTX documents. This is the default.
- "PACKAGE": The constant shall be used only from procedures or validities defined in the same package like the local OTX document. This means that the constant shall be invisible for OTX documents belonging to other packages.
- "PUBLIC": The constant can be used from **anywhere**.

Associated checker rules:

- Core_Chk051 immutability of constants, input parameters and context variables
- Core_Chk009 mandatory constant initialisation

ISO 13209-2:2012(E)

<variable> : DocumentVariableDeclaration

Declares a document variable which is only visible to procedures and validity terms defined within the same document.

- visibility : Visibility={PRIVATE|PACKAGE|PUBLIC} [0..1]

The attribute is a visibility modifier. The visibility levels are described by the Visibility enumeration (cf. 7.16.8). For document variables, the attribute value is fixed to "PRIVATE". This ensures that document variables are not visible to other OTX documents.

<context> : ContextVariableDeclaration

Declares a context variable. See 6.7 for further information about the OTX context concept.

visibility : Visibility={PRIVATE | PACKAGE | PUBLIC} [0..1]

The attribute is a visibility modifier. The visibility levels are described by the Visibility enumeration (cf. 7.16.8), which allows the following attribute values:

- "PRIVATE": The context variable shall be used only from procedures or validities defined in the same document. This means that the context variable shall be invisible for other OTX documents. This is the default.
- "PACKAGE": The context variable shall be used only from procedures or validities defined in the same package as the local OTX document. This means that the context variable shall be invisible for OTX documents belonging to other packages.
- "PUBLIC": The context variable can be used from anywhere.

Associated checker rules:

Core Chk051 – immutability of constants, input parameters and context variables

Context variables play a special role in the OTX data model. They represent a connection to contextual information which is defined by the surroundings, e.g. information about the currently diagnosed vehicle, the name of the workshop where the diagnostic application is running in, the user name of the currently logged in user etc. Unlike normal variables, the value of context variables cannot be changed directly by OTX actions. In OTX procedures, context variables shall – despite the name – be treated as constants. Context variables can only be changed by identification routines of the test application, e.g. when another vehicle gets connected to the diagnostic application, an identification routine determines e.g. the model or the vehicle identification number and makes this information available to the OTX runtime. OTX procedures can then read that information by using the context variable which stands for the respective context information.

OTX authors may define default values for context variables (this shall be done by using the <init> element, see 7.16.7). For cases when the value of a context variable cannot be determined, the default value applies instead. If no explicit default value is given, the implicit default value defined for the assigned data type applies. For data types for which no implicit value is specified, the context variable is uninitialized - reading such a variable will produce an exception at runtime, as specified in 7.15.3.

OTX documents declaring context variables should be connected to corresponding identification routines which return the current value of the contextual information in scope. Therefore, diagnostic applications require a mapping between context variables and according identification routines. The mapping may be kept in application specific places, but it may also be contained in meta-data compartments of an OTX document (cf. 7.16.5).

Recommendations:

Concerning identification routines for gathering context information, there are no requirements or assumptions made in this part of ISO 13209. The implementation of identification routines is application specific. Only in the case that an identification routine is implemented in the form of an OTX procedure, the following approach is recommended.

For a context variable to identification routine mapping, the <metaData> element should be used, containing two special purpose <data> elements:

-- <data key="[Application Id].OtxPackage">[PackageName]</data>

The [ApplicationId] should be a string identifying the specific diagnostic application for which the mapping applies. The string should be in dotted notation, providing as much uniqueness as possible, e.g. "com.myCompany.myApplication". The [PackageName] identifies the package in which the OTX procedure which shall serve as identification routine is contained.

-- <data key="[Application Id].OtxProcedure">[ProcedureName]</data>

The [ProcedureName] should be the name of the OTX procedure providing the identification routine.

— <data key="[Application Id].OtxOutParameter">[ParameterName]</data>

The [ParameterName] should be the name of the OTX procedure's out-Parameter which contains the context information.

By following this recommendation, the exchangeability of OTX documents can be ameliorated: A diagnostic application using an OTX document created by another application may add its own mapping information to its specific identification routines without having to overwrite the mapping of the other application.

7.5.4 Example

The example below defines a global constant, a document variable as well as two context variables:

- A global constant float named "PI", initialised by float value "3.14159265". Its visibility is "PUBLIC" which means that the constant can be accessed by any other importing OTX document.
- A Boolean document variable named "dv". The visibility attribute is not given explicitly in the document; nonetheless the variable is implicitly "PRIVATE". This setting is fixed for all document variables by the OTX schema.
- A context variable "VIN", which is connected to an identification routine. The meta-data assigned to the context variable contains a mapping to the identification routine it is an OTX procedure named "getVehicleIdent" belonging to the package "identification". The out-Parameter "vin" yields the context value (the vehicle identification number of the currently diagnosed vehicle).
- A context variable "HAS_SUNROOF". There is no mapping to an identification routine given in the metadata. If there is no external mapping also, the context variable is not connected to the "real world" in this case the default value false will apply.

EXAMPLE Sample of OTX-file "GlobalDeclarationsExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="3"
  name="GlobalDeclarationsExample"
 package="org.iso.otx.examples"
version="1.0"
  timestamp="2009-10-20T14:40:10"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
    <constant name="PI" visibility="PUBLIC" id="3-d1">
      <specification>This defines a global constant/specification>
      <realisation>
        <dataType xsi:type="Float"><init value="3.14159265"/></dataType>
      </realisation>
    <variable name="dv" id="3-d2">
      <specification>A document-wide visible variable/specification>
      <realisation>
        <dataType xsi:type="Boolean"/>
      </realisation>
    </variable>
    <context name="VIN" visibility="PUBLIC" id="3-d3">
      <specification>Holds the VIN of the currently diagnosed vehicle</specification>
        <data key="com.myCompany.myApp.OtxPackage">identification</data>
        <data key="com.myCompany.myApp.OtxProcedure">getVehicleIdent</data>
        <data key="com.myCompany.myApp.OtxOutParameter">vin</data>
      </metaData>
      <realisation>
        <dataType xsi:type="String"/>
      </realisation>
    </context>
    <context name="HAS_SUNROOF" visibility="PUBLIC" id="3-d4">
      <specification>True if diagnosed vehicle has a sunroof/specification>
        <dataType xsi:type="Boolean"><init value="false"/></dataType>
      </realisation>
    </context>
  </declarations>
```

7.6 Validity terms

7.6.1 Description

OTX documents may contain a list of *validity terms*. This is required for the validities concept, see 6.8. A validity term is a uniquely named, reusable Boolean term which is defined at global level. Validity terms are primarily used to configure test sequence behaviour according to runtime context. In contrast to Boolean context variables which can be used as validity, too, validity terms allow describing compound Boolean expressions which may depend on more than just one Boolean value.

Validities can be addressed *cross-document*; this allows defining a set of popular validities in a central OTX document which can be reused by other OTX documents via OtxLink association.

Action nodes, Group nodes and Procedures can be connected to validity terms by the validFor attribute (see 7.14, 7.13.4.2 and 7.9.). At runtime, the Boolean term value of the referenced validity term is evaluated; it determines whether an ActionRealisation, GroupRealisation or a Procedure is valid or not.

7.6.2 Syntax

Figure 15 shows the syntax of the Validities type.

Figure 15 — Data model view: Validities

7.6.3 Semantics

The properties of the Validity type have the following semantics:

— id: OtxId [1] (derived from NamedAndSpecified, see 7.16.4)

This represents the <validity> element's id. It shall be unique among all other ids in a document. Please refer to 7.16.4 for details concerning ids in OTX documents.

— name: OtxName [1] (derived from NamedAndSpecified, see 7.16.4)

This attribute represents the name of the validity term. It must be unique throughout all global scope identifiers defined in the same OTX document. This constraint is verifiable through XML Schema validation (by the xsd:key> constraint "UniqueGlobalNames" specified in the OTX schema, refer to Annex F).

Actions, groups and procedures can be connected to validity terms by referring to the name (through the validFor attribute containing an OtxLink).

- visibility : Visibility={PRIVATE | PACKAGE | PUBLIC} [0..1]
 - The attribute is a visibility modifier. The visibility levels are described by the Visibility enumeration (cf. 7.16.8), which allows the following attribute values:
 - "PRIVATE": The validity term shall be accessible only by the **same document**. This means that the validity term shall be invisible for other OTX documents. This is the default.
 - "PACKAGE": The validity term shall be accessible only by OTX documents of the same package like the local document. This means that the validity term shall be invisible for documents belonging to other packages.
 - "PUBLIC": The validity term shall be accessible by **any** other OTX document.
- <metaData> : MetaData [0..1] (derived from NamedAndSpecified, see 7.16.4)

This optional element is used for adding meta-data to a validity term. For details on the MetaData type, refer to 7.16.5.

— <specification> : xsd:string [0..1] (derived from NamedAndSpecified, See 7.16.4)

The static string content of this optional element shall be used to specify the purpose of the validity term for human readers. The complement of specification> is the element realisation> (see below).

Associated checker rules:

- Core_Chk007 have specification if no realisation exists
- <realisation> : BooleanTerm [0..1]

The BooleanTerm given by the <realisation> element represents the validity condition: The validity term holds if and only if the term evaluation returns true with respect to the runtime context.

ISO 13209-2:2012(E)

NOTE Validity term truth values should be evaluated on first use. Later uses of a validity term do not require reevaluation as long as no relevant context change occurred. In between context changes, validity term values may be treated as runtime constants. Only in the case when a context changes, concerned validity terms should be re-evaluated on next use.

7.6.4 Example

The example below defines two validities: They can be used to identify in which environment the runtime is located, either in a repair workshop or at an assembly line. Of course, relevant context information must be available for the OTX runtime system, namely via the **LOCATION** context variable.

EXAMPLE Sample of OTX-file "ValidityTermExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="4"</pre>
 name="ValidityTermExample"
 package="org.iso.otx.examples"
version="1.0"
  timestamp="2009-10-20T14:40:10"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <imports>
    <import document="contexts" package="org.iso.otx.examples" prefix="context"/>
  </imports>
  <validities>
    <validity name="Workshop" id="4-v1">
      <specification>Valid if executed in a workshop environment</specification>
      <realisation xsi:type="IsEqual">
        <term xsi:type="StringValue" valueOf="context:LOCATION" />
         <term xsi:type="StringLiteral" value="DealershipWorkshop" />
      </realisation>
    </validity>
    <validity name="Assembly" id="4-v2">
      <specification>Valid if executed at an assembly line/specification>
      <realisation xsi:type="IsEqual">
        <term xsi:type="StringValue" valueOf="context:LOCATION"/>
<term xsi:type="StringLiteral" value="AssemblyLine" />
      </realisation>
    </validity>
  </validities>
```

7.7 Signatures

7.7.1 Description

OTX signatures support the *design by contract* concept: Generally speaking, a signature⁴⁾ represents an interface description to another software module whose inner implementation details do not need to be known by the user of that module. As long as the user and the implementing software module(s) obey to the signature specification, the interoperability is guaranteed: The user has to fulfill all the prerequisites described by the signature (e.g. by providing correct ProcedureCall arguments defined by a ProcedureSignature, see 7.8) and the software module implementing the signature is obligated to complete the function specified by the signature if the prerequisites are fulfilled.

OTX allows different types of signatures. In the OTX Core data model there only one type of signature called **ProcedureSignature**. OTX extensions may specify additional signatures for extension-specific purposes, so for example the **ScreenSignature** of the HMI extension as specified in ISO 13209-3.

7.7.2 Syntax

Figure 16 shows the syntax of the Signatures type.

⁴⁾ This is also called interface, prototype or header in other programming languages.

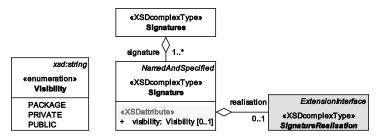


Figure 16 — Data model view: Signatures

7.7.3 Semantics

The properties of the Signature type have the following semantics:

— id: OtxId [1] (derived from NamedAndSpecified, see 7.16.4)

This represents the <signature> element's id. It shall be unique among all other ids in a document. Please refer to 7.16.4 for details concerning ids in OTX documents.

— name: OtxName [1] (derived from NamedAndSpecified, see 7.16.4)

This attribute represents the name of the signature. It must be unique throughout all global identifiers defined in the same OTX document. This constraint is verifiable through XML Schema validation (by the <xsd:key> constraint "UniqueGlobalNames" specified in the OTX schema, refer to Annex F).

visibility: Visibility={PRIVATE | PACKAGE | PUBLIC} [0..1]

The attribute is a visibility modifier. The visibility levels are described by the **Visibility** enumeration, which allows the following attribute values:

- "PRIVATE": The signature is visible only within the **same document**. This means that using the signature from outside of the document is not allowed.
- "PACKAGE": The signature is visible only within the **same package**. Using the signature from outside of the package is not allowed. This is the default.
- "PUBLIC": The signature can be used from anywhere.
- -- <metaData> : MetaData [0..1] (derived from NamedAndSpecified, see 7.16.4)

This optional element is used for adding meta-data to a signature. For details on the MetaData type, refer to 7.16.5.

— <specification>: xsd:string [0..1] (derived from NamedAndSpecified, See 7.16.4)

The static string content of this optional element shall be used to specify the purpose of the signature for the human reader. The complement of <specification> is the element realisation> (see below).

Associated checker rules:

- Core_Chk007 have specification if no realisation exists
- <realisation> : SignatureRealisation [0..1]

signatureRealisation is an abstract type. This means that for the <realisation> element, a concrete child of SignatureRealisation shall be chosen by using the xsi:type attribute. In the OTX Core, there is only one child available, namely ProcedureSignature (see 7.8). OTX extensions may derive further child types, e.g. the ScreenSignature in the HMI extension (see ISO 13209-3). For details about derived SignatureRealisation types refer to the respective specifications.

Procedure signatures

7.8.1 Description

The ProcedureSignature type is required for the signature concept (see 6.9).

Where procedures declare a set of parameters, a set of local variables and constants and the procedure flow containing the program logic, procedure signatures only declare a set of parameters. Procedures which implement a specific procedure signature need to have the same set of parameters (see 7.9 on procedures). Procedure signatures represent the "empty shell" of such procedures.

Signature-implementing procedures can be called indirectly via a procedure signature. This is described in the ProcedureCall action, see 7.14.5.

7.8.2 Syntax

Figure 17 shows the syntax of the ProcedureSignature type.




Figure 17 — Data model view: ProcedureSignatures

Semantics 7.8.3

ProcedureSignature is a SignatureRealisation (7.7). Only the specific semantic properties of the ProcedureSignature type are described here.

The properties of ProcedureSignature have the following semantics:

- <parameters> : Parameters [0..1]
 - Parameters of the signature shall be declared in this block (see 7.11).
- <throws> : Throws [0..1]

Exceptions shall be declared in this block. Each exception listed here may potentially be thrown by signature-implementing procedures.

<exception> : Exception [1..*]

Represents the exceptions. For each exception, the type shall be chosen by the xsi:type attribute.

IMPORTANT — A signature without <realisation> represents a NOP (No Operation) at runtime.

7.8.4 Example

The first example below shows a couple of signatures in an OTX File. While the latter two signatures are only in specification stage, the first one, GetIgnitionState, is in realisation stage. The procedure signature describes procedures which return the state of the ignition of a vehicle. Since this is a signature, there is no implementation; it is up to the signature-implementing procedures to define how exactly the ignition state shall be computed.

The second example below shows two signature-implementing procedures. The first gets the ignition via a diagnostic service sent to the vehicle (valid for a workshop environment) whereas the other gets it by measuring at the OBD connector (valid for an assembly line environment). Please refer also to the example given in 7.14.5.4 (ProcedureCall).

EXAMPLE 1 Sample of OTX-file "SignatureExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="5"
 name="SignatureExample"
 package="org.iso.otx.examples"
version="1.0"
 timestamp= "2009-10-20T14:40:10"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
    <signature name="getIgnitionState" id="5-s1">
     <specification>Returns the status of the ignition.
     <realisation xsi:type="ProcedureSignature">
       <parameters>
         <outParam name="state" id="5-d1">
           <specification>Ignition state result. true:ON | false:OFF/specification>
           <realisation>
             <dataType xsi:type="Boolean" />
           </realisation>
         </outParam>
       </parameters>
      </realisation>
   </signature>
   <signature name="checkHeadlights" id="5-s2">
     <specification>Tests the head lights for proper functioning.
   <signature name="retrieveVIN" id="5-s3">
     <specification>Returns the vehicle Identification number.
    </signature>
  </signatures>
</otx>
```

EXAMPLE 2 Sample of OTX-file "ImplementingProcedureExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="6"
 name="ImplementingProcedureExample"
 package="org.iso.otx.examples"
 version="1.0
 timestamp="2009-10-20T14:40:10"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
 <imports>
   <import prefix="sig" package="org.iso.otx.examples" document="SignatureExample" />
<import prefix="val" package="org.iso.otx.examples" document="Validities" />
  </imports>
  cedures>
   <specification>Gets the state by using a diagnostic service</specification>
     <realisation>
       <parameters>
         <outParam name="state" id="6-d1">
           <specification>Ignition state result. true:ON | false:OFF</specification>
           <realisation>
            <dataType xsi:type="Boolean" />
          </realisation>
         </outParam>
       </parameters>
       <flow>
         <!-- The implementation goes here -->
       </flow>
     </realisation>
   </procedure>
   <specification>Gets the state by measuring via OBD connector/specification>
   </procedure>
 </procedures>
</otx>
```

7.9 **Procedures**

Description 7.9.1

A cprocedure> element represents an executable unit in an OTX document. It can be used as the entry point for OTX interpreters when a test sequence shall be executed, but it can also be the target of a procedure call from another OTX procedure (see 7.14.5).

7.9.2 Syntax

Figure 18 shows the syntax of the Procedure type.

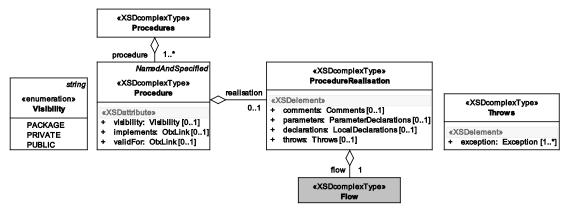


Figure 18 — Data model view: Procedures

7.9.3 Semantics

The properties of the **Procedure** type have the following semantics:

id: OtxId [1] (derived from NamedAndSpecified, see 7.16.4)

This represents the cedure element's id. It shall be unique among all other ids in a document. Please refer to 7.16.4 for details concerning ids in OTX documents.

name: OtxName [1] (derived from NamedAndSpecified, see 7.16.4)

This attribute represents the name of the procedure. It must be unique throughout global identifiers defined in the same OTX document. This constraint is verifiable through XML Schema validation (by <xsd:key> constraints specified in the OTX schema, refer to Annex F).

IMPORTANT — Special semantic for main-procedures: If the name attribute of a procedure has the value "main", then this procedure shall be treated as a top-level procedure which represents the entry point for test sequence execution in an OTX application. Main-procedures shall always be public. They can be called by other OTX test sequences also like normal procedures.

Associated checker rules:

- Core_Chk008 public main procedure
- visibility: Visibility={PRIVATE|PACKAGE|PUBLIC} [0..1]

The attribute is a visibility modifier. The visibility levels are described by the Visibility enumeration, which allows the following attribute values:

"PRIVATE": The procedure shall be visible only within the same document. This means that calling the procedure from outside of the document is not allowed. This is the default.

- "PACKAGE": The procedure shall be visible only within the **same package**. Calling the procedure from outside of the package is not allowed.
- "PUBLIC": The procedure shall be visible from any document in any package.

— implements : OtxLink [0..1]

This optional attribute supports the signature concept (see 6.9). It shall contain the qualified name of the signature that a procedure implements.

Associated checker rules:

- Core_Chk053 no dangling OtxLink associations
- Core_Chk026 no duplicate validities for procedures implementing the same signature
- Core_Chk027 procedure parameters match signature parameters

— validFor : OtxLink [0..1]

This optional procedure attribute supports the signature concept which is based on the validities concept (see 6.9 and 6.8). It can be connected to a Boolean context variable, a global Boolean constant or to a validity term (by OtxLink). At runtime, the truth value of the associated context variable, constant or the validity term determines whether a procedure shall be executed (validity value is true) or not (validity value is false). This allows context-based disabling/enabling of procedures. Refer to the ProcedureCall action described in 7.14.5.

Associated checker rules:

- Core_Chk053 no dangling OtxLink associations
- Core Chk013 correct referencing of validities
- <metaData> : MetaData [0..1] (derived from NamedAndSpecified, see 7.16.4)

This optional element is used for adding meta-data to a procedure (refer to the MetaData type, 7.16.5).

— <specification> : xsd:string [0..1] (derived from NamedAndSpecified, see 7.16.4)

The static string content of this optional element shall be used to specify the purpose of the procedure for the human reader. The complement of <specification> is the element <rpre><rpre><rpre> (see below).

Associated checker rules:

Core_Chk007 – have specification if no realisation exists

<realisation> : ProcedureRealisation [0..1]

Specifies the procedure implementation parts. When a procedure enters realisation stage in the test sequence development process (after specification stage), this element shall be instantiated. Its type, **ProcedureRealisation**, represents a wrapper for all elements needed for the procedure implementation:

— <comments> : Comments [0..1]

This optional element is a container for an arbitrary-length list of floating comments. They shall be used for commenting parts of the procedure flow implementation for the human reader. For a description of the Comment type, refer to 7.10.

— <parameters> : Parameters [0..1]

Parameters of the procedure shall be declared in this block (see 7.11).

— <declarations> : Declarations [0..1]

Local variables and constants of the procedure shall be declared in this block (see 7.12).

```
— <throws> : Throws [0..1]
```

Exceptions shall be declared here. Each exception listed may potentially be thrown by the procedure under certain circumstances.

```
— <exception> : Exception [1..*]
```

Represents the exceptions. For each exception, the type is chosen by the xsi:type attribute.

```
— <flow> : Flow [1]
```

This block contains the procedure logic (see 7.16.9). The logic is represented by a sequence of nodes, each of which has type-specific semantics (see 7.13).

IMPORTANT — A procedure without <realisation> represents a NOP (No Operation) at runtime. The same applies procedure signatures without <realisation>.

7.9.4 Example

The example below shows two procedures defined in the same OTX document. The first is an entry point test sequence (name="main"). The other is a procedure that can be used only by procedure calls from within the same package. It implements the signature "sig:writeMsg" which is defined in the document "Signatures" in the package "org.iso.otx.examples". It can be executed only if the validity value of "val:DebugMode" is true. The validity term is defined in the document "validities" in the same package. Both procedures neither declare any parameters, variables or constants, nor contain a program flow. These sub-elements are declared in the following clauses.

EXAMPLE Sample of OTX-file "ProcedureExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="7"
 name="ProcedureExample"
 package="org.iso.otx.examples"
  version= "1.0"
 timestamp="2009-10-20T14:40:10"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <imports>
   <import prefix="sig" package="org.iso.otx.examples" document="Signatures" />
<import prefix="val" package="org.iso.otx.examples" document="Validities" />
  </imports>
  <specification>This is an empty top-level procedure, a test sequence</specification>
     <realisation>
       <flow/>
     <realisation>
   </procedure>
   validFor="val:DebugMode" visibility="PACKAGE" id="7-p2">
     <specification>A empty procedure implementing a signature, with validity information.
     <realisation>
       <flow/>
     <realisation>
   </procedure>
  </procedures>
</otx>
```

7.10 Floating comments

7.10.1 Description

Procedures allow an optional <comments> element. It contains any number of <comment> elements which can be linked to any number of nodes inside the procedure flow. Comments can link to sub-structures inside of nodes and to other comment nodes also, as specified below. This feature supports graphical OTX editors by allowing any graphically presentable OTX feature to be linked to comments. They are thought to help test sequence authors to provide additional, human readable information during the test sequence development process, especially for the specification and intermediate stage in test sequence development.

A single comment carries a text message for the human reader, and has a list of links pointing to the elements in the procedure that the comment refers to.

7.10.2 Syntax

Figure 19 shows the structure of the complex type Comment.

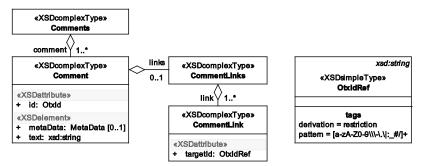


Figure 19 — Data model view: Comment

7.10.3 Semantics

The properties of the Comment type have the following semantics:

— id : OtxId [1]

This represents a <comment> element's id. It shall be unique among all other ids in a document. Please refer to 7.16.4 for details concerning ids in OTX documents.

— <metaData> : MetaData [0..1]

Used for adding meta-data to a comment. For details on the MetaData type, refer to 7.16.5.

— <text> : xsd:string [1]

The comment text that shall be displayed to the human reader.

- links> : Links [0..1]

Contains an arbitrary-length list of link> elements.

— <link> : CommentLink [1..*]

Links the comment to a commented entity by its targetId attribute:

— targetId : OtxIdRef [1]

The link between a comment and the commented entity is established with the targetId attribute of the comment link. The attribute value shall match the id of a commented entity.

Otherwise, a comment link might point to nowhere which is undesirable. XML validation enforces that for each targetId value, there is an entity in the procedure with the corresponding id value (using xsd:keyref> constraints specified in the OTX schema, refer to Annex F).

The OtxIdRef type is the counterpart of the OtxId type. In analogy to OtxId, it is a patternrestriction of the xsd:string simple type. The value space of the attribute is restricted by the regular expression "[a-zA-z0-9\\\-\.\|:_#/]+", which allows the basic letters, numbers as well as a set of delimiters.

Entities to which a comment's <link> may point to are the flow nodes, branch case conditions, loop conditions as well as comments themselves.

7.10.4 Example

The example below shows two comments linked to different entities in the procedure. The first comment points at the action node in the procedure flow and at the group in the loop node. The second comment points at the loop configuration and to another comment.

Sample of OTX-file "CommentExample.otx" **EXAMPLE**

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="8"
 name="CommentExample"
 package="org.iso.otx.examples"
version="1.0"
 timestamp="2009-10-20T14:40:10"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" >
   cprocedure name="main" visibility="PUBLIC" id="8-p1">
     <specification>Demonstration of a commented procedure/specification>
     <realisation>
     <comments>

          <text>This is a comment for two nodes in the flow</text>
          ks>
           k targetId="action1" />
           k targetId="group1" />
          </links>
      </comment>
        <comment id="cmt2">
          <text>This comment is linked to another comment and a loop configuration</text>
          ks>
           <link targetId="loop1config" />
           <link targetId="cmt1" />
          </links>
        </comment>
      </comments>
      <flow>
        <action id="action1" />
        <loop id="loop1" name="emptyLoop">
          <realisation>
           <configuration id="loop1config" />
           <flow>
             <group id="group1" />
             <action id="action2" />
           </flow>
          </realisation>
        </loop>
      </flow>
     </realisation>
   </procedure>
 </procedures>
</otx>
```

7.11 Parameter declarations

7.11.1 Description

The parameter declaration block allows for declaring in-, inout- and out-parameters of signatures and procedures. This information is especially important for the **ProcedureCall** action, as specified by 7.14.5.

7.11.2 Syntax

The declaration block cparameters is located in the crealisation element of procedures or signatures
(see 7.7 and 7.9). Figure 20 shows the syntax of the ParameterDeclarations type.

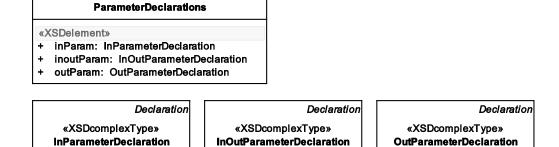


Figure 20 — Data model view: ParameterDeclarations

7.11.3 Semantics

All parameter declaration types have common properties inherited from their common base types **Declaration** and **NamedAndSpecified**. For the semantics of inherited properties see 7.16.7. Only the specific semantic properties of each type of **Declaration** are described here.

— <inParam> : InParameter

Declares an input parameter of the signature or procedure. When calling a signature or procedure, an input argument may be omitted **if and only if** there's an initial value defined for the parameter. This initial value shall apply in place of the missing argument. Input parameters shall be treated as constants – the value is not allowed to change throughout procedure execution.

Associated checker rules:

- Core_Chk051 immutability of constants, input parameters and context variables
- Core_Chk030 input- and in&output-argument omission

«XSDcomplexType»

— <inoutParam> : InOutParameter

Declares an input/output parameter of the procedure. Arguments for in&output parameters shall be passed by reference. This means that any change to the parameter value is visible to the caller also. When calling a signature or procedure, an input/output argument may be omitted **if and only if** there's an initial value defined for the parameter.

Associated checker rules:

Core_Chk030 – input- and in&output-argument omission

<outParam> : OutParameter

Declares an output parameter of the procedure. Output parameters shall be returned to the caller. The caller may omit output parameters freely (e.g. in the case when there is no interest in one of the returned values). If the procedure does never write a declared output parameter and there is no explicit initial value defined for it, the output argument variable stays unchanged. If the procedure throws an exception the output parameter stays unchanged. Otherwise the following rule shall apply: If the parameter has an explicit initial value, or the procedure writes it, the value will be assigned to the corresponding output argument variable.

Signature or Procedure parameter declarations carry a name attribute (derived from NamedAndSpecified, see 7.16.4). Local parameter declaration names shall be unique among all local declaration and local parameter declaration names. This constraint is verifiable through XML schema validation (by <xsd:key> constraints specified in the OTX schema, refer to Annex F).

Furthermore, parameter declarations with the same name like a global declaration shall be allowed. At this, OTX follows the concept of shadowing: If an identifier is used which is declared both locally and globally, the local identifier shadows the global identifier. This means that the global identifier is invisible and not useable by any node in the local procedure. Since this may lead to unwanted situations, identifier shadowing is discouraged. To avoid it, distinct names should be used for local and global declarations. Another solution is making an OTX document import itself; this provides a prefix which can be used for unambiguously referring to global declarations.

Associated checker rules:

Core_Chk052 - identifier shadowing

7.11.4 Example

The example given below shows a procedure "ListItemMeanValue" with two parameter declarations:

- a List of Integer type input parameter named "listOfInt",
- a Float type output parameter named "mean"

EXAMPLE Sample of OTX-file "ParameterDeclarationsExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="9" version="1.0" timestamp="2009-10-20T14:40:10"</pre>
    \textit{name} = \texttt{"ParameterDeclarationsExample"} \quad \textit{package} = \texttt{"org.iso.otx.examples"}
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  cedures>
   cprocedure name="ListItemMeanValue" visibility="PUBLIC" id="9-p1">
       Demonstration of parameter declarations. The procedure calculates the arithmetic average of the
       input list's items ("list" parameter) and returns the average value in output parameter
     </specification>
     <realisation>
         arameters/
<inParam name="listOfInt" id="9-d1">

       <parameters>
           <specification>Input parameter: List of Integers/specification>
           <realisation>
             <dataType xsi:type="List" >
               <itemType xsi:type="Integer"/>
             </dataType>
           </realisation>
       (</inParam>
         <outParam name="mean" id="9-d2">
           <specification>Output parameter: Mean value (Float)/specification>
           <realisation>
             <dataType xsi:type="Float"/>
           </realisation>
         </outParam>
       </parameters>
       <flow/>
     </realisation>
   </procedure>
  </procedures>
</otx>
```

7.12 Local declarations

7.12.1 Description

The local declaration block allows for declaring constants and variables which are visible only for the declaring procedure.

7.12.2 Syntax

The local declaration block <declarations> is enclosed in the cprocedure> element (see 7.9). Figure 21 shows the syntax of the LocalDeclarations type.

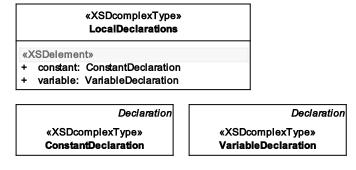


Figure 21 — Data model view: LocalDeclarations

7.12.3 Semantics

All local constant and variable declarations have common properties inherited from their common base type **Declaration** and **NamedAndSpecified**. See 7.16.7 for semantics of inherited properties. Only the specific semantic properties of each type of **Declaration** are described here. Only the specific semantic properties of each type of **Declaration** are described here.

The syntactical order of variable and constant declarations is semantically irrelevant. Constant and variable identifiers have procedure wide scope. LocalDeclarations allows declaring an arbitrary number of local constants and variables (by utilizing xsd:choice> [1..*]):

— <constant> : Constant

Declares a constant identifier for the procedure. The value of a constant is fixed at declaration time – it is not allowed to change throughout procedure execution.

Associated checker rules:

Core_Chk009 – mandatory constant initialisation

— <variable> : Variable

Declares a variable identifier for the procedure. The value of the variable is allowed to change throughout procedure execution. If no initial value is given, the default initial value defined for its data type applies (refer to 7.16.7.3).

Local constants and variables carry a name attribute (derived from NamedAndSpecified, see 7.16.4). Local constant and variable declaration names shall be unique among all local declaration and local parameter declaration names. This constraint is verifiable through XML schema validation (by <xsd:key> constraints specified in the OTX schema, refer to Annex F).

Furthermore, local declarations with the same name like a global declaration shall be allowed. At this, OTX follows the concept of *shadowing*: If an identifier is used which is declared both locally and globally in the same OTX document, the local identifier shadows the global identifier. This means that the global identifier is

ISO 13209-2:2012(E)

invisible and not useable by any node in the local procedure. Since this may lead to unwanted situations, identifier shadowing is discouraged. To avoid it, distinct names should be used for local and global declarations. Another solution is making an OTX document import itself; this provides a prefix which can be used for unambiguously referring to global declarations.

Associated checker rules:

Core_Chk052 – identifier shadowing

7.12.4 Example

The example below shows the declaration of

- a local constant float named "PI", initialised by float value "3.14159265"
- a local variable named "v" which has no data type assigned to it yet.

```
EXAMPLE
               Sample of OTX-file "LocalDeclarationsExample.otx"
```

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="10"
name="LocalDeclarationsExample"</pre>
 package="org.iso.otx.examples"
 version="1.0"
 timestamp="2009-10-20T14:40:10"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
 cedures>
   cedure name="main" visibility="PUBLIC" id="10-p1">
     <specification>Demonstration of variable and constant declarations/specification>
     <realisation>
      <declarations>
        <constant name="PI" id="10-d1">
          <specification>A local constant float value</specification>
            <dataType xsi:type="Float">
             <init value="3.14159265" />
            </dataType>
          </realisation>
      </constant>
        <variable name="v" id="10-d2">
          <specification>A local variable of yet unknown type/specification>
      </declarations>
      <flow />
     </realisation>
   </procedure>
 </procedures>
</otx>
```

7.13 Nodes

7.13.1 Overview

OTX nodes represent the single steps in the program flow of a procedure. They appear in Flow-type elements, see 7.16.9.

Nodes can be atomic or compound:

Atomic nodes⁵⁾ are single steps containing no further embedded flows. At runtime, atomic nodes should be executed as one monolithic unit. The following node types are atomic: Return, Continue, Break,

⁵⁾ OTX atomic nodes can be seen as the equivalent to one-line statements in line-based programming languages.

- TerminateLanes, Throw. In general, Action nodes are also atomic, but there are exemptions depending on the ActionRealisation type (e.g. the ProcedureCall action which is not atomic).
- Compound nodes⁶⁾ are steps that embed one or more flow(s) recursively (Node types Group, Loop, Branch, Parallel, MutexGroup and Handler). To execute these compound nodes, their inner flow(s) shall be interpreted step by step as well.

In order to reflect the above distinction in the data model, the inheritance hierarchy of OTX nodes shown in Figure 22 has been implemented: There is an abstract base type Node which contains all features common to all nodes — refer to the Node specification in 7.13.2 for details. All compound nodes are derived from the abstract type CompoundNode. All other nodes are in general atomic nodes (implicitly). Furthermore there is an abstract sub-classification EndNode for nodes that can only be used at the end of a node sequence — refer to the specification of all EndNode types in 7.13.5. The special role of the Action node is specified in 7.13.3.

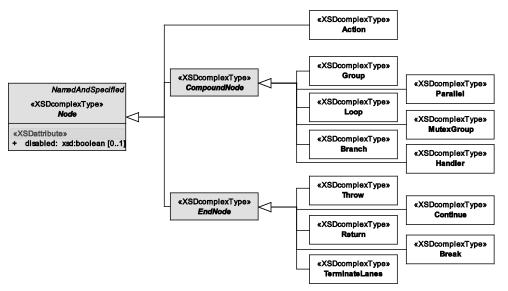


Figure 22 — Data model view: Node inheritance hierarchy

7.13.2 Node

7.13.2.1 Description

This type serves as the abstract base for all **Node** types. The properties of the type are therefore part for all derived nodes.

7.13.2.2 Syntax

The syntax of the abstract type **Node** is shown in Figure 22.

⁶⁾ OTX compound nodes are the equivalent to control statements that stretch over more than one line in text-based programming languages. Those statements usually enclose an inner block of statements which is often introduced by "{" and closed by "}" brackets.

7.13.2.3 Semantics

Node is based on NamedAndSpecified. The properties of the Node type have the following semantics:

— id: OtxId [1] (derived from NamedAndSpecified, see 7.16.4)

This represents a node's id. It shall be unique among all other ids in a document. Please refer to 7.16.4 for details concerning ids in OTX documents.

— name : OtxName [0..1] (derived from NamedAndSpecified, see 7.16.4)

The attribute represents the human readable counterpart to the id attribute. It shall serve authors to identify nodes easily by name on the surface of a graphical OTX editor. There are no constraints concerning uniqueness of the name attribute values; nonetheless uniqueness is recommended, but not enforced.

Associated checker rules:

Core_Chk010 – unique node names

— disabled : xsd:boolean={false|true} [0..1]

By using this attribute a node can be switched-on and -off: A node with disabled="true" shall be ignored at runtime; otherwise it shall be executed normally⁷). If the attribute is not set, the node is enabled (default is disabled="false").

NOTE The OTX XSD does not allow nodes after an **EndNode** no matter if it is disabled or enabled (cf. 7.16.9).

Associated checker rules:

- Core_Chk011 no disabled nodes
- <metaData> : MetaData [0..1] (derived from NamedAndSpecified, See 7.16.4)

This optional element is used for adding meta-data to a node. For details on the MetaData type, refer to 7.16.5.

— <specification>: xsd:string [0..1] (derived from NamedAndSpecified, see 7.16.4)

The simple xsd:string content of this optional element shall be used to specify the purpose of the node for the human reader. The complement of <specification> is the element <realisation> which is not specified for the Node type, because it is specific for each distinct node type (see below).

Associated checker rules:

Core_Chk007 – have specification if no realisation exists

7.13.3 Action node

7.13.3.1 Description

IMPORTANT — Action nodes play a central role concerning the extensibility of the OTX data model. The extension mechanism is described in Annex D.

An Action node is a simple node in a flow (cf. "single-line statement"). The runtime behaviour of an Action node can be customized for different contexts by applying the validities concept (see 6.8). A context-specific behaviour can be configured by choosing one out of a list of available ActionRealisations defined by the OTX Core or any OTX extension. The comprehensive specification of all Core ActionRealisations can be

⁷⁾ This is comparable to commenting out lines or blocks of source code in text-based programming languages.

found in 7.14. Action nodes are in general to be treated as atomic, but there are exemptions depending on the ActionRealisation type. Exemptions are especially emphasized in the specification for the particular type of ActionRealisation.

7.13.3.2 Syntax

Figure 23 shows the syntax of the Action node type.




Figure 23 — Data model view: Action

7.13.3.3 Semantics

Action is a Node which is NamedAndSpecified. The semantics of all derived properties are described in 7.13.2. Only the specific semantic properties of Action are described here.

The properties of Action have the following semantics:

— realisation : ActionRealisation [0..*]

This is the counterpart of the <specification> element for an Action node.

IMPORTANT — As long as no <realisation> elements are set, an Action node has no runtime semantics which means that it shall be skipped during execution.

The precise behaviour of the finally executed <realisation> element is determined by the value of the xsi:type attribute: Any complex type extending ActionRealisation can be inserted here, e.g. the types ProcedureCall, Assignment or ListInsertItems, just to name a few.

The behaviour of all OTX Core ActionRealisations is described in 7.14.

— validFor : OtxLink [0..1]

An ActionRealisation may be connected to a Boolean context variable, a global Boolean constant or a validity term (by OtxLink). Analyzing the validFor attribute of a <realisation> element in an Action node determines whether the <realisation> is valid or not. Here, the following rules apply:

- If there is no validFor attribute, the <realisation> is valid.
- If there is a validFor attribute, the Boolean context variable, constant or the validity term referenced by the OtxLink shall be evaluated. The <realisation> is valid if and only if the result is true.

Associated checker rules:

- Core Chk012 no unreachable realisations in Action and Group nodes
- Core_Chk053 no dangling OtxLink associations
- Core_Chk013 correct referencing of validities

Figure 24 shows a behavioural description of the Action node. The examples in 6.8 show the benefits of the static validity concept which sets itself apart from the dynamic branch node, even if the behaviour shown in Figure 24 resembles the branch node behaviour to a great extent.

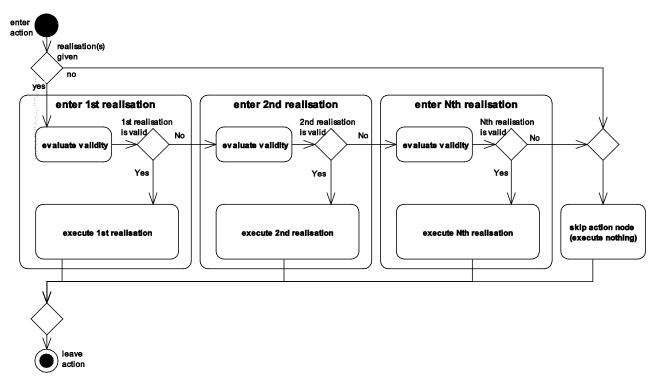


Figure 24 — Behavioural description: Action

7.13.3.4 Example

The example below shows context variables and validity terms which are defined in a central document named "Validities.otx" and another document named "ActionExample.otx" using the validity terms in an Action node with multiple <realisation> elements. With this setup, the one-time defined context variables and validity terms can be reused by any other OTX document that imports this document.

"ActionExample.otx" uses action realisations which are defined by the OTX extension schemas HMI, DiagCom and Logging (cf. ISO 13209-3). They are introduced to the root of the document by the namespace definition attributes xmlns:hmi, xmlns:diag, xmlns:log together with the respective fully qualified namespace strings (cf. 7.3).

EXAMPLE 1 Sample of OTX-file "Validities.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="11"
 name="Validities"
 package="org.iso.otx.examples"
 version="1.0"
 timestamp="2009-10-20T14:40:10"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
   Central validity term and context variable definition document,
   use validity terms and context variables defined here.
 </specification>
 <declarations>
   <context name="DEBUG_MODE" id="11-d1">
      Reflects the current debug setting: true: debugging is on. false: debugging is off.
     </specification>
     <realisation>
      <dataType xsi:type="Boolean">
        <init value="false" />
      </dataType>
     </realisation>
  </context>
   <context name="MODEL" id="11-d2">
     <specification>Reflects the currently diagnosed vehicle's model/specification>
     <realisation>
      <dataType xsi:type="String" />
     </realisation>
   validity name="isModernModel" id="11-v1">
    <specification>Valid if context variable MODEL=="ModernCar"</specification>
     <realisation xsi:type="IsEqual">
      <term xsi:type="StringValue" valueOf="MODEL" />
      <term xsi:type="StringLiteral" value="ModernCar" />
     </realisation>
  </rd></rd></rd>
  <validity name="isVintageModel" id="11-v2">
     <specification>Valid if context variable MODEL=="VintageCar"</specification>
     <realisation xsi:type="IsEqual">
    <term xsi:type="StringValue" valueOf="MODEL" />
      <term xsi:type="StringLiteral" value="VintageCar" />
     </realisation>
  </validity>
 </validities>
```

To get access to the declarations in "Validities.otx", "ActionExample.otx" needs to import it by using an <import> element. All visible global scope identifiers of the imported document (here, these are context variables and validity terms) are then accessible by using the freely chosen prefix val.

The first Action node in "ActionExample.otx" writes a log message if the Boolean context variable "DEBUG_MODE" is true. The <realisation> uses the WriteLog action realisation from the OTX Environment extension.

The second Action node reads the battery voltage. Whether the voltage is read by manual input or automatically by a diagnostic service depends on the current vehicle-related context:

- If the context variable MODEL equals "VintageModel", then the validity term "isVintageModel" holds and the first <realisation> of the Action node is executed. The <realisation> uses the InputDialog action realisation from the OTX HMI extension which allows the mechanic to input a measured voltage value (details for InputDialog are not given here).
- If the context variable MODEL equals "ModernModel", then the validity term "isModernModel" holds and the second <realisation> of the Action node is executed. The <realisation> uses the ExecuteDiagnosticService action realisation from the OTX DiagCom extension to read the voltage automatically from the vehicle.

If none of the validity terms hold, no action is performed.

EXAMPLE 2 Sample of OTX-file "ActionExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="12"
name="ActionExample"</pre>
 package="org.iso.otx.examples"
  version="1.0"
 timestamp="2009-10-20T14:40:10"
xmlns:diag="http://iso.org/OTX/1.0.0/DiagCom"
 xmlns:hmi="http://iso.org/OTX/1.0.0/HMI"
 xmlns:log="http://iso.org/OTX/1.0.0/Logging"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
   <import prefix="val" package="org.iso.otx.examples" document="Validities"/>
  cedures>
    cprocedure name="main" visibility="PUBLIC" id="11-p1">
      <specification>Check battery voltage of vehicle</specification>
      <realisation>
        <declarations>
          <variable name="voltage" id="11-d1">
           <specification>Variable for the measured voltage/specification>
            <realisation>
             <dataType xsi:type="Float"/>
            </realisation>
          </variable>
        </declarations>
          <action id="a1">
            <specification>Write LogMessage (debug only)</specification>
<realisation validFor="val:DEBUG_MODE" xsi:type="log:WriteLog">
                   ActionRealisation details -->
        </action>
          <action id="a2">
            <specification>Read battery voltage</specification>
            <!-- For the vintage car: -->
           <!-- This will ask the mechanic to enter the measured voltage manually -->
<realisation validFor="val:isVintageCar" xsi:type="hmi:InputDialog">
                  ActionRealisation details -->
            </realisation>
            <!-- For the modern car: -->
            <!-- This will read the voltage by using a diagnostic service -->
            <realisation validFor="val:isModernCar" xsi:type="diag:ExecuteDiagService">
                   ActionRealisation details -->
            </realisation>
          </action>
                       ______
          <branch id="b1">
            <specification>Show OK/NOK message depending on voltage level read/specification>
            <realisation>
              <!-- branch according to measured voltage value -->
            </realisation>
          </branch>
        </flow>
      </realisation>
    </procedure>
  </procedures>
```

7.13.4 Compound nodes

7.13.4.1 Overview

Nodes derived from the abstract CompoundNode type contain one or more nested Flow-type elements. The set of all such nodes represents the control structures of OTX. The following subclauses specify each of the CompoundNode subtypes shown in Figure 22.

NOTE The abstract and empty CompoundNode type itself needs no further specification because it serves for logical data model structuring only.

7.13.4.2 Group node

7.13.4.2.1 Description

The simplest of all compound nodes is the **Group** node. It can be used to wrap a sequence of nodes together. Nodes contained in a **Group** form a higher-level unit that can be treated as one logical block by authors. This makes sense especially for nodes that belong together logically; grouping allows the author to demonstrate this togetherness and to provide clarity through modular sequence design.

Like the Action node (see 7.13.3), the runtime behaviour of a Group node can be customized for different contexts by applying the validities concept (see 6.8). Context-specific behaviour can be configured by implementing group flows for each anticipated context situation.

NOTE In a graphical OTX authoring environment, groups can be used for folding and unfolding parts of a procedure in order to create views with different levels of detail; it can be used for refactoring tasks as well, e.g. making a loop out of a group or extracting a procedure based on a group, etc.

7.13.4.2.2 Syntax

Figure 25 shows the syntax of the Group node type.




Figure 25 — Data model view: Group

7.13.4.2.3 Semantics

Group is a CompoundNode which is a Node which is NamedAndSpecified. The semantics of all derived properties are described in 7.13.2. Only the specific properties of the Group type are described here, with the following semantics:

— <realisation> : GroupRealisation [0..*]

This optional element is the counterpart to the specification> element described for the Node type.
Since GroupRealisation is derived from the Flow type (cf. 7.16.9), the realisation> element is a container for a sequence of nodes which shall be executed one by one in the order of appearance.

— validFor : OtxLink [0..1]

A GroupRealisation may be connected to a Boolean context variable or a validity term (by OtxLink). Analyzing the validFor attribute of a <realisation> element in an Group node determines whether the <realisation> is valid or not:

- If there is no validFor attribute, the <realisation> is valid.
- If there is a **validFor** attribute, the **Boolean** context variable, global **Boolean** constant or the validity term referenced by the **OtxLink** shall be evaluated. The **<realisation>** is valid if and only if the result is **true**.

Associated checker rules:

- Core_Chk012 no unreachable realisations in Action and Group nodes
- Core_Chk053 no dangling OtxLink associations

Core_Chk013 - correct referencing of validities

The context-specific behaviour of Group nodes with multiple crealisation> elements is analogous to the Action node behaviour which is shown in Figure 24.

7.13.4.2.4 Example

The example below shows a procedure-flow level group (id="group1") with three nodes in it: An Action node (id="action1"), an embedded Group node (id="group2") and a Return node (id="ret1"). The embedded group itself contains a single Action node (id="action2"). In this example, Group nodes are not context-dependent (no validFor attribute).

EXAMPLE Sample of OTX-file "GroupExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="13"</pre>
 name="GroupExample"
 package="org.iso.otx.examples"
 version="1.0"
 timestamp="2009-10-20T14:40:10"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
 cedures>
   <specification>Demonstration of nested flows</specification>
    <realisation>
      <flow>
      /<group id="group1">
         <specification>A group containing a group</specification>
         <realisation>
         <specification>Inner group</specification>
           <realisation>
             <action id="action2" />
           </realisation>
         </realisation>
      (</group>
       <action id="action3" />
      </flow>
    </realisation>
   </procedure>
 </procedures
</otx>
```

The example also demonstrates the use of the Flow type which occurs with two different names here: The <flow> element of the procedure and the <realisation> elements of the groups.

7.13.4.3 Loop node

7.13.4.3.1 **Description**

For repetitive execution of a sequence of nodes, the Loop node shall be utilized. OTX supports several loop configurations which are commonly called (do-)while-, for- and for-each-loop.

7.13.4.3.2 Syntax

Figure 26 shows the syntax of the Loop node. The syntax of the significant sub-element <configuration> (which allows choosing and configuring different loop types) is depicted in Figure 27.




Figure 26 — Data model view: Loop

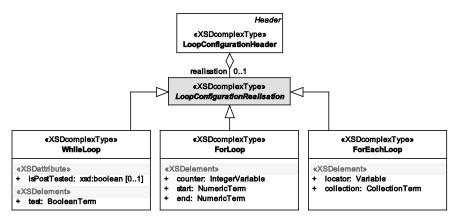


Figure 27 — Data model view: LoopConfigurationHeader

7.13.4.3.3 Semantics

Loop is a **CompoundNode** which is a **Node** which is **NamedAndSpecified**. The semantics of all derived properties are described in 7.13.2. Only the specific properties of the **Loop** type are described here.

IMPORTANT — Continue and Break nodes have a special meaning for loops, as specified in 7.13.5.3 (Continue) and 7.13.5.4 (Break). Since these nodes specify their target by using the targeted loop's name, the name attribute is mandatory for loops (unlike the base type NamedAndSpecified where it is optional). This is enforced by <xsd:key> constraints specified in the OTX schema.

Loop nodes have to be configured in order to define the desired type of loop, (do-)while-, for- and for-each-loop. For configuring the LoopConfigurationHeader type is used, which is described separately in the following sections.

The top-level properties of the **Loop** type have the following semantics:

— <realisation> : LoopRealisation [0..1]

This optional element is the counterpart to the <specification> element described for the Node type.
In the <reation> parts of a loop, a <configuration> and a <flow> are indispensable:

— <configuration> : LoopConfigurationHeader [1]

Represents the loop header which defines the loop configuration type (plus the derived properties of the **Header** base type, see 7.13.4.9).

— <realisation> : LoopConfigurationRealisation [1]

This element determines the loop configuration type of the Loop node. Since LoopConfigurationRealisation is an abstract base type for the different loop configuration types, the xsi:type attribute shall be used to choose the type of interest. Semantics of the individual loop types are described below.

<flow> : Flow [1]

This element is a container for a sequence of nodes which shall be executed one by one in the order of appearance. For details about the Flow type, see 7.16.9.

Semantics of the WhileLoop configuration

The (do-)while-loop is a generic loop with a test that controls repetition of the included flow. The test is a boolean term. As long as the test condition holds, the loop flow is executed repeatedly. In OTX, it can be configured whether the test shall be checked before (while-loop) or after the first flow execution (do-whileloop).

The WhileLoop configuration is derived from LoopConfigurationRealisation and has the following semantic properties:

isPostTested : xsd:boolean={false|true} [0..1]

This optional attribute controls whether the condition for the next loop shall be tested prior to the next loop iteration start (the default) or after finishing the loop flow. Note that flows in post tested loops will always be executed at least once.

<test> : BooleanTerm [0..1]

This contains the Boolean term that shall be evaluated prior to executing the loop flow. Syntax and semantics of terms like **BooleanTerm** are specified in 7.15.

Figure 28 illustrates the runtime behaviour of pre-tested while- and post-tested do-while- loops.

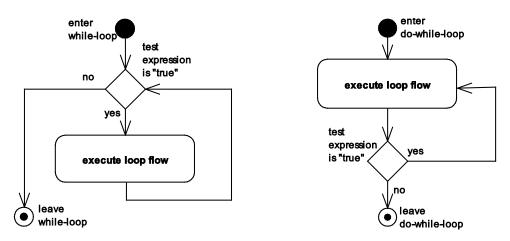


Figure 28 — Behavioural description: while- and do-while-loop

Semantics of the ForLoop configuration

The OTX for-loop allows configuring a start and an end value (integer terms). When the loop starts, the start value is assigned to the counter (an integer). Prior to each iteration, the counter value is compared to the end value. If the counter value exceeds the end value, the loop exits, otherwise the iteration is carried out. After each iteration - also after the final one - the counter is incremented by one. The counter value can be accessed and be used for any kind of computation in the loop flow.

IMPORTANT — Since a counter is visible procedure-wide in OTX, it is accessible on the outside of the loop as well.

IMPORTANT — When entering a for-loop, the old counter value will be *overwritten* implicitly by the start value. After finishing the final iteration *normally* (not by break), the counter value will be incremented one more time. This value is the exit value visible to the follower nodes of the loop node.

NOTE 1 By contrast to the for-each-loop behaviour which throws a ConcurrentModificationException if its collection is changed during loop execution, it is valid to change a for-loop's counter value while the for-loop is active.

The ForLoop configuration is derived from LoopConfigurationRealisation and has the following semantic properties:

— <counter> : IntegerVariable [1]

This element identifies an Integer variable that shall be used as the counter of the for-loop.

— <start> : NumericTerm [1]

The value of the NumericTerm given by <start> shall be evaluated once when entering the for-loop. It represents the start value which is assigned to the counter (see above). Float values shall be truncated.

— <end> : NumericTerm [1]

The value of the NumericTerm given by <end> shall be evaluated once when entering the for-loop. It represents the end value which is compared to the counter value prior to each iteration. Float values shall be truncated.

See the activity diagrams in Figure 29 for the runtime behaviour of for-loops.




Figure 29 — Behavioural description: for-loop

IMPORTANT — The counter variable shall be increased by 1 at the end of each loop iteration even if terminated by a Continue node. Only in the case that a loop iteration is terminated by a Break node, the counter variable shall NOT be increased before leaving the loop.

Semantics of the ForEachLoop configuration

The OTX for-each-loop is configured by a collection (a list or a map) and a so called locator variable. The collection is expressed by a list or map expression which shall be evaluated initially. The flow of the loop shall be executed repeatedly for each item found in the collection. The current item of an iteration can be accessed by using the locator variable which contains the index or key of the list or map item, respectively. Like this, the current item can be used for any kind of computation in the loop flow.

IMPORTANT — If the collection is a List, there is a defined order for the iterations: The loop starts with the first List item (index 0), followed the second item and so on. By contrast, there is no particular order defined for Map.

IMPORTANT — Since a locator variable is visible procedure-wide, it is accessible on the outside of the loop as well.

IMPORTANT — When entering a for-each-loop, the old value of the locator variable shall be overwritten implicitly by the index/key of the first item of the list/map. After leaving the loop, the locator variable value of the final iteration will be visible to the follower nodes of the loop node.

IMPORTANT — Actions derived from ListModifier and MapModifier are collection modifiers. Since they change a collection's length (List case) or size (Map case), applying such modifications on a foreach-loop's collection during loop execution may cause serious inconsistencies (e.g. when a collection item is accessed which does not exist anymore). Therefore OTX runtimes shall throw ConcurrentModificationException when such modifications occur.

IMPORTANT — By contrast, changing the value of items of a for-each-loop's collection does not represent a concurrent modification and shall not cause a ConcurrentModificationException.

When catching a ConcurrentModificationException, the data in a for-each-loop's collection may already be corrupt (e.g. when a List item has been removed). In this case, it is not possible for exception handling to restore the original collection.

The ForEachLoop configuration is derived from LoopConfigurationRealisation and has the following semantic properties:

<locator> : Variable [1]

This element points to an Integer or a String that shall be used as the locator variable of the foreach-loop.

<collection> : CollectionTerm [1]

The term value expressed by <collection> represents the List or Map over which the for-each-loop shall iterate.

Associated checker rules:

- Core_Chk014 correct locator variable type in for-each-loop
- Core Chk056 no modification of collection inside foreach-loops

Throws:

ConcurrentModificationException

in case that the collection is modified while the loop is active. Modifications can be triggered by actions inside of the loop or from the outside, e.g. by actions in a parallel lane.

enter for-each-loop

evaluate collection term

another collection item is available

yes

set locator to index or key of current item

execute loop flow

See the activity diagram in Figure 30 for the runtime behaviour of for-each-loops.

Figure 30 — Behavioural description: for-each-loop

for-each-loop

7.13.4.3.4 Example

The examples below demonstrate a while-, for- and for-each-loop. Example 1 shows an endless while loop (the loop condition is always true). Example 2 shows a for-loop which counts from 1 to 10. In each iteration, a dialog is shown containing the current loop iteration number. Example 3 shows a for-each-loop which iterates over a list of values. The value of the current iterations list item is shown in a dialog.

EXAMPLE 1 Sample of OTX-file "LoopExample.otx" - while-loop

```
<loop id="loop1" name="myWhileLoop">
      <specification>An endless while loop</specification>
        <configuration id="loop1config">
          <specification>Always true loop condition
          <realisation xsi:type="WhileLoop">
  <test xsi:type="BooleanLiteral" value="true" />
          </realisation>
        </configuration>
        <flow>
          <action id="a1" /> <action id="a2" />
        </flow>
      </realisation>
    </loop>
EXAMPLE 2
                 Sample of OTX-file "LoopExample.otx" - for-loop
    <loop id="loop2" name="myForLoop">
      <specification>Loop repeats an action 10 times
      <realisation>
        <configuration id="loop2config">
          <specification>Start at 1, end at 10, counter variable is i/specification>
<realisation xsi:type="ForLoop">
            <counter xsi:type="IntegerVariable" name="i" />
            <start xsi:type="IntegerLiteral" value="1" />
            <end xsi:type="IntegerLiteral" value="10" />
          </realisation>
        </configuration>
        <flow>
          <action id="a3">
            <specification>Shows the iteration number i/specification>
             <realisation xsi:type="hmi:ConfirmDialog" messageType="INFO">
              <hmi:message xsi:type="ToString" >
                <term xsi:type="IntegerValue" valueOf="i"/>
              </hmi:message>
            </realisation>
          </action>
        </flow>
      </realisation>
    </loop>
```

EXAMPLE 3 Sample of OTX-file "LoopExample.otx" - for-each-loop

```
<loop id="loop3" name="myForEachLoop">
  <specification>Loop iterates over all items of list L and shows them
  <realisation>
    <configuration id="loop3config">
      <specification>Collection is L, locator variable is index/specification>
      <realisation xsi:type="ForEachLoop">
  <locator xsi:type="IntegerVariable" name="index" />
        <collection xsi:type="ListValue" valueOf="L" />
      </realisation>
    </configuration>
    <flow>
      <action id="a4">
        <specification>Show the value of current List item by using the iterator/specification>
        <realisation xsi:type="hmi:ConfirmDialog" messageType="INFO">
          <hmi:message xsi:type="StringValue"</pre>
            valueOf="L">
            <path>
              <stepByIndex xsi:type="IntegerValue" valueOf="index" />
            </path>
          </hmi:message>
        </realisation>
      </action>
    </flow>
  </realisation>
</loop>
```

7.13.4.4 Branch node

7.13.4.4.1 Description

For conditional execution of flows, Branch nodes are used. With a Branch node, a series of one or more condition/flow pairs can be defined. The conditions are evaluated one after the other, in the order of appearance in the document. The flow of the first true condition found will be executed. If no condition holds, an optional unconditional flow will be executed, if given. The Branch construct is commonly referred to as "if..elseif..else"-statement.

7.13.4.4.2 Syntax

Figure 31 shows the syntax of the **Branch** node type.

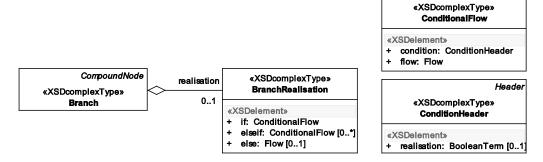


Figure 31 — Data model view: Branch

7.13.4.4.3 Semantics

Branch is a CompoundNode which is a Node which is NamedAndSpecified. The semantics of all derived properties are described in 7.13.2. Only the specific semantic properties of Branch are described here.

— <realisation> : BranchRealisation [0..1]

Contains one <if> element followed by an optional list of <elseif> elements and an optional <else> element:

— <if>: ConditionalFlow [1]

This is the only mandatory part of the Branch node. At runtime, its <condition> shall always be the first to be tested, prior to any <elseif> conditions. If the condition holds, its <flow> shall be executed. Otherwise, any trailing <elseif> or <else> elements shall be processed.

— <condition> : ConditionHeader [1]

The <realisation> of the element is a BooleanTerm which represents the test to be carried out prior to flow execution. For additional properties from the Header base type, see 7.13.4.9.

NOTE In graphical representation, the condition header should be shown by a "diamond" shape.

- <flow> : Flow [1]

The flow to be carried out when the condition holds.

— <elseif> : ConditionalFlow [0..*]

If there is more than one conditional flow to be defined, a list of <elseif> elements shall be used.

At runtime, the <condition> of each <elseif> is tested one by one, after the <if> part has been processed. The <flow> of the first <elseif> with a true condition shall be executed. Further semantics are identical to the <if> element (see above).

```
- <else> : Flow [0..1]
```

If none of the <if> or <elseif> elements could be executed, the <else> flow shall apply. In cases where no <else> exists, the whole <branch> node is skipped.

Figure 32 shows an activity diagram describing the runtime behaviour of a Branch.

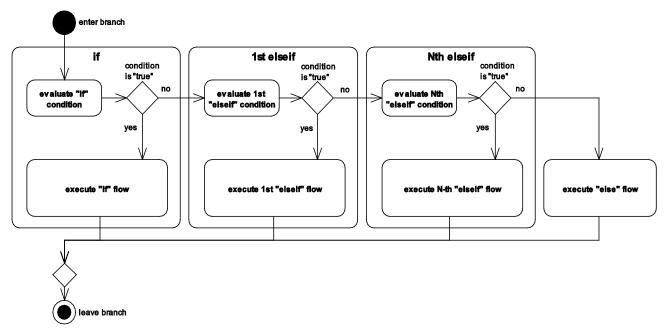


Figure 32 — Behavioural description: Branch

7.13.4.4.4 Example

The example below shows a simple Branch node.

EXAMPLE Sample of OTX-file "BranchExample.otx"

```
<branch id="branch1">
 <specification>if-elseif-else branch/specification>
  <realisation>
     <condition id="ifcond">
       <specification>Unreachable flow (condition always false)
       <realisation xsi:type="BooleanLiteral" value="false" />
     </condition>
     <flow>
       <action id="a1" />
     </flow>
   </if>
   <elseif>
     <condition id="elseiflcond">
       <specification>unspecified elseif condition/specification>
     </condition>
     <flow>
       <action id="a2" />
     </flow>
   </elseif>
   <else>
     <action id="a3" />
   </else>
 </realisation>
</branch>
```

7.13.4.5 Parallel node

7.13.4.5.1 **Description**

A parallel node consists of two or more flows (lanes) that shall be executed simultaneously and synchronouly.

7.13.4.5.2 Syntax

Figure 33 shows the syntax of the Parallel node type.




Figure 33 — Data model view: Parallel

7.13.4.5.3 Semantics

Parallel is a CompoundNode which is a Node which is NamedAndSpecified. The semantics of all derived properties are described in 7.13.2. Only the specific semantic properties of Parallel are described here.

— <realisation> : ParallelRealisation [0..1]

Contains at least two <lane> elements. All given lanes shall be executed in parallel.

— <lane> : Flow [1..*]

Every lane is a flow of nodes. See 7.16.9 for a detailed description of the Flow type.

Associated checker rules:

Core_Chk015 – correct nesting of Parallel nodes

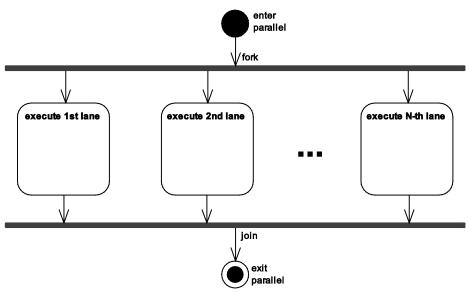


Figure 34 — Behavioural description: Parallel

ISO 13209-2:2012(E)

Figure 34 shows an activity diagram describing the runtime behaviour of a Parallel node. The lanes after the fork shall be executed simultaneously. Since the Parallel node's normal runtime behaviour shall be synchronized, a Parallel node shall not complete until all of its lanes have completed.

CAUTION — The relative timing of node execution in different lanes is not determined — race conditions may occur. For that reason one lane should not rely on the execution of any other lane in the Parallel node. In order to gain thread safety, authors should use MutexGroup nodes (see 7.13.4.6).

There are several conditions which induce special completion rules for the Parallel node. The rules shall be applied when a Return node, a TerminateLanes node or an exception occurs in the lanes.

— TerminateLanes node:

This special end node induces a special behaviour: If a **TerminateLanes** node is executed in one of the lanes, all other lanes are signalled to complete prematurely.

IMPORTANT — On receiving a premature completion signal, all lanes shall complete immediately after completion of the last atomic node, MutexGroup or finally block (if any). Atomic nodes are Action nodes with an atomic ActionRealisation as well as the end nodes Return, Break, Continue, TerminateLanes and Throw. Since there is no completion timeout defined for atomic nodes, finally blocks or MutexGroup nodes, lane completion is delayed no matter how long the node takes to complete. This avoids producing undefined states and implies possibilities of deadlocks. An OTX author is responsible for avoiding deadlock situations.

— Return node:

If a Return node is executed in one of the lanes, the lane shall complete, but the jump induced by the Return node shall be delayed until all other lanes complete. After this, the Procedure completes.

— Throw of an unhandled exception:

If a node in one of the lanes throws an exception which is **not** handled in that lane, the lane shall complete, but the throw is delayed until all other lanes have completed. After this, the exception is thrown upwards. If more than one exception was delayed, the **first** thrown exception shall be thrown upwards and the others shall be discarded.

Concerning concurrency issues which might occur on multicore systems, the following rules apply:

- When there are two or more delayed exceptions which occurred simultaneously (same timestamp), it is not specified which exception will be thrown upwards. The behaviour depends on the specific OTX runtime implementation.
- When there is a delayed exception and a delayed return which occurred simultaneously (same timestamp), the behaviour is unspecified – it depends on the specific OTX runtime implementation whether an exception is thrown upwards or the Procedure completes.

7.13.4.5.4 Example

The example below shows a simple parallel node with three lanes. The lanes contain branches, loops and actions to be carried out in parallel. It also contains a **TerminateLanes** node (other nodes in the lanes are not further specified for this example).

EXAMPLE Sample of OTX-file "ParallelExample.otx"

```
<parallel id="parallel1">
  <specification>Demonstration of three parallel lanes/specification>
  <realisation>
    <lane>
      <action id="a1"/>
      <branch id="b1">
        <realisation>
          <if>
            <condition id="b1c1"/>
            <flow>
              <terminateLanes id="t1"/>
            </flow>
          </if>
        </realisation>
      </branch>
    </lane>
    <lane>
      <action id="a2"/>
      <loop id="11" name="MyLoop"/>
    </lane>
      <action id="a3"/>
      <action id="a4"/>
      <action id="a5"/>
    </lane>
  </realisation>
</parallel>
```

7.13.4.6 MutexGroup node

7.13.4.6.1 **Description**

The MutexGroup node is designed for resolving concurrency issues which might occur within the scope of Parallel nodes, as specified in 7.13.4.5. Syntactically, the MutexGroup node has similarities to the Group node because it can be used to wrap a sequence of nodes together, but beyond that it has special semantics concerning parallel execution, as specified below.

7.13.4.6.2 Syntax

Figure 35 shows the syntax of the MutexGroup node type.




Figure 35 — Data model view: MutexGroup

7.13.4.6.3 Semantics

MutexGroup is a CompoundNode which is a Node which is NamedAndSpecified. The semantics of all derived properties are described in 7.13.2. Only the specific properties of the MutexGroup type are described here, with the following semantics:

```
— <realisation> : Flow [0..1]
```

This optional element is the counterpart to the <specification> element described for the Node type.
It is a Flow of nodes (cf. 7.16.9) which shall be executed one by one in the order of appearance. The whole Flow shall be thread safe as it is part of the MutexGroup.

In multi-threaded environments, more than one process may try to access the same variable(s). This can cause serious concurrency issues and has to be dealt with properly. Consider concurrency situation shown to the left of Figure 36:

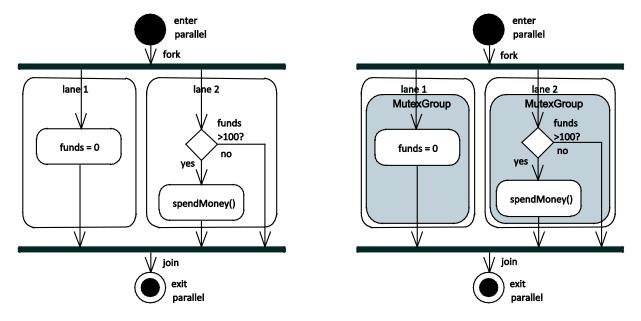


Figure 36 — Behavioural description: MutexGroup

In the above example, both lanes try to access the variable "funds". The condition in lane 2 aims to make sure money is only spent if there are enough funds available. In lane 1, "funds" changes its value to 0. In parallel execution this change might happen after the condition "funds > 100?" is checked in lane 2 but before "spendMoney()" is executed. In this case the result is unexpected. At the time the procedure is called, the value is not greater than 100 anymore even though this value was checked. The condition for the procedure call is not valid and the procedure should not be called.

In general, parts of code where multiple threads try to access the same variable(s) are called *critical sections*. By only allowing one thread at a time to enter a critical section, access is effectively reduced to one thread at a time – other threads have to wait for their turn.

The OTX MutexGroup node is shown to the right of Figure 36. It allows wrapping critical sections so that access happens in a controlled manner (as it is mutually exclusive). Since only one MutexGroup shall be executed at a time, variable access in the critical sections becomes thread safe.

Entry to the critical section shall be controlled by one internal, global object which is not specifically mentioned in OTX. The node closely resembles the synchronized block as specified by §14.19 of The JavaTM Language Specification [1].

7.13.4.6.4 Example

The example below shows a specification-level OTX snippet which demonstrates the concurrency situation discussed above (cf. Figure 36).

EXAMPLE Sample of OTX-file "MutexGroupExample.otx"

```
<parallel id="p1">
  <specification>Controlled concurrency</specification>
  <realisation>
   <lame> <!-- left lane -->
      <mutex id="m2">
        <specification>Critical section/specification>
        <realisation>
          <action id="a1">
            <specification>funds = 0</specification>
           <!-- Implementation goes here ---
          </action>
        </realisation>
      </mutex>
    </lane>
   <lane> <!-- right lane -->
      <mutex id="m2">
        <specification>Critical section/specification>
        <realisation>
          <branch id="b1">
            <specification>Spend money if funds are greater 100</specification>
            <realisation>
              <if>
                <condition id="b1c1">
                 <specification>Condition: funds greater 100?</specification>
                  <!-- Implementation goes here -->
                </condition>
                <flow>
                  <action id="call1">
                    <specification>Call procedure `spendMoney'</specification>
                        Implementation goes here -->
                  </action>
                </flow>
              </if>
            </realisation>
          </branch>
        </realisation>
      </mutex>
   </lane>
 </realisation>
</parallel>
```

7.13.4.7 Handler node

7.13.4.7.1 Description

The Handler node is designed for monitoring sections of a procedure for unexpected behaviour (exceptions). If an exception was thrown in the monitored section, it can be treated by so called catch blocks.

7.13.4.7.2 Syntax

Figure 37 shows the syntax of the complex type Handler.

The <realisation> element of Handler has a special design: In addition to the mandatory <try> flow, it forces authors to implement

- either a single but mandatory <finally> flow or
- a list of at least one <catch> flow followed by an optional <finally> flow

Like this, it is guaranteed that there is at the least a <finally> when no <catch> is given - but if there are <catch> flows, <finally> becomes optional.

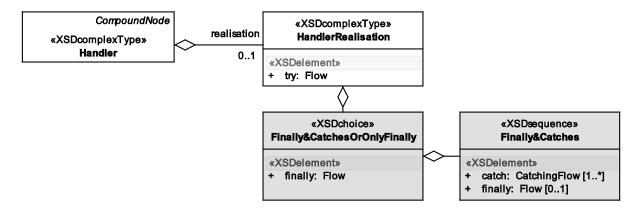


Figure 37 — Data model view: Handler

7.13.4.7.3 Semantics

Handler is a CompoundNode which is itself a Node which is NamedAndSpecified. The semantics of all derived properties are described in 7.13.2. Only specific semantic properties of Handler are described here.

A <handler> node contains a so called <try> flow accompanied by a list of <catch> flows for exception treatment and/or a <finally> flow. The <handler> node monitors the <try> flow for exceptions:

When an exception is raised in the monitored <try> flow, it completes abruptly. If there is a <catch> flow for treating the kind of exception that was raised, control is passed to that <catch> flow. After <catch> execution, node execution will resume right after the <handler> node (if the catch execution completes normally). Otherwise, if there is no <catch> for the exception raised, the exception is passed upwards to an outer <handler> that shall treat the exception, and so on. If the exception is not treated by outer handlers either, the exception is passed to the runtime system itself (out of OTX scope). If there is a <finally> flow, it will always be executed at the end, disregarding if there was any exception or not or if a catch flow has thrown also or not.

IMPORTANT — The full runtime behaviour of the <handler> node is even more complex than described above. Since the semantics are equivalent to the semantics of the try statement in the Java language, the specification given by §14.20 of *The Java™ Language Specification*^[1] is indispensable for full comprehension of the <handler> node.

Handler has the following properties:

<realisation> : HandlerRealisation [0..1]

This optional element is the machine-readable counterpart to the <specification> element described for the Node type. It is a container for a <try> flow, <catch> flows and a <finally> flow:

- <try> : Flow [1]

Represents the flow that is monitored by the Handler. Potentially thrown exceptions may be treated by <catch> flows. Any occurring exception in this flow will cause it to complete abruptly.

- <catch> : CatchingFlow [1..*]

When an exception is thrown in the <try> block, the <catch> flows of a Handler are analyzed one by one in order of appearance in the OTX document. The first <catch> with a matching exception type will be executed. If there is no matching <catch>, control is passed to the next outer handler (after executing the <finally> flow, if given). Refer to 7.13.4.8 for a detail description of CatchingFlow.

Associated checker rules:

- Core_Chk016 no redundant exception catches
- <finally> : Flow [0..1]

If existing, this flow will always be executed at the end of the <handler>. It will also be executed, if there is no <catch> treating the type of exception, or if the <catch> flow also completed abruptly.

7.13.4.7.4 Example

The example below shows the Handler node. In its <try> flow, an exception is thrown explicitly which is caught by a <catch> flow. Also refer to 7.13.5.5 for an overview of the Throw node type.

EXAMPLE Sample of OTX-file "HandlerExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="18"</pre>
 name="HandlerExample"
 package="org.iso.otx.examples"
version="1.0"
 timestamp="2009-10-20T14:40:10"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:hmi="http://iso.org/OTX/1.0.0/HMI">
 cedures>
    cprocedure name="main" visibility="PUBLIC" id="18-p1">
     <realisation>
        <declarations>
        <variable name="userExc" id="18-d1">
  <realisation>
             <dataType xsi:type="UserException" />
           </realisation>
         </variable>
        d/declarations>
          <exception xsi:type="UserException" />
        </throws>
         <handler id="handler1">
        <flow>
           <specification>Handler with a finally and a catch/specification>
            <realisation>
             <try>
               <throw id="throw1">
                 <specification>Throws an exception configured by the author/specification>
                 <realisation xsi:type="UserExceptionCreate">
                   <qualifier xsi:type="StringLiteral" value="MyManualException" />
                   <text xsi:type="StringLiteral"
                     value="This is an exception thrown without reason!" />
                 </realisation>
               </throw>
              </try>
             <catch>
                <exception id="exc1">
                 <specification>Catch UserExceptions/specification>
                 <realisation>
                   <type xsi:type="UserException" />
                   <handle name="userExc" />
                 </realisation>
                </exception>
                <flow>
                 <action id="a3">
                   <specification>Show the exception text/specification>
                    <realisation xsi:type="hmi:MessageDialog">
                      <hmi:message xsi:type="GetExceptionText">
    <exception xsi:type="ExceptionVariable" name="userExc" />
                      </hmi:message>
                     <hmi:messageType xsi:type="IntegerLiteral"</pre>
                       value="1" />
                   </realisation>
                 </action>
               </flow>
             </catch>
             <finally>
               <action id="finalAction" />
             </finally>
           </realisation>
         </handler>
        </flow>
      </realisation>
   </procedure>
 </procedures>
</otx>
```

7.13.4.8 CatchingFlow

7.13.4.8.1 Description

The CatchingFlow type bundles information about a to-be-caught Exception to a Flow that handles it. The flow shall only be executed if there was an exception of the right type thrown in the enclosing exception Handler, see above.

7.13.4.8.2 Syntax

Figure 38 shows the syntax of the CatchingFlow type.




Figure 38 — Data model view: CatchingFlow

7.13.4.8.3 Semantics

CatchingFlow has the following semantic properties:

— <exception> : CatchHeader [1]

Represents the catch header which aggregates information about the exception <type> and the <handle> to which a caught exception shall be assigned to (plus the derived properties of the Header base type, see 7.13.4.9).

— <type> : Exception [1]

Allows choosing one out of the list of all Exception types (by using the xsi:type attribute). The base type Exception may be chosen here as well: In this case, any kind of exception is caught by the CatchingFlow.

The <flow> of the CatchingFlow shall only be executed if the type of the thrown exception matches (or is a subtype of) the type given here.

If an <init> sub-element ocurrs here, it shall be ignored (cf. UserException, 7.16.7.3.8)

Refer to 7.16.7.3.8 for a definition of Core Exception types.

Associated checker rules:

Core_Chk057 – no use of init in catch header exception type definition

— <handle> : ExceptionVariable [0..1]

If the associated <flow> element needs to access the exception object itself, the optional <handle> element allows assigning the object to an Exception type variable.

Associated checker rules:

- Core_Chk019 type-safe exception catches
- Core_Chk053 no dangling OtxLink associations

ISO 13209-2:2012(E)

<flow> : Flow [1]

The flow shall be carried out when the exception stated by the <exception> element has been caught (see 7.16.9).

7.13.4.8.4 Example

Refer to the example given in 7.13.4.7.4.

7.13.4.9 Header type

7.13.4.9.1 Description

The compound nodes Loop, Branch and Handler use the Header type as a container for heading information like loop conditions, the if- or else-if-case conditions in a branch or the exception indication in catch blocks of a handler. In graphical representations of OTX-sequences, this information should be displayed in distinct graphical shapes, like e.g. a "diamond" for displaying conditions, etc.

The abstract Header type describes the common features used by all of its subtypes, namely LoopConfigurationHeader, ConditionHeader and CatchHeader.

7.13.4.9.2 Syntax

Figure 39 shows the syntax of the **Header** type.




Figure 39 — Data model view: Header

7.13.4.9.3 Semantics

With respect to graphical representation, headers play a similar role as nodes: They can be displayed by graphical shapes, they can be specified or/and realised, floating comments may point to them and they may carry a name. The only difference to the abstract Node type is the missing disabled attribute, which does not make sense for headers.

The properties of the abstract **Header** type have the following semantics:

- id : OtxId [1] (derived from NamedAndSpecified, see 7.16.4) Semantics are identical to the **Node** semantics, see 7.13.2.
- name: OtxName [0..1] (derived from NamedAndSpecified, see 7.16.4) Semantics are identical to the **Node** semantics, see 7.13.2.
- <metaData> : MetaData [0..1] (derived from NamedAndSpecified, see 7.16.4) Semantics are identical to the **Node** semantics, see 7.13.2.
- <specification> : xsd:string [0..1] (derived from NamedAndSpecified, See 7.16.4) Semantics are identical to the **Node** semantics, see 7.13.2.

7.13.4.9.4 Example

Below is an example of two different uses of the Header type: As a specification stage loop condition (the <configuration> element is of Header type) and as a branches if-case condition (the <condition> element is of Header type).

EXAMPLE Sample of OTX-file "HeaderExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="19"</pre>
 name="HeaderExample"
 package="org.iso.otx.examples"
version="1.0"
 timestamp="2009-10-20T14:40:10"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
   <specification>Demonstration of a loop</specification>
     <realisation>
      <flow>
        <lpre><loop id="loop1" name="myLoop">
          <realisation>
           <configuration id="looplcondl">
             <specification>unspecified loop condition/specification>
           </configuration>
          </realisation>
        </loop>
        <branch id="b1">
          <realisation>
             <condition id="blcond1">
           <if>
               <specification>This is always true
               <realisation xsi:type="BooleanLiteral"</pre>
                value="true" />
            </condition>
             <flow />
           </if>
           <else>
             <action id="a1" />
            </else>
          </realisation>
        </branch>
      </flow>
     </realisation>
   </procedure>
 </procedures>
</otx>
```

7.13.5 End Nodes

7.13.5.1 Overview

Reconsider 7.16.9 concerning the behaviour of flows. After flow processing has executed the last node of a flow, control is passed to the next-in-row node in the outer flow. If there is no more outer flow – this is the case when the end of the procedure level flow is reached – procedure execution ends.

This is the standard behaviour for implicit flow ends. By contrast, the explicit **EndNode** types described in the following clauses enforce a different end-of-flow behaviour.

7.13.5.2 Return node

7.13.5.2.1 **Description**

A Return node shall complete the execution of a procedure immediately. Control shall be passed back to the caller. Return nodes are allowed at any nesting depth. Return is a controlled jump with a well-defined jump target, namely the end of the procedure. Compare this to the structured programming paradigm in 6.3.

7.13.5.2.2 Syntax

Figure 40 shows the syntax of the Return node type.



Figure 40 — Data model view: Return

7.13.5.2.3 Semantics

Return is an EndNode which is a Node which is NamedAndSpecified. The semantics of all derived properties are described in 7.13.2. Only the specific semantic properties of Return are described here.

IMPORTANT — For the Parallel node, special semantics apply when Return is executed in parallel lanes. For details, see 7.13.4.5 which is indispensable for the comprehension of the correct behaviour of Return in Parallel.

The activity diagram in Figure 41 clarifies the semantics. It shows a procedure flow which consists out of a Branch and another node labelled "last node in procedure". The if-flow in the branch contains a node "node" followed by a Return node. There is no default case.

- Without the explicit Return node, "last node in procedure" would always be executed after branch execution, since control would pass to the next node in the outer procedure level flow, independent of the truth value of the if-condition.
- With the explicit Return node, procedure execution ends immediately and "last node in procedure" is bypassed if the condition is true.

A corresponding example OTX document is given below.

This ability of the Return node is helpful in situations where the procedure execution shall end prematurely because certain circumstances are met.

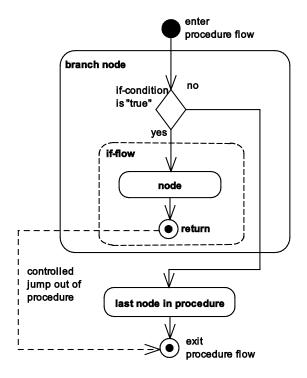


Figure 41 — Behavioural description: Return

7.13.5.2.4 Example

EXAMPLE Sample of OTX-file "ReturnExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="20"</pre>
 name="ReturnExample"
 package="org.iso.otx.examples"
version="1.0"
  timestamp="2009-10-20T14:40:10">
  cedures>
    cedure name="main" visibility="PUBLIC" id="20-p1">
      <realisation>
        <flow>
          <branch id="branch1">
            <specification>Branch with a return</specification>
            <realisation>
              <if>
                <condition id="cond1">
                  <specification>Cause for early procedure completion/specification>
                </condition>
                <flow>
                 </return>
                </flow>
              </if>
            </realisation>
          </branch>
          <action id="a2">
            <specification>Last node in procedure</specification>
          </action>
        </flow>
      </realisation>
    </procedure>
  </procedures>
</otx>
```

7.13.5.3 Continue node

7.13.5.3.1 **Description**

A Continue node completes execution of a Loop flow immediately and initiates the next iteration, after loop condition evaluation. Continue shall be used only within Loop nodes, at any nesting depth. Continue is a controlled jump with a well-defined jump target, namely the first node of the Loop flow. Compare this to the structured programming paradigm explained in 6.3.

7.13.5.3.2 Syntax

Figure 42 shows the syntax of the Continue node type.




Figure 42 — Data model view: Continue

7.13.5.3.3 Semantics

Continue is an EndNode which is a Node which is NamedAndSpecified. The semantics of all derived properties are described in 7.13.2. Only the specific semantic properties of Continue are described here.

Figure 43 shows the runtime behaviour of loops with nested Continue nodes. For the sake of brevity the condition test has been left out in the figure. The condition shall always be tested before the first node in the loop flow will be executed.




Figure 43 — Behavioural description: Continue

The properties of Continue have the following semantics:

target : OtxName [0..1]

This attribute specifies which of the outer loops shall be continued. If the attribute is omitted, the default target shall be the innermost loop. Otherwise, the value shall match the name attribute of the targeted loop in the procedure. This is ensured by XML validation. However, XML validation cannot ensure that the

Continue node is in fact nested in the targeted loop. There is a checker rule defined for ensuring this requirement.

Associated checker rules:

Core_Chk020 – correct nesting of Continue node

7.13.5.4 Break node

7.13.5.4.1 **Description**

A Break node forces Loop execution to complete immediately. Control is passed to the next node after the "broken" Loop node. Break shall be used only within Loop nodes, at any nesting depth.

Break is a controlled jump with a well-defined jump target, namely the next node after the Loop. Compare this to the structured programming paradigm explained in 6.3.

7.13.5.4.2 Syntax

Figure 44 shows the syntax of the Break node type.



Figure 44 — Data model view: Break

7.13.5.4.3 Semantics

Break is an EndNode which is a Node which is NamedAndSpecified. The semantics of all derived properties are described in 7.13.2. Only the specific semantic properties of Break are described here.

The properties of Break have the following semantics:

— target : OtxName [0..1]

This attribute names the target Loop node which is forced to complete immediately. If the attribute is omitted, the default target shall be the innermost loop. Otherwise, the value shall match the name attribute of the targeted loop in the procedure. This is ensured by XML validation. However, XML validation cannot ensure that the Break node is in fact nested in the targeted loop. There is a checker rule defined for ensuring this requirement.

Associated checker rules:

Core_Chk021 – correct nesting of Break node

Figure 45 shows the runtime behaviour of loops with nested <code>Break</code> nodes. For the sake of brevity the condition test has been left out in the figure. The condition shall always be tested before the first node in the loop flow will be executed.

No reproduction or networking permitted without license from IHS




Figure 45 — Behavioural description: Break

7.13.5.5 Throw Node

7.13.5.5.1 Description

There are different reasons for exceptions to occur:

Exceptions can be thrown implicitly, e.g. by the execution of an Action node (see 7.13.3) or during evaluation of a Term (see 7.15). For any of such Action nodes and Term types, the potentially thrown exceptions are defined in this part of ISO 13209.

E.g. the Divide term throws an ArithmeticException under well defined conditions. Here, it is not the author who throws the exception explicitly, but it is the evaluation algorithm for Divide which is executed by the runtime system which throws the exception implicitly. The only task left for the author is to define a reaction onto the potentially expected exception by using a <catch> in a Handler node (See 7.13.4.7).

By contrast, the Throw node is a means to throw exceptions explicitly. The author can define exactly when an exception shall be thrown and he may configure the exception by providing textual information describing his user defined exception.

7.13.5.5.2 Syntax

Figure 46 shows the syntax of the **Throw** node type.




Figure 46 — Data model view: Throw

7.13.5.5.3 Semantics

Throw is derived from EndNode which is a Node which is NamedAndSpecified. The semantics of all derived properties are described in 7.13.2. Only the specific semantic properties of Throw are described here.

The properties of **Throw** have the following semantics:

— realisation : ExceptionTerm [0..1]

Specifies an ExceptionTerm that returns the exception object that shall be thrown. This can be either the value of an exception variable of any Exception type, or a newly created UserException.

Associated checker rules:

- Core_Chk017 checked exceptions (1)
- Core_Chk018 checked exceptions (2)

IMPORTANT — Special semantics apply when exceptions are thrown in Parallel lanes. For details see 7.13.4.5 which is indispensable for the comprehension of the correct behaviour of Throw in Parallel.

7.13.5.5.4 Example

An example is provided in the **Handler** specification, see 7.13.4.7.4.

7.13.5.6 TerminateLanes node

7.13.5.6.1 Description

The TerminateLanes end node is exclusively designed for deployment in Parallel node lanes. It allows aborting the execution of all lanes in a Parallel node without having to wait for them to complete normally (for details about the Parallel node, see 7.13.4.5).

7.13.5.6.2 Syntax

Figure 47 shows the syntax of the TerminateLanes node type.



Figure 47 — Data model view: TerminateLanes

7.13.5.6.3 Semantics

TerminateLanes is derived from EndNode which is a Node which is NamedAndSpecified. The semantics of all derived properties are described in 7.13.2. Only the specific semantic properties of TerminateLanes are described here.

When a TerminateLanes node is executed in one of the lanes of a Parallel node, all other lanes are signalled to complete prematurely.

IMPORTANT — Additional semantics for TerminateLanes are specified in 7.13.4.5. These are indispensable for the comprehension of the correct behaviour of TerminateLanes in Parallel.

IMPORTANT — On receiving a premature completion signal, all lanes shall complete immediately after completion of the last atomic node or finally block (if any). Atomic nodes are Action nodes with an atomic ActionRealisation as well as the end nodes Return, Break, Continue, TerminateLanes and Throw. There is no completion timeout defined for atomic nodes, a lane has to wait no matter how long the node takes to complete. This avoids producing undefined states.

Associated checker rules:

Core Chk022 – correct nesting of TerminateLanes node

7.13.5.6.4 Example

An example is provided in the Parallel specification, see 7.13.4.5.

7.14 Actions

7.14.1 Overview

The following describes all ActionRealisation extensions defined in the OTX Core. Those are designed for setting the behaviour of Action nodes, as specified in 7.13.3.

7.14.2 Syntax

The syntax of all ActionRealisation types is shown in the overview of Figure 48.

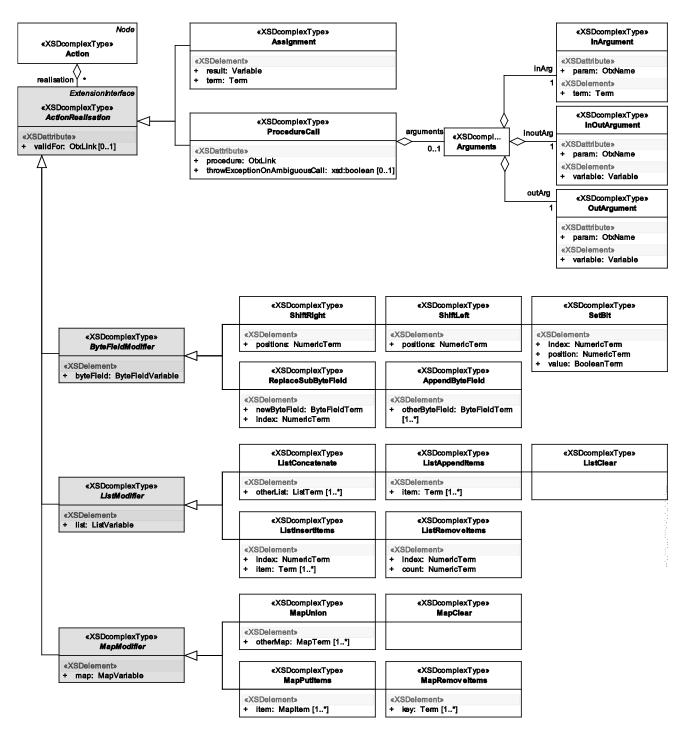


Figure 48 — OTX Core ActionRealisation extensions overview

7.14.3 General considerations

There are several basic considerations concerning all of the action realisation types:

IMPORTANT — The evaluation order of arguments of the actions is not always specified. Therefore, if exceptions occur in more than one argument, the behaviour may differ for different OTX runtime systems.

IMPORTANT — Actions modify the value of one or several variables. In order to guarantee that variable values are always in a defined state, all arguments of an action and all preconditions shall be checked before modifying a variable value.

ISO 13209-2:2012(E)

7.14.4 Assignment

7.14.4.1 Description

The Assignment action assigns a value to a variable.

7.14.4.2 Syntax

The syntax of the ProcedureCall action type is shown in Figure 48.

7.14.4.3 Semantics

Assignment is an ActionRealisation. See 7.13.3 for details on the Action node type.

The properties of Assignment have the following semantics:

<result> : Variable [1]

Describes the variable to which the resulting value of term evaluation shall be assigned (cf. 7.16.6 for the Variable type).

<term> : Term [1]

Describes the value which shall be evaluated out of the given term at runtime. The evaluation semantics of all OTX Core terms are described in 7.15.

Associated checker rules:

Core_Chk023 - type-safe assignments

7.14.5 ProcedureCall

7.14.5.1 Description

This action calls another OTX procedure (directly or indirectly via a signature). If there are input parameters declared by the callee, the ProcedureCall action allows describing a list of corresponding arguments which shall be passed to the callee at runtime. OTX procedures do not have one single dedicated return value instead, they can define a set of output parameters which can (but do not have to) be used by the caller.

Procedure calls can happen in-document or cross-document, the latter means that a procedure defined in one document can call another signature or procedure defined in another, separate document. In the latter case, the visibility information of the called signature or procedure has to be taken into account (cf. 7.7 and 7.9). Procedures or signatures which are not visible to the caller shall not be callable.

7.14.5.2 Syntax

The syntax of the ProcedureCall action type is shown in Figure 48.

7.14.5.3 **Semantics**

ProcedureCall is an ActionRealisation. See 7.13.3 for details on the Action node type.

IMPORTANT — ProcedureCall represents an exemption concerning the atomicity of Action nodes. It is not atomic. If a ProcedureCall is executed in a Parallel lane and a TerminateLanes node is executed in another lane, procedure execution shall be completed prematurely. The same rules as for prematurely completed lanes apply, see 7.13.4.5 for details.

Since ProcedureCall is closely linked to the specification of the Procedure and Signature types and their parameter declarations, compare the following to 7.9 and 7.11.

The properties of ProcedureCall have the following semantics:

— procedure : OtxLink [1]

Contains the fully qualified name of the called procedure or signature. For cross-document calls, a prefix is needed which indicates the external document. The prefix shall be defined by a corresponding <import> element in the <imports> section of the OTX document (see 7.4). For in-document calls, no prefix is needed. See 7.16.3 for details of the OtxLink type.

IMPORTANT — The target of a ProcedureCall shall be visible to the caller. The information given by the visibility attribute of the called signature or procedure shall to be taken into account.

IMPORTANT — If the target of a ProcedureCall is a procedure or signature without <realisation>, the call shall be a NOP. The same applies for the call of a procedure which is not valid with respect to the context. Given arguments of the ProcedureCall action shall stay unchanged.

Associated checker rules:

- Core_Chk053 no dangling OtxLink associations
- Core_Chk028 No Operation (NOP) ProcedureCall
- Core Chk024 correct target for ProcedureCall
- Core_Chk025 procedure signature has at least one implementing procedure
- Core Chk017 checked exceptions (1)
- Core Chk018 checked exceptions (2)

— throwExceptionOnAmbiguousCall : xsd:boolean={false|true} [0..1]

For indirect calls (i.e. the call target is a signature), this attribute determines the behaviour when call ambiguity occurs: If two or more of the implementing procedures are valid, an <code>AmbiguousCallException</code> shall be thrown when <code>throwExceptionOnAmbiguousCall="true"</code> (the default). Otherwise, the first valid procedure in alphabetic order shall be executed (cf. Figure 49 and the following).

— <arguments> : Arguments [0..1]

This simple container element represents the list of arguments for a procedure call. The content-type of Arguments is <xsd:choice> [1..*] which allows an arbitrary-length list of <inArg>, <inoutArg> and <outArg> elements.

Associated checker rules:

Core_Chk029 – correct ProcedureCall arguments

Semantics of the argument types:

— <inArg> : InArgument

Describes an input argument. In the callee, input arguments shall be treated like constants – they can not be written (like for constants, a static checker rule interdicts this). An input argument may be omitted **if and only if** there's an explicit initial value defined for the corresponding parameter. This initial value applies in place of the missing argument. The parameter for the argument is identified by name; the value that shall be passed into that parameter is described by a term:

param : OtxName [1]

The name of the parameter which receives the argument value.

<term> : Term [1]

The term describing the argument value.

NOTE 1 In graphical presentation of the procedure call, the initial value of an in-argument should be shown in an accentuated way to the author. Like this, the author gets feedback about the omitted argument (maybe he did not omit it on purpose).

<inoutArg> : InOutArgument

Describes an input/output argument. Any changes made to the corresponding parameter in the callee shall be visible in the associated argument variable of the caller. An input/output argument may be omitted if and only if there's an explicit initial value defined for the corresponding parameter. In the called procedure, this initial value applies for the parameter in place of the missing argument value.

The callee parameter for the callers argument is identified by name, the callers argument is a variable:

— param : OtxName [1]

The name of the callee parameter which receives the argument value.

- <variable> : Variable [1] (cf. 7.16.6)

Represents the variable which shall be used for the input/output parameter.

IMPORTANT — In parallel execution (Parallel node), any changes made to an input/output argument or parameter will be visible in the caller and the callee at the same time: If the callee changes the value of the parameter, the new value will be available on the outside, in the parallel lanes using the argument variable. Vice versa, if the argument variable value is changed in one of the parallel lanes, the change will be visible in the corresponding parameter of the callee.

NOTE 2 In graphical presentation of the procedure call, the initial value of an inout -argument should be shown in an accentuated way to the author. Like this, the author gets feedback about the omitted argument (maybe he did not omit it on purpose).

<outArg> : OutArgument

Describes where the returned value of an output parameter shall be assigned to. The caller may omit output arguments **freely** (e.g. in the case when there is no interest in one of the returned data).

The callee parameter for the callers argument is identified by name, the callers argument is a variable:

- param : OtxName [1]

The name of the parameter whose returned value is of interest.

- <variable> : Variable [1] (cf. 7.16.6)

Describes the variable to which the returned parameter value shall be written.

IMPORTANT — The writing-back of the returned parameter value into the argument variable shall not happen until termination of the called procedure.

Associated checker rules:

Core Chk030 – input- and in&output-argument omission

Throws:

- InvalidReferenceException
 if one of the inout-arguments is invalid (e.g. an uninitialized variable)
- AmbiguousCallException in case of indirect call via signature and throwExceptionOnAmbiguousCall="true": if two or more implementing procedures are valid at the same time (call target cannot be determined unambiguously)

The OTX procedure call is closely linked to the signature concept (see 6.9). Therefore, the runtime semantics differ depending if a procedure was directly called or if there's an indirection via a signature (cf. Figure 49).

The two major cases to be considered are the following:

- In the direct case, the called procedure will be executed after input argument evaluation and passing, if it is valid with respect to the context. If the procedure is not valid, nothing is executed (NOP).
- In the indirect case (the call target is a signature) a procedure implementing the signature needs to be identified. Since this is a dynamic process (the linking is done at runtime, not at authoring time), an OTX runtime system is required to have a signature-to-procedure-mapping: For a given signature name, the mapping shall contain a list of all procedures implementing that signature. When a signature is called, the runtime system shall infer the procedure from the mapping. The runtime system shall only identify procedures which are visible to the document defining the signature (see visibility attribute for signatures and procedures, 7.7 and 7.9) and which are valid with respect to the context (see validities concept, 6.8). If there is more than one applicable procedure available for the signature and the attribute throwExceptionOnAmbiguousCall is true an exception shall be thrown. Otherwise the first applicable procedure (in ascending alphabetic order) shall be executed. The ordering shall be done after package-, document- and procedure-name. If there is no implementing procedure, nothing will be executed; nonetheless, inout- and out-arguments shall be set to init-values of the corresponding parameters, if init-values are provided in the signature. Otherwise, inout- and out-arguments stay unchanged.

NOTE 3 It is recommended that OTX runtime applications should log cases when ambiguous procedure calls occur. This supports later debugging.

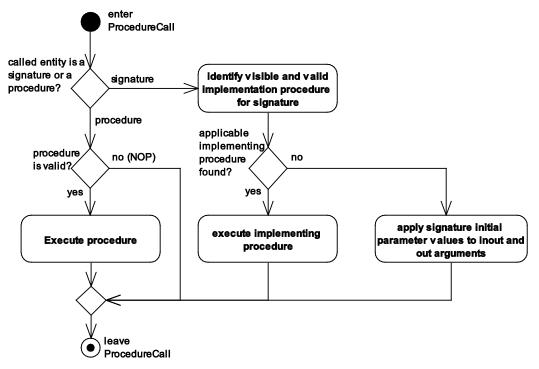


Figure 49 — ProcedureCall Activity

7.14.5.4 Example

Examples 1 and 2 below show two ProcedureCall action nodes:

- A call to a procedure computeDelta which is described in the same document. Note the matching parameter names in the call and in the procedure definition. Two input arguments, a literal integer 5 and a integer variable x are passed to parameters a and b. The output parameter delta is returned into variable x of the caller.
- A call to a procedure via a signature named modifyValue. The external document containing the signature is identified by the prefix sig. The names defined in the document are imported to the local document by an <import> element. Implementation procedures for the signature operate on a single input/output argument x which is passed to the value parameter (no implementation procedures given here).

EXAMPLE 1 Sample of OTX-file "ProcedureCallExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
cotx xmlns="http://iso.org/OTX/1.0.0" name="ProcedureCallExample" package="org.iso.otx.examples"
version="1.0" timestamp="2009-10-20T14:40:10" id="20"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
 cedures>
   cprocedure name="main" visibility="PUBLIC" id="20-p1">
     <specification>Demonstration of variable, constant and parameter declarations
     <realisation>
       <declarations>
         <variable name="x" id="20-d1" />
       </declarations>
       <f<u>low</u>>_
                         <action id="call1">
           <specification>Calls procedure located in same document/specification>
           <realisation xsi:type="ProcedureCall" procedure="computeDelta">
            <arguments>
              <inArg param="a">
                <term xsi:type="IntegerLiteral" value="5" />
              </inArg>
              <inArg param="b">
                <term xsi:type="IntegerValue" valueOf="x" />
              </inArg>
              <outArg param="delta">
                <variable xsi:type="IntegerVariable" name="d" />
              </outArg>
            </arguments>
           </realisation>
        </action>
                         _____
         <action id="call2">
           <specification>Calls procedure by an external signature/specification>
<realisation xsi:type="ProcedureCall" procedure="sig:modifyValue">
            <arguments>
              <inoutArg param="value">
                <variable xsi:type="IntegerVariable" name="x" />
              </inoutArg>
            </arguments>
           </realisation>
       </flow>
     </realisation>
   </procedure>
   computeDelta" id="20-p2">
     <specification>Computes the difference between two values/specification>
     <realisation>
       <parameters>
         <inParam name="a" id="20-d2" />
<inParam name="b" id="20-d3" />
         <outParam name="delta" id="20-d4" />
       </parameters>
       <flow />
     </realisation>
   </procedure>
 </procedures>
</otx>
```

EXAMPLE 2 Sample of OTX-file "SignatureExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" name="SignatureExample" package="org.iso.otx.examples"</pre>
 version="1.0" timestamp="2009-10-20T14:40:10" id="21
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
 <signatures>
    <signature name="modifyValue" id="21-s1">
     <specification>Adds a number to parameter value
      <realisation xsi:type="ProcedureSignature">
        <parameters>
          <inoutParam name="value" id="21-d1">
            <realisation>
              <dataType xsi:type="Integer" />
            </realisation>
          </inoutParam>
       </parameters>
     </realisation>
    </signature>
  </signatures>
</otx>
```

ISO 13209-2:2012(E)

7.14.6 ByteFieldModifiers

7.14.6.1 Overview

ByteFieldModifier actions are designed for modifying bytefields. They shall only operate on ByteField

7.14.6.2 ShiftRight

7.14.6.2.1 Description

Shifts a ByteField right. Bits at the most significant positions will be stuffed by zero.

7.14.6.2.2 Syntax

The syntax of the **shifRight** action type is shown in Figure 48.

7.14.6.2.3 Semantics

ShiftRight is a ByteFieldModifier which is an ActionRealisation. See 7.13.3 for details on the Action node type.

The properties of **shiftRight** have the following semantics:

- <byteField> : ByteFieldVariable [1] (derived from ByteFieldModifier) Identifies a ByteField variable which shall be shifted right.
- <positions> : NumericTerm [1]

Number of positions to shift. Float values shall be truncated.

Throws:

OutOfBoundsException If the numer of positions to shift is a negative number.

IMPORTANT — The ShiftRight operation shall have no effect on an empty ByteField.

7.14.6.3 ShiftLeft

7.14.6.3.1 **Description**

Shifts a ByteField left. Bits at the least significant positions will be stuffed by zero.

7.14.6.3.2 Syntax

The syntax of the **shifleft** action type is shown in Figure 48.

7.14.6.3.3 Semantics

ShiftLeft is a ByteFieldModifier which is an ActionRealisation. See 7.13.3 for details on the Action node type.

The properties of ShiftLeft have the following semantics:

- <byteField> : ByteFieldVariable [1] (derived from ByteFieldModifier)
 Identifies a ByteField variable which shall be shifted left.
- <positions> : NumericTerm [1]

Number of positions to shift. Float values shall be truncated.

Throws:

OutOfBoundsException

If the numer of positions to shift is a negative number.

IMPORTANT — The ShiftLeft operation shall have no effect on an empty ByteField.

7.14.6.4 SetBit

7.14.6.4.1 Description

Sets a bit in a ByteField.

7.14.6.4.2 Syntax

The syntax of the setBit action type is shown in Figure 48.

7.14.6.4.3 Semantics

SetBit is a ByteFieldModifier which is an ActionRealisation. See 7.13.3 for details on the Action node type.

The properties of SetBit have the following semantics:

- <byteField> : ByteFieldVariable [1] (derived from ByteFieldModifier)
 Identifies a ByteField variable in which the bit shall be set.
- <index> : NumericTerm [1]

A term identifying the byte of the ByteField in which in the bit shall be set. Float values shall be truncated.

— <position> : NumericTerm [1]

A term representing the bit position in the byte chosen by <index>. Float values shall be truncated.

— <value> : BooleanTerm [1]

If the Boolean term given by <value> returns true the bit shall be set to 1, otherwise to 0.

Throws:

OutOfBoundsException

If the index is not within the range [0,n-1], where n is the size of the ByteField.

OutOfBoundsException

If the bit position not within the range [0,7] of allowed bit positions.

7.14.6.5 ReplaceSubByteField

7.14.6.5.1 Description

Replaces parts of a ByteField at a given position by overwriting it with another ByteField.

7.14.6.5.2 Syntax

The syntax of the ReplaceSubByteField action type is shown in Figure 48.

7.14.6.5.3 Semantics

ReplaceSubByteField is a ByteFieldModifier which is an ActionRealisation. See 7.13.3 for details on the Action node type.

The properties of ReplaceSubByteField have the following semantics:

- <byteField> : ByteFieldVariable [1] (derived from ByteFieldModifier) Identifies a ByteField variable in which part shall be replaced.
- <newByteField> : ByteFieldTerm [1]

Represents the new ByteField which shall overwrite the original ByteField starting at <index>.

- <index> : NumericTerm [1]

A numeric term representing the byte index in the original ByteField where the replacement shall start. Float values shall be truncated.

IMPORTANT — If the replacement exceeds the byte size of the original ByteField (size of original ByteField < index+size of new ByteField), then the original bytefield will be extended to the minimum size necessary to hold the excess bytes.

Throws:

OutOfBoundsException If the index is not within the range [0,n-1], where n is the size of the ByteField.

7.14.6.6 AppendByteField

7.14.6.6.1 Description

Appends ByteField values to the end of another ByteField.

7.14.6.6.2 Syntax

The syntax of the AppendByteField action type is shown in Figure 48.

7.14.6.6.3 Semantics

AppendByteField is a ByteFieldModifier which is an ActionRealisation. See 7.13.3 for details on the Action node type.

The properties of AppendByteField have the following semantics:

<byteField> : ByteFieldVariable [1] (derived from ByteFieldModifier) Identifies a ByteField variable to which the other ByteField values shall be appended. — <otherByteField> : ByteFieldTerm [1..*]

Represents the ByteField values which shall be appended.

7.14.7 ListModifiers

7.14.7.1 Overview

ListModifier actions are designed for modifying lists. They shall only operate on List variables.

7.14.7.2 ListConcatenate

7.14.7.2.1 Description

This action concatenates lists. The modified list shall contain all original items in the front, plus shallow copies of the items of the other lists in the end. The lists shall be concatenated one after the other (in the order of appearance in the OTX document). The items shall be ordered like they were ordered in the original lists.

7.14.7.2.2 Syntax

The syntax of the ListConcatenate action type is shown in Figure 48.

7.14.7.2.3 Semantics

ListConcatenate is a ListModifier which is an ActionRealisation. See 7.13.3 for details on the Action node type.

The properties of ListConcatenate have the following semantics:

- <list> : ListVariable [1] (derived from ListModifier)

 Identifies a List to which shallow copies of the items of the other lists shall be appended.
- <otherList> : ListTerm [1..*]

Shallow copies of the items in the lists given by <otherList> elements shall be appended to the end of list>. The lists shall be concatenated one after the other (in the order of appearance in the OTX document).

Associated checker rules:

Core_Chk031- type-safe ListConcatenate

7.14.7.3 ListAppendItems

7.14.7.3.1 **Description**

Appends one or more items to the end of a list.

7.14.7.3.2 Syntax

The syntax of the ListAppendItems action type is shown in Figure 48.

ISO 13209-2:2012(E)

7.14.7.3.3 Semantics

ListAppendItems is a ListModifier which is an ActionRealisation. See 7.13.3 for details on the Action node type.

The properties of ListAppendItems have the following semantics:

<list> : ListVariable [1] (derived from ListModifier) Identifies List variable to which the items shall be appended.

<item> : Term [1..*]

Each <item> element given here shall be appended to the end of the list>. Items are represented as terms which shall be evaluated first before the resulting value will be appended. Items shall be appended in the order of appearance in the OTX document.

Associated checker rules:

Core_Chk032 - type-safe ListAppendItems

7.14.7.4 ListInsertItems

7.14.7.4.1 Description

Inserts one ore more items into a list at a defined position.

7.14.7.4.2 Syntax

The syntax of the ListInstertItems action type is shown in Figure 48.

7.14.7.4.3 Semantics

ListInsertItems is a ListModifier which is an ActionRealisation. See 7.13.3 for details on the Action node type.

The properties of ListInsertItems have the following semantics:

<list> : ListVariable [1] (derived from ListModifier) Identifies a List variable into which the items shall be inserted.

<index> : NumericTerm [1]

Describes the position in the list where the items shall be inserted. The first item in a list shall have the index value 0. The items shall be inserted in front of the item that was originally located at the given index. Float values shall be truncated.

<item> : Term [1..*]

Each <item> element given here shall be inserted to the <1ist>. Items are represented as terms which shall be evaluated first before the resulting value will be inserted. Items shall be inserted in the order of appearance in the OTX document.

Associated checker rules:

Core Chk033 – type-safe ListInsertItems

Throws:

— OutOfBoundsException

If the index is not in the list (index<0 or index>length-1 of list).

7.14.7.5 ListRemoveltems

7.14.7.5.1 **Description**

Removes one or more items from a list at a defined position.

7.14.7.5.2 Syntax

The syntax of the ListRemoveItems action type is shown in Figure 48.

7.14.7.5.3 Semantics

ListRemoveItems is a ListModifier which is an ActionRealisation. See 7.13.3 for details on the Action node type. The properties of ListRemoveItems have the following semantics:

— <list> : ListVariable [1] (derived from ListModifier)

Identifies a List variable from which items shall be removed.

— <index> : NumericTerm [1]

Describes the position where item removal starts. The first item in a list shall have the index value 0. Float values shall be truncated.

— <count> : NumericTerm [1]

Describes the amount of items that shall be removed starting from the index. Float values shall be truncated.

Throws:

— OutOfBoundsException

If the index is not in the list (index<0 or index>length-1 of list).

7.14.7.6 ListClear

7.14.7.6.1 **Description**

Removes all items from a List.

7.14.7.6.2 Syntax

The syntax of the ListClear action type is shown in Figure 48.

7.14.7.6.3 Semantics

ListClear is a ListModifier which is an ActionRealisation. See 7.13.3 for details on the Action node type. The properties of ListClear have the following semantics:

— -- ListVariable [1] (derived from ListModifier)

Identifies the List which shall be cleared.

7.14.8 MapModifiers

7.14.8.1 Overview

MapModifier actions are designed for modifying maps. They shall only operate on Map variables.

7.14.8.2 MapUnion

7.14.8.2.1 Description

Unites (merges) maps. The modified map shall contain all original items, plus shallow copies of the items of the other maps.

7.14.8.2.2 Syntax

The syntax of the MapUnion action type is shown in Figure 48.

7.14.8.2.3 Semantics

MapUnion is a MapModifier which is an ActionRealisation. See 7.13.3 for details on the Action node

The properties of MapUnion have the following semantics:

- <map> : MapVariable [1] (derived from MapModifier) Identifies a Map to which the other maps shall be merged.
- <otherMap> : MapTerm [1..*]

Describes the maps which shall be merged to the <map>. To do so, all items of the maps given by the <otherMap> elements shall be shallow copied to <map>.

IMPORTANT — If the modified map already contains the key of a put item, then the corresponding value is overwritten.

Associated checker rules:

Core_Chk042 – type-safe MapUnion

7.14.8.3 MapPutItems

7.14.8.3.1 Description

Puts one ore more map items into a map.

7.14.8.3.2 Syntax

The syntax of the MapPutItems action type is shown in Figure 48.

7.14.8.3.3 Semantics

MapPutItems is a MapModifier which is an ActionRealisation. See 7.13.3 for details on the Action node type.

The properties of MapPutItems have the following semantics:

— <map> : MapVariable [1] (derived from MapModifier)

Identifies a Map variable that shall receive the new items.

- <item> : MapItem [1..*]

Each <item> element given here shall be put into the <map>. The map items are represented as key/value pairs:

— <key> : SimpleTerm [1]

Describes the map item key by which the to-be-put item can be addressed later.

— <value> : Term [1]

Describes the map item value.

IMPORTANT — If the key of a put item already exists in the map, the new item value shall overwrite the original item value. This behaviour is similar to the Assignment action (M1["key"]:="value").

Associated checker rules:

Core_Chk038 – type-safe MapPutItems

7.14.8.4 MapRemoveltems

7.14.8.4.1 **Description**

Removes a set of items from a map.

7.14.8.4.2 Syntax

The syntax of the MapRemoveItems action type is shown in Figure 48.

7.14.8.4.3 Semantics

MapRemoveItems is a MapModifier which is an ActionRealisation. See 7.13.3 for details on the Action node type.

The properties of MapRemoveItems have the following semantics:

— <map> : MapVariable [1] (derived from MapModifier)

Identifies a Map variable from which items shall be removed.

- <key> : Term [1..*]

Each <key> element describes a key of a map item that shall be removed.

Associated checker rules:

— Core_Chk039 – type-safe MapRemoveItems

Throws:

OutOfBoundsException

If a key does not exist in the map.

7.14.8.5 MapClear

7.14.8.5.1 Description

Removes all items from a Map.

7.14.8.5.2 Syntax

The syntax of the MapClear action type is shown in Figure 48.

7.14.8.5.3 Semantics

MapClear is a MapModifier which is an ActionRealisation. See 7.13.3 for details on the Action node type. The properties of MapClear have the following semantics:

-- <map> : MapVariable [1] (derived from MapModifier)
Identifies the Map which shall be cleared.

7.15 Terms

7.15.1 Overview

OTX terms represent syntactic expressions which can be evaluated in order to yield a value. The resulting value of a term can be a simple value (e.g. an integer in the OTX Integer case) or a reference to complex data (e.g. a reference to a list in the OTX List case). Terms are required in various places in the data model, when a value needs to be computed which is then e.g. assigned to a variable, used as an input parameter for a procedure call, or used as the condition truth value in a branch, etc.

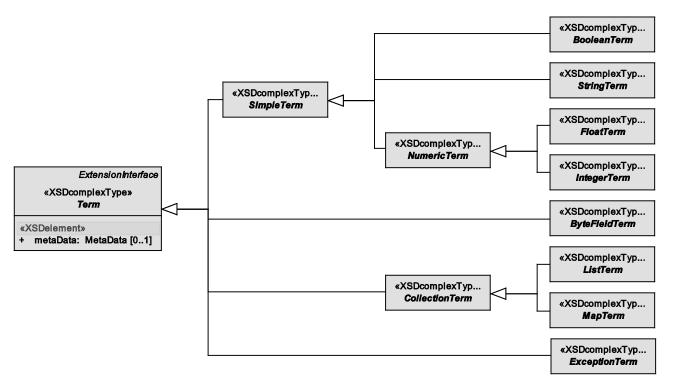


Figure 50 — Data model view: Term hierarchy

As shown in Figure 50, every OTX term is categorized according to its return type. The OTX syntax prescribes a term hierarchy; the leaf term categories (term to the right side of the hierarchy figure) correspond directly to the OTX data types, e.g. every StringTerm will return a String value.

The higher level term categories bundle other term categories — e.g. all terms returning an Integer (IntegerTerm) and terms returning a Float (FloatTerm) are in the category NumericTerm. The higher level categories are used in places where more then one data type is allowed, e.g. in a for-each-loop, the collection over which the loop iterates may be a List or a Map, so the CollectionTerm is used which bundles both MapTerm and ListTerm.

There is also the high-level term SimpleTerm which serves to separate terms returning simple values from terms returning references.

NOTE In OTX applications, simple OTX data types may also be implemented as boxed types if necessary. To OTX sequence authors, this should be transparent.

There are also concrete terms derived directly from a higher level category; this is required for terms where the returned data type is determined according to the term argument data types, e.g. the Add term which is a NumericTerm because it returns an Integer value if all summand arguments are Integer, but it returns a Float value if all summand arguments are Float, etc.

All category term types shown in the figure are abstract types. The following clauses specify all the concrete terms which are derived from the abstract terms, like the NumericTerm Add, the ByteFieldTerm ShiftLeft, etc.

IMPORTANT — OTX terms never have side-effects – this means that the arguments of a term shall not be changed by term evaluation.

IMPORTANT — The abstract OTX Core terms are extensible. This means that OTX extensions may derive new terms from any of the abstract term categories defined in the OTX Core (see Annex D).

Due to the way terms are modelled in OTX, they are appearing in *parsed* form in OTX documents. This means that OTX terms do not have to be parsed anymore for computing the expression tree. As a consequence, OTX does not have to define any operator precedence rules to disambiguate terms (this is only needed in languages with expression strings in combination with infix-notation).

Since all terms are derived from the Term type, they may optionally contain a <metaData> element (as specified in 7.16.5).

7.15.2 Literal terms

7.15.2.1 Description

The simplest types of terms are the *literal* terms. They are a notation for representing a fixed value in the source code of an OTX document.

All OTX Core data types (without the Exception type) provide a literal notation term. In the case of simple data types, a literal term returns the fixed value for simple data types at runtime. For complex data types, a reference to the List or Map object constructed out of the literal is returned.

7.15.2.2 Syntax

Figure 51 shows the syntax of the literal term types.

Figure 51 — Data model view: Literal terms

7.15.2.3 **Semantics**

7.15.2.3.1 Boolean Literal

BooleanLiteral is a BooleanTerm. It returns the Boolean value of the literal.

Its properties have the following semantics:

— value : xsd:boolean [1]

This attribute contains a fixed Boolean value. Refer to [W3C XSD:2004] for an overview of allowed values for xsd:boolean.

7.15.2.3.2 IntegerLiteral

IntegerLiteral is a IntegerTerm. It returns the Integer value of the literal.

Its properties have the following semantics:

— value : xsd:long [1]

This attribute contains a fixed integer value. Refer to [W3C XSD:2004] for an overview of allowed values for xsd:long.

7.15.2.3.3 FloatLiteral

FloatLiteral is a FloatTerm. It shall return the Float value of the literal.

Its properties have the following semantics:

— value : xsd:double [1]

This attribute contains a fixed Boolean value. Refer to [W3C XSD:2004] for an overview of allowed values for xsd:double.

7.15.2.3.4 StringLiteral

StringLiteral is a StringTerm. It shall return the String value of the literal.

Its properties have the following semantics:

— value : xsd:string [1]

This attribute shall contain the fixed string value. Refer to [W3C XSD:2004] for an overview of allowed values for xsd:string.

7.15.2.3.5 ByteFieldLiteral

ByteFieldLiteral is a ByteFieldTerm. It shall return the ByteField value of the literal.

Its properties have the following semantics:

— value : xsd:hexBinary [1]

This attribute shall contain a fixed hexadecimal value or an empty ByteField. Refer to [W3C XSD:2004] for an overview of allowed values for xsd:hexBinary.

7.15.2.3.6 ListLiteral

ListLiteral is a ListTerm. It shall return a new List created out of the literal list items.

By using the ListLiteral term, a list of <item> elements can be described which shall represent a literal notation of each list item. It is possible to describe nested item literal structures like e.g. a map of lists of integers etc. All literal items in a list shall be of the same datatype.

The ListLiteral properties have the following semantics:

— <itemType> : DataType [1]

Specifies the data type of all items in the list, in a flat or recursive way (list of strings, list of floats, list of lists of integers ...). For this definition, the DataType complex type itself is reused recursively. All items in the <items> element have to be of the type stated here.

Associated checker rules:

- Core_Chk034 no use of init in list item type definition
- <items> : ListItems [0..1]

Wrapper element for the literal List items. If <items> is omitted, this shall represent the empty list.

— <item> : Term [1..*]

Each <item> shall represent an item in the list literal. The item literals need to be of the exact (deep) type stated in the <itemType> element (see above).

Associated checker rules:

- Core_Chk036 ListLiteral and ListCreate item types follow item type definition
- Core_Chk037 ListLiteral items are literal terms

7.15.2.3.7 MapLiteral

MapLiteral is a MapTerm. It shall return a new Map created out of the given literal Map items.

A MapLiteral term contains a list of <item> elements which shall represent a literal notation of each key/value pair of the map. It is possible to describe nested item literal structures like e.g. a map of lists of integers etc.

The MapLiteral properties have the following semantics:

— <keyType> : CountableType [1]

Defines the data type for the keys of all key/value pairs in the map. The key type must be a simple, countable type. All keys in the <items> element have to be of the type stated here.

Associated checker rules:

Core_Chk044 – no use of init in map key type definition

— <valueType> : DataType [1]

Defines the data type for all values of the key/value pairs in the map, flat or recursive (map of strings, map of list of floats, map of maps of integers ...). For this definition, the DataType complex type itself is reused recursively. All values in the <items> element have to be of the type stated here.

Associated checker rules:

Core_Chk045 – no use of init in map value type definition

— <items> : MapItems [0..1]

Wrapper element for the literal Map items. If <items> is omitted, this shall represent the empty map.

- <item> : MapItem [1..*]

Represents key/value pair items in the map literal.

— <key> : SimpleTerm [1]

The key literal of the map item literal.

-- <value> : Term [1]

The value literal of the map item literal.

Associated checker rules:

- Core_Chk047 MapLiteral and MapCreate key&value types follow key&value type definition
- Core_Chk048 MapLiteral items are literal terms
- Core_Chk043 unique keys in MapLiteral

7.15.2.3.8 UserExceptionLiteral

UserExceptionLiteral is an **ExceptionTerm**. The term shall be used for creating a customized exception (a **UserException**). The most prominent uses of this term are the initialisation in **UserException** declarations as well as the explicit **Throw** node which allows for the author to customize and throw such an exception.

The properties of UserExceptionLiteral have the following semantics:

— <qualifier> : StringLiteral [1]

This string literal allows for the author to provide a short qualifier for the exception initialisation. A qualifier shall be used to categorize an exception.

```
— <text> : StringTerm [1]
```

This string literal allows for the author to provide a text which characterises the exception's reason.

7.15.2.4 Example

The two examples below show literal terms for all types. The terms are embedded in an Assignment action node here — of course, they can appear in other places like loop conditions or procedure call arguments also.

Example 1 shows the simple data type literal terms, Example 2 the complex type literal terms.

EXAMPLE 1 Sample of OTX-file "TermExamples.otx" – simple type literal terms

```
<action id="a1">
  <realisation xsi:type="Assignment">
    <result xsi:type="BooleanVariable" name="b" />
    <term xsi:type="BooleanLiteral" value="true" />
  </realisation>
</action>
<action id="a2">
   <realisation xsi:type="Assignment">
     <result xsi:type="IntegerVariable" name="i" />
     <term xsi:type="IntegerLiteral" value="42" />
  </realisation>
</action>
<action id="a3">
  <realisation xsi:type="Assignment">
     <result xsi:type="FloatVariable" name="f" />
     <term xsi:type="FloatLiteral" value="42.0815" />
  </realisation>
</action>
<action id="a4">
  <realisation xsi:type="Assignment">
  <result xsi:type="StringVariable" name="s" />
  <term xsi:type="StringLiteral" value="Hello World!!!" />
  </realisation>
</action>
```

EXAMPLE 2 Sample of OTX-file "TermExamples.otx" - complex type literal terms

```
<action id="a5">
  <realisation xsi:type="Assignment">
    <result xsi:type="ByteFieldVariable" name="bf" />
    <term xsi:type="ByteFieldLiteral" value="002A" />
  </realisation>
</action>
<action id="a6">
  <realisation xsi:type="Assignment">
    <result xsi:type="ListVariable" name="myListOfInts" />
<term xsi:type="ListLiteral">
       <itemType xsi:type="Integer"/>
       <items>
         <item xsi:type="IntegerLiteral" value="4" />
<item xsi:type="IntegerLiteral" value="2" />
<item xsi:type="IntegerLiteral" value="1" />
       </items>
    </term>
  </realisation>
</action>
<action id="a7">
  <realisation xsi:type="Assignment">
    <result xsi:type="MapVariable" name="myMapOfIntegers" />
<term xsi:type="MapLiteral">
       <keyType xsi:type="String"/>
       <valueType xsi:type="Integer"/>
       <items>
         <item>
            <key xsi:type="StringLiteral" value="stdNumber"/>
            <value xsi:type="IntegerLiteral" value="13209" />
         <item>
           <key xsi:type="StringLiteral" value="stdDocumentParts"/>
            <value xsi:type="IntegerLiteral" value="3" />
         </item>
       </items>
    </term>
  </realisation>
</action>
```

7.15.3 Dereferencing terms

7.15.3.1 Description

Dereferencing terms are used for reading the value of variables or constants or values which are contained inside of a complex structure like a list or map.

Since the syntax and semantics of all dereferencing terms are similar for all data types (only the data types of the returned data differ), a general description applying to all types is provided hereby.

7.15.3.2 Syntax

Figure 52 shows the syntax of the dereferencing term types.

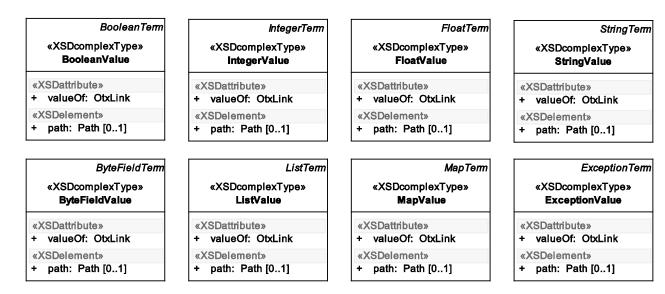


Figure 52 — Data model view: Dereferencing terms

7.15.3.3 Semantics

The properties of all addressing terms have the following semantics:

— valueOf : OtxLink [1]

Contains the name of the variable, constant or parameter where the value is stored. If the value of interest resides deeper within a complex data structure like a List or Map, the <path> element shall be utilized to address the data inside of the structure.

- <path> : Path [0..1]

The element addresses parts of complex structures like List or Map. It is built out of a series of indexand name-steps which allow navigate into the structure:

— <stepByIndex> : IntegerTerm [1]

This step of a <path> shall be used for locations addressed by index. Items in a List and items in a Map with Integer keys shall be addressed in this way.

— <stepByName> : StringTerm [1]

This step of a <path> shall be used for addressing locations by name. Items in a Map with String keys shall be addressed in this way.

Associated checker rules:

- Core_Chk053 no dangling OtxLink associations
- Core_Chk050 type-safe variable and constant usage

Throws:

OutOfBoundsException

Only if a <path> is set: The <path> points to a location which does not exist (like a list index exceeding list length, or a map key which is not part of the map).

InvalidReferenceException

For ExceptionValue only: If the variable value is not valid (This can happen since there is no implicit initialisation for the Exception types).

NOTE In a graphical OTX editor, variable value terms should be displayed in the common notation form used by all major programming languages. E.g. for a BooleanValue term for a variable b, the display should simply show b; a term with a path> pointing to the item at index i in a list L of Booleans, L[i] should be displayed, etc.

7.15.3.4 Example

EXAMPLE Sample of OTX-file "TermExamples.otx" – dereferencing terms

The example above shows a BooleanValue term which is used in a Branch node condition. By the valueOf attribute and the <path> element, the Boolean value at index i is read from myListofBool (a list of Booleans). Note that the <stepByIndex> element in the <path> is a dereferencing term as well (IntegerValue).

7.15.4 Creation terms

7.15.4.1 Description

There are cases when a List, a Map or a UserException have to be created dynamically at runtime. Since literal terms cannot be used for that task (because the item literals are fix in the source code, not dynamic), OTX provides a set of *creation* terms.

7.15.4.2 Syntax

Figure 53 shows the syntax of the creation term types.

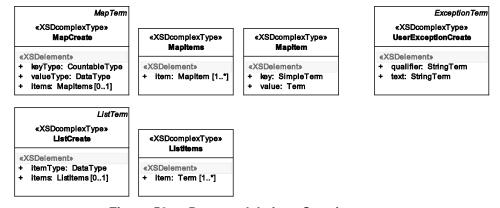


Figure 53 — Data model view: Creation terms

Note that the types ListCreate and MapCreate are of <xsd:choice> [0..1] content-type. For the ListCreateTerm, this means that authors can either use the <otherList> element or a list of <item>

elements, but not both. Also for the MapCreateTerm, either the <otherMap> element or a list of <item> elements can be used, but not both.

7.15.4.3 Semantics

7.15.4.3.1 ListCreate

ListCreate is a ListTerm that allows for creating a new list which is created by appending a given set of items to it (shallow copies). The ListCreateTerm returns the newly created list.

ListCreate is of <xsd:choice> [0..1] content-type. The choices of ListCreate have the following semantics:

— <itemType> : DataType [1]

Specifies the data type of all items in the list, in a flat or recursive way (list of strings, list of floats, list of lists of integers ...). For this definition, the DataType complex type itself is reused recursively. All items in the <items> element have to be of the type stated here.

Associated checker rules:

- Core_Chk034 no use of init in list item type definition
- <items> : ListItems [0..1]

Wrapper element for the List items. If <items> is omitted, this shall represent the empty list.

— <item> : Term [1..*]

Each <item> shall represent an item in the newly created list. The items need to be of the exact (deep) type stated in the <itemType> element (see above).

Associated checker rules:

Core Chk036 – ListLiteral and ListCreate item types follow item type definition

7.15.4.3.2 MapCreate

MapCreate is a MapTerm that allows for creating a new map which is created by putting a given set of key/value items to it (shallow copies). The MapCreateTerm returns the newly created list.

MapCreate is of <xsd:choice> [0..1] content-type. The choices of MapCreate have the following semantics:

- <keyType> : CountableType [1]

Defines the data type for the keys of all key/value pairs in the map. The key type must be a simple, countable type. All keys in the <items> element have to be of the type stated here.

Associated checker rules:

Core_Chk044 - no use of init in map key type definition

— <valueType> : DataType [1]

Defines the data type for all values of the key/value pairs of the newly created map, flat or recursive (map of strings, map of list of floats, map of maps of integers ...). For this definition, the DataType complex type itself is reused recursively. All values in the <items> element have to be of the type stated here.

Associated checker rules:

Core Chk045 – no use of init in map value type definition

<items> : MapItems [0..1]

Wrapper element for the Map items. If <items> is omitted, this shall represent the empty map.

- <item> : MapItem [1..*]

Represents key/value pair items of the newly created map.

- <key> : SimpleTerm [1]

The key of the map item.

— <value> : Term [1]

The value of the map item.

Associated checker rules:

Core_Chk047 – MapLiteral and MapCreate key&value types follow key&value type definition

Throws:

OutOfBoundsException

If two or more items in the literal have the same key.

7.15.4.3.3 UserExceptionCreate

UserExceptionCreate is an ExceptionTerm which is used for creating a customized exception (a UserException). The most prominent use of this term is the explicit Throw node which allows for the author to customize and throw such an exception. The term returns a reference to the newly created exception.

The properties of UserExceptionCreate have the following semantics:

<qualifier> : StringTerm [1]

Allows for the author to provide a short string qualifier for the customized exception. A qualifier may be used to categorize an exception.

<text> : StringTerm [1]

Allows for the author to provide a text which characterises the reason for the exception.

7.15.4.4 Example

The example shows the creation of a List, a Map and a UserException.

The List is created out of to literal integers 10 and 20 and the value of i (known only at runtime). The Map is created out of two literal key/value items. The UserException is created in a Throw node, with a qualifier and a text defined by StringLiteral terms.

EXAMPLE Sample of OTX-file "TermExamples.otx" – creation terms

```
<action id="a8">
 <specification>Creates a list out of three items 10, 20, i </specification>
  -
<realisation xsi:type="Assignment">
   <result xsi:type="ListVariable" name="myNewList" />
<term xsi:type="ListCreate">
     <itemType xsi:type="Integer" />
     <items>
       <item xsi:type="IntegerLiteral" value="10" />
<item xsi:type="IntegerLiteral" value="20" />
       <item xsi:type="IntegerValue" valueOf="i" />
      </items>
   </term>
  </realisation>
</action>
<action id="a9">
  <specification>Creates a map with items "stdNumber":13209 and "stdDocumentParts":3 </specification>
  <realisation xsi:type="Assignment">
   <result xsi:type="MapVariable" name="myNewMap" />
<term xsi:type="MapCreate">
      <keyType xsi:type="String" />
      <valueType xsi:type="Integer" />
      <items>
       <item>
         <key xsi:type="StringLiteral" value="stdNumber"</pre>
          <value xsi:type="IntegerLiteral" value="13209" />
        </item>
       <item>
         <key xsi:type="StringLiteral" value="stdDocumentParts" />
         <value xsi:type="IntegerLiteral" value="3" />
      </items>
  </realisation>
</action>
<throw id="t1">
 </realisation>
```

7.15.5 Conversion terms

7.15.5.1 Description

This category of terms is required to convert values of one data type to another data type. Since conversion depends on the data types and the conversion direction, special rules apply for each conversion term type.

Since the syntax and general semantics of all conversion terms are similar for all data types, a general description applying to all types is provided first, followed by the special rules for each data type conversion.

NOTE Since no use cases for converting to List, Map or Exception types were identified, no conversion terms exist for these types.

7.15.5.2 Syntax

Figure 54 shows the syntax of the conversion term types.




Figure 54 — Data model view: Conversion terms

7.15.5.3 Semantics

Every conversion term describes the value that shall be converted with a <term> element:

- <term> : Term [1]

Represents the value that shall be converted to a value of a particular data type.

IMPORTANT — The conversion terms are only specified herein for Boolean, Integer, Float, String and ByteField arguments. For all other Core OTX data types, the behaviour is unspecified (except for the ToString conversion, see below). OTX applications may provide custom implementations of the conversion terms for other data types. If a conversion term is applied to data of a type for which no implementation exists, a runtime exception shall be thrown.

7.15.5.3.1 ToBoolean

This term shall return the Boolean counterpart of the argument term. The conversion is specified for the following data types (the behaviour for other OTX Core types is unspecified):

Return false if 0, otherwise true. Integer

Return false if 0.0, otherwise true. Float

ByteField Return false if empty, otherwise true.

Return true if the string value is "true", ignoring case, otherwise false. String

Return the copy of the value. Boolean

7.15.5.3.2 Tolnteger

This term shall return the Integer counterpart of the argument term. The conversion is specified for the following data types (the behaviour for other types is unspecified):

- Boolean Return 1 if the value is true, otherwise 0.

Return the integer part (the digits to the left of the decimal point – truncation). Float

ByteField Return the integer value of the ByteField. For interpretation of the ByteField, little endian byte order and n-bit two's complement shall be used, where n is the ByteField's size multiplied by 8 (in other words: the total number of bits in the original ByteField). For finer control of the byte order used for conversions, see DecodeInteger term in 7.15.6.3.1.

Return the integer value of the string. The string shall constitute an integer literal, as String specified by §3.10.1 of The Java™ Language Specification 11, otherwise an exception is thrown.

> IMPORTANT - The reference implementation for this conversion is the Java method java.lang.Integer.valueOf(). There shall be no deviation from this implementation.

Integer Return the copy of the value.

Throws:

OutOfBoundsException

in the ByteField case only: if the ByteField is empty or its size is greater than 8 bytes (in that case, the value space of xsd:long is exceeded, cf. Annex A).

TypeMismatchException

in the string case only: if the string does not constitute an integer value literal.

7.15.5.3.3 ToFloat

This term shall return the **Float** counterpart of the argument term. The conversion is specified for the following data types (the behaviour for other OTX Core types is unspecified):

- Boolean Return 1.0 if the value is true, otherwise 0.0.
- Integer Return a float copy of the integer value.
- ByteField Return the float value of the ByteField (interpretation according to [IEEE 754:2008]). The result shall be stored in double precision, regardless of the argument being a single precision (32-bit) or a double precision (64-bit) ByteField.
- **String** Return the float value of the string. The string shall constitute a float literal, as specified by §3.10.2 of *The Java™ Language Specification* [1], otherwise an exception is thrown.

IMPORTANT — The reference implementation for this conversion is the Java method java.lang.Float.valueOf(). There shall be no deviation from this implementation.

Float Return the copy of the value.

Throws:

- TypeMismatchException in the String case only: if the String does not constitute a float value literal.
- OutOfBoundsException in the ByteField case only: if the ByteField's bit-size is neither 32 bit nor 64 bit (which means that the value cannot be interpreted as single or double precision according to [IEEE 754:2008]).

7.15.5.3.4 ToByteField

This term shall return the **ByteField** counterpart of the argument term. The conversion is specified for the following data types (the behaviour for other types is unspecified):

- Boolean Return 0x01 if the value is true, otherwise 0x00.
- Return the smallest possible two's complement representation of the integer (using the smallest possible number of bytes). Concerning byte order in the resulting ByteField, little endian shall be used. With this, e.g. 127 converts to 1-byte 01111111₂ (0x7F), -127 to 10000001₂ (0x81), whereas 6719 converts to 2-byte 00111111₂ 00011010₂ (0x3F 0x1A), -129 to 01111111₂ 111111111₂ (0x7F 0xFF), and so on. Therefore, the size of the resulting ByteField depends on the input integer's magnitude. For explicit control over integer encoding, the EncodeInteger term specified in 7.15.6.3.2 should be used.
- Float Return the 64-bit double precision encoded value according to [IEEE 754:2008].
- String Return the UTF-8 encoded value.
- ByteField Return the copy of the value.

7.15.5.3.5 ToString

This term shall return the **String** counterpart of the argument term. The conversion is specified for the following data types (the behaviour for other OTX Core types is unspecified):

Boolean Return "true" if the value is true, otherwise "false".

Integer Return the value in decimal string representation.

— Float Return the value in decimal string representation. For an overview about string represen-

tations of floats see §3.10.2 of The Java™ Language Specification [1].

IMPORTANT — The reference implementation for this conversion is the Java method java.lang.Float.toString(). There shall be no deviation from its specification.

— String Return the copy of the value.

ByteField Return the UTF-8 interpretation.

IMPORTANT — Tostring shall not cause a runtime exception (cf. 7.15.5.3). For this, the Tostring conversion shall be custom implemented for all other OTX data types in a way appropriate for the specific data type⁸). A Tostring conversion applied e.g. onto an arbitrary List of Integers should yield a result similar to "{4;12;13}". This allows for e.g. writing debug messages containing serialized complex data during test sequence development.

Throws:

OutOfBoundsException
in the ByteField case only: if the value cannot be interpreted as string in UTF-8 format.

7.15.5.4 Example

The example below shows a two-step conversion in an Assignment action: A float literal containing Pi is converted to an integer which is then converted to a string. The string is assigned to a variable s will be "3" in this example.

EXAMPLE Sample of OTX-file "TermExamples.otx" – conversion terms

7.15.6 Integer conversion terms

7.15.6.1 Description

This category of terms allows converting between Integer and ByteField values. Compared to the generic conversion terms ToInteger(ByteField) and ToByteField(Integer) as described in 7.15.5, integer conversion terms allow controlling the Bytefield size, encoding type for negative integers and byte order which shall be used for this special kind of conversions.

⁸⁾ The conversion term ToString represents an analogy to the Java method java.lang.Object.toString() which is designed to be overridden by new classes (see §4.3.2 of *The Java™ Language Specification*^[1]).

7.15.6.2 Syntax

Figure 55 shows the syntax of the integer conversion term types.




Figure 55 — Data model view: Integer conversion terms

7.15.6.3 **Semantics**

7.15.6.3.1 DecodeInteger

DecodeInteger is an IntegerTerm. It returns the decoded Integer value of the ByteField argument. The term provides control over the byte order which shall be used for decoding as well as the way how the ByteField shall be decoded regarding n-bit unsigned, n-bit signed binary or n-bit two's complement interpretation, where n is the ByteField's size multiplied by 8 (in other words: the total number of bits in the original ByteField).

- encodingType : EncodingType={UNSIGNED|SIGNED-BINARY|TWOS-COMPLEMENT} [1]
 Specifies how the bytes of the ByteField shall be interpreted (after respecting byte order!):
 - UNSIGNED: The ByteField shall be interpreted as an unsigned integer value. With this interpretation, a ByteField of e.g. 1111111102 is decoded as 254.
 - SIGNED-BINARY: The most significant bit in the ByteField shall be interpreted as the sign and the rest as the binary encoded absolute integer value. With this interpretation, a ByteField of e.g. 11111110₂ is decoded as -126.
 - TWOS-COMPLEMENT (default): The ByteField shall be interpreted according to the most widely used encoding called two's complement. With this interpretation, a ByteField of e.g. 111111102 is decoded as -2.
- byteOrder : Endianness={LITTE-ENDIAN|MIXED-ENDIAN|BIG-ENDIAN} [1]

Specifies the byte order which shall be respected prior to decoding the ByteField value. The most widely used byte order LITTLE-ENDIAN is the default.

— <bytes> : ByteFieldTerm [1]

Represents the ByteField value which shall be converted to Integer.

Throws:

— OutOfBoundsException

if the ByteField is empty or the value space of xsd:long is exceeded (cf. Annex A). This happens if the ByteField's size is greater than 8 bytes, or when using UNSIGNED interpretation on an 8 byte ByteField in which the most significant bit is 1.

7.15.6.3.2 EncodeInteger

EncodeInteger is a ByteFieldTerm. It returns a ByteField which contains the encoded value of the original Integer argument. For the encoding, n-bit unsigned, n-bit signed-binary or n-bit two's complement representation of the integer can be chosen, where n shall be chosen out of 8, 16, 32 and 64 bit. The term also provides control over the byte order which shall be used for encoding.

- encodingType : EncodingType={UNSIGNED|SIGNED-BINARY|TWOS-COMPLEMENT} [0..1]
 Specifies how the Integer value shall be encoded (examples using BIG-ENDIAN byte order):
 - UNSIGNED: The Integer shall be written to the ByteField, using all available bits (including the sign-bit). For negative integers, its absolute value shall be encoded. With this encoding, an Integer value of e.g. 129 is encoded as 100000012, and an Integer value of e.g. -129 will also be encoded as 100000012.
 - SIGNED-BINARY: With this encoding, the first bit in the resulting bytes shall mark the sign; the other bits encode the absolute value. According to this, e.g. 129 is encoded as 000000002 100000012, whereas e.g. -129 will be encoded as 100000002 100000012. Two bytes are required in the example, since the sign-bit reduces the value space.
 - TWOS-COMPLEMENT (default): The Integer shall be encoded according to the most widely used encoding called two's complement. With this encoding, an Integer value of e.g. 129 is encoded as 00000000₂ 10000001₂, whereas a negative Integer value of e.g. -129 will be encoded as 11111111₂ 01111111₂. Two bytes are required here, since the sign-bit reduces the value space.
- encodingSize : EncodingSize={8-BIT|16-BIT|32-BIT|64-BIT} [0..1]

Specifies how many bits shall be used for the encoding. This shall be used to restrict the size of the resulting ByteField which can be useful if e.g. only small integers are encoded, or e.g. if it is required that resulting ByteFields always have the same specified size. However, if an encoded integer requires more bits than specified by this attribute, an exception will be raised. Since the OTX Integer datatype is 64 bit, an encoding size of 64-BIT is the default value.

— byteOrder : Endianness={LITTE-ENDIAN|MIXED-ENDIAN|BIG-ENDIAN} [0..1]

Specifies the byte order which shall be used when writing the encoded Integer value into the resulting ByteField. The most widely used byte order LITTLE-ENDIAN is the default.

- <integer> : IntegerTerm [1]

Represents the Integer value which shall be converted to ByteField.

Throws:

OutOfBoundsException

if the number of bits required for encoding the Integer value exceeds the number of bits specified by the encodingSize attribute (overflow).

7.15.6.4 Example

The example below shows two integer conversions: The Integer value -42 is encoded into the ByteField named "bytes", using BIG-ENDIAN byte order and TWOS-COMPLEMENT encoding. After execution of the Assignment action, "bytes" will have a value of 111111111 110101102. The second action converts the ByteField with value 100101012 (0x95) to Integer by using LITTLE-ENDIAN, and UNSIGNED interpretation. After execution, "i" will have a value of 149.

EXAMPLE Sample of OTX-file "TermExamples.otx" – integer conversion terms

```
<action id="a1">
    <specification>Converts a integer value to ByteField/specification>
<realisation xsi:type="Assignment" >
         <result xsi:type="ByteFieldVariable" name="bytes" />
         <term xsi:type="EncodeInteger" byteOrder="BIG-ENDIAN" encodingSize="16-BIT">
           <integer xsi:type="IntegerLiteral" value="-42" />
         </term>
    </realisation>
</action>
<action id="a2">
    <specification>Converts a ByteField value to Integer/specification>
<realisation xsi:type="Assignment" >
         <result xsi:type="IntegerVariable" name="i" />
         <term xsi:type="DecodeInteger" encodingType="UNSIGNED">
           <bytes xsi:type="ByteFieldLiteral" value="95" />
         </term>
    </realisation>
</action>
```

7.15.7 Logic operations

7.15.7.1 Description

The logic operation terms provide the most basic and widely used logical connectives for the Boolean algebra, namely conjunction (LogicAnd), disjunction (LogicOr), exclusive disjunction (LogicXor) and negation (LogicNot).

7.15.7.2 Syntax

Figure 56 shows the syntax of the logic operation term types.




Figure 56 — Data model view: Logic operations

7.15.7.3 **Semantics**

7.15.7.3.1 LogicAnd

LogicAnd is a BooleanTerm which represents the Boolean conjunction. Returns true if and only if the values of all operands are true.

```
— <term> : BooleanTerm [2..*]
```

Represents the list of BooleanTerm operands of the conjunction. Terms shall be evaluated in the order of appearance in the OTX document.

IMPORTANT — Since OTX terms do not have side-effects, the evaluation of LogicAnd operand terms shall complete when the first false operand has been identified; LogicAnd returns false then without evaluating the remaining operand terms. Note that one consequence of this is that exceptions which might have occurred in the remaining operands are bypassed.

NOTE In a graphical representation, LogicAnd should be represented by the operator symbols \land or && (or just and) in infix notation. This is the most common representation form used in mathematical notation and by many programming languages.

7.15.7.3.2 LogicOr

Logicor is a BooleanTerm which represents the Boolean disjunction. Returns true if and only if at least one of the operands is true.

— <term> : BooleanTerm [2..*]

Represents the list of BooleanTerm operands of the disjunction. Terms shall be evaluated in the order of appearance in the OTX document.

NOTE 1 Since OTX terms do not have side-effects, the evaluation of Logicor operand terms should complete when the first true operand has been identified; Logicor returns true then without evaluating the remaining operand terms. This may improve execution speed.

IMPORTANT — Since OTX terms do not have side-effects, the evaluation of LogicOr operand terms shall complete when the first true operand has been identified; LogicOr returns true then without evaluating the remaining operand terms. Note that one consequence of this is that exceptions which might have occurred in the remaining operands are bypassed.

NOTE 2 In graphical representation, LogicOr should be represented by the operator symbols \lor or $| \ | \ |$ (or just or) in infix notation.

7.15.7.3.3 LogicXor

LogicXor is a BooleanTerm which represents the Boolean exclusive disjunction. Returns true if and only if one of the two operands is true, but not both.

— <term> : BooleanTerm [2]

Represents the two BooleanTerm operands of the exclusive disjunction. Terms shall be evaluated in the order of appearance in the OTX document.

NOTE In graphical representation, LogicXor should be represented by the operator symbol * (or just xor) in infix notation.

7.15.7.3.4 LogicNot

LogicNot is a BooleanTerm which represents the Boolean negation. Returns true if and only if the operand is false.

— <term> : BooleanTerm [1]

Represents the BooleanTerm operand of the negation.

NOTE In graphical representation, LogicNot should be represented by the operator symbol ¬ or ! (or just not).

No reproduction or networking permitted without license from IHS

7.15.7.4 Example

The example below shows a branch condition with represents the logical implication $\mathbf{a} \to \mathbf{b}$, which is expressed by its logical equivalent $\mathtt{not}(\mathbf{a} \ \mathtt{or} \ \mathbf{b})$.

EXAMPLE Sample of OTX-file "TermExamples.otx" – logic operation terms

```
<branch id="branch2">
  <realisation>
   <if>
      <condition id="branch2condition">
        <specification>Does imlication "a->b" alias "not(a||b)" hold?</specification>
        <realisation xsi:type="LogicNot">
          <term xsi:type="LogicOr">
            <term xsi:type="BooleanValue" valueOf="a" />
            <term xsi:type="BooleanValue" valueOf="b" />
          </term>
        </realisation>
      </condition>
      <flow>
       <action id="a11" />
      </flow>
    </if>
  </realisation>
</branch>
```

7.15.8 Relational operations

7.15.8.1 Description

The relational operation terms provide the most basic and widely used comparators, namely equality (IsEqual), inequality (IsNotEqual), less-than (IsLess), greater-then (IsGreater), less-then-or-equal (IsLessOrEqual) and greater-then-or-equal (IsGreaterOrEqual).

While equality and inequality can be applied for all kinds of terms, the other comparators shall only be used for simple terms. Before such a simple term comparison can be performed, preparations have to be met depending on the data type of the operands:

- Float or Integer case: Ordinary comparison based on the numerical values of the operands. No preparatory steps to be taken.
- string case: Relations are based on the lexicographical order (also known as alphabetical order) of the string operands. Ordering shall happen according to the Unicode character set [2].
- Boolean case: The convention true is greater than false applies. All other relations are based on this.

IMPORTANT — When an Integer value is compared to a Float value, automatic promotion of the Integer shall be performed. This means that the Integer is automatically cast to Float and then the values are compared.

7.15.8.2 Syntax

Figure 57 shows the syntax of the relational operation term types.

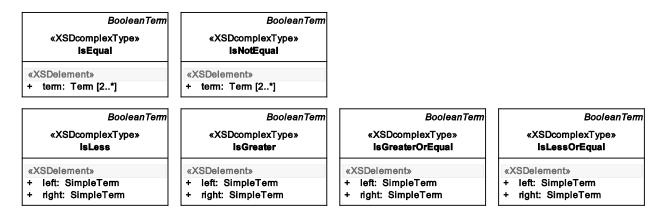


Figure 57 — Data model view: Relational operations

7.15.8.3 **Semantics**

7.15.8.3.1 IsEqual

IsEqual is a BooleanTerm which tests for equality of two or more operands. For SimpleTerm arguments, true is returned if and only if the values of all terms are equal. For terms returning a reference value (e.g. a reference to a List or Map), true is returned if and only if the references returned by all terms are equal.

<term> : Term [2..*]

Represents the operands which shall be tested for equality. Terms shall be evaluated in the order of appearance in the OTX document.

IMPORTANT — Since OTX terms do not have side-effects, the evaluation of IsEqual operand terms shall complete when the first unequal to others operand has been identified; IsEqual returns false then without evaluating the remaining operand terms. Note that one consequence of this is that exceptions which might have occurred in the remaining operands are bypassed.

Associated checker rules:

Core Chk049 – uniform relation operand type

In graphical representation, IsEqual should be represented by the operator symbol = or == (or just equals) NOTE in infix notation.

7.15.8.3.2 IsNotEqual

IsNotEqual is a BooleanTerm which tests for inequality of two or more operands. For SimpleTerm arguments, true is returned if and only if not all of the values of the terms are equal. For terms returning a reference, true is returned if and only if not all of the references returned by the terms are equal.

<term> : Term [2..*]

Represents the operands which shall be tested for equality. Terms shall be evaluated in the order of appearance in the OTX document.

IMPORTANT — Since OTX terms do not have side-effects, the evaluation of IsNotEqual operand terms shall complete when the first unequal to others operand has been identified; IsNotEqual returns true then without evaluating the remaining operand terms. Note that one consequence of this is that exceptions which might have occurred in the remaining operands are bypassed.

Associated checker rules:

— Core_Chk049 – uniform relation operand type

NOTE In graphical representation, IsNotEqual should be represented by the operator symbol != or <> or ≠ in infix notation.

7.15.8.3.3 IsLess

IsLess is a BooleanTerm. Returns true if and only if the <left> value is less than the <right> value.

— <left> : SimpleTerm [1]

Represents the value that has to be less than the <right> value.

— <right> : SimpleTerm [1]

Represents the value that has to be greater than the <left> value.

Associated checker rules:

— Core_Chk049 – uniform relation operand type

NOTE In graphical representation, **Isless** should be represented by the operator symbol < in infix notation.

7.15.8.3.4 IsGreater

IsGreater is a BooleanTerm. Returns true if and only if the <left> value is greater than the <right> value.

— <left> : SimpleTerm [1]

Represents the value that has to be greater than the <right> value.

— <right> : SimpleTerm [1]

Represents the value that has to be less than the <left> value.

Associated checker rules:

Core_Chk049 – uniform relation operand type

NOTE In graphical representation, IsGreater should be represented by the operator symbol > in infix notation.

7.15.8.3.5 IsGreaterOrEqual

IsGreaterOrEqual is a BooleanTerm. Returns true if and only if the <left> value is greater or equal than the <right> value.

— <left> : SimpleTerm [1]

Represents the value that has to be greater or equal than the <right> value.

— <right> : SimpleTerm [1]

Represents the value that has to be less or equal than the <left> value.

Associated checker rules:

Core_Chk049 – uniform relation operand type

NOTE In graphical representation, IsGreaterOrEqual should be represented by the operator symbol \geq or >= in infix notation.

7.15.8.3.6 IsLessOrEqual

IsGreaterOrEqual is a BooleanTerm. Returns true if and only if the <left> value is greater or equal than the <right> value.

- <left> : SimpleTerm [1]

Represents the value that has to be less or equal than the <right> value.

- <right> : SimpleTerm [1]

Represents the value that has to be greater or equal than the <left> value.

Associated checker rules:

Core_Chk049 – uniform relation operand type

NOTE In graphical representation, IslessOrEqual should be represented by the operator symbol \(\le \text{or} <= \text{in infix} \) notation.

7.15.8.4 Example

The Branch node in the example below contains a condition (f<10)&&(f=10) using IsLess and IsEqual relations.

EXAMPLE Sample of OTX-file "TermExamples.otx"

```
<br/>
d="branch3">
  <realisation>
   <if>
     <condition id="branch1condition">
       <specification>Is f less than 10 AND f equals 10 !?</specification>
       <realisation xsi:type="LogicAnd">
         <term xsi:type="IsLess">
          <left xsi:type="FloatValue" valueOf="f" />
          <right xsi:type="IntegerLiteral" value="10" />
         </term>
         <term xsi:type="IsEqual">
          <term xsi:type="FloatValue" valueOf="f" />
           <term xsi:type="IntegerLiteral" value="10" />
         </term>
       </realisation>
     </condition>
     <flow>
       <throw id="t1">
         <text xsi:type="StringLiteral" value="Something went terribly wrong!" />
         </realisation>
       </throw>
     </flow>
   </if>
 </realisation>
</branch>
```

7.15.9 Mathematical operations

7.15.9.1 Description

The mathematical operation terms provide the most basic mathematical operators, namely addition (Add), Subtraction (Subtract), multiplication (Multiply), division (Divide), abs (AbsoluteValue), modulo (Modulo), negation (Negate) and rounding (Round).

7.15.9.2 Syntax

Figure 58 shows the syntax of the mathematical operation term types.

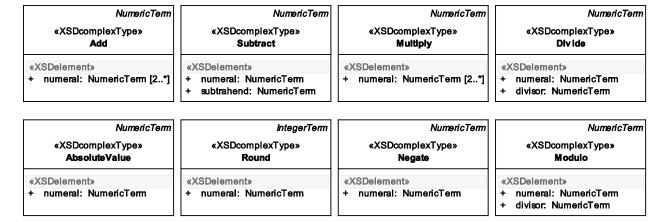


Figure 58 — Data model view: Mathematical operations

7.15.9.3 **Semantics**

7.15.9.3.1 General

The OTX Integer and Float data types have restricted value spaces, as specified in Annex A. Therefore the mathematical operations described in the following may cause overflows or underflows. More specifically an overflow or underflow situation occurs when the mathematically correct result of an operation is outside of the value space of Integer or Float. OTX does not define exceptions for those situations. Overflows and underflows shall be handled in analogy to the specifications given by §4.2 of The JavaTM Language Specification [1].

7.15.9.3.2 Add

Add is a NumericTerm which returns the sum of all its operands.

```
— <numeral> : NumericTerm [2..*]
```

The numeric operands (= summands) of the addition. Terms shall be evaluated in the order of appearance in the OTX document.

IMPORTANT — The actual return data type of the Add term depends on the data types of the operands: If one of the operands is Float, all Integer operands are automatically promoted to Float prior to the operation and the returned value is Float. Otherwise, the returned value is Integer.

NOTE In graphical representation, Add should be represented in infix notation by the operator symbol +.

7.15.9.3.3 Subtract

Subtract is a NumericTerm which returns the numerical difference between the operands.

— <numeral> : NumericTerm [1]

A numeric term which represents the minuend value.

<subtrahend> : NumericTerm [1]

A numeric term which represents the subtrahend value.

IMPORTANT — The actual return data type of the Subtract term depends on the data types of the operands: If one of the operands is Float, all Integer operands are automatically promoted to Float prior to the operation and the returned value is Float. Otherwise, the returned value is Integer.

NOTE In graphical representation, Subtract should be represented in infix notation by the operator symbol -.

7.15.9.3.4 Multiply

Multiply is a NumericTerm which returns the product of the operands.

<numeral> : NumericTerm [2..*]

The numeric term which represents the factor values. Terms shall be evaluated in the order of appearance in the OTX document.

IMPORTANT — The actual return data type of the Multiply term depends on the data types of the operands: If one of the operands is Float, all Integer operands are automatically promoted to Float prior to the operation and then the returned value is Float. Otherwise, the returned value is Integer.

NOTE In graphical representation, Multiply should be represented by the operator symbol ., x or * in infix notation.

7.15.9.3.5 Divide

Divide is a NumericTerm which returns the quotient of two operands.

<numeral> : NumericTerm [1]

A numeric term which represents the dividend value.

<divisor> : NumericTerm [1]

A numeric term which represents the divisor value.

Throws:

ArithmeticException

If both dividend and divisor are Integer and the divisor value is zero.

IMPORTANT — The result of Divide is computed in two different ways, depending on the data types of the operands: If both dividend and divisor are Integer, then the fraction (quotient) is truncated and an Integer result is returned. If dividend or divisor are Float, then a Float fraction is returned.

NOTE In graphical representation, Divide should be represented in infix notation by the operator symbol /.

7.15.9.3.6 Modulo

Modulo is a NumericTerm which returns the remainder of a division. If the dividend value is positive, the returned remainder will be positive. If the dividend value is negative, the returned remainder will be negative.

<numeral> : NumericTerm [1]

A numeric term which represents the dividend value.

— <divisor> : NumericTerm [1]

A numeric term which represents the divisor value.

Throws:

— ArithmeticException

If both dividend and divisor are Integer and the divisor value is zero.

IMPORTANT — The result of Modulo is computed in two different ways, depending on the data types of the operands: If both dividend and divisor are Integer, then the returned remainder is Integer. If dividend or divisor are Float, then a Float remainder is returned. In the Float case, the Java approach shall be applied (see Reference [1], §15.17.3 "Remainder Operator %") which truncates the quotient for the modulo computation. Note that this is NOT the IEEE 754 approach which rounds the quotient (cf. IEEE 754:2008).

NOTE In graphical representation, Modulo should be represented in infix notation by the operator symbol % (or just mod).

7.15.9.3.7 AbsoluteValue

AbsoluteValue is a NumericTerm which returns the value of the operand without regard to its sign.

— <numeral> : NumericTerm [1]

The numeric term whose absolute value shall be returned.

IMPORTANT — The actual return data type of the AbsoluteValue term depends on the data type of the operand: If the operand is Float, then the returned value is Float. Otherwise, the returned value is Integer.

NOTE In graphical representation, AbsoluteValue should be represented by enclosing the operator in | | symbols, e.g. |a|.

7.15.9.3.8 Round

Round is a NumericTerm which returns the rounded integer value of the operand.

— <numeral> : NumericTerm [1]

The numeric term that shall be rounded to the *nearest* integer towards plus infinity.

7.15.9.3.9 Negate

Negate is a NumericTerm which returns the value of the operand with inverted sign.

— <numeral> : NumericTerm [1]

The numeric term that shall be negated.

7.15.9.4 Example

The example below shows mathematical terms in a **Branch** condition $E-m*c^2==0$.

EXAMPLE Sample of OTX-file "TermExamples.otx"

```
<branch id="branch4">
  <realisation>
      <condition id="branch1condition">
        <specification>Is E-m*c^2==0?
         <realisation xsi:type="IsEqual">
           <term xsi:type="Subtract">
             <numeral xsi:type="FloatValue" valueOf="E" />
             <subtrahend xsi:type="Multiply">
               <numeral xsi:type="FloatValue" valueOf="m" />
               <numeral xsi:type="FloatValue" valueOf="constants:c" />
<numeral xsi:type="FloatValue" valueOf="constants:c" />
             </subtrahend>
           </term>
           <term xsi:type="IntegerLiteral" value="0" />
        </realisation>
      </condition>
      <flow>
        <action id="a1">
           <specification>Einstein was right!!!</specification>
      </flow>
    </if>
  </realisation>
</branch>
```

7.15.10 ByteField operations

7.15.10.1 Description

For operating on ByteField data, there is a set of special operations defined in the OTX Core. These are the bitwise logical operations BitwiseAnd, BitwiseOr, BitwiseXor and BitwiseNot which are similar to the Boolean logic operations, and other ByteField related operations ByteFieldGetSize and GetBit.

7.15.10.2 Syntax

Figure 59 shows the syntax of the ByteField operation term types.

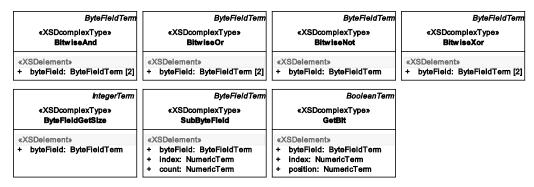


Figure 59 — Data model view: ByteField operations

7.15.10.3 Semantics

7.15.10.3.1 BitwiseAnd

BitwiseAnd is a ByteFieldTerm which operates on individual bits of ByteField values. It returns the bitwise conjunction of the two ByteField operands.

<byteField> : ByteFieldTerm [2]

The two ByteField operands of the conjunction. Terms shall be evaluated in the order of appearance in the OTX document.

IMPORTANT — If an operand is shorter than the other, it is promoted to the length of the other by bit stuffing (0-bits) from the left prior to executing the bitwise operation. The length of the returned ByteField is the length of the longer one.

NOTE In graphical representation, BitwiseAnd should be represented in infix notation by the operator symbol &.

7.15.10.3.2 BitwiseOr

BitwiseOr is a ByteFieldTerm which operates on individual bits of ByteField values. It returns the bitwise disjunction of the two ByteField operands.

— <byteField> : ByteFieldTerm [2]

The two ByteField operands of the disjunction. Terms shall be evaluated in the order of appearance in the OTX document.

IMPORTANT — If an operand is shorter than the other, it is promoted to the length of the other by bit stuffing (0-bits) from the left prior to executing the bitwise operation. The length of the returned ByteField is the length of the longer one.

NOTE In graphical representation, Bitwiseor should be represented in infix notation by the operator symbol |.

7.15.10.3.3 BitwiseXor

BitwiseXor is a ByteFieldTerm which operates on individual bits of ByteField values. It returns the bitwise exclusive disjunction of the two ByteField operands.

— <byteField> : ByteFieldTerm [2]

The two ByteField operands of the exclusive disjunction. Terms shall be evaluated in the order of appearance in the OTX document.

IMPORTANT — If an operand is shorter than the other, it is promoted to the length of the other by bit stuffing (0-bits) from the left prior to executing the bitwise operation. The length of the returned ByteField is the length of the longer one.

NOTE In graphical representation, BitwiseOr should be represented in infix notation by the operator symbol ^.

7.15.10.3.4 BitwiseNot

BitwiseNot is a ByteFieldTerm which operates on individual bits of a ByteField value. It returns the bitwise negation (the inverse) of the ByteField operand.

- <byteField> : ByteFieldTerm [1]

The ByteField operand that shall be inverted.

NOTE In graphical representation, LogicNot should be represented by the operator symbol ~.

7.15.10.3.5 ByteFieldGetSize

ByteFieldGetSize is an IntegerTerm which returns the number of bytes that the ByteField operand contains.

— <byteField> : ByteFieldTerm [1]

The ByteField operand whose size shall be returned.

7.15.10.3.6 SubByteField

subByteField is a **ByteFieldTerm** which reads a given number of bytes from a **ByteField** starting at a given byte index. The read bytes are returned as a **ByteField** value.

— <byteField> : ByteFieldTerm [1]

The ByteField from which the sub-bytefield shall be read.

— <index> : NumericTerm [1]

The byte index of the first byte of the sub-bytefield to be read. Float values shall be truncated.

— <count> : NumericTerm [1]

The total number of bytes to be read starting from <index>. If <count> equals 0, an empty Bytefield shall be returned. Float values shall be truncated.

Throws:

OutOfBoundsException

If the index is not within the range [0,n-1], where n is the size of the ByteField.

OutOfBoundsException

If index+count > size of the ByteField.

7.15.10.3.7 GetBit

GetBit is a BooleanTerm which returns true if the bit at the given byte index and bit position is 1, otherwise it returns false.

- <byteField> : ByteFieldTerm [1]

The ByteField in which the bit shall be looked up.

-/ <index> : NumericTerm [1]

The byte index of the byte in which the bit of interest resides. Float values shall be truncated.

— <position> : NumericTerm [1]

The bit position of the bit within the identified byte. Float values shall be truncated.

Throws:

— OutOfBoundsException

If the index is not within the range [0,n-1], where n is the size of the ByteField.

OutOfBoundsException

If the bit position not within the range [0,7] of allowed bit positions.

7.15.11 List-related terms

7.15.11.1 Description

List related terms operate on lists; OTX provides a term to identify the length of a list (ListGetLength) and a query for the existence of a value in a list (ListContainsValue).

7.15.11.2 Syntax

Figure 60 shows the syntax of the List related term types.




Figure 60 — Data model view: List related terms

7.15.11.3 Semantics

7.15.11.3.1 ListGetLength

ListGetLength is an IntegerTerm that returns the number of items contained in a List.

— <list> : ListTerm [1]

The List whose length shall be computed.

7.15.11.3.2 ListContainsValue

ListContainsValue is a BooleanTerm that returns true if and only if the given value is contained in the List.

— <list> : ListTerm [1]

The List which shall be checked for the <value> to exist.

-- <value> : Term [1]

The value whose existence in the List shall be tested. If the <value> represents a reference, then it is tested whether the reference is part of the List or not.

7.15.11.3.3 ListCopy

ListCopy is a ListTerm that returns a List which contains shallow copies of all items of another List.

— <otherList> : ListTerm [1]

The List which shall be copied.

7.15.12 Map-related terms

7.15.12.1 Description

Similar to the List related terms, OTX provides terms which operate on Map values. There is a term to identify the size of a map (MapGetSize), query terms for testing the existence of a key or a value in a map (MapContainsKey and MapContainsValue) and a term for extracting a list of keys out of a map (MapGetKeyList).

Not for Resale

7.15.12.2 Syntax

Figure 61 shows the syntax of the Map related term types.

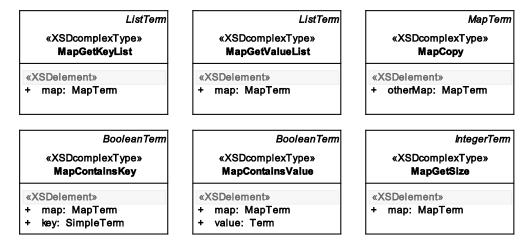


Figure 61 — Data model view: Map related terms

7.15.12.3 Semantics

7.15.12.3.1 MapContainsKey

MapContainsKey is a BooleanTerm that returns true if and only if the given key is contained in the Map.

<map> : MapTerm [1]

The Map which shall be checked for the <key> to exist in one of the Map items.

<key> : SimpleTerm [1]

The key whose existence in the Map shall be tested.

Associated checker rules:

Core_Chk040 - type-safe MapContainsKey

7.15.12.3.2 MapContainsValue

MapContainsValue is a BooleanTerm that returns true if and only if the given value is contained in the Map.

<map> : MapTerm [1]

The Map which shall be checked for the <value> to exist in one of the Map items.

<value> : Term [1]

The value whose existence in the Map shall be tested. If the <value> represents a reference, then it is tested whether the reference is part of the Map or not.

Associated checker rules:

Core_Chk041 – type-safe MapContainsValue

7.15.12.3.3 MapGetSize

MapGetSize is an IntegerTerm that returns the number of items contained in a Map.

- <map> : MapTerm [1]

The Map whose size shall be computed.

7.15.12.3.4 MapGetKeyList

MapGetKeyList is a ListTerm that returns a new List which shall contain the keys of a given Map. In the special case when the Map is empty, the returned List shall also be empty.

- <map> : MapTerm [1]

The Map whose keys shall be extracted into a List.

7.15.12.3.5 MapGetValueList

MapGetValueList is a ListTerm that returns a new List which shall contain shallow copies of the values of a given Map. In the special case when the Map is empty, the returned List shall also be empty.

- <map> : MapTerm [1]

The Map whose values shall be extracted into a List.

7.15.12.3.6 MapCopy

MapCopy is a MapTerm that returns a Map which contains shallow copies of all items of another Map.

— <otherMap> : MapTerm [1]

The Map which shall be copied.

7.15.13 Exception-related terms

7.15.13.1 Description

For treating exceptions in a catch block of a handler, the getter terms <code>GetExceptionOriginatorNode</code>, <code>GetExceptionQualifier</code>, <code>GetExceptionText</code> and <code>GetStackTrace</code> are provided.

7.15.13.2 Syntax

Figure 62 shows the syntax of the Exception related term types.




Figure 62 — Data model view: Exception related terms

7.15.13.3 Semantics

7.15.13.3.1 GetExceptionOriginatorNode

GetExceptionOriginatorNode is a StringTerm which returns the id of the node that caused the exception (cf. 7.13.2).

<exception> : ExceptionTerm [1] Represents the exception.

7.15.13.3.2 GetExceptionQualifier

GetExceptionQualifier is a StringTerm which returns the exception qualifier (cf. A.3.5).

<exception> : ExceptionTerm [1] Represents the exception.

IMPORTANT — Exception qualifiers are only defined for explicit exceptions (in OTX Core, the only explicit exception is UserException). Therefore, GetExceptionQualifier shall return the string representation of the exception's data type when it is applied on implicit exceptions.

7.15.13.3.3 GetExceptionText

GetExceptionText is a StringTerm which returns the exception text (cf. A.3.5).

<exception> : ExceptionTerm [1] Represents the exception.

7.15.13.3.4 GetStackTrace

GetExceptionStack is a ListTerm (List of String) which shall return the procedure call stack for a given exception. The call stack shall be determined when the exception is created, not when it is thrown. The zeroth element of the list shall represent the top of the stack, which is the last procedure invocation in the sequence. Typically, this is the point at which the exception was created and thrown. The returned list shall contain the fully qualified names of the invoked procedures, e.g. {"myCompany.otx. myProcedure", "myCompany.otx.main" \}.

<exception> : ExceptionTerm [1] Represents the exception.

7.15.14 Validity concept related terms

7.15.14.1 Description

The only validity concept related term IsValid allows testing a validity for its truth value with respect to the current context.

7.15.14.2 Syntax

Figure 63 shows the syntax of the validity related term types.




Figure 63 — Data model view: Validity concept related terms

7.15.14.3 Semantics

IsValid is a BooleanTerm which returns true if and only if the validity term referenced by OtxLink is true with respect to the current context (cf. 6.8). This term shall be used if two or more validity terms shall be pulled together by e.g. LogicAnd, LogicOr or LogicXor, etc. The term shall also be applicable to Boolean context variables or global Boolean constants (in this case, the IsValid term is semantically equivalent to the BooleanValue term).

— validity : OtxLink [1]

The validity term (or Boolean context variable) that shall be tested.

Associated checker rules:

- Core_Chk053 no dangling OtxLink associations
- Core_Chk013 correct referencing of validities

7.15.14.4 Example

The example below shows the definition of a validity called "DieseldrivenConvertible" which is valid if and only if validities "Convertible" and "Dieseldriven" are both valid (the latter validities are not further specified for this example).

EXAMPLE Sample of OTX-file "ValidityTermCombinationExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="23"</pre>
 name = "ValidityTermCombinationExample"
 package="org.iso.otx.examples"
version="1.0"
  timestamp="2009-10-20T14:40:10"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
    <validity name="Convertible" id="23-v1">
      <specification>True if vehicle under test is a convertible/specification>
            Validity term goes here -->
    </validity>
    <validity name="Dieseldriven" id="23-v2">
      <specification>True if vehicle under test is a Diesel/specification>
           Validity term goes here -->
    </validity>
    <validity name="DieseldrivenConvertible" id="23-v3">
      <realisation xsi:type="LogicAnd">
        <term xsi:type="IsValid" validity="Convertible" />
<term xsi:type="IsValid" validity="Dieseldriven" />
      </realisation>
    </validity>
  </validities>
```

7.16 Universal types

7.16.1 Overview

In 7.16 are described auxiliary types, elements or attributes that are used by various types in the OTX data model. Since they cannot be associated to one specific feature of the model only, they are described in this comprehensive section.

7.16.2 PackageName

7.16.2.1 Description

The PackageName type prescribes the syntax for package naming. It is used by the package attribute of the <otx> root element (see 7.3) and the <import> element (see 7.4).

7.16.2.2 Syntax

Figure 64 shows the syntax of the PackageName type.




Figure 64 — Data model view: PackageName

7.16.2.3 **Semantics**

The simple type PackageName is derived from xsd:string. The type restricts the value space of xsd:string by the regular expression "[a-zA-Z][a-zA-Z0-9]*(\.[a-zA-Z][a-zA-Z0-9]*)*".

As a consequence, a PackageName is segmented into one or more alphanumeric chunks which are separated from each other by a dot ("."). Each chunk has to start with a letter; all following characters have to be alphanumeric. This guarantees and enforces a uniform naming scheme for package names to which OTX authors shall obey.

Valid uses of this naming scheme allow identifiers like e.g. "com.MyCompany.OtxSequences5" or "My5OtxSequences", whereas invalid uses are e.g. "com._MyCompany.OTX", "mesSéquencesTest", "9thPackage" or just the empty string.


7.16.3 OtxName and OtxLink

7.16.3.1 Description

The two interrelated simple types <code>OtxName</code> and <code>OtxLink</code> are described here. In various places of the OTX data model, <code>OtxName</code> is used for naming entities like signatures, procedures or validities as well as global and local declarations. Its counterpart <code>OtxLink</code> is used for referring to these named entities (document-internally or cross-documents). Both <code>OtxName</code> and <code>OtxLink</code> represent restrictions on the syntax of such names and references, as described below.

7.16.3.2 Syntax

Figure 65 shows the syntax of the OtxName and OtxLink types.






Figure 65 — Data model view: OtxName and OtxLink

7.16.3.3 Semantics

7.16.3.3.1 OtxName

The simple type OtxName is derived from xsd:string. The type restricts the value space of xsd:string by a regular expression pattern "_*[a-zA-Z][a-zA-Z0-9_]*".

As a consequence, an OtxName has to start with a letter (optionally preceded by any number of underscore characters); all following characters have to be alphanumeric. This guarantees and enforces a uniform naming scheme to which OTX authors shall obey.

Valid uses of this naming scheme allow identifiers like e.g. "MyProcedure", "__validity10", "PI" or "_y2", whereas invalid uses are e.g. "9x", "___" or just the empty string.

7.16.3.3.2 OtxLink

The simple type OtxLink is derived from xsd:string. The type restricts the value space of xsd:string by a regular expression pattern "(_*[a-zA-Z][a-zA

According to the pattern, the OtxLink syntax allows two ways of referring to a named entity, depending on whether the target entity is defined in the same document, or whether it is defined in an external document (which was imported to the local document as specified in 7.4). In the first case the syntax equals the

OtxName syntax. In the latter case the syntax equals "OtxName:OtxName": Here the first part shall be the name of the prefix assigned to the particular OTX document where the target entity is defined, the second part (after the colon) is the entity name itself.

Valid uses of this naming scheme allow document-internal references like e.g. "MyProcedure" or "x", but also cross-document references to entities defined in external documents like e.g. "sig:mySignature5" or "constants:PI".

Associated checker rules:

- Core_Chk053 no dangling OtxLink associations
- Core_Chk005 no use of undefined import prefixes


7.16.4 NamedAndSpecified

7.16.4.1 Description

The abstract type NamedAndSpecified is used by every type that shall be identifiable, nameable, carry a specification text and/or supply meta-data. Types using this are e.g. all Node types, variable, constant and parameter declarations, the Procedure and Signature types or the Otx root type itself.

7.16.4.2 Syntax

Figure 66 shows the syntax of the NamedAndSpecified type.






Figure 66 — Data model view: NamedAndSpecified

7.16.4.3 **Semantics**

The abstract type NamedAndSpecified has the following semantic properties:

— id : OtxId [1]

The attribute value represents the unique identifier of a NamedAndSpecified element. It shall be unique among all other ids in the same OTX document. This constraint is verifiable through XML schema validation (by <xsd:key> constraints specified in the OTX schema, refer to Annex F). The OtxId type is a pattern-restriction of the xsd:string simple type. The value space of the attribute is restricted by the regular expression "[a-zA-z0-9\\\-\.\|:_#/]+", which allows the basic letters, numbers as well as a set of delimiters.

The id attribute is useful concerning versioning, differencing or concurrent editing of OTX documents. It facilitates traceability of changes that occurred in between different versions of an OTX document because an element can still be identified even after having been moved or changed thoroughly.

Concerning id value allocation, OTX authoring applications shall provide the following:

When a new NamedAndSpecified element is created, the application shall generate and assign a unique id-value to the element's id attribute.

- After creation, applications shall not alter id values anymore. An id shall stay with its element as an inherent part as long as the element exists it shall not be changed even if the element is moved or the contents of the element are changed.
- For each copy of an element, a new unique id value shall be generated and assigned to the copy.
- The allocation and handling of id values should happen automatically in the background. No user action should be required (manual creation of unique ids is an awkward task; beyond that this is not acceptable concerning useability). Id values should not be shown to the user and, most importantly, they shall not be editable by the user.

NOTE Certainly users can bypass these rules by editing OTX-documents directly (e.g. with a simple text editor). Therefore, these rules only make sense as long as the user works within an OTX authoring application. This provided, optimal process stability concerning change traceability is ensured.

Recommendation:

The standard requires ids to be unique only within the scope of their local OTX document. Even better process stability concerning change traceability can be gained when guaranteeing id uniqueness on larger scales, e.g. uniqueness among a full set of OTX documents, projects, company wide uniqueness or even universal uniqueness. To achieve this, it is beneficial to use *Universally Unique Identifiers* (UUID) for the id attribute, as specified by [RFC 4122].

— name : OtxName [0..1]

Represents the OTX name of a NamedAndSpecified element.

IMPORTANT — Since some NamedAndSpecified types require the name attribute while others do not, there are special rules defined for those types who require it. The rules are enforced by <xsd:key> restrictions in the OTX Schema, compare Annex F.

— <specification> : xsd:string [0..1]

This allows adding a descriptive specification to the NamedAndSpecified element.

— <metaData> : MetaData [0..1]

If meta-data is added to a NamedAndSpecified element, the <metaData> shall be used (see 7.16.5.).

7.16.5 MetaData

7.16.5.1 Description

The complex type MetaData is used by several types in the OTX data model, e.g. by the Otx, Procedure and Node types, which contain a <metaData> element. The MetaData type allows tools to store additional, mainly tool-specific data.

IMPORTANT — By definition, any meta-data in an OTX document shall be ignorable or even removable at any time without changing the original logic of the procedures contained.

7.16.5.2 Syntax

Figure 67 shows the syntax of the MetaData type.

There are no syntactical constraints on the meta-data itself (however, there are semantic constraints). Syntactically, each <data> element in a <metaData> element can consist of

— a simple string (since Data is a mixed type),

- an embedded XML document valid to an arbitrary XML schema (see AnyContent which is an <xsd:any> wildcard element in the OTX schema) or
- XLink attributes which allow pointing to meta-data sources which may be contained in an external document (see [W3C XLink:2010]).

The validation setting processContents="lax" is set for the xsd:anywildcard, which is used for arbitrary XML style meta-data. This setting means that XML content will not be taken into account by validators unless the corresponding XML schema for the XML content is given (e.g. by the xml:schemaLocation attribute).

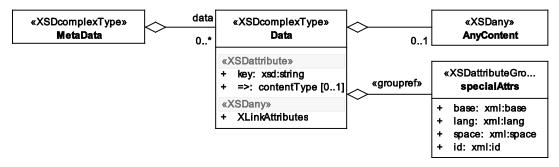


Figure 67 — Data model view: MetaData

7.16.5.3 Semantics

Since the contained meta-data is potentially tool-specific and non-standardized, it is not guaranteed to be understood by every OTX conform application. This is why the data must not be used by any OTX application in a way that the behaviour of the procedure logic is changed.

A <metaData> element is merely a container for an arbitrary-length list of <data> elements. The following describes the meaning of the corresponding Data type:

— key : xsd:Name [1]

This attribute contains a key used by applications to identify a specific meta-data item. All key names have to be unique within the scope of the surrounding <metadata> element. This is ensured by XML schema validation (by <xsd:key> constraints specified in the OTX schema, refer to Annex F.

— xmime:contentType : xsd:string [0..1]

This optional attribute is used to describe the content type of the meta-data. This information can be used by applications e.g. to start a viewer which can handle this kind of content, etc. The content type string must be formatted according to the rules given in RFC 2045, *Multipurpose Internet Mail Extensions* (MIME) Part One: Format of Internet Message Bodies and RFC 2046, *Multipurpose Internet Mail Extensions* (MIME) Part Two: Media Types.

— xml:specialAttrs (xml:base, xml:lang, xml:space, xml:id [all optional])

This attribute group is referenced by the <code>Data</code> complex type; it is externally defined by the "xml:" namespace http://www.w3.org/XML/1998/namespace, standardized by the W3C. For OTX meta-data, these attributes can optionally be used to specify some further properties of the data, e.g. defining the language of the contents, how spaces should be treated, etc. For detailed information about the use of the attributes, refer to the following W3C recommendations:

- [W3C XMLNS:2009]: General information about the xml: namespace.
- [W3C XML:2008]: Attributes xml:lang and xml:space.
- [W3C XMLBASE:2009]: Attribute xml:base.

XLinkAttributes

The optional XLink attributes as specified by [W3C XLink:2010] allow pointing to a URI of an external resource which contains the actual meta-data. It is also possible to point to particular places inside of the external resource.

Recommendation:

If the XLink attributes are set, any other content between the <data> and </data> markup may be used as an alternative when the external resource cannot be accessed; otherwise it may be ignored.

Mixed Content (Text or any XML data)

The content of <data> elements has no semantic defined by the OTX standard. Semantics are application specific and need to be defined separately.

7.16.5.4 Example

The example below shows different uses of <data> elements in the <metaData> section of the <otx> element.

EXAMPLE Sample of OTX-file "MetaDataExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="24"
 name="MetaDataExample"
 package="org.iso.otx.examples"
 version="1.0"
 timestamp="2009-10-20T14:40:10"
 xmlns:xmime="http://www.w3.org/2005/05/xmlmime"
 xmlns:xlink=" http://www.w3.org/1999/xlink"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <metaData>
   <data key="kl" xlink:href="../images/image1.jpeg" xmime:contentType="image/jpeg" />
    <data key="k2" xmime:contentType="application/xhtml+xml">
      <html xmlns="http://www.w3.org/1999/xhtml" xml:lang="en" lang="en">
        <head><title>XHTML document</title></head>
       <body>
          This is an example of meta-data, structured after XML rules
        </body>
      </html>
    </data>
   <data key="k3" xml:lang="en-GB" xml:space="preserve">Some simple
                                                                      meta information</data>
   <data key="k4"><![CDATA[More meta <data>]]></data>
 </metaData>
</otx>
```

The first use (key="k1") is an xlink to an external document, there is a hint for the content type of this document (xmime:contentType="image/jpeg"). The second (key="k2") is an example for meta-data which has XML form, in this case it is a XHTML document. Since there is no schema location given for the XHTML content in this example, validation will succeed even if the data were no valid (but well formed) XHTML. The third use (key="k3") shows meta-data that is represented by static string content. The last use shows meta-data contained in an unparsed CDATA section.

7.16.6 Variable Access

7.16.6.1 Description

The variable access types represent the counterpart of the dereferencing terms (see 7.15.3) which are used to read the actual value stored in a variable or constant. By contrast, variable access types are used by OTX nodes and actions when the variable container itself is of primary interest, not the value stored in it. This is the case e.g. in an Assignment action: The calculated value given by the <term> will be assigned to the variable identified by <result> (cf. 7.14.4). Another example is the Loop (for-loop configuration) node with

*..***....*****

ISO 13209-2:2012(E)

its <counter> element, which identifies the Integer variable which shall contain the current iteration number at runtime (cf. 7.13.4.3). In all of these cases, the current value of the variable is not relevant.

Since all Variable subtypes have uniform syntax and semantics, a general description applying to all types is provided hereby.

7.16.6.2 Syntax

Figure 68 shows the syntax of the Variable types.

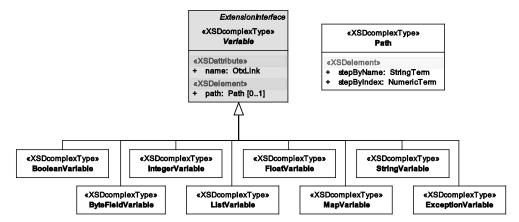


Figure 68 — Data model view: Variable types

7.16.6.3 Semantics

The properties of all Variable types have the following semantics:

name : OtxLink [1]

Contains the OtxLink to the variable which is of interest. For getting access to data which resides deeper within a complex data structure like a List or Map, the <path> element shall be utilized which points to the data inside of the structure.

<path> : Path [0..1]

The element addresses parts of complex structures like List or Map. It is built out of a series of index-

<stepByIndex> : NumericTerm [1]

This step of a <path> shall be used for locations addressed by index. Items in a List and items in a Map with Integer keys shall be in this way. Float values shall be truncated.

<stepByName> : StringTerm [1]

This step of a <path> shall be used for addressing locations by name. Items in a Map with String keys shall be addressed in this way.

The OTX data model does not allow any Variable subtype to refer to immutable data (constants).

Associated checker rules:

- Core_Chk053 no dangling OtxLink associations
- Core_Chk050 type-safe variable and constant usage
- Core_Chk051 immutability of constants, input parameters and context variables

Throws:

OutOfBoundsException

Only if there is a <path>: If the <path> points to a location which has not been allocated (like a list index exceeding list length, or a map key which is not part of the map).

NOTE In a graphical OTX editor, variable types should be displayed in the common notation form used by all major programming languages. E.g. for a BooleanVariable type for a variable b, the display should simply show b; for a BooleanVariable with a pointing to index i in a list L of Booleans, L[i] should be displayed, etc.

7.16.6.4 Example

The example below shows an IntegerVariable term which is used as the in an Assignment action. The name attribute identifies the integer variable i. The value assigned to i is the value of another variable j, which is dereferenced by using the IntegerValue term (see 7.15.3).

EXAMPLE 1 Sample of OTX-file "VariableAccessExample.otx"

Consider the other example in the OTX snippet below. The Assignment action addresses the target of the result by using the name attribute with a <path>. The target resides in the complex structure L (a List of Map), more specifically at L[1,"key1"]. The Assignment also uses the valueOf attribute in the IntegerValue term for reading the constant named c.

EXAMPLE 2 Sample of OTX-file "VariableAccessExample.otx"

```
<declarations>
   <specification>A list of maps of {string:integer} items/specification>
 </variable>
 <constant name="c" />
</declarations>
  <action id="a1">
   <specification>Assign the value of c to L[1,'key1']
   <path>
        <stepByIndex xsi:type="IntegerLiteral" value="1" />
        <stepByName xsi:type="StringLiteral" value="key1" />
      </path>
    </result>
     <term xsi:type="IntegerValue" valueOf="c" />
   </realisation>
 </action>
</flow>
```

7.16.7 Declarations

7.16.7.1 Overview

Test sequences need a facility for storing data that represents the state of the program during execution. In OTX, data is stored in global constants, document variables, context variables, procedure parameters, local constants and local variables. These are declared in the global declaration block, the parameter declaration blocks or local declaration blocks, as shown in the overview given by Figure 69.

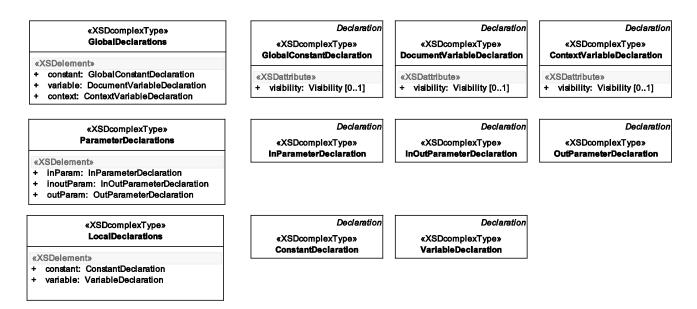


Figure 69 — Data model view: Declarations

NOTE The XSD complex types GlobalDeclarations, ParametersDeclarations and LocalDeclarations are of <xsd:choice> [1..*] content-type, which is not explicitly shown in the figure above.

Since it must be possible for nodes in the procedure flow to refer to the data, every declaration carries a globally/locally unique identifier. To every identifier, an OTX data type may be assigned. The declaration and the data type assignment are specified in the following.

7.16.7.2 Declaration

7.16.7.2.1 Description

The **Declaration** type is used for declarations in the global, local and parameter declaration blocks. The visibility of declared identifiers depends on the location of the declaration and of the visibility modifier (see 7.16.8).

7.16.7.2.2 Syntax

Generally spoken, every declaration is composed of a name (the identifier) and a data type. Compare to the **Declaration** type in Figure 70, which is the base for all parameter, constant and variable declaration types.



Figure 70 — Data model view: Declaration

7.16.7.2.3 Semantics

Declarations shall be processed before procedure execution. Memory needs to be reserved for the data, according to the data type. The properties of the abstract <code>Declaration</code> type have the following semantics:

— id : OtxId [1] (derived from NamedAndSpecified, see 7.16.4)

This represents a declaration's id. It shall be unique among all other ids in a document. Please refer to 7.16.4 for details concerning ids in OTX documents.

— name: OtxName [1] (derived from NamedAndSpecified, see 7.16.4)

The value of the attribute represents the human readable identifier for the data. For global declarations, the name must be unique among all global identifiers of the same document. For local declarations, it must be unique among all declaration identifiers in the procedure. These constraints are verifiable through XML schema validation (by xsd:key> constraints specified in the OTX schema, refer to Annex F).

— <specification> : xsd:string [0..1] (derived from NamedAndSpecified, see 7.16.4)

The static string content of this element shall be used to specify the purpose of the declaration for the human reader. The complement of <specification> is the element realisation> (see below).

Associated checker rules:

- Core_Chk007 have specification if no realisation exists
- <realisation> : DeclarationRealisation [0..1]

For declarations at specification stage, having a name for the declaration is sufficient. For realisation stage, the declaration needs a data type assignment. The optional realisation element is used for exactly this task — it contains a <dataType> sub element:

— <dataType> : DataType [1]

This element represents the data type for the declared data. It can be chosen out of the list of available OTX data types; these are derived from the abstract **DataType** complex type. See 7.16.7.3 about data type assignment.

The runtime characteristics of all data types required by the OTX Core are fully specified in Annex A.

7.16.7.3 Data type assignment

For each OTX data type, there are different rules concerning the declaration and especially the initialisation of identifier values.

An overview about the possible data types that can be assigned to an identifier at declaration time is given in Figure 71. This subclause defines the syntax of data type assignment. A definition of the OTX data types concerning internal data type structure and value space of each data type is provided by Annex A.

Note that there is a sub-categorisation into SimpleType, ComplexType, CountableType and Exception:

- SimpleType and ComplexType are abstract types; they basically serve the clarity of the data model.
- CountableType is the base for all data types that can be used as keys in maps (see below).
- **Exception** is the base type for all special exception types (cf. 7.13.4.7 on the **Handler** node).

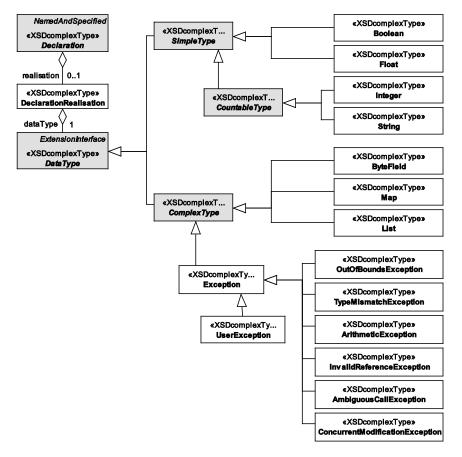


Figure 71 — Overview: Data type hierarchy in declaration blocks

Since there are differences for each data type assignment concerning initialisation, the following sub sections provide detailed specifications.

7.16.7.3.1 **Boolean Declaration**

7.16.7.3.1.1 Description

This XSD complex type is designed for declaring and optionally initialising Boolean identifiers.

7.16.7.3.1.2 **Syntax**

Figure 72 shows the syntax of the Boolean data type declaration.




Figure 72 — Declaration and Initialisation of a Boolean

7.16.7.3.1.3 Semantics

Assigns the Boolean data type to an identifier in a declaration. For the definition of the OTX Boolean data type, refer to Annex A.

- <init> : BooleanLiteral [0..1]
- This optional element stands for the initialisation of the identifier at declaration time. Initialisation is done by a hard-coded Boolean literal (true, false) in the OTX document.
 - value : xsd:boolean [1]

This attribute contains the Boolean value. Refer to [W3C XSD:2004] for an overview of allowed values for xsd:boolean.

IMPORTANT — If the Boolean declaration is not explicitly initialized (omitted <init> element), the default value false shall apply implicitly.


7.16.7.3.2 Float Declaration

7.16.7.3.2.1 Description

This XSD complex type is designed for declaring and optionally initializing Float identifiers.

7.16.7.3.2.2 Syntax

Figure 73 shows the syntax of the Float data type declaration.






Figure 73 — Declaration and Initialisation of a Float

7.16.7.3.2.3 Semantics

Assigns the Float data type to an identifier in a declaration. For the definition of the OTX Float data type, please refer to Annex A.

— <init> : FloatLiteral [0..1]

This optional element stands for the initialisation of the identifier at declaration time. Initialisation is done by a hard-coded Float literal (e.g. "0.1923") in the OTX document.

— value : xsd:double [1]

This attribute contains the Float value. See [W3C XSD:2004] for an overview of allowed values for **xsd:double**.

 $\label{local_index} \textbf{IMPORTANT} — \ \, \textbf{If the Float declaration is not explicitly initialized (omitted <init> element), the default value 0.0 shall apply implicitly.}$

151

7.16.7.3.3 Integer Declaration

7.16.7.3.3.1 Description

This XSD complex type is designed for declaring and optionally initializing Integer identifiers.

7.16.7.3.3.2 Syntax

Figure 74 shows the syntax of the Integer data type declaration.




Figure 74 — Declaration and Initialisation of an Integer

7.16.7.3.3.3 Semantics

Assigns the Integer data type to an identifier in a declaration. For the definition of the OTX Integer data type, please refer to Annex A.

— <init> : IntegerLiteral [0..1]

This optional element stands for the initialisation of the identifier at declaration time. Initialisation is done by a hard-coded Integer literal (e.g. "42") in the OTX document.

— value : xsd:long [1]

This attribute contains the integer value. Refer to [W3C XSD:2004] for an overview of allowed values for xsd:long.

IMPORTANT — If the Integer declaration is not explicitly initialized (omitted <init> element), the default value 0 shall apply implicitly.

7.16.7.3.4 String Declaration

7.16.7.3.4.1 Description

This XSD complex type is designed for declaring and optionally initializing string identifiers.

7.16.7.3.4.2 Syntax

Figure 75 shows the syntax of the **String** data type declaration.




Figure 75 — Declaration and Initialisation of a String

7.16.7.3.4.3 Semantics

Assigns the string data type to an identifier in a declaration. For the definition of the OTX string data type, refer to Annex A.

— <init> : StringLiteral [0..1]

This optional element stands for the initialisation of the identifier at declaration time. Initialisation is done by a hard-coded String literal (e.g. "Hello World!") in the OTX document.

— value : xsd:string [1]

This attribute contains the String value. Refer to [W3C XSD:2004] for an overview of allowed values for xsd:string.

IMPORTANT — If the String declaration is not explicitly initialized (omitted <init> element), the empty string default value "" shall apply implicitly.


7.16.7.3.5 ByteField Declaration

7.16.7.3.5.1 **Description**

This XSD complex type is designed for declaring and optionally initializing ByteField identifiers.

7.16.7.3.5.2 Syntax

Figure 76 shows the syntax of the **ByteField** data type declaration.






Figure 76 — Declaration and initialisation of a ByteField

7.16.7.3.5.3 Semantics

Assigns the ByteField data type to an identifier in a declaration. For the definition of the OTX ByteField data type, refer to Annex A.

— <init> : ByteFieldLiteral [0..1]

This optional element stands for the initialisation of the identifier at declaration time. Initialisation is done by a hexadecimal literal (e.g. "2AFB") in the OTX document.

— value : xsd:hexBinary [1]

This attribute contains the ByteField value. Refer to [W3C XSD:2004] for an overview of allowed values for xsd:hexBinary.

IMPORTANT — If the ByteField declaration is not explicitly initialized (omitted <init> element), the default shall be an empty ByteField.

7.16.7.3.6 List Declaration

7.16.7.3.6.1 Description

This XSD complex type is designed for declaring and optionally initializing list identifiers.

7.16.7.3.6.2 **Syntax**

Figure 77 shows the syntax of the List data type declaration.




Figure 77 — Declaration and Initialisation of a List

7.16.7.3.6.3 **Semantics**

This assigns the List data type to an identifier in a declaration. For the definition of the OTX List data type, refer to Annex A.

<itemType> : DataType [1]

Defines the data type of all items in the list, in a flat or recursive way (list of strings, list of floats, list of lists of integers ...). For this definition, the DataType complex type itself is reused recursively. All items that are occurring in the initialisation (<init> element) have to be of the type stated here.

Associated checker rules:

Core_Chk034 – no use of init in list item type definition

<init> : ListLiteral [0..1]

This optional element stands for the initialisation of the identifier at declaration time. Initialisation is done by using a recursive mechanism: E.g. a list of lists of integers is initialised by using list literals for each list-type item again, and so on. Compare to notations "{1, 4, 2}" or "{'Hello', 'World', '!'}" or even "{{2, 3}, {4, 5, 6}}" used by some programming languages.

For details on the ListLiteral term type, refer to 7.15.2.3.6.

Associated checker rules:

Core_Chk035 – ListLiteral item type matches list declaration item type

IMPORTANT — If the List declaration is not explicitly initialized (omitted <init> element), an empty list shall be created and assigned to the List identifier.

7.16.7.3.7 Map Declaration

7.16.7.3.7.1 Description

This XSD complex type is designed for declaring and optionally initializing Map identifiers.

7.16.7.3.7.2 Syntax

Figure 78 shows the syntax of the Map data type declaration.




Figure 78 — Declaration and Initialisation of a Map

7.16.7.3.7.3 Semantics

This assigns the Map data type to an identifier in a declaration. For the definition of the OTX Map data type, refer to Annex A.

— <keyType> : CountableType [1]

Defines the data type for the keys of all key/value pairs in the declared map. The key type must be a simple, countable type. All keys that are occurring in the initialisation (<init> element) have to be of the type stated here.

Associated checker rules:

— Core_Chk044 – no use of init in map key type definition

— <valueType> : DataType [1]

Defines the data type for all values of the key/value pairs in the map, flat or recursive (map of strings, map of list of floats, map of maps of integers ...). For this definition, the DataType complex type itself is reused recursively. All values that are occurring in the initialisation (<init> element) have to be of the type stated here.

Associated checker rules:

Core_Chk045 – no use of init in map value type definition

— <init> : MapLiteral [0..1]

This optional element stands for the initialisation of the identifier at declaration time. Initialisation is done by using a recursive mechanism: E.g. a map of maps of integers is initialised by using map literals for the value of each key/value pair in the map, and so on.

For details on the MapLiteral term type, refer to 7.15.2.3.7.

Associated checker rules:

Core_Chk035 – ListLiteral item type matches list declaration item type

IMPORTANT — If the Map declaration is not explicitly initialized (omitted <init> element), an empty map shall be created and assigned to the Map identifier.

7.16.7.3.8 Exception Declaration

Description 7.16.7.3.8.1

This XSD complex type is designed for declaring Exception identifiers. In OTX, there are two types of exceptions - the implicit and the explicit exceptions, as specified by Annex A. Only explicit exceptions (i.e. UserException) are initializable at declaration time, as explained below.

7.16.7.3.8.2 **Syntax**

Figure 79 shows the syntax of exeption data type declarations.

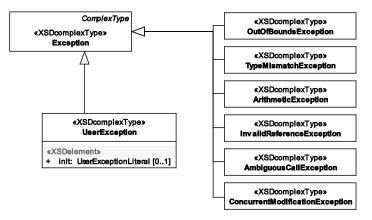


Figure 79 — Declaration and Initialisation of a Map

7.16.7.3.8.3 **Semantics**

Explicit exceptions

The only explicit exception data type is the UserException type. It has the following semantic properties:

<init> : UserExceptionLiteral [0..1]

This optional element stands for the initialisation of the UserException at declaration time. Initialisation is done by a UserExceptionLiteral (cf. 7.15.2.3.8):

<qualifier> : StringLiteral [1]

This string literal allows for the author to provide a short qualifier for the exception initialisation. A qualifier shall be used to categorize an exception.

- <text> : StringLiteral [1]

This string literal allows for the author to provide a text which characterises the exception's reason.

IMPORTANT — If the UserException declaration is not explicitly initialized (omitted <init> element), the exception value shall stay undefined. If such an undefined exception is accessed at a later point in a test sequence, an InvalidReferenceException will be thrown (cf. 7.15.3).

Implicit exceptions

The different types of implicit exceptions have no special properties concerning declaration and initialisation. Therefore, only a brief overview about the different implicit exception types is given here. Exception variables can be declared in order to use them as handles for caught exceptions (see Handler node in 7.13.4.7. and CatchingFlow in 7.13.4.8).

OutOfBoundsException

If memory shall be accessed illegally (e.g. if an index for accessing a list item is greater than the length of the list, or if a key is not contained in a map, etc.), this exception is thrown. It is also thrown in cases where an overflow occurs, e.g. when an integer value exceeds the limit of the integer value space through an Add operation.

TypeMismatchException

This is thrown if e.g. a string value shall be assigned to an integer without correct type conversion, etc.

ArithmeticException

For the arithmetic terms, there are situations where this exception is thrown. Examples for this are the **Divide** or the **Modulo** term.

InvalidReferenceException

Thrown if an invalid value is used, e.g. if a variable's value shall be accessed, but no value has been assigned to the variable before. This applies to data types which might have no reasonable default value. Since all data types the OTX Core but the Exception types are initialized (explicitly or implicitly), this applies only for the Exception types themselves. OTX extensions allowing other implicitly uninitialized data types shall also specify this type of exception for relevant actions or terms.

AmbiguousCallException

Thrown if during an indirect procedure call (i.e. a call through a signature) two or more implementing procedures are valid at the same time (i.e. the call is ambiguous).

ConcurrentModificationException

This exception occurs when the collection value of a for-each-loop is modified during loop execution. Such modifications can happen from the outside (e.g. from other parallel lanes) or in the loop itself. All actions derived from ListModifier or MapModifier count as a collection modification. In any case, this may cause serious inconsistencies which can be handled by catching this exception.

IMPORTANT — The base Exception type and the implicit exception types can not be explicitly initialized at declaration time (no <init> element). Since OTX does not define an implicit intialisation value for exceptions also, an InvalidReferenceException is thrown whenever an exception shall be accessed to which no exception value has been assigned before. A value can be assigned to an implicit exception variable by catching a thrown exception.

Refer to Annex A for further information on OTX Core exception types.

7.16.7.3.9 Comprehensive Example

EXAMPLE Sample of OTX-file "DataTypeAssignmentExample.otx"

```
<declarations>
  <variable name="bool" id="26-d1">
    <specification>A simple Boolean/specification>
    <realisation><dataType xsi:type="Boolean"><init value="true" /></dataType></realisation>
  <variable name="i" id="26-d2">
    <specification>A simple Integer/specification>
    <realisation><dataType xsi:type="Integer"><init value="42" /></dataType></realisation>
  </variable>
  <variable name="f" id="26-d3">
    <specification>A simple Float/specification>
    <realisation><dataType xsi:type="Float"><init value="0.234" /></dataType></realisation>
  </variable>
  <variable name="b" id="26-d4">
    <specification>A simple Bytefield</specification>
    <realisation><dataType xsi:type="ByteField"><init value="01CB2AC6" /></dataType></realisation>
  <variable name="s" id="26-d5">
    <specification>A simple String</specification>
    <realisation><dataType xsi:type="String"><init value="Hello World!" /></dataType></realisation>
  </variable>
  <variable name="myList" id="26-d6">
    <specification>A List of 2 Integers: {4, 2}</specification>
    <realisation>
      <dataType xsi:type="List">
        <itemType xsi:type="Integer" />
        <init>
          <itemType xsi:type="Integer" />
          <items>
            <item xsi:type="IntegerLiteral" value="4" />
<item xsi:type="IntegerLiteral" value="2" />
          </items>
         </init>
      </dataType>
    </realisation>
  </variable>
  <variable name="myMap" id="26-d7">
    <specification>Map of Lists of Integers: {"kl":{1,2},"k2":{3} }
    <realisation>
      <dataType xsi:type="Map">
        <keyType xsi:type="String" />
        <valueType xsi:type="List"><itemType xsi:type="Integer" /></valueType>
          <keyType xsi:type="String" />
           <valueType xsi:type="List"><itemType xsi:type="Integer" /></valueType>
          <items>
             <item>
              <key xsi:type="StringLiteral" value="k1" />
               <value xsi:type="ListLiteral">
                 <itemType xsi:type="Integer" />
                 <items>
                  <item xsi:type="IntegerLiteral" value="1" />
<item xsi:type="IntegerLiteral" value="2" />
                 </items>
               </value>
             </item>
             <item>
              <key xsi:type="StringLiteral" value="k2" />
<value xsi:type="ListLiteral">
                 <itemType xsi:type="Integer" />
                 <items>
                   <item xsi:type="IntegerLiteral" value="3" />
                 </items>
              </value>
            </item>
          </items>
        </init>
      </dataType>
    </realisation>
  </variable>
  <variable name="e" id="26-d8">
    <realisation>
      <dataType xsi:type="ArithmeticException" />
    </realisation>
  </variable>
</declarations>
```

7.16.8 Visibility

7.16.8.1 Description

In OTX, global elements such as procedures, signatures, global constants, context variables, document variables or validity terms are marked by a visibility attribute. Its value determines whether other documents may use the marked entity or not (e.g. call a procedure, use a validity term or read a global constant, etc.). There are three visibility levels which are specified in the following.

7.16.8.2 Syntax

The syntax of the Visibility enumeration is shown in Figure 80.




Figure 80 — The Visibility enumeration

7.16.8.3 **Semantics**

The visibility attribute of procedures, signatures, global constants, context variables, document variables and validity terms is of type Visibility. The type is an enumeration restriction on the value space of xsd:string. The allowed values "PRIVATE", "PACKAGE" and "PUBLIC" induce the following semantics:

- "PRIVATE": The associated entity shall be accessible only by the **same document**. This means that the entity shall be **invisible** for all other OTX documents.
- "PACKAGE": The associated entity shall be accessible only by OTX documents belonging to the same package like the local document. This means that the entity shall be invisible for all OTX documents belonging to other packages.
- "PUBLIC": The constant is accessible by any other OTX document.

7.16.9 Flow

7.16.9.1 Description

The **Flow**⁹⁾ type is a container for a sequence of OTX nodes which represents a section of program logic. Nodes enclosed by **Flow**-type elements have to be executed one by one, in the order of their appearance. Furthermore, compound nodes such as **Group**, **Loop**, **Branch** etc. use **Flow**-type elements recursively. This constitutes the structured programming characteristic of OTX (cf. 6.3).

-

⁹⁾ The OTX term "flow" is an equivalent to the term "block" commonly used in programming which is usually expressed by "{" and "}" brackets enclosing a sequence of statements.

Figure 81 shows the syntax of the Flow type.

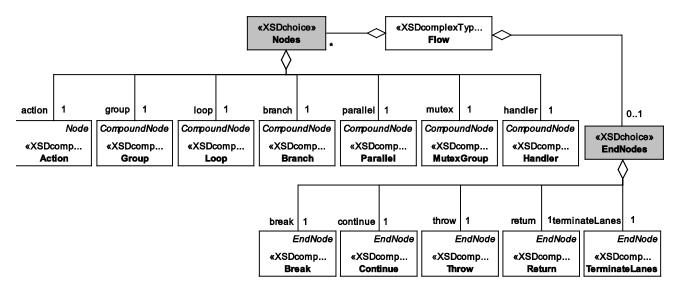


Figure 81 — Data model view: Flow

The type Flow dictates a special order of nodes: Any number of normal nodes (XSDchoice Nodes) is optionally followed by one end node (XSDchoice EndNodes).

7.16.9.3 **Semantics**

When control is passed to a flow, the contained nodes shall be executed one by one, in the order of appearance. Compound nodes (see 7.13.4) may contain one or many nested flows – after the execution of such a nested flow in a compound node, control is passed back to the next node in the nesting flow.

Figure 82 shows a behavioural description of the Flow type.

NOTE Even if shown in the activity diagram, there is no **explicit** Start node type in the OTX data model. This is not needed because the first node in a flow has the role to be the first node executed, **implicitly**. The same applies for the non-existing explicit *End* node type – the last node in the flow marks the end of flow execution, **also implicitly**. Only for special end-of-flow behaviour, there are **explicit EndNode** types (Continue, Break, Throw and Return, refer to 7.13.5).

The diagram to the left shows a simple flow. Nodes 1 through N shall be executed in top-down order. Keep in mind that each node shown in the diagrams may be simple or compound again.

The right-side diagram shows a stand-alone flow, nested within an outer flow. After "Node 1" has been executed in the outer flow, control is passed to "Node 2", the nested flow, which is executed recursively: "Node 2.1" is the first, followed by "Node 2.2", which is the last node in the sequence. Since there is no explicit EndNode, control is passed back to the outer flow, where the successive "Node 3" is executed.

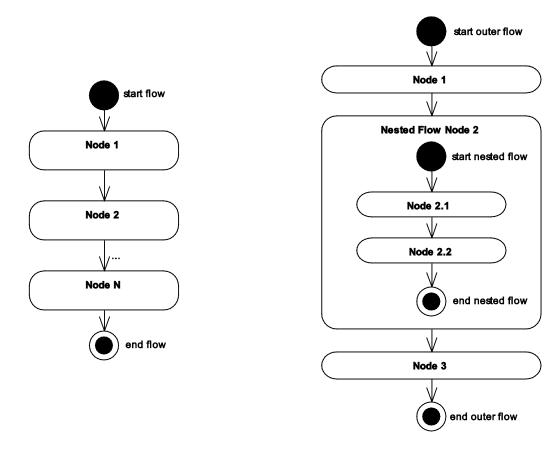


Figure 82 — Behavioural descriptions: Flow

7.16.9.4 Example

The example below shows a procedure level Flow with three nodes in it:

An Action node (id="action1"), a Loop node (id="loop1") and a Return node (id="ret1"). The Loop contains a single Action node (id="action2").

EXAMPLE Sample of OTX-file "FlowExample.otx"

```
<?xml version="1.0" encoding="UTF-8"?>
<otx xmlns="http://iso.org/OTX/1.0.0" id="27"</pre>
 name="FlowExample"
 package="org.iso.otx.examples"
 version= "1.0"
  timestamp="2009-10-20T14:40:10" >
  cedures>
    cedure name="main" visibility="PUBLIC" id="27-p1">
      <specification>Demonstration of nested flows</specification>
      <realisation>
          <action id="action1" />
          <action id = action />
<loop id = loop1 " name = "MyLoop" >
      <specification>Loop with nested flow</specification>
            <realisation>
              <configuration id="loop1config" />
              <flow>
                <action id="action2" />
              </flow>
            </realisation>
          </loop>
          <return id="ret1" />
        </flow>
      </realisation>
    </procedure>
  </procedures>
```

Annex A (normative)

OTX data types

A.1 Overview

The OTX Core defines a fixed set of data types which shall be supported by every OTX compliant application. This annex describes the semantic features that the mere syntax description of the UML or XSD data model cannot provide.

In the OTX data model, data types appear only concerning the syntax of declaring identifiers in declaration, or they appear e.g. as return types for terms; this allows a basic type safety ensured by XML validation.

Otherwise the technical OTX data model does not provide any hint about the exact characteristics of the OTX data types. Since the technical data model specifies the syntax of OTX documents, not the semantics, it only specifies e.g. how an identifier is marked to be an Integer by just stating the data type-name "Integer" (syntactically), or the data model allows in which term an integer is allowed as argument (also only syntactically) – however, there is no hint about the very integer characteristics, what makes an integer an integer, what its range of values is, that it can take a negative value etc.

NOTE New data types can be added to OTX by designing extension schemas. The data type extension mechanisms prescribed by the OTX Core are specified in Annex D.

IMPORTANT — Concerning OTX data types, OTX adheres closely to the W3C definition of data types. See [W3C XSD:2004].

A.2 Simple data types

A.2.1 General

Simple data types are scalars which store one single value. They can be used as building blocks for complex data types.

A.2.2 Boolean

OTX Boolean values have a value space of {"true", "false", "1", "0"}. Even though "1" and "0" are contained in the value space, treating Boolean values like numeric values directly is **not allowed** by OTX¹⁰).

OTX adheres to the W3C definition of the xsd:boolean data type.

A.2.3 Integer

The OTX Integer data type shall correspond to the term "integer" in a purely mathematical sense. For this reason it is **not allowed** to use overflow mechanisms or Byte manipulation actions on Integers.

Since OTX adheres to the W3C definition of the xsd:long data type, the value space is nonetheless restricted; it ranges from -9223372036854775808 (-2^{63}) to 9223372036854775807 (2^{63} -1). This corresponds to 64-bit two's complement memory representation of the integer.

¹⁰⁾ This is unlike some other languages like C, where Boolean values are treated as numeric values, e.g. "true" == 1, "false" == 0. Random arithmetic operations can then be applied to Boolean values, which shall not be possible in OTX because it endangers type safety.

A.2.4 Float

Floating point numbers are used to store non integer numeric values.

OTX adheres to the W3C definition of the xsd:double data type, which corresponds to the IEEE double-precision 64-bit floating point type in [IEEE 754:2008]. The basic value space of xsd:double consists of the values $m \times 2^e$, where m is an integer whose absolute value is less than 2^{53} , and e is an integer between -1075 and 970, inclusive.

IMPORTANT — There are additional special values of xsd:double (0, -0, INF, -INF and NaN). OTX applications must be able to handle these, too.

A.2.5 String

A String stores an arbitrary number of characters. Every character in an OTX String shall have a corresponding UCS/Unicode code point, which is an integer. See UCS [ISO/IEC 10646:2011] or Unicode [2] or for further information regarding character sets.

OTX adheres to the W3C definition of the xsd:string data type.

A.3 Complex data types

A.3.1 General

Complex data types are composed using simple data types and other complex types.

The OTX Core specifies two container data types List and Map which can store a set of items of simple and complex type. Furthermore, there is the complex ByteField data type which is used to store raw data of arbitrary size.

A.3.2 ByteField

An OTX **ByteField** is an arbitrary length sequence of bytes. Each byte is an unsigned eight bit value with a value space ranging from *0x00* to *0xFF* (0 to 255).

The bytes in a ByteField of byte size n shall be ordered from left to right, where the leftmost byte shall have a byte index of n-1, as demonstrated in Table A.1.

Table A.1 — Byte order in a ByteField

Byte index	Byte 0	Byte 1	Byte 2	 	Byte n-1
Value	0x87	0x7F	0x02	 	0xFF

The bits in each byte of the ByteField are ordered from the least significant bit (LSB) to the most significant bit (MSB), see Table A.2.

Table A.2 — Bit positions of a byte in a ByteField

Bit position	Bit 7 (MSB)	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0 (LSB)
Value	128	64	32	16	8	4	2	1

OTX ByteField values can be used to store raw data in memory representation which is used in the ECU. There is no assertion made for any interpretation of that raw data; a ByteField can therefore describe any kind of data, from simple integer data up to encoded text etc.

OTX adheres to the W3C definition of the xsd:hexBinary data type.

A.3.3 List

An OTX List consists of an arbitrary number of items of the same data type. At the declaration the list's item data type must be defined. The length of a list can be modified by the sequence by deleting or adding items. Insertion of items can be done at every position. In that case, the existing elements move one index further. The inverse happens when items are deleted from a list. See Figure A.1, Figure A.2 and Figure A.3. All list modification actions and list access terms are defined in clauses 7.14.7 and 7.15. Also compare to 7.16.7.3.5 about list declaration.



Figure A.1 — Design of a List




Figure A.2 — Insertion of items in a List




Figure A.3 — Deletion of items in a List

A.3.4 Map

An OTX Map contains of an arbitrary number of key/value pair items. At the declaration the map's key and value data types must be defined. Map keys must be of countable type. All keys must be unique inside a map, because values in a map are accessed by their key. For the data type of the values, there are no restrictions other than that all values in a map must be of the same type. Compare to 7.16.7.3.7, Map declaration.

A.3.5 Exception

Exceptions are complex data types which are all based on a common Exception type. They carry an exception text and stack trace information; both of which are created once the exception is created and cannot be modified later.

Among the OTX Core data types, there are two categories of exceptions 11):

- the implicit exceptions OutOfBoundsException, TypeMismatchException, Arithmetic-Exception, AmbiguousCallException, ConcurrentModificationException and Invalid-ReferenceException
- the explicit exception UserException

¹¹⁾ This corresponds to the checked vs. the unchecked exception classes in Java (cf. generic Exception classes vs. RuntimeException classes in §11.2 of The Java™ Language Specification [1])

In contrast to the UserException, implicit exceptions can not be created explicitly by the OTX autor; they are created implicitly by actions or terms when certain error conditions occur at runtime.

IMPORTANT — When an implicit exception is created, the OTX runtime system shall assign a meaningful exception text to it. The text shall explain the exception situation precisely from a mostly technical view. Preferably the text should also be understandable for the user.

IMPORTANT — The stack trace information for an exception shall be determined at the moment when the exception is created, not when it is thrown. The stack trace information can be accessed by the GetStackTrace term, which returns a list of fully qualified procedure names representing a snapshot of the procedure call stack (cf. 7.15.13.3.4).

In addition to the exception text and the stack trace information, the explicit exception **UserException** also carries an exception qualifier. Qualifiers shall be used by OTX authors to categorize user exceptions. Both qualifier and text of a **UserException** are defined by the OTX author, not by the OTX runtime system.

NOTE The common base type **Exception** can be used in **Handler** nodes to catch any kind of exception (7.13.4.8).

Exception and **UserException** are *checked exceptions* which should be handled by the OTX procedure. If they are not handled, OTX checker applications shall provide warnings (cf. respective checker rules in Annex C).

Also compare to 7.16.7.3.8 about exception declaration.

A.4 Nesting of data type domains

The OTX data types have different value spaces, which are partly nested. The nesting is shown in Figure A.4.

IMPORTANT — OTX uses automatic type promotion for Integer values whenever Float is required (e.g. in an Assignment f := i, the Integer i will be casted implicitly to Float before being assigned to f). This removes the necessity for explicit casting in such trivial cases.

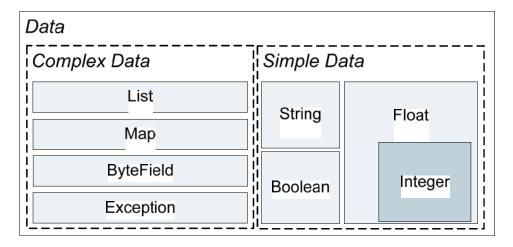


Figure A.4 — Nesting of data type value spaces

Annex B

(normative)

Scope and memory allocation

B.1 Overview

In OTX, global identifiers (global constants, document variables, context variables) and local identifiers (procedure parameters, local constants and variables) have a well defined scope and lifetime:

- The scope of an identifier describes where in an OTX procedure or validity term the identifier may be used or, with other words, where it is visible. The declaration type of the identifier determines the scope, as specified in detail below.
- The lifetime of an identifier is a runtime aspect of the identifier. It describes the portion of the OTX test sequence's execution time during which the identifier continues to refer to the same value or memory location.

An identifier's lifetime is closely connected with its scope; entrance into the identifier's scope typically begins a variable's lifetime and exit from that scope typically ends its lifetime.

The following specifies scope and lifetime for different declaration types of OTX.

B.2 Global identifiers

B.2.1 Global constants

Global constants (cf. 7.5) shall have global scope – that is, document-global, package-global or fully global scope, depending on the visibility setting (see visibility attribute for global identifiers in 7.16.8).

Since the value of global constants shall not change at runtime, the value shall be bound to the constant identifier permanently. Therefore its lifetime stretches across the full test sequence's execution time, disregarding scope.

B.2.2 Document variables

Document variables (cf. 7.5) shall have document-global scope, since their **visibility** attribute is rescricted to **PRIVATE** by the OTX XSD (see **visibility** attribute for global identifiers in 7.16.8).

Document variables shall have static characteristics concerning lifetime which means that, once a document variable is set the first time, its lifetime shall extend across the entire run of a test sequence's execution. As a consequence, when a procedure sets the value of a document variable and then returns, the variable's value shall still be present in memory. Other procedures which are called later (within the same process space) shall be able to access that value even if the identifier has fallen out of scope in between the calls.

B.2.3 Context variables

Context variables (cf. 7.5) shall have document-global, package-global or fully global scope, depending on the visibility setting (see visibility attribute for global identifiers in 7.16.8).

A context variable's value is determined by so-called *identification routines* (cf. 6.7 for an overview of the context concept). The lifetime of a context variable shall be independent of its scope – instead, it shall depend on the session to which the contextual property it describes is associated to. When that session ends, the context variable's lifetime shall end, too.

Consider e.g. the context variable "ENGINE_TYPE" which reflects the engine type of the vehicle that is attached to the test application. This context variable is bound to a meaningful value only during the current vehicle session. As soon as the vehicle is disconnected, the context variable's lifetime ends which means that the value will not be determinable anymore by the associated identification routine.

In fact, situations may occur where a context variable's identifier is in scope of an OTX procedure or a validity term, but its value cannot be determined, e.g. because the vehicle was disconnected. If the procedure or validity term tries reading the context variable at that moment, the identification routine should yield an error because there is currently no binding for the context variable.

NOTE Different types of sessions are e.g. a diagnostic session with an ECU or with a vehicle, a user session, or the test application session which lasts as long as the application is executed, etc. To each of these session types, different contextual properties are associated, like e.g. the logged-in user's name for the current user session, the model of the vehicle currently diagnosed in a vehicle session, the manufacturer of the ECU currently diagnosed in an ECU session, or license information belonging to the application session. A list of different session types and associated contextual properties is not specified by this part of ISO 13209 since it depends on the area of application where OTX is used.

B.3 Local identifiers

B.3.1 Procedure parameters

Procedure parameters declared in an OTX procedure (cf. 7.12) shall have procedure-wide scope.

The lifetime of a procedure parameter shall extend across the entire run of the procedure in which it is declared. Once that procedure returns, the binding of the parameter to its value shall end.

B.3.2 Local constants

Local constants declared in an OTX procedure (cf. 7.12) shall have procedure-wide scope.

Since the value of local constants shall not change at runtime, the value shall be bound to the constant identifier permanently. Therefore its lifetime stretches across the full test sequence's execution time, disregarding scope.

As compared to global constants, local constants only differ concerning scope.

B.3.3 Local variables

Local variables declared in an OTX procedure (cf. 7.12) shall have procedure-wide scope.

The lifetime of a local variable shall extend across the entire run of the procedure in which it is declared. Once that procedure returns, the binding of the variable to its value shall end.

Copyright International Organization for Standardization ghts reserved Provided by IHS under license with ISO No reproduction or networking permitted without license from IHS

Annex C (normative)

Comprehensive checker rule listing

C.1 Overview

To ensure OTX document quality and correctness, stand-alone OTX checker applications shall use a twostage approach:

a) The first stage is standard XML Schema validation which makes sure that the document is correct with respect to the XML grammar constraints given by the OTX Schema(s). The scope of validation is always on a single document, interdependencies in between documents are not resolved.

A document failing this test shall be considered invalid and shall not enter the second stage.

The second stage is needed for testing constraints that standard XML Schema validation cannot verify. Typical constraints which fall into this category are constraints of semantic and not of syntactic nature (e.g. cross-document interdependencies, like a procedure call into another OTX document, or cooccurrence interdependencies between elements which reside in entirely separate regions of the document, like a variable declaration in the declaration block and its use in a procedure flow, ...).

An OTX document or a set of documents that pass the critical second stage tests shall be considered as fully standard conform.

The constraints (alias checker rules) for the second checker stage are listed in the following.

C.2 Listing

Core Chk001 - document name matches file name

Severity: Warning

Criterion: For OTX documents stored in a file system, the attribute name of the <otx> root element should match the filename of the containing file (without the extension ".otx").

Comment: For other document management systems (e.g. a OTX data base system), this rule is irrelevant. Here, the combination of package and document name represents a primary key for unambiguous document identification.

Core_Chk002 - package-wide uniqueness of document names

Severity: Critical

Criterion: The value of the <otx> attribute name must be unique within the scope of all OTX documents belonging to the same package.

Core_Chk003 - no dead import links

Severity: Critical

Criterion: Imported OTX documents (referenced by package name and document name via <import> elements) should exist and should be accessible.

Core_Chk004 - no unused imports

Severity: Warning

Criterion: An imported OTX document should be used at least once in the importing document. **Comment:** This avoids needless dependencies (imports of documents which are never used).

Core_Chk005 - no use of undefined import prefixes

Severity: Critical

Criterion: If an imported name is accessed by prefix in an OtxLink type attribute, the corresponding prefix definition has to exist in an <import> element.

Core_Chk006 - match of imported document's data model version

Severity: Critical

Criterion: An imported OTX document (imported by an <import> element) shall be bound to the same data model version as the importing document. For this, the OTX XSD namespaces claimed by the <otx> root elements of both documents (attribute xmlns="http://iso.org/OTX/<version>") shall be identical.

Core Chk007 - have specification if no realisation exists

Severity: Warning

Criterion: For all elements with specification and realisation parts in an OTX document: if there is no <realisation> given, the according <specification> element should exist and have content (no empty string).

Comment: This aims towards gaining better documentation quality in OTX documents. Authors should at least provide a specification text if the realisation parts are not yet implemented.

Core_Chk008 - public main procedure

Severity: Critical

Criterion: The value of cprocedure attribute visibility shall always be "PUBLIC" if the procedure name is "main".

Core_Chk009 - mandatory constant initialisation

Severity: Critical

Criterion: Constant declarations shall always be initialised.

Comment: Usually, non-initialised constants are the result of an author mistake – the author might just have forgotten to initialise the constant.

Core_Chk010 - unique node names

Severity: Warning

Criterion: The value of a nodes name attribute should be unique among all nodes in a procedure.

Core_Chk011 - no disabled nodes

Severity: Warning

Criterion: A procedure should not contain any disabled nodes any more before it is rolled out (disabled attribute in Node types).

ISO 13209-2:2012(E)

Core_Chk012 – no unreachable realisations in Action and Group nodes

Severity: Warning

Criterion: In a single Action or Group node, the values of the validFor attributes of all <realisation> elements should be distinct. Also, after a <realisation> without validFor attribute, no further <realisation> elements should exist.

Comment: This avoids that e.g. two realisations are connected to the same validity information which would result in unreachable code: The realisation which comes second-in-sequence is never executed. The same is true for realisations following a default realisation. Usually, unreachable code is an indicator for possible inconsistencies in the code. This rule helps identifying some of these problems.

Core Chk013 - correct referencing of validities

Severity: Critical

Criterion: The validFor attribute (in types Procedure, ActionRealisation, GroupRealisation) and the validity attribute (IsValid term) shall refer to a visible validity term, Boolean context variable or global Boolean constant only.

Core_Chk014 - correct locator variable type in for-each-loop

Severity: Critical

Criterion: The locator variable used in for-each-loops shall be of the correct type: If the collection of the foreach-loop is a ListTerm, then the data type shall be Integer. If the collection is a MapTerm, the data type needs to match the key data type (Countable) of the map produced by the term.

Comment: To identify the key data type of the (potentially compound) MapTerm, the leaves of the term have to be analyzed. Possible leaves are MapValue, MapLiteral or MapCreate.

Core_Chk015 - correct nesting of Parallel nodes

Severity: Critical

element shall not be the *descendant* of another cparallel> element).

Core_Chk016 - no redundant exception catches

Severity: Warning

Criterion: In a <handler>, only one <catch> flow for one exception type should exist.

Comment: When this check fails, the author probably implemented an incorrect exception handling. The procedure might work nonetheless.

Core_Chk017 - checked exceptions (1)

Severity: Warning

Criterion: Every unhandled checked exception that is to be expected in a procedure should be declared in that procedures <throws> declaration.

Comment: The only checked exceptions in OTX Core are the explicit exception UserException and its base type Exception. These may be thrown when calling a procedure which defines UserException or Exception in its throws-attribute, or by a Throw node. In these places (ProcedureCall action or Throw node), the checker should provide a warning message, if not listed in throws. When this check fails, the author probably implemented an incomplete exception handling. The procedure might work nonetheless.

Core_Chk018 - checked exceptions (2)

Severity: Warning

Criterion: Every node which possibly throws a checked exception should be embedded in a **Handler** providing a **<catch>** applicable to that exception type, but only if the procedure does not already declare that explicit exception type in its **throws**-attribute (see Core_Chk017).

Comment: The only checked exceptions in OTX Core are the explicit exception **UserException** and its base type **Exception**. These may be thrown when calling a procedure which defines **UserException** or **Exception** in its **throws**-attribute, or by a **Throw** node. In these places (**ProcedureCall** action or **Throw** node), the checker should provide a warning message, if not handled. When this check fails, the author probably implemented an incomplete exception handling. The procedure might work nonetheless.

Core_Chk019 - type-safe exception catches

Severity: Critical

Criterion: In the CatchHeader of a <catch> block, the data type of the to-be-caught exception (given by the <type> element) shall match or is a subtype of the type of the handle variable (given by the <handle> element).

Comment: This makes sure that a caught exception cannot be assigned to a variable of another exception type. The data type of the handle is defined in the declaration block.

Core_Chk020 - correct nesting of Continue node

Severity: Critical

Criterion: The target attribute of a Continue node shall point to a Loop node. No other node types are allowed. Furthermore, the Continue node has to be nested *inside* of the targeted Loop (In XML wording: the <continue> element has to be a *descendant* of the targeted <loop> element). In the special case that a Continue node is nested inside of a Parallel node, the targeted Loop node has to be nested inside of the same Parallel node, too.

Core Chk021 - correct nesting of Break node

Severity: Critical

Criterion: The target attribute of a Break node shall point to a Loop node. No other node types are allowed. Furthermore, the Break node has to be nested *inside* of the targeted Loop (In XML wording: the
 break> element has to be a *descendant* of the targeted <loop> element). In the special case that a Break node is nested inside of a Parallel node, the targeted Loop node has to be nested inside of the same Parallel node, too.

Core_Chk022 - correct nesting of TerminateLanes node

Severity: Critical

Core_Chk023 - type-safe assignments

Severity: Critical

Criterion: In an Assignment action, the data type of the variable (identified by the correspond to the data type of the value (given by term>). Automatic type promotion has to be taken into account which allows assigning an Integer to a Float without explicit cast.

Comment: This ensures that e.g. a StringTerm value cannot be assigned to an Integer variable.

ISO 13209-2:2012(E)

Core_Chk024 – correct target for ProcedureCall

Severity: Critical

Criterion: A ProcedureCall action's procedure attribute shall refer to a Procedure, a Signature without realisation or a Signature with ProcedureSignature realisation. No other SignatureRealisation type but the ProcedureSignature type shall be allowed.

Comment: This avoids situations where a **ProcedureCall** misleadingly calls e.g. an HMI **ScreenSignature** which has a totally different purpose.

Core Chk025 - procedure signature has at least one implementing procedure

Severity: Warning

Criterion: For each procedure signature called by a **ProcedureCall** action at least one implementing procedure should exist which is visible relative to the signature.

Comment: Missing implementation procedures are usually a hint for possible inconsistencies in the code. Most often it was simply forgotten to implement the signature.

Core Chk026 - no duplicate validities for procedures implementing the same signature

Severity: Warning

Criterion: The values of the **validFor** attributes of all procedures implementing the same signature should be distinct. Also, there should only be one implementing procedure without **validFor** attribute.

Comment: This avoids that e.g. two procedures are connected to the same validity information which would result in unreachable code: One of these procedures will never be executed, even though it is valid also. Usually, unreachable code is an indicator for possible inconsistencies in the code. This rule helps identifying some of these problems.

Core_Chk027 - procedure parameters match signature parameters

Severity: Critical

Criterion: Implementing procedures (implements attribute is set) shall declare the same set of parameters like the corresponding signature, if the signature has a <realisation>. For each parameter, name and <datatype> shall match exactly. If a signature parameter has an explicit <init> value, the corresponding procedure parameter shall provide one also.

Comment: Explicit initial values are allowed to differ because an implementing procedure may define own initial values.

Comment: If the signature has no realisation>, this rule is irrelevant because a call to such a signature is a NOP at runtime.

Core_Chk028 - No Operation (NOP) ProcedureCall

Severity: Warning

Criterion: For a ProcedureCall action, the called procedure or signature should have a <realisation>.

Comment: When a procedure is called that has no realisation>, the call is a NOP at runtime. In general, calling such a procedure is an indication for a possible programming error. On the other hand, it might also be intended by the author. Therefore, the author should be warned when doing so.

Core_Chk029 - correct ProcedureCall arguments

Severity: Critical

Criterion: In a **ProcedureCall** action, the given arguments shall match to the corresponding procedure or signature parameter declaration, but only if the called procedure or signature has a **<realisation>**. This concerns parameter names as well as data types.

Comment: If the called procedure or signature has no realisation, the call is a NOP. In this case it is pointless to match arguments to parameters because parameters are not described yet (specification stage).

Core_Chk030 - input- and in&output-argument omission

Severity: Critical

Criterion: For any omitted input- or in&output-argument (when calling a procedure), an initial value has to be defined in the declaration of the corresponding parameter.

Core_Chk031- type-safe ListConcatenate

Severity: Critical

Criterion: In a ListConcatenate action, the lists described by ListTerm (given by the <otherList> elements) shall have identical data type structures as declared for the modified list (given by the element).

Comment: This disallows concatenating e.g. a list of lists of integers to a list of lists of strings.

Core_Chk032 - type-safe ListAppendItems

Severity: Critical

Criterion: In a ListAppendItems action, the list items described by Term (given by the <item> elements) shall have an identical data type structure as declared for the items of the modified list (referenced by the list> element).

Comment: This disallows appending e.g. an integer item to a list of strings.

Core_Chk033 - type-safe ListInsertItems

Severity: Critical

Criterion: In a ListInsertItems action, the list items (given by the <item> elements) shall have an identical data type structure as declared for the items of the modified list (referenced by the <list> element).

Comment: This disallows inserting e.g. an integer item into a list of strings.

Core_Chk034 - no use of init in list item type definition

Severity: Warning

Criterion: The element <itemType> may, according to the OTX schema, have an <init> sub element. In its use solely for defining the item type in a List declaration, the <init> element should not occur here.

Core_Chk035 - ListLiteral item type matches list declaration item type

Severity: Critical

Criterion: The <itemType> of the ListLiteral described by the <init> element of a List declaration must match to the <itemType> definition of the declaration.

ISO 13209-2:2012(E)

Core_Chk036 - ListLiteral and ListCreate item types follow item type definition

Severity: Critical

Criterion: In a ListLiteral or a ListCreate term, the types of the items in the <items> element must

match exactly to the type defined by the <itemType> element.

Core Chk037 - ListLiteral items are literal terms

Severity: Critical

Criterion: The <item> elements in a ListLiteral may, according to the OTX schema, be of any Term type, not only literal terms. In its use solely for describing literal items of a list, no other term types but literal

terms are allowed here.

Comment: The OTX Core defines the literal terms IntegerLiteral, FloatLiteral, BooleanLiteral, StringLiteral, BooleanLiteral, ListLiteral, MapLiteral and UserExceptionLiteral. These

are the only OTX Core terms allowed in a ListLiteral.

Core_Chk038 - type-safe MapPutItems

Severity: Critical

Criterion: In a MapPutItems action, the map items described by MapItem (given by the <item> elements) shall have an identical data type structure as declared for the items of the modified map (referenced by the

<map> element). This applies in terms of key and value data type declarations.

Core_Chk039 - type-safe MapRemoveltems

Severity: Critical

Criterion: In a MapRemoveItems action, the <key> elements shall have an identical data type structure as

declared for the items of the target map. They must be of Countable type.

Core_Chk040 – type-safe MapContainsKey

Severity: Critical

Criterion: In every occurrence of the term MapContainsKey, the data type of <key> must match the key

type of <map>.

Core_Chk041 - type-safe MapContainsValue

Severity: Critical

Criterion: In every occurrence of the term MapContainsValue, the data type of <value> must match the

value type of <map>.

Core_Chk042 - type-safe MapUnion

Severity: Critical

Criterion: In a MapUnion action, the maps described by MapTerm (given by the <otherMap> elements) shall have an identical data type structure as declared for the modified map (given by the <map> element).

This applies in terms of key **and** value data type declarations.

---,,...,...---,,,.,.,.--

Core_Chk043 - unique keys in MapLiteral

Severity: Critical

Criterion: A MapLiteral is wrongly defined if two or more key/value pairs (items) with the same key appear.

Core Chk044 - no use of init in map key type definition

Severity: Warning

Criterion: The element <keyType> may, according to the OTX schema, have an <init> sub element. In its use solely for defining the key type in a Map declaration, the <init> element should not occur here.

Core_Chk045 – no use of init in map value type definition

Severity: Warning

Criterion: The element <**valueType>** may, according to the OTX schema, have an <**init>** sub element. In its use solely for defining the value type in a Map declaration, the <**init>** element should not occur here.

Core Chk046 - MapLiteral key&value types match map declaration key&value types

Severity: Critical

Criterion: The <keyType> and <valueType> of the MapLiteral described by the <init> element of a Map declaration must match to the <keyType> and the <valueType> definition of the declaration.

Core Chk047 - MapLiteral and MapCreate key&value types follow key&value type definition

Severity: Critical

Criterion: In a MapLiteral term, the types of the keys and values of items in the <items> element must match to the types defined by the <keyType> and the <valueType> element.

Core_Chk048 – MapLiteral items are literal terms

Severity: Critical

Criterion: The <key> and <value> elements of items in a MapLiteral may, according to the OTX schema, be of any SimpleTerm / Term type, not only literal terms. In its use solely for describing literal items of a list, no other term types but literal terms are allowed here.

Comment: The OTX Core defines the literal terms IntegerLiteral, FloatLiteral, BooleanLiteral, StringLiteral, BooleanLiteral, ListLiteral, MapLiteral and UserExceptionLiteral. These are the only OTX Core terms allowed in a MapLiteral.

Core_Chk049 - uniform relation operand type

Severity: Critical

Criterion: The data types of all argument terms in a comparison operation shall match. An exception of this rule are **Integer** and **Float**, these may appear mixed in comparison operations.

Comment: Otherwise, comparisons like "string" < 10 would be possible. With the exception of the rule, a numeric comparison e.g. of a float value and an integer value, e.g. "10.0 < 11", is still allowed.

ISO 13209-2:2012(E)

Core_Chk050 - type-safe variable and constant usage

Severity: Critical

Criterion: When referring to a variable or constant via one of the dereferencing terms or a **Variable** subtype, the data type of the corresponding declaration has to correspond to the data indicated by the dereferencing term or **Variable** subtype.

Comment: This ensures that e.g. a BooleanValue or a BooleanVariable term can refer to Boolean type data only. The target of the referral can be stored top-level in a Boolean variable, constant or parameter, or inside of complex data structures like lists or maps. The rule shall check both cases. The declarations give information about the data types.

Core Chk051 - immutability of constants, input parameters and context variables

Severity: Critical

Criterion: The value of a constant, input parameter or context variable is not allowed to be changed (after initialization). Therefore, all occurrences of **Variable** type elements in OTX documents shall neither address constants nor input parameters or context variables.

Comment: E.g. in an **Assignment** action node, the **result** element shall never refer to a constant or an input parameter.

Core_Chk052 - identifier shadowing

Severity: Warning

Criterion: Locally declared identifiers (procedure parameter names as well as local constant and variable names) should not shadow globally declared identifiers (global constant, document variable and context names). Therefore, references which cause shadowing should be avoided.

Comment: This signals naming conflicts which may occur when a global identifier should be accessed but accidentally a local identifier of the same name is used. To solve the issue (after receiving the warning from the checker), authors may either rename the local or global identifier, so that they have distinct names, or they may self-import the local OTX document and use the import prefix in all references.

Core_Chk053 - no dangling OtxLink associations

Severity: Critical

Criterion: The target of any OtxLink type attribute shall exist and shall be accessible. Furthermore, if the target has a visibility attribute (see signatures and procedures), the visibility information has to be taken into account: An OtxLink attribute shall never link to a target which is not visible to the source document.

Furthermore, OtxLink type attributes shall point to the correct target category. In detail, this means that

- for validFor attributes and the validity attribute (occurring in types Procedure, ActionRealisation, GroupRealisation and the IsValid term), a visible Validity term, Boolean context variable or global Boolean constant with corresponding package and name shall exist,
- for the procedure attribute (occurring in type ProcedureCall), a visible Signature or Procedure with corresponding package and name shall exist,
- for the implements attribute (occurring in type Procedure), a visible Signature with corresponding package and name shall exist and that
- for the name attributes and the valueOf attributes (occurring in the Variable types and the dereferencing terms), a local Declaration or a visible global Declaration with corresponding package and name shall exist.

Comment: This is not important at authoring time, but critical for linking. Possible link targets are entities like e.g. validities, global constants, procedures, signatures and local parameters/constants/variables. They are referenced by an OtxLink which implicitly provides their package, document name and entity name. This rule is closely connected to rule Core_Chk003 – no dead import links.

Core Chk054 - unused declarations

Severity: Warning

Criterion: Global private declarations and private validities as well as local declarations should be read at least once in an OTX document. This means, each of such declarations should appear at least once in a dereferencing term's **valueOf**-attribute or (for validities) in a **validFor**-attribute.

Comment: Unused declarations are an indicator for possible inconsistencies in the code. This rule helps identifying some of these problems.

Core Chk055 - unreachable nodes

Severity: Critical

Criterion: Nodes in a procedure to which there is no path through the control flow shall not be allowed.

Comment: The constraint "no nodes after an endnode" imposed by the OTX Schema works only on the top-level of a local flow. When all embedded flows in an outer flow end with an endnode, XSD validation cannot identify this. This rule shall ensure that all nodes are reachable.

Core_Chk056 - no modification of collection inside foreach-loops

Severity: Critical

Criterion: Inside of foreach-loops, the collection (List or Map) shall not be modified.

Comment: Modifications can be identified by searching for occurrences of the collection identifier as an I-value (cf. Variable type). However, this rule cannot fully prevent ConcurrentModificationExceptions to happen because the modification might happen outside of the loop, e.g. in a Parallel lane.

Core_Chk057 - no use of init in catch header exception type definition

Severity: Warning

Criterion: The element <type> in CatchRealisation may, according to the OTX schema, have an <init> sub element (if the to-be-caught exception type is set to UserException). Since the <type> element's use in a catch block is solely for defining the to-be-caught exception type, the <init> element should not occur here.

Annex D (normative)

Extension mechanism

D.1 Overview

OTX defines a mechanism to extend the feature set of the language. Using this mechanism it is possible to create new extension schemas which describe additional data types, terms, actions and signature types.

Extending the XML schema is done by deriving new complex types from the ExtensionInterface types ActionRealisation, DataType, Variable, Term and SignatureRealisation or their children. In any case, a parent type of the complex type which is used for derivation must be part of the Core.

In order to make the new features useable in an OTX document, the extension schema must be declared in the document by the xmlns attribute and optionally the schemaLocation attribute (see 7.3.3).

IMPORTANT — The extension mechanism described here only defines the syntactic rules to which extension implementers have to obey in order to conform to this part of ISO 13209. Semantics ofnew data types, terms and actions have to be documented by the extension implementer in a form he considers suitable.

Figure shows all types derived from ExtensionInterface.

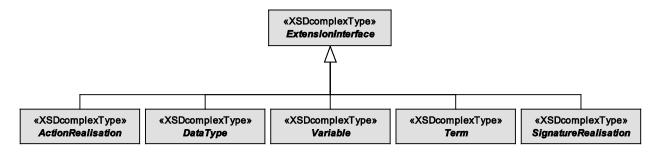


Figure D.1 — Data model view: ExtensionInterface

OTX itself uses this mechanism to define the standard extension schemas that represent the interface to various external systems. Therefore they are also called IFD schemas (Interface Definition). These are specified in ISO 13209-3.

D.2 Adding new data type declarations, variables and terms

When a new data type shall defined in an OTX extension, there are several steps to be taken:

- For allowing declaration of variables etc. of the new data type, the declaration syntax for the ne data type shall be specified. This shall be done by deriving new XSD complex type from DataType or one of its children. Doing so makes the new data type available in all declaration blocks in an OTX document.
- If it shall be possible to initialize variables etc. of that new data type at declaration time, an <init> element is required. The element shall allow stating a literal representing the initial value; therefore a new literal term shall also be created.

- Since variables etc. declared with the new data type also shall be useable from nodes in an OTX procedure (e.g. left-hand in an Assignment action), the syntax for referring to a variable shall be specified. This shall be done by deriving a new XSD complex type from the Variable type.
- Since the value of variables etc. declared with the new data type shall be accessible, the syntax for reading the value shall also be specified. Therefore a new dereferencing term shall also be created.

In general, new terms shall be defined by deriving a new XSD complex type from Term or one of its abstract children.

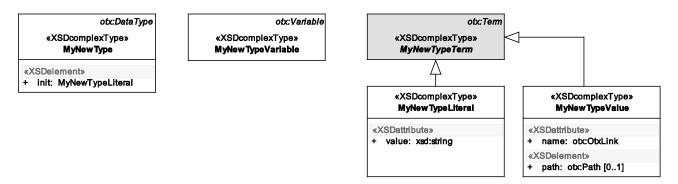


Figure D.2 — Deriving new data types and terms

Figure D.2 shows the definition of a new data type with the name MyNewType. It has an init attribute for initialisation. The type of <init> is MyNewTypeLiteral which is derived from MyNewTypeTerm. MyNewTypeLiteral has an attribute value which is of the xsd:string type. Furthermore, MyNewTypeVariable was derived from Variable. The dereferencing term MyNewTypeValue has been implemented by deriving from MyNewTypeTerm. MyNewTypeTerm is derived from Term. All terms which return a MyNewType value must be derived from this complex type.

D.3 Adding new actions

By deriving XSD complex types from an ActionRealisation or one of its children, it is also possible to create new actions, as shown in Figure D.3 and Figure D.4.




Figure D.3 — Deriving new actions

D.4 Reusing OTX Core data model features within actions and terms

All terms and data types can be reused in extension schemas.

Figure D.4 demonstrates this: By adding an element <count> to MyNewAction, the action gets a new property. Figure D.4 shows MyNewAction type with its new element which is derived from the abstract OTX Core term IntegerTerm. When using this new action, any term derived from IntegerTerm can henceforth be substituted there.




Figure D.4 — Reusing an OTX Core type in a new ActionRealisation

D.5 XSD of the example extension

The example shows the XML schema for the OTX extension modelled above. OTX documents importing the namespace "http://com.myCompany/MyOtxExtension" can use all the new actions, terms and data types defined within the schema.

EXAMPLE Sample of OTX-extension schema "ExtensionExample.xsd"

```
<?xml version="1.0" encoding="UTF-8"?>
\textbf{<xsd:schema xmlns:xsd} = \texttt{"http://www.w3.org/2001/XMLSchema" } \textbf{targetNamespace} = \texttt{"http://com.myCompany/MyOtxExtension"} \\
 xmlns="http://com.myCompany/MyOtxExtension" xmlns:otx="http://iso.org/OTX/1.0.0"
  elementFormDefault="qualified">
  <xsd:import namespace="http://iso.org/OTX/1.0.0" schemaLocation="../Core/otx.xsd"/>
  <xsd:complexType name="MyNewType">
    <xsd:complexContent>
      <xsd:extension base="otx:DataType">
        <xsd:sequence>
          <xsd:element name="init" type="MyNewTypeLiteral" minOccurs="1" maxOccurs="1" />
      </xsd:extension>
   </xsd:complexContent>
 </xsd:complexType>
  <xsd:complexType name="MyNewTypeVariable">
    <xsd:complexContent>
      <xsd:extension base="otx:Variable" />
    </xsd:complexContent>
  </xsd:complexType>
  <xsd:complexType name="MyNewTypeTerm" abstract="true">
    <xsd:complexContent>
      <xsd:extension base="otx:Term"/>
   </xsd:complexContent>
  </xsd:complexType>
  <xsd:complexType name="MyNewTypeLiteral">
    <xsd:complexContent>
      <xsd:extension base="MyNewTypeTerm">
        <xsd:attribute name="value" use="optional" type="xsd:string" />
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
 <xsd:complexType name="MyNewTypeValue">
    <xsd:complexContent>
      <xsd:extension base="MyNewTypeTerm">
        <xsd:sequence>
          <xsd:element name="path" type="otx:Path" minOccurs="0" maxOccurs="1" />
        </xsd:sequence
        <xsd:attribute name="name" use="optional" type="otx:OtxLink" />
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
 <xsd:complexType name="MyNewAction">
    <xsd:complexContent>
      <xsd:extension base="otx:ActionRealisation">
        <xsd:sequence>
          <xsd:element name="count" type="otx:IntegerTerm" minoccurs="1" maxOccurs="1" />
        </xsd:sequence>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
</xsd:schema>
```

Annex E

(normative)

Schema annotations for exception handling

E.1 Overview

Exceptions can be thrown explicitly by using the **Throw** node (see 7.13.5.5), or implicitly by the execution of a **Term** or an **ActionRealisation**. For the implicit case, OTX provides a formal specification of the exceptions that a **Term** or **ActionRealisation** may throw. The specification is contained in the type definitions of the OTX schema — more precisely, inside of the annotation section of the respective XSD complex type (element <xsd:appinfo> in <xsd:annotation>).

A separate XML schema has been developed for describing the formal annotation content. As can be seen in Figure E.1, the schema simply reuses the **Throws** type out of the OTX Core schema (cf. 7.9, <throws> in the **Procedure** type). The corresponding XSD (otxAppInfo.xsd) is contained in Annex F.




Figure E.1 — Data model view: otxAppInfo.xsd

E.2 Example

The snippet out of the OTX Core XSD below shows the use of otxAppInfo.xsd for the term Divide. In the case of a division by zero, Divide will throw an ArithmeticException. This is specified formally in the <xsd:appinfo/> element marked in the figure.

EXAMPLE Sample of OTX-schema "otx.xsd"

```
<xsd:schema targetNamespace="http://iso.org/OTX/1.0.0"
    xmlns:oai="http://iso.org/OTX/1.0.0/Auxiliaries/AppInfo"|</pre>
  <xsd:complexType name="Divide">
    <xsd:annotation>
        Coai:throws>
      <xsd:appinfo>
           <otx:exception xsd:type="otx:ArithmeticException" />
         </oai:throws>
      </xsd:appinfo>
    </xsd:annotation>
    <xsd:complexContent>
      <xsd:extension base="otx:NumericTerm">
         <xsd:sequence>
           <xsd:element name="numeral" type="otx:NumericTerm" minoccurs="1" maxOccurs="1"/>
<xsd:element name="divisor" type="otx:NumericTerm" minoccurs="1" maxOccurs="1"/>
         </xsd:sequence>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
```

Annex F (normative)

XML Schemas

F.1 Access to ISO 13209-2 OTX XML schema definition file

For the convenience of the user, the ISO 13209-2 OTX XML schema definition file (XSD) is published alongside this document.

F.2 OTX Core Schema (Core/otx.xsd)

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema targetNamespace="http://iso.org/OTX/1.0.0" xmlns:otx="http://iso.org/OTX/1.0.0"</pre>
xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:xmime="http://www.w3.org/2005/05/xmlmime"
xmlns:oai="http://iso.org/OTX/1.0.0/Auxiliaries/AppInfo" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
elementFormDefault="qualified" version="1.0.0">
  <xsd:annotation>
    <xsd:documentation>ISO 13209-2 schema specification V. 1.0.0 (OTX Core), November 2011/xsd:documentation>
  <xsd:import namespace="http://www.w3.org/2005/05/xmlmime" schemaLocation="../w3c/xmlmime.xsd"/>
  <xsd:import namespace="http://www.w3.org/XML/1998/namespace" schemaLocation="../w3c/xml.xsd"/>
  <xsd:complexType name="MetaData">
    <xsd:sequence>
      <xsd:element name="data" type="otx:Data" minOccurs="1" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="InOutParameterDeclaration">
    <xsd:complexContent>
      <xsd:extension base="otx:Declaration"/>
    </xsd:complexContent>
  </xsd:complexType>
  <xsd:complexType name="InParameterDeclaration">
    <xsd:complexContent>
      <xsd:extension base="otx:Declaration"/>
    </xsd:complexContent>
  </xsd:complexType>
  <xsd:complexType name="CommentLinks">
    <xsd:sequence>
      <xsd:element name="link" type="otx:CommentLink" minOccurs="1" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="Data" mixed="true">
    <xsd:sequence>
      <xsd:any namespace="##any" processContents="lax" minoccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="key" use="required" type="xsd:string"/>
    <xsd:attribute use="optional" ref="xmime:contentType"/>
    <xsd:attributeGroup ref="xml:specialAttrs"/>
    <xsd:anyAttribute namespace="http://www.w3.org/1999/xlink" processContents="lax"/>
  </xsd:complexType>
  <xsd:element name="otx" type="otx:0tx">
    <xsd:key name="MandatoryDocumentName">
      <xsd:selector xpath="."/>
      <xsd:field xpath="@name"/>
    </xsd:key>
    <xsd:key name="UniqueIds">
      <xsd:selector</pre>
xpath=".|.//otx:signature|.//otx:procedure|.//otx:validity|.//otx:declarations/otx:*|.//otx:parameters/otx:*|.//
otx:terminateLanes|.//otx:mutex|.//otx:group|.//otx:configuration|.//otx:action|.//otx:branch|.//otx:parallel|./
/otx:handler|.//otx:catch/otx:exception|.//otx:loop|.//otx:return|.//otx:continue|.//otx:break|.//otx:throw|.//o
tx:condition .//otx:comment"/>
      <xsd:field xpath="@id"/>
    </xsd:key>
    <xsd:key name="UniqueMetaDataKeys">
      <xsd:selector xpath="otx:metaData/otx:data"/>
      <xsd:field xpath="@key"/>
    </xsd:kev>
    <xsd:key name="UniqueProcedureAndSignatureNames">
      <xsd:selector xpath="otx:procedures/otx:procedure|otx:signatures/otx:signature"/>
      <xsd:field xpath="@name"/>
    </xsd:key>
```

```
<xsd:key name="UniqueGlobalIdentifierNames">
    <xsd:selector xpath="otx:validities/otx:validity|otx:declarations/otx:*"/>
    <xsd:field xpath="@name"/>
  </xsd:key>
</xsd:element>
<xsd:complexType name="ParameterDeclarations">
  <xsd:choice minOccurs="1" maxOccurs="unbounded">
    <xsd:element name="inParam" type="otx:InParameterDeclaration" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="inoutParam" type="otx:InOutParameterDeclaration" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="outParam" type="otx:OutParameterDeclaration" minOccurs="1" maxOccurs="1"/>
  </xsd:choice>
</xsd:complexType>
<xsd:complexType name="VariableDeclaration">
  <xsd:complexContent>
    <xsd:extension base="otx:Declaration"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ListVariable">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:Variable"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ConstantDeclaration">
  <xsd:complexContent>
    <xsd:extension base="otx:Declaration"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="CommentLink">
  <xsd:attribute name="targetId" use="required" type="otx:OtxIdRef"/>
</xsd:complexType>
<xsd:complexType name="OutParameterDeclaration">
  <xsd:complexContent>
    <xsd:extension base="otx:Declaration"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Comment">
  <xsd:all>
    <xsd:element name="metaData" type="otx:MetaData" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="text" type="xsd:string" minOccurs="1" maxOccurs="1"/>
<xsd:element name="links" type="otx:CommentLinks" minOccurs="0" maxOccurs="1"/>
  </xsd:all>
  <xsd:attribute name="id" use="required" type="otx:OtxId"/>
</xsd:complexType>
<xsd:complexType name="ProcedureRealisation">
  <xsd:all>
    <xsd:element name="comments" type="otx:Comments" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="parameters" type="otx:ParameterDeclarations" minoccurs="0" maxOccurs="1"/>
    <xsd:element name="declarations" type="otx:LocalDeclarations" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="throws" type="otx:Throws" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="flow" type="otx:Flow" minOccurs="1" maxOccurs="1"/>
  </xsd:all>
</xsd:complexType>
<xsd:complexType name="Comments">
  <xsd:sequence>
    <xsd:element name="comment" type="otx:Comment" minoccurs="1" maxoccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Otx">
  <xsd:complexContent>
    <xsd:extension base="otx:NamedAndSpecified">
      <xsd:sequence>
        <xsd:element name="adminData" type="otx:AdminData" minOccurs="0" maxOccurs="1"/>
         <xsd:element name="imports" type="otx:Imports" minOccurs="0" maxOccurs="1">
           <xsd:key name="UniqueImportPrefixes">
             <xsd:selector xpath="otx:import"/>
             <xsd:field xpath="@prefix"/>
          </xsd:key>
        </xsd:element>
        <xsd:element name="declarations" type="otx:GlobalDeclarations" minOccurs="0" maxOccurs="1"/>
        <xsd:element name="validities" type="otx:Validities" minOccurs="0" maxOccurs="1"/>
<xsd:element name="signatures" type="otx:Signatures" minOccurs="0" maxOccurs="1"/>
         <xsd:element name="procedures" type="otx:Procedures" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
      <xsd:attribute name="package" use="required" type="otx:PackageName"/>
      <xsd:attribute name="version" use="required" type="xsd:token"/>
      <xsd:attribute name="timestamp" use="required" type="xsd:dateTime"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="AdminData">
  <xsd:complexType name="AdminData">
  <xsd:anyAttribute namespace="http://www.w3.org/1999/xlink" processContents="lax"/>
</xsd:complexType>
```

```
<xsd:complexType name="Declaration" abstract="true">
    <xsd:complexContent>
      <xsd:extension base="otx:NamedAndSpecified">
        <xsd:sequence>
          <xsd:element name="realisation" type="otx:DeclarationRealisation" minoccurs="0" maxOccurs="1"/>
        </xsd:sequence>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
  <xsd:complexType name="Procedure">
    <xsd:complexContent>
      <xsd:extension base="otx:NamedAndSpecified">
        <xsd:sequence>
          <xsd:element name="realisation" type="otx:ProcedureRealisation" minOccurs="0" maxOccurs="1"/>
        </xsd:sequence>
        <xsd:attribute name="visibility" use="optional" default="PRIVATE" type="otx:Visibility"/>
        <xsd:attribute name="implements" use="optional" type="otx:OtxLink"/>
        <xsd:attribute name="validFor" use="optional" type="otx:OtxLink"/>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
 <xsd:complexType name="LocalDeclarations">
  <xsd:choice minOccurs="1" maxOccurs="unbounded">
      <xsd:element name="constant" type="otx:ConstantDeclaration" minOccurs="1" maxOccurs="1"/>
      <xsd:element name="variable" type="otx:VariableDeclaration" minOccurs="1" maxOccurs="1"/>
    </xsd:choice>
  </xsd:complexType>
  <xsd:complexType name="Procedures">
    <xsd:sequence>
      <xsd:element name="procedure" type="otx:Procedure" minOccurs="1" maxOccurs="unbounded">
        <xsd:key name="UniqueLocalIdentifierNames">
          <xsd:selector xpath="otx:realisation/otx:parameters/otx:*|otx:realisation/otx:declarations/otx:*"/>
          <xsd:field xpath="@name"/>
        </xsd:kev>
        <xsd:key name="UniqueNodeIds">
          <xsd:selector</pre>
xpath=".//otx:terminateLanes|.//otx:mutex|.//otx:group|.//otx:configuration|.//otx:action|.//otx:branch|.//otx:p
arallel|.//otx:handler|.//otx:catch/otx:exception|.//otx:loop|.//otx:return|.//otx:continue|.//otx:break|.//otx
throw | .//otx:condition | .//otx:comment"/>
          <xsd:field xpath="@id"/>
        </xsd:key>
        <xsd:keyref name="CommentTargetId" refer="otx:UniqueNodeIds">
          <xsd:selector xpath="otx:realisation/otx:comments/otx:comment/otx:links/otx:link"/>
          <xsd:field xpath="@targetId"/>
        </xsd:keyref>
        <xsd:key name="LoopKeyForBreakAndContinue">
          <xsd:selector xpath=".//otx:loop"/>
          <xsd:field xpath="@name"/>
        </xsd:key>
        <xsd:keyref name="LoopRef" refer="otx:LoopKeyForBreakAndContinue">
          <xsd:selector xpath=".//otx:break|.//otx:continue"/>
          <xsd:field xpath="@target"/>
        </xsd:keyref>
      </xsd:element>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="ExtensionInterface" abstract="true"/>
  <xsd:complexType name="HandlerRealisation">
    <xsd:sequence>
      <xsd:element name="try" type="otx:Flow" minOccurs="1" maxOccurs="1"/>
<xsd:choice minOccurs="1" maxOccurs="1">
        <xsd:element name="finally" type="otx:Flow" minoccurs="1" maxOccurs="1"/>
<xsd:sequence minoccurs="1" maxOccurs="1">
          <xsd:element name="catch" type="otx:CatchingFlow" minoccurs="1" maxOccurs="unbounded"/>
          <xsd:element name="finally" type="otx:Flow" minOccurs="0" maxOccurs="1"/>
        </xsd:sequence>
      </xsd:choice>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="GroupRealisation">
    <xsd:complexContent>
      <xsd:extension base="otx:Flow">
        <xsd:attribute name="validFor" use="optional" type="otx:OtxLink"/>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
  <xsd:complexType name="Imports">
    <xsd:sequence>
      <xsd:element name="import" type="otx:Import" minOccurs="1" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="Import">
    <xsd:attribute name="package" use="required" type="otx:PackageName"/>
    <xsd:attribute name="document" use="required" type="otx:OtxName"/>
    <xsd:attribute name="prefix" use="required" type="otx:OtxName"/>
  </xsd:complexType>
  <xsd:complexType name="IsGreater">
```

```
<xsd:complexContent>
    <xsd:extension base="otx:BooleanTerm">
      <xsd:sequence>
        <xsd:element name="left" type="otx:SimpleTerm" minOccurs="1" maxOccurs="1"/>
<xsd:element name="right" type="otx:SimpleTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Throw">
  <xsd:complexContent>
    <xsd:extension base="otx:EndNode">
      <xsd:sequence>
        <xsd:element name="realisation" type="otx:ExceptionTerm" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
    </r></rad:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:simpleType name="OtxLink">
  <xsd:restriction base="xsd:string">
    <xsd:pattern value="(_*[a-zA-Z][a-zA-Z0-9_]*:)?_*[a-zA-Z][a-zA-Z0-9_]*"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:complexType name="Branch">
  <xsd:complexContent>
    <xsd:extension base="otx:CompoundNode">
      <xsd:sequence>
        <xsd:element name="realisation" type="otx:BranchRealisation" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ConditionHeader">
  <xsd:complexContent>
    <xsd:extension base="otx:Header">
      <xsd:sequence>
        <xsd:element name="realisation" type="otx:BooleanTerm" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="WhileLoop">
  <xsd:complexContent>
    <xsd:extension base="otx:LoopConfigurationRealisation">
      <xsd:sequence>
        <xsd:element name="test" type="otx:BooleanTerm" minoccurs="1" maxOccurs="1"/>
      </xsd:sequence>
      <xsd:attribute name="isPostTested" use="optional" default="false" type="xsd:boolean"/>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ParallelRealisation">
  <xsd:sequence>
    <xsd:element name="lane" type="otx:Flow" minoccurs="2" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="BranchRealisation">
  <xsd:sequence>
    <xsd:element name="if" type="otx:ConditionalFlow" minoccurs="1" maxoccurs="1"/>
    <xsd:element name="elseif" type="otx:ConditionalFlow" minOccurs="0" maxOccurs="unbounded"/>
<xsd:element name="else" type="otx:Flow" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Continue">
  <xsd:complexContent>
    <xsd:extension base="otx:EndNode">
      <xsd:attribute name="target" use="optional" type="otx:OtxName"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="GetBit">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:BooleanTerm">
      <xsd:sequence>
        <xsd:element name="byteField" type="otx:ByteFieldTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="index" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="position" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="CompoundNode" abstract="true">
```

```
<xsd:complexContent>
    <xsd:extension base="otx:Node"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="LoopConfigurationHeader">
  <xsd:complexContent>
    <xsd:extension base="otx:Header">
      <xsd:sequence>
        <xsd:element name="realisation" type="otx:LoopConfigurationRealisation" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="LoopRealisation">
  <xsd:sequence>
    <xsd:element name="configuration" type="otx:LoopConfigurationHeader" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="flow" type="otx:Flow" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Group">
  <xsd:complexContent>
    <xsd:extension base="otx:CompoundNode">
      <xsd:sequence>
        <xsd:element name="realisation" type="otx:GroupRealisation" minOccurs="0" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ListRemoveItems">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:ListModifier">
      <xsd:sequence>
        <xsd:element name="index" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="count" type="otx:NumericTerm" minoccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ListClear">
  <xsd:complexContent>
    <xsd:extension base="otx:ListModifier"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="GlobalDeclarations">
  <xsd:choice minOccurs="1" maxOccurs="unbounded">
    <xsd:element name="constant" type="otx:GlobalConstantDeclaration" minOccurs="1" maxOccurs="1"/>
<xsd:element name="variable" type="otx:DocumentVariableDeclaration" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="context" type="otx:ContextVariableDeclaration" minoccurs="1" maxoccurs="1"/>
  </xsd:choice>
</xsd:complexType>
<xsd:complexType name="Parallel">
  <xsd:complexContent>
    <xsd:extension base="otx:CompoundNode">
      <xsd:sequence>
        <xsd:element name="realisation" type="otx:ParallelRealisation" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="LoopConfigurationRealisation" abstract="true"/>
<xsd:complexType name="ActionRealisation" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:ExtensionInterface">
      <xsd:attribute name="validFor" use="optional" type="otx:OtxLink"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="SetBit">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:ByteFieldModifier">
      <xsd:sequence>
        <xsd:element name="index" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="position" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="value" type="otx:BooleanTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
```

```
</xsd:complexType>
<xsd:complexType name="MapUnion">
  <xsd:complexContent>
    <xsd:extension base="otx:MapModifier">
      <xsd:sequence>
        <xsd:element name="otherMap" type="otx:MapTerm" minOccurs="1" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="List">
  <xsd:complexContent>
    <xsd:extension base="otx:ComplexType">
      <xsd:all>
        <xsd:element name="itemType" type="otx:DataType" minoccurs="1" maxOccurs="1"/>
<xsd:element name="init" type="otx:ListLiteral" minoccurs="0" maxOccurs="1"/>
      </xsd:all>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Handler">
  <xsd:complexContent>
    <xsd:extension base="otx:CompoundNode">
      <xsd:sequence>
         <xsd:element name="realisation" type="otx:HandlerRealisation" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
    </rd></rdiextension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="CatchingFlow">
  <xsd:sequence>
    <xsd:element name="exception" type="otx:CatchHeader" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="flow" type="otx:Flow" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Loop">
  <xsd:complexContent>
    <xsd:extension base="otx:CompoundNode">
      <xsd:sequence>
        <xsd:element name="realisation" type="otx:LoopRealisation" minoccurs="0" maxoccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Return">
  <xsd:complexContent>
    <xsd:extension base="otx:EndNode"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Node" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:NamedAndSpecified">
      <xsd:attribute name="disabled" use="optional" default="false" type="xsd:boolean"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ForLoop">
  <xsd:complexContent>
    <xsd:extension base="otx:LoopConfigurationRealisation">
      <xsd:sequence>
        <xsd:element name="counter" type="otx:IntegerVariable" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="start" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
<xsd:element name="end" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Map">
  <xsd:complexContent>
    <xsd:extension base="otx:ComplexType">
      <xsd:all>
        <xsd:element name="keyType" type="otx:CountableType" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="valueType" type="otx:DataType" minOccurs="1" maxOccurs="1"/>
<xsd:element name="init" type="otx:MapLiteral" minOccurs="0" maxOccurs="1"/>
      </xsd:all>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Integer">
  <xsd:complexContent>
    <xsd:extension base="otx:CountableType">
        <xsd:element name="init" type="otx:IntegerLiteral" minOccurs="0" maxOccurs="1"/>
      </xsd:all>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
```

```
<xsd:complexType name="DeclarationRealisation">
    <xsd:element name="dataType" type="otx:DataType" minOccurs="1" maxOccurs="1"/>
 </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Boolean">
  <xsd:complexContent>
    <xsd:extension base="otx:SimpleType">
      <xsd:all>
        <xsd:element name="init" type="otx:BooleanLiteral" minOccurs="0" maxOccurs="1"/>
      </xsd:all>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="OutOfBoundsException">
  <xsd:complexContent>
    <xsd:extension base="otx:Exception"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="AmbiguousCallException">
  <xsd:complexContent>
    <xsd:extension base="otx:Exception"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ConcurrentModificationException">
  <xsd:complexContent>
    <xsd:extension base="otx:Exception"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ArithmeticException">
  <xsd:complexContent>
    <xsd:extension base="otx:Exception"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="CountableType" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:SimpleType"/>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="SimpleType" abstract="true">
 <xsd:complexContent>
    <xsd:extension base="otx:DataType"/>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapCreate">
 <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:MapTerm">
        <xsd:element name="keyType" type="otx:CountableType" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="valueType" type="otx:DataType" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="items" type="otx:MapItems" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Float">
  <xsd:complexContent>
    <xsd:extension base="otx:SimpleType">
        <xsd:element name="init" type="otx:FloatLiteral" minOccurs="0" maxOccurs="1"/>
      </xsd:all>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ComplexType" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:DataType"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="String">
  <xsd:complexContent>
    <xsd:extension base="otx:CountableType">
      <xsd:all>
        <xsd:element name="init" type="otx:StringLiteral" minOccurs="0" maxOccurs="1"/>
      </xsd:all>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="TypeMismatchException">
  <xsd:complexContent>
    <xsd:extension base="otx:Exception"/>
  </xsd:complexContent>
```

```
</xsd:complexType>
<xsd:complexType name="DataType" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:ExtensionInterface"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ByteFieldGetSize">
  <xsd:complexContent>
    <xsd:extension base="otx:IntegerTerm">
      <xsd:sequence>
        <xsd:element name="byteField" type="otx:ByteFieldTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ToString">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:StringTerm">
      <xsd:sequence>
        <xsd:element name="term" type="otx:Term" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </rd></rdiextension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="BitwiseAnd">
  <xsd:complexContent>
    <xsd:extension base="otx:ByteFieldTerm">
      <xsd:sequence>
        <xsd:element name="byteField" type="otx:ByteFieldTerm" minOccurs="2" maxOccurs="2"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="FloatLiteral">
  <xsd:complexContent>
    <xsd:extension base="otx:FloatTerm">
      <xsd:attribute name="value" use="required" type="xsd:double"/>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ListCreate">
  <xsd:complexContent>
    <xsd:extension base="otx:ListTerm">
      <xsd:sequence>
        <xsd:element name="itemType" type="otx:DataType" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="items" type="otx:ListItems" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapRemoveItems">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:MapModifier">
      <xsd:sequence>
        <xsd:element name="key" type="otx:Term" minOccurs="1" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapClear">
  <xsd:complexContent>
    <xsd:extension base="otx:MapModifier"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ProcedureCall">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws>
        <otx:exception xsi:type="otx:InvalidReferenceException" />
      </oai:throws>
      <oai:throws>
        <otx:exception xsi:type="otx:AmbiguousCallException" />
      </oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:ActionRealisation">
```

```
<xsd:sequence>
        <xsd:element name="arguments" type="otx:Arguments"</pre>
          minOccurs="0" maxOccurs="1">
          <xsd:key name="UniqueArgumentParameterNames">
            <xsd:selector xpath="otx:*" />
            <xsd:field xpath="@param" />
          </xsd:key>
        </xsd:element>
      </xsd:sequence>
      <xsd:attribute name="procedure" use="required"</pre>
        type="otx:OtxLink" />
      <xsd:attribute name="throwExceptionOnAmbiguousCall" type="xsd:boolean" default="true" use="optional"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="GetStackTrace">
  <xsd:complexContent>
    <xsd:extension base="otx:ListTerm">
      <xsd:sequence>
        <xsd:element name="exception" type="otx:ExceptionTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="GetExceptionQualifier">
  <xsd:complexContent>
    <xsd:extension base="otx:StringTerm">
      <xsd:sequence>
        <xsd:element name="exception" type="otx:ExceptionTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapGetValueList">
  <xsd:complexContent>
    <xsd:extension base="otx:ListTerm">
      <xsd:sequence>
        <xsd:element name="map" type="otx:MapTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="LogicOr">
  <xsd:complexContent>
    <xsd:extension base="otx:BooleanTerm">
      <xsd:sequence>
        <xsd:element name="term" type="otx:BooleanTerm" minoccurs="2" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="FloatValue">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:FloatTerm">
      <xsd:sequence>
        <xsd:element name="path" type="otx:Path" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
      <xsd:attribute name="valueOf" use="required" type="otx:OtxLink"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapLiteral">
  <xsd:complexContent>
    <xsd:extension base="otx:MapTerm">
      <xsd:sequence>
        <xsd:element name="keyType" type="otx:CountableType" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="valueType" type="otx:DataType" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="items" type="otx:MapItems" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Modulo">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:ArithmeticException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:NumericTerm">
      <xsd:sequence>
        <xsd:element name="numeral" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
```

```
<xsd:element name="divisor" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="StringValue">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:StringTerm">
      <xsd:sequence>
        <xsd:element name="path" type="otx:Path" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
      <xsd:attribute name="valueOf" use="required" type="otx:OtxLink"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ListTerm" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:CollectionTerm"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ListGetLength">
  <xsd:complexContent>
    <xsd:extension base="otx:IntegerTerm">
      <xsd:sequence>
        <xsd:element name="list" type="otx:ListTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="BooleanValue">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:BooleanTerm">
      <xsd:sequence>
        <xsd:element name="path" type="otx:Path" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
      <xsd:attribute name="valueOf" use="required" type="otx:OtxLink"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="InArgument">
  <xsd:sequence>
    <xsd:element name="term" type="otx:Term" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="param" use="required" type="otx:OtxName"/>
</xsd:complexType>
<xsd:complexType name="NumericTerm" abstract="true">
    <xsd:complexContent>
    <xsd:extension base="otx:SimpleTerm"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapContainsValue">
  <xsd:complexContent>
    <xsd:extension base="otx:BooleanTerm">
      <xsd:sequence>
        <xsd:element name="map" type="otx:MapTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="value" type="otx:Term" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ListValue">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:ListTerm">
      <xsd:sequence>
        <xsd:element name="path" type="otx:Path" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
      <xsd:attribute name="valueOf" use="required" type="otx:OtxLink"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapModifier" abstract="true">
  <xsd:complexContent>
```

```
<xsd:extension base="otx:ActionRealisation">
        <xsd:element name="map" type="otx:MapVariable" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="UserExceptionCreate">
  <xsd:complexContent>
    <xsd:extension base="otx:ExceptionTerm">
      <xsd:sequence>
        <xsd:element name="qualifier" type="otx:StringTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="text" type="otx:StringTerm" minOccurs="1" maxOccurs="1"/>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="GlobalConstantDeclaration">
  <xsd:complexContent>
    <xsd:extension base="otx:Declaration">
      <xsd:attribute name="visibility" use="optional" default="PRIVATE" type="otx:Visibility"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ByteFieldTerm" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:Term"/>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="StringLiteral">
  <xsd:complexContent>
    <xsd:extension base="otx:StringTerm">
      <xsd:attribute name="value" use="required" type="xsd:string"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ToFloat">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws>
        <otx:exception xsi:type="otx:OutOfBoundsException"/>
        <otx:exception xsi:type="otx:TypeMismatchException"/>
      </oai:throws>
    </xsd:appinfo>
 </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:FloatTerm">
      <xsd:sequence>
        <xsd:element name="term" type="otx:Term" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Term" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:ExtensionInterface">
      <xsd:sequence>
        <xsd:element name="metaData" type="otx:MetaData" minoccurs="0" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="FloatTerm" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:NumericTerm"/>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ListAppendItems">
  <xsd:complexContent>
    <xsd:extension base="otx:ListModifier">
      <xsd:sequence>
        <xsd:element name="item" type="otx:Term" minoccurs="1" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ByteFieldModifier" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:ActionRealisation">
      <xsd:sequence>
        <xsd:element name="byteField" type="otx:ByteFieldVariable" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="LogicXor">
 <xsd:complexContent>
```

```
<xsd:extension base="otx:BooleanTerm">
        <xsd:element name="term" type="otx:BooleanTerm" minOccurs="2" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="StringTerm" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:SimpleTerm"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="LogicAnd">
  <xsd:complexContent>
    <xsd:extension base="otx:BooleanTerm">
      <xsd:sequence>
        <xsd:element name="term" type="otx:BooleanTerm" minoccurs="2" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapTerm" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:CollectionTerm"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ListContainsValue">
  <xsd:complexContent>
    <xsd:extension base="otx:BooleanTerm">
      <xsd:sequence>
        <xsd:element name="list" type="otx:ListTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="value" type="otx:Term" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="GetExceptionOriginatorNode">
  <xsd:complexContent>
    <xsd:extension base="otx:StringTerm">
      <xsd:sequence>
        <xsd:element name="exception" type="otx:ExceptionTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="BitwiseXor">
  <xsd:complexContent>
    <xsd:extension base="otx:ByteFieldTerm">
      <xsd:sequence>
        <xsd:element name="byteField" type="otx:ByteFieldTerm" minOccurs="2" maxOccurs="2"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="IntegerLiteral">
  <xsd:complexContent>
    <xsd:extension base="otx:IntegerTerm">
      <xsd:attribute name="value" use="required" type="xsd:long"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="BitwiseNot">
  <xsd:complexContent>
    <xsd:extension base="otx:ByteFieldTerm">
      <xsd:sequence>
        <xsd:element name="byteField" type="otx:ByteFieldTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ShiftLeft">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:ByteFieldModifier">
      <xsd:sequence>
        <xsd:element name="positions" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapGetKeyList">
  <xsd:complexContent>
    <xsd:extension base="otx:ListTerm">
```

```
<xsd:sequence>
        <xsd:element name="map" type="otx:MapTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapItems">
    <xsd:element name="item" type="otx:MapItem" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="LogicNot">
  <xsd:complexContent>
    <xsd:extension base="otx:BooleanTerm">
      <xsd:sequence>
        <xsd:element name="term" type="otx:BooleanTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="IsEqual">
  <xsd:complexContent>
    <xsd:extension base="otx:BooleanTerm">
      <xsd:sequence>
        <xsd:element name="term" type="otx:Term" minOccurs="2" maxOccurs="unbounded"/>
      </xsd:sequence>
    </rd></rd></rd></rd>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="IsGreaterOrEqual">
  <xsd:complexContent>
    <xsd:extension base="otx:BooleanTerm">
      <xsd:sequence>
        <xsd:element name="left" type="otx:SimpleTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="right" type="otx:SimpleTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ToBoolean">
  <xsd:complexContent>
    <xsd:extension base="otx:BooleanTerm">
      <xsd:sequence>
        <xsd:element name="term" type="otx:Term" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="IntegerValue">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:IntegerTerm">
      <xsd:sequence>
        <xsd:element name="path" type="otx:Path" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
      <xsd:attribute name="valueOf" use="required" type="otx:OtxLink"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ListModifier" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:ActionRealisation">
      <xsd:sequence>
        <xsd:element name="list" type="otx:ListVariable" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="AppendByteField">
  <xsd:complexContent>
    <xsd:extension base="otx:ByteFieldModifier">
      <xsd:sequence>
        <xsd:element name="otherByteField" type="otx:ByteFieldTerm" minOccurs="1" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Add">
  <xsd:complexContent>
    <xsd:extension base="otx:NumericTerm">
      <xsd:sequence>
        <xsd:element name="numeral" type="otx:NumericTerm" minOccurs="2" maxOccurs="unbounded"/>
      </xsd:sequence>
```

```
</xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapValue">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:MapTerm">
      <xsd:sequence>
        <xsd:element name="path" type="otx:Path" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence
      <xsd:attribute name="valueOf" use="required" type="otx:OtxLink"/>
    </rd></rdiextension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ListLiteral">
  <xsd:complexContent>
    <xsd:extension base="otx:ListTerm">
      <xsd:sequence>
        <xsd:element name="itemType" type="otx:DataType" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="items" type="otx:ListItems" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ToInteger">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws>
        <otx:exception xsi:type="otx:OutOfBoundsException"/>
        <otx:exception xsi:type="otx:TypeMismatchException"/>
      </oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:IntegerTerm">
      <xsd:sequence>
        <xsd:element name="term" type="otx:Term" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapPutItems">
  <xsd:complexContent>
    <xsd:extension base="otx:MapModifier">
      <xsd:sequence>
        <xsd:element name="item" type="otx:MapItem" minOccurs="1" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ShiftRight">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:ByteFieldModifier">
      <xsd:sequence>
        <xsd:element name="positions" type="otx:NumericTerm" minoccurs="1" maxoccurs="1"/>
      </xsd:sequence
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ListInsertItems">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:ListModifier">
        <xsd:element name="index" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="item" type="otx:Term" minOccurs="1" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:simpleType name="PackageName">
  <xsd:restriction base="xsd:string">
    <xsd:pattern value="[a-zA-Z][a-zA-Z0-9]*(\.[a-zA-Z][a-zA-Z0-9]*)*"/>
  </xsd:restriction>
```

```
</xsd:simpleType>
<xsd:complexType name="Validities">
  <xsd:sequence>
    <xsd:element name="validity" type="otx:Validity" minOccurs="1" maxOccurs="unbounded"/>
 </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="SignatureRealisation" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:ExtensionInterface"/>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MutexGroup">
 <xsd:complexContent>
    <xsd:extension base="otx:CompoundNode">
      <xsd:sequence>
        <xsd:element name="realisation" type="otx:Flow" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Subtract">
  <xsd:complexContent>
    <xsd:extension base="otx:NumericTerm">
      <xsd:sequence>
        <xsd:element name="numeral" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="subtrahend" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapItem">
  <xsd:sequence>
    <xsd:element name="key" type="otx:SimpleTerm" minOccurs="1" maxOccurs="1"/>
<xsd:element name="value" type="otx:Term" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="BitwiseOr">
  <xsd:complexContent>
    <xsd:extension base="otx:ByteFieldTerm">
      <xsd:sequence>
        <xsd:element name="byteField" type="otx:ByteFieldTerm" minOccurs="2" maxOccurs="2"/>
      </xsd:sequence>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Multiply">
 <xsd:complexContent>
    <xsd:extension base="otx:NumericTerm">
      <xsd:sequence>
        <xsd:element name="numeral" type="otx:NumericTerm" minOccurs="2" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="GetExceptionText">
  <xsd:complexContent>
    <xsd:extension base="otx:StringTerm">
      <xsd:sequence>
        <xsd:-lement name="exception" type="otx:ExceptionTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="IntegerTerm" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:NumericTerm"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="BooleanTerm" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:SimpleTerm"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Divide">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:ArithmeticException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:NumericTerm">
      <xsd:sequence>
        <xsd:element name="numeral" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="divisor" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
```

```
</xsd:complexType>
<xsd:complexType name="MapContainsKey">
  <xsd:complexContent>
    <xsd:extension base="otx:BooleanTerm">
      <xsd:sequence>
        <xsd:element name="map" type="otx:MapTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="key" type="otx:SimpleTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="BooleanLiteral">
  <xsd:complexContent>
    <xsd:extension base="otx:BooleanTerm">
      <xsd:attribute name="value" use="required" type="xsd:boolean"/>
    </rd></rdiextension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="CatchRealisation">
  <xsd:sequence>
    <xsd:element name="type" type="otx:Exception" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="handle" type="otx:ExceptionVariable" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="SimpleTerm" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:Term"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="OutArgument">
  <xsd:sequence>
    <xsd:element name="variable" type="otx:Variable" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="param" use="required" type="otx:OtxName"/>
</xsd:complexType>
<xsd:complexType name="Arguments">
  <xsd:choice minOccurs="1" maxOccurs="unbounded">
    <xsd:element name="inoutArg" type="otx:InOutArgument" minoccurs="1" maxOccurs="1"/>
<xsd:element name="outArg" type="otx:OutArgument" minoccurs="1" maxOccurs="1"/>
    <xsd:element name="inArg" type="otx:InArgument" minOccurs="1" maxOccurs="1"/>
  </xsd:choice>
</xsd:complexType>
<xsd:complexType name="IsLess">
  <xsd:complexContent>
    <xsd:extension base="otx:BooleanTerm">
      <xsd:sequence>
        <xsd:element name="left" type="otx:SimpleTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="right" type="otx:SimpleTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Round">
  <xsd:complexContent>
    <xsd:extension base="otx:IntegerTerm">
      <xsd:sequence>
        <xsd:element name="numeral" type="otx:NumericTerm" minoccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="IsLessOrEqual">
  <xsd:complexContent>
    <xsd:extension base="otx:BooleanTerm">
      <xsd:sequence>
        <xsd:element name="left" type="otx:SimpleTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="right" type="otx:SimpleTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="InOutArgument">
  <xsd:sequence>
    <xsd:element name="variable" type="otx:Variable" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="param" use="required" type="otx:OtxName"/>
</xsd:complexType>
<xsd:complexType name="Throws">
  <xsd:sequence>
    <xsd:element name="exception" type="otx:Exception" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="ListConcatenate">
  <xsd:complexContent>
    <xsd:extension base="otx:ListModifier">
      <xsd:sequence>
        <xsd:element name="otherList" type="otx:ListTerm" minOccurs="1" maxOccurs="unbounded"/>
```

```
</xsd:sequence>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Assignment">
  <xsd:complexContent>
    <xsd:extension base="otx:ActionRealisation">
        <xsd:element name="result" type="otx:Variable" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="term" type="otx:Term" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ReplaceSubByteField">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:ByteFieldModifier">
      <xsd:sequence>
        <xsd:element name="newByteField" type="otx:ByteFieldTerm" minoccurs="1" maxOccurs="1"/>
        <xsd:element name="index" type="otx:NumericTerm" minoccurs="1" maxoccurs="1"/>
      </xsd:sequence>
    </rd></rdiextension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Exception">
  <xsd:complexContent>
    <xsd:extension base="otx:ComplexType"/>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ExceptionTerm" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:Term"/>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ExceptionValue">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws>
        <otx:exception xsi:type="otx:OutOfBoundsException"/>
        <otx:exception xsi:type="otx:InvalidReferenceException"/>
      </oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:ExceptionTerm">
      <xsd:sequence>
        <xsd:element name="path" type="otx:Path" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
      <xsd:attribute name="valueOf" use="required" type="otx:OtxLink"/>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="CollectionTerm" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:Term"/>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="DocumentVariableDeclaration">
  <xsd:complexContent>
    <xsd:extension base="otx:Declaration">
      <xsd:attribute name="visibility" use="optional" fixed="PRIVATE" type="otx:Visibility"/>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapGetSize">
  <xsd:complexContent>
    <xsd:extension base="otx:IntegerTerm">
      <xsd:sequence>
        <xsd:element name="map" type="otx:MapTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ProcedureSignature">
  <xsd:complexContent>
    <xsd:extension base="otx:SignatureRealisation">
        <xsd:element name="parameters" type="otx:ParameterDeclarations" minOccurs="0" maxOccurs="1">
          <xsd:key name="UniqueSignatureParameterNames">
            <xsd:selector xpath="otx:*"/>
<xsd:field xpath="@name"/>
          </xsd:key>
```

```
<xsd:element name="throws" type="otx:Throws" minOccurs="0" maxOccurs="1"/>
      </xsd:all>
    </rd></rdiextension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Signature">
  <xsd:complexContent>
    <xsd:extension base="otx:NamedAndSpecified">
      <xsd:sequence>
        <xsd:element name="realisation" type="otx:SignatureRealisation" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
      <xsd:attribute name="visibility" use="optional" default="PACKAGE" type="otx:Visibility"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Signatures">
  <xsd:sequence>
    <xsd:element name="signature" type="otx:Signature" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Variable" abstract="true">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
 </rd></rd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:ExtensionInterface">
      <xsd:sequence>
        <xsd:element name="path" type="otx:Path" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
      <xsd:attribute name="name" use="required" type="otx:OtxLink"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ByteField">
  <xsd:complexContent>
    <xsd:extension base="otx:ComplexType">
      <xsd:all>
        <xsd:element name="init" type="otx:ByteFieldLiteral" minOccurs="0" maxOccurs="1"/>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="CatchHeader">
  <xsd:complexContent>
    <xsd:extension base="otx:Header">
      <xsd:sequence>
        <xsd:element name="realisation" type="otx:CatchRealisation" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Break">
  <xsd:complexContent>
    <xsd:extension base="otx:EndNode">
      <xsd:attribute name="target" use="optional" type="otx:OtxName"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Header" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:NamedAndSpecified"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ForEachLoop">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:ConcurrentModificationException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:LoopConfigurationRealisation">
      <xsd:sequence>
        <xsd:element name="locator" type="otx:Variable" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="collection" type="otx:CollectionTerm" minoccurs="1" maxoccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Flow">
    <xsd:choice minOccurs="0" maxOccurs="unbounded">
      <xsd:element name="action" type="otx:Action" minOccurs="1" maxOccurs="1"/>
<xsd:element name="parallel" type="otx:Parallel" minOccurs="1" maxOccurs="1"</pre>
      <xsd:element name="mutex" type="otx:MutexGroup" maxOccurs="1" minOccurs="1"/>
```

```
<xsd:element name="group" type="otx:Group" minOccurs="1" maxOccurs="1"/>
      <xsd:element name="loop" type="otx:Loop" minOccurs="1" maxOccurs="1"/>
      <xsd:element name="handler" type="otx:Handler" minOccurs="1" maxOccurs="1"/>
      <xsd:element name="branch" type="otx:Branch" minOccurs="1" maxOccurs="1"/>
    </xsd:choice>
    <xsd:choice minoccurs="0" maxOccurs="1">
      <xsd:element name="break" type="otx:Break" minOccurs="1" maxOccurs="1"/>
      <xsd:element name="return" type="otx:Return" minOccurs="1" maxOccurs="1"/>
      <xsd:element name="continue" type="otx:Continue" minoccurs="1" maxoccurs="1"/>
      <xsd:element name="throw" type="otx:Throw" minOccurs="1" maxOccurs="1"/>
<xsd:element name="terminateLanes" type="otx:TerminateLanes" minOccurs="1" maxOccurs="1"/>
    </xsd:choice>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="EndNode" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="otx:Node"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ConditionalFlow">
  <xsd:sequence>
    <xsd:element name="condition" type="otx:ConditionHeader" minOccurs="1" maxOccurs="1"/>
<xsd:element name="flow" type="otx:Flow" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Action">
  <xsd:complexContent>
    <xsd:extension base="otx:Node">
      <xsd:sequence>
        <xsd:element name="realisation" type="otx:ActionRealisation" minOccurs="0" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ContextVariableDeclaration">
  <xsd:complexContent>
    <xsd:extension base="otx:Declaration">
      <xsd:attribute name="visibility" use="optional" default="PRIVATE" type="otx:Visibility"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ByteFieldValue">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:ByteFieldTerm">
      <xsd:sequence>
        <xsd:element name="path" type="otx:Path" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
      <xsd:attribute name="valueOf" use="required" type="otx:OtxLink"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ByteFieldLiteral">
  <xsd:complexContent>
    <xsd:extension base="otx:ByteFieldTerm">
      <xsd:attribute name="value" use="required" type="xsd:hexBinary"/>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="AbsoluteValue">
  <xsd:complexContent>
    <xsd:extension base="otx:NumericTerm">
      <xsd:sequence>
        <xsd:element name="numeral" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="IntegerVariable">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
 </xsd:annotation>
 <xsd:complexContent>
    <xsd:extension base="otx:Variable"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="StringVariable">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
```

```
</xsd:annotation>
  <xsd:complexContent>
   <xsd:extension base="otx:Variable"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="SubByteField">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws>
       <otx:exception xsi:type="otx:OutOfBoundsException"/>
      </oai:throws
   </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:ByteFieldTerm">
      <xsd:sequence>
        <xsd:element name="byteField" type="otx:ByteFieldTerm" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="index" type="otx:NumericTerm" minoccurs="1" maxoccurs="1"/>
        <xsd:element name="count" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
   </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ExceptionVariable">
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
   </xsd:appinfo>
 </xsd:annotation>
 <xsd:complexContent>
   <xsd:extension base="otx:Variable"/>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ToByteField">
  <xsd:complexContent>
    <xsd:extension base="otx:ByteFieldTerm">
      <xsd:sequence>
        <xsd:element name="term" type="otx:Term" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
   </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="IsNotEqual">
  <xsd:complexContent>
   <xsd:extension base="otx:BooleanTerm">
      <xsd:sequence>
        <xsd:element name="term" type="otx:Term" minoccurs="2" maxOccurs="unbounded"/>
      </xsd:sequence>
   </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Validity">
  <xsd:complexContent>
    <xsd:extension base="otx:NamedAndSpecified">
      <xsd:sequence>
        <xsd:element name="realisation" type="otx:BooleanTerm" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
      <xsd:attribute name="visibility" use="optional" default="PRIVATE" type="otx:Visibility"/>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="IsValid">
  <xsd:complexContent>
   <xsd:extension base="otx:BooleanTerm">
      <xsd:attribute name="validity" use="required" type="otx:OtxLink"/>
   </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="Path">
  <xsd:choice minOccurs="1" maxOccurs="unbounded">
    <xsd:element name="stepByName" type="otx:StringTerm" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="stepByIndex" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
 </xsd:choice>
</xsd:complexType>
<xsd:complexType name="InvalidReferenceException">
 <xsd:complexContent>
    <xsd:extension base="otx:Exception"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="NamedAndSpecified" abstract="true">
  <xsd:sequence>
    <xsd:element name="specification" type="xsd:string" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="metaData" type="otx:MetaData" minOccurs="0" maxOccurs="1"/>
 </xsd:sequence>
 <p
</xsd:complexType>
```

```
<xsd:simpleType name="Visibility">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="PACKAGE"/>
    <xsd:enumeration value="PRIVATE"/>
    <xsd:enumeration value="PUBLIC"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:complexType name="FloatVariable">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:Variable"/>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="UserException">
  <xsd:complexContent>
    <xsd:extension base="otx:Exception">
      <xsd:all>
        <xsd:element name="init" type="otx:UserExceptionLiteral" minOccurs="0" maxOccurs="1"/>
      </xsd:all>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:simpleType name="OtxName">
  <xsd:restriction base="xsd:string">
    <xsd:pattern value="_*[a-zA-Z][a-zA-Z0-9_]*"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:complexType name="ByteFieldVariable">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
 <xsd:complexContent>
    <xsd:extension base="otx:Variable"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="BooleanVariable">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="otx:Variable"/>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapVariable">
  <xsd:annotation>
    <xsd:appinfo>
      <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
    </xsd:appinfo>
 </xsd:annotation>
 <xsd:complexContent>
    <xsd:extension base="otx:Variable"/>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="TerminateLanes">
  <xsd:complexContent>
    <xsd:extension base="otx:EndNode"/>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ListItems">
  <xsd:sequence>
    <xsd:element name="item" type="otx:Term" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="ListCopy">
  <xsd:complexContent>
    <xsd:extension base="otx:ListTerm">
      <xsd:sequence>
        <xsd:element name="otherList" type="otx:ListTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
 </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="MapCopy">
  <xsd:complexContent>
    <xsd:extension base="otx:MapTerm">
      <xsd:sequence>
        <xsd:element name="otherMap" type="otx:MapTerm" minOccurs="1" maxOccurs="1"/>
      </xsd:sequence>
    </xsd:extension>
```

```
</xsd:complexContent>
  </xsd:complexType>
  <xsd:complexType name="UserExceptionLiteral">
    <xsd:complexContent>
      <xsd:extension base="otx:ExceptionTerm">
        <xsd:sequence>
          <xsd:element name="qualifier" type="otx:StringLiteral" minOccurs="1" maxOccurs="1"/>
          <xsd:element name="text" type="otx:StringLiteral" minOccurs="1" maxOccurs="1"/>
        </xsd:sequence>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
  <xsd:complexType name="Negate">
    <xsd:complexContent>
      <xsd:extension base="otx:NumericTerm">
        <xsd:sequence>
          <xsd:element name="numeral" type="otx:NumericTerm" minOccurs="1" maxOccurs="1"/>
        </xsd:sequence>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
  <xsd:complexType name="DecodeInteger">
    <xsd:annotation>
      <xsd:appinfo>
        <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
      </xsd:appinfo>
    </r></rad:annotation>
    <xsd:complexContent>
      <xsd:extension base="otx:IntegerTerm">
        <xsd:sequence>
          <xsd:element name="bytes" type="otx:ByteFieldTerm" minOccurs="1" maxOccurs="1"/>
        </xsd:sequence>
        <xsd:attribute name="encodingType" use="optional" default="TWOS-COMPLEMENT" type="otx:EncodingType"/>
        <xsd:attribute name="byteOrder" use="optional" default="LITTLE-ENDIAN" type="otx:Endianness"/>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
  <xsd:complexType name="EncodeInteger">
    <xsd:annotation>
      <xsd:appinfo>
        <oai:throws><otx:exception xsi:type="otx:OutOfBoundsException"/></oai:throws>
      </xsd:appinfo>
    </xsd:annotation>
    <xsd:complexContent>
      <xsd:extension base="otx:ByteFieldTerm">
        <xsd:sequence>
          <xsd:element name="integer" type="otx:IntegerTerm" minOccurs="1" maxOccurs="1"/>
        </xsd:sequence>
        <xsd:attribute name="encodingType" use="optional" default="TWOS-COMPLEMENT" type="otx:EncodingType"/>
<xsd:attribute name="encodingSize" use="optional" default="64-BIT" type="otx:EncodingSize"/>
        <xsd:attribute name="byteOrder" use="optional" default="LITTLE-ENDIAN" type="otx:Endianness"/>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
  <xsd:simpleType name="Endianness">
    <xsd:restriction base="xsd:string">
      <xsd:enumeration value="LITTLE-ENDIAN"/>
      <xsd:enumeration value="MIXED-ENDIAN"/>
      <xsd:enumeration value="BIG-ENDIAN"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:simpleType name="EncodingSize">
  <xsd:restriction base="xsd:string">
      <xsd:enumeration value="8-BIT"/>
      <xsd:enumeration value="16-BIT"/>
      <xsd:enumeration value="32-BIT"/>
      <xsd:enumeration value="64-BIT"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:simpleType name="EncodingType">
    <xsd:restriction base="xsd:string">
      <xsd:enumeration value="UNSIGNED"/>
      <xsd:enumeration value="SIGNED-BINARY"/>
      <xsd:enumeration value="TWOS-COMPLEMENT"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:simpleType name="OtxId">
    <xsd:restriction base="xsd:string">
      <xsd:pattern value="[a-zA-Z0-9\\\-\.\|:_#/]+"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:simpleType name="OtxIdRef">
    <xsd:restriction base="xsd:string">
      <xsd:pattern value="[a-zA-Z0-9\\\-\.\|:_#/]+"/>
    </xsd:restriction>
  </xsd:simpleType>
</xsd:schema>
```

F.3 OTX Applnfo Schema (Auxiliaries/otxApplnfo.xsd)

```
<?xml version="1.0" encoding="UTF-8"?>
<:xad: velsion= 1.0" encouring="Off-0":
</pre>

/ sed schema xmlns:xsd="http://iso.org/OTX/1.0.0/Auxiliaries/AppInfo"
xmlns:oai=" http://iso.org/OTX/1.0.0/Auxiliaries/AppInfo"
xmlns:otx="http://iso.org/OTX/1.0.0"
   elementFormDefault="qualified" version="1.0.0">
   <xsd:import namespace="http://iso.org/OTX/1.0.0" schemaLocation="../Core/otx.xsd"/>
   <xsd:element name="throws" type="otx:Throws"/>
</xsd:schema>
```

Bibliography

- [1] James Gosling, Bill Joy, Guy Steele, Gilad Bracha: *The Java™ Language Specification Third Edition*. Addison-Wesley, Boston, 2005. ISBN: 0-321-24678-0
- [2] The Unicode Consortium: *The Unicode Standard, Version 6.0 Core Specification.* The Unicode Consortium, Mountain View CA, 2011. ISBN 978-1-936213-01-6
- [3] ISO/IEC 7498-1:1994, Information technology Open Systems Interconnection Basic Reference Model: The Basic Model
- [4] ISO 8601:2004, Data elements and interchange formats Information interchange Representation of dates and times
- [5] ISO 8879:1986, Information processing Text and office systems Standard Generalized Markup Language (SGML)
- [6] ISO 14229 (all parts), Road vehicles Unified diagnostic services (UDS)
- [7] ISO 22900 (all parts), Road vehicles Modular vehicle communication interface (MVCI)
- [8] ISO 13209-3, Road vehicles Open Test sequence eXchange format (OTX) Part 3: Standard extensions and requirements



ICS 43.020

Price based on 205 pages