BS EN ISO 4018:2011



BSI Standards Publication

Hexagon head screws — Product grade C



BS EN ISO 4018:2011

National foreword

This British Standard is the UK implementation of EN ISO 4018:2011. It supersedes BS EN ISO 4018:2001, which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee FME/9/3, Fasteners - Product Standards.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© BSI 2011

ISBN 978 0 580 71152 7

ICS 21.060.10

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 April 2011.

Amendments issued since publication

Date Text affected

EUROPEAN STANDARD

EN ISO 4018

NORME EUROPÉENNE EUROPÄISCHE NORM

April 2011

ICS 21.060.10

Supersedes EN ISO 4018:2000

English Version

Hexagon head screws - Product grade C (ISO 4018:2011)

Vis à tête hexagonale entièrement filetées - Grade C (ISO 4018:2011)

Sechskantschrauben mit Gewinde bis Kopf - Produktklasse C (ISO 4018:2011)

This European Standard was approved by CEN on 31 January 2011.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

BS EN ISO 4018:2011 EN ISO 4018:2011 (E)

Foreword

This document (EN ISO 4018:2011) has been prepared by Technical Committee ISO/TC 2 " Fasteners" in collaboration with Technical Committee CEN/TC 185 "Fasteners", the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by October 2011, and conflicting national standards shall be withdrawn at the latest by October 2011.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN ISO 4018:2000.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

Endorsement notice

The text of ISO 4018:2011 has been approved by CEN as a EN ISO 4018:2011 without any modification.

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 4018 was prepared by Technical Committee ISO/TC 2, Fasteners, Subcommittee SC 10, Product standards for fasteners.

This fourth edition cancels and replaces the third edition (ISO 4018:1999), of which it constitutes a minor revision.

Introduction

This International Standard belongs to a complete family of product standards developed by ISO on external hexagon drive fasteners. It comprises the following:

- a) hexagon head bolts (ISO 4014, ISO 4015, ISO 4016 and ISO 8765);
- b) hexagon head screws (ISO 4017, ISO 4018 and ISO 8676);
- c) hexagon nuts (ISO 4032, ISO 4033, ISO 4034, ISO 4035, ISO 4036, ISO 7040, ISO 7041, ISO 7042, ISO 7719, ISO 7720, ISO 8673, ISO 8674, ISO 8675, ISO 10511, ISO 10512 and ISO 10513);
- d) hexagon bolts with flange (ISO 4162, ISO 15071 and ISO 15072);
- e) hexagon nuts with flange (ISO 4161, ISO 7043, ISO 7044, ISO 10663, ISO 12125, ISO 12126 and ISO 21670).

Hexagon head screws —Product grade C

1 Scope

This International Standard specifies the characteristics of hexagon head screws with threads from M5 up to and including M64, of product grade C.

NOTE This type of product is the same as that covered by ISO 4016 with the exception of threading up to head.

If, in special cases, specifications other than those listed in this International Standard are required, they can be selected from existing International Standards, for example ISO 724, ISO 888, ISO 898-1, ISO 965-1 and ISO 4759-1.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 225, Fasteners —Bolts, screws, st uds and nuts —Symbols and descriptions of dimensions

ISO 724, ISO general-purpose metric screw threads —Basic dimensions

ISO 898-1, Mechanical properties of fasteners made of carbon steel and alloy steel — Part 1: Bolts, screws and studs with specified property classes — Coarse thread and fine pitch thread

ISO 965-1, ISO general-purpose metric screw threads —Tolerances —Part 1: Principles and basic data

ISO 3269, Fasteners — Acceptance inspection

ISO 4042, Fasteners —Electroplated coatings

ISO 4759-1, Tolerances for fasteners —Part 1: Bolts, screws, studs and nuts —Product grades A, B and C


ISO 8992, Fasteners — General requirements fo r bolts, screws, studs and nuts

ISO 10683, Fasteners —Non-electrolytically applied zinc flake coatings

3 Dimensions

See Figure 1 and Tables 1 and 2.

Symbols and descriptions of dimensions are specified in ISO 225.

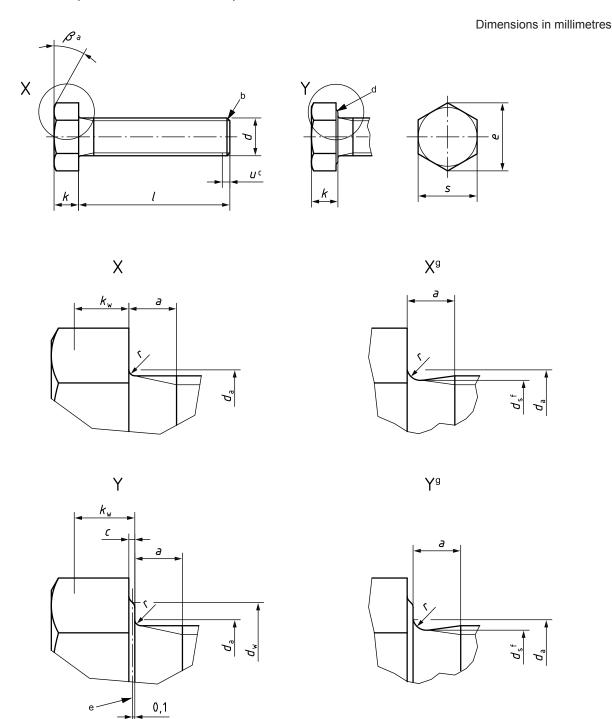

- a $\beta = 15^{\circ} \text{ to } 30^{\circ}.$
- b End without special requirements.
- Incomplete thread $u \leq 2P$.
- d Washer face permissible.
- e Reference datum for $d_{\rm w}$.
- f $d_{s} \approx \text{pitch diameter.}$
- g Permissible shape.

Figure 1

Table 1 —Preferred threads

Thread, d	p		M5	M6	M8	M10	M12	M16	M20	M24	M30	M36	M42	M48	M56	M64
p_{g}			8,0	1	1,25	1,5	1,75	2	2,5	3	3,5	4	4,5	2	2,5	9
		max.	2,4	3	4	4,5	5,3	9	7,5	6	10,5	12	13,5	15	16,5	18
z	=	min.	0,8	_	1,25	1,5	1,75	2	2,5	3	3,5	4	4,5	2	2,5	9
С		max.	0,5	0,5	9,0	9,0	9,0	8,0	8,0	8,0	8,0	8,0	1	_	-	~
$d_{\mathbf{a}}$		max.	9	7,2	10,2	12,2	14,7	18,7	24,4	28,4	35,4	42,4	48,6	9,95	29	75
d_{w}		min.	6,74	8,74	11,47	14,47	16,47	22	27,7	33,25	42,75	51,11	26.62	69,45	78,66	88,16
в		min.	8,63	10,89	14,2	17,59	19,85	26,17	32,95	39,55	50,85	60,79	71,3	82,6	93,56	104,86
		nom.	3,5	4	5,3	6,4	7,5	10	12,5	15	18,7	22,5	26	30	35	40
k		max.	3,875	4,375	5,675	6,85	7,95	10,75	13,4	15,9	19,75	23,55	27,05	31,05	36,25	41,25
		min.	3,125	3,625	4,925	26'9	7,05	9,25	11,6	14,1	17,65	21,45	24,95	28,95	33,75	38,75
$k_{\rm w}^{ m b}$		min.	2,19	2,54	3,45	4,17	4,94	6,48	8,12	9,87	12,36	15,02	17,47	20,27	23,63	27,13
r		min.	0,2	0,25	0,4	0,4	9,0	9,0	8,0	0,8	1	_	1,2	1,6	2	2
ì	mom.	. = max.	8,00	10,00	13,00	16,00	18,00	24,00	30,00	36	46	55,0	65,0	75,0	85,0	95,0
'n		min.	7,64	9,64	12,57	15,57	17,57	23,16	29,16	35	45	53,8	63,1	73,1	82,8	92,8
	l _C															
nom.	min.	max.														
10	9,25	10,75														
12	11,1	12,9														
16	15,1	16,9														
20	18,95	21,05														
25	23,95	26,05														
30	28,95	31,05														
35	33,75	36,25														
40	38,75	41,25														
45	43,75	46,25														
20	48,75	51,25														
22	53,5	56,5														
09	58,5	61,5														
9	63,5	66,5														
70	68,5	71,5														
80	78,5	81,5														

Dimensions in millimetres

Table 1 (continued)

Thre	Thread, d			M5	M6	M8	M10	M12	M16	M20	M24	M30	M36	M42	M48	M56	M64
	1	l _c															
no	nom. m	min.	max.														
σ	88 06	88,25	91,75														
1	100	98,25	101,75														
7	110 108	108,25	111,75														
1;	120 118	118,25	121,75														
7	130 13	128	132			_											
1,	140 1	138	142			_											
1,	150 14	148	152														
1(160 1	156	164			_											
~	180	176	184			_											
7	200 19	195,4	204,6														
5	220 21	215,4	224,6														
5	240 23	235,4	244,6														
2(260 25	254,8	265,2														
28	280 27	274,8	285,2			_											
3(300 29	294,8	305,2														
37	320 31	314,3	325,7			_											
Š	340 33	334,3	345,7			_											
36	360 35	354,3	365,7														
ñ	380 37	374,3	385,7														
4	400 39	394,3	405,7			_											
4	420 41	413,7	426,3														
4	440 43	433,7	446,3														
4	460 45	453,7	466,3														
4	480 47	473,7	486,3														
2(500 49	493,7	506,3														
Ø	${\it P}$ is the pitch of the thread.	ch of th€	e thread.														
Q	$k_{\rm W,min}=0,7~k_{\rm min}.$	7 k_{min}															
O	The range	of prefe	erred length	s is betwee	The range of preferred lengths is between the solid, bold, stepped lines.	, bold, step	ped lines.										

Table 2 —Non-preferred threads

Dimensions in millimetres

Thread, d			M14	M18	M22	M27	M33	M39	M45	M52	M60
pa			2	2,5	2,5	က	3,5	4	4,5	5	5,5
		max.	9	7,5	7,5	0	10,5	12	13,5	15	16,5
a		min.	2	2,5	2,5	က	3,5	4	4,5	5	5,5
2		max.	9,0	8'0	0,8	8,0	8,0	1	1	1	1
d_{a}		max.	16,7	21,2	26,4	32,4	38,4	45,4	52,6	62,6	71
^{M}p		min.	19,15	24,85	31,35	38	46,55	55,86	64,7	74,2	83,41
е		min.	22,78	29,56	37,29	45,2	55,37	66,44	76,95	88,25	99,21
		nom.	8,8	11,5	41	17	21	25	28	33	38
k		max.	9,25	12,4	14,9	17,9	22,05	26,05	29,05	34,25	39,25
		min.	8,35	10,6	13,1	16,1	19,95	23,95	26,95	31,75	36,75
$k_{\mathbf{w}}^{b}$		min.	5,85	7,42	9,17	11,27	13,97	16,77	18,87	22,23	25,73
r		min.	0,6	9'0	0,8	1	1	1	1,2	1,6	2
3		nom. = max.	21,00	27,00	34	41	20	0'09	0,07	80,0	0,06
'n		min.	20,16	26,16	33	40	49	58,8	68,1	78,1	87,8
	ol										
nom.	min.	max.									
30	28,95	31,05									
32	33,75	36,25									
40	38,75	41,25									
45	43,75	46,25									
09	48,75	51,25									
99	53,5	56,5									
09	28,2	61,5									
9	63,5	66,5									
02	68,5	71,5									
08	78,5	81,5	_								
06	88,25	91,75									
100	98,25	101,75									
110	108,25	111,75	_								
120	118,25	121,75									
130	128	132									

Table 2 (continued)

Thread, d			M14	M18	M22	M27	M33	M39	M45	M52	M60
	ρl										
nom.	min.	max.									
140	138	142									
150	148	152									
160	156	164									
180	176	184									
200	195,4	204,6									
220	215,4	224,6									
240	235,4	244,6									
260	254,8	265,2									
280	274,8	285,2									
300	294,8	305,2									
320	314,3	325,7									
340	334,3	345,7									
360	354,3	365,7									
380	374,3	385,7									
400	394,3	405,7									
420	413,7	426,3									
440	433,7	446,3									
460	453,7	466,3									
480	473,7	486,3									
200	493,7	506,3									
a P is the p	P is the pitch of the thread.										
b $k_{w, min} = 0,7 k_{min}$.	0,7 <i>k</i> min.										
i		The control of both and the control of the control	4 F1 C C C C	(((((((((((((((((((

4 Specifications and reference International Standards

See Table 3.

Table 3 —Specifications and reference International Standards

Material		Steel
General requirements	International Standard	ISO 8992
Thread	Tolerance class	8g
Tilleau	International Standard	ISO 724, ISO 965-1
Machanical property	Property class ^a	$d \le 39 \text{ mm: } 4.6, 4.8$ d > 39 mm: as agreed
Mechanical property	International Standard	$d \leqslant$ 39 mm: ISO 898-1 $d >$ 39 mm: as agreed
Tolerance	Product grade	С
Tolerance	International Standard	ISO 4759-1
		As processed
		Requirements for electroplating are specified in ISO 4042.
Finish —Coating		Requirements for non-electrolytically applied zinc flake coatings are specified in ISO 10683.
		Additional requirements or other finishes or coatings shall be agreed between the supplier and the purchaser.
Acceptability		Acceptance inspection is specified in ISO 3269.
a Other property classes ar	re specified in ISO 898-1.	

5 Designation

EXAMPLE A hexagon head screw, product grade C, with thread M12, nominal length l = 80 mm and property class 4.6 is designated as follows:

Hexagon head screw ISO 4018 - M12 \times 80 - 4.6

Bibliography

- [1] ISO 888, Bolts, screws and studs —Nominal lengths, and thread lengths for general purpose bolts
- [2] ISO 4014, Hexagon head bolts —Product grades A and B
- [3] ISO 4015, Hexagon head bolts —Product grade B —Reduced shank (shank diameter approximately equal to pitch diameter)
- [4] ISO 4016, Hexagon head bolts —Product grade C
- [5] ISO 4017, Hexagon head screws —Product grades A and B
- [6] ISO 4032, Hexagon nuts, style 1 —Product grades A and B
- [7] ISO 4033, Hexagon nuts, style 2 —Product grades A and B
- [8] ISO 4034, Hexagon nuts —Product grade C
- [9] ISO 4035, Hexagon thin nuts (chamfered) —Product grades A and B
- [10] ISO 4036, Hexagon thin nuts (unchamfered) —Product grade B
- [11] ISO 4161, Hexagon nuts with flange —Coarse thread
- [12] ISO 4162, Hexagon flange bolts —Small series
- [13] ISO 7040, Prevailing torque type hexagon nuts (with non-metallic insert), style 1 Property classes 5, 8 and 10
- [14] ISO 7041, Prevailing torque type hexagon nuts (with non-metallic insert), style 2 —Property classes 9 and 12
- [15] ISO 7042, Prevailing torque type all-metal hexagon nuts, style 2 —Property classes 5, 8, 10 and 12
- [16] ISO 7043, Prevailing torque type hexagon nuts with flange (with non-metallic insert) Product grades A and B
- [17] ISO 7044, Prevailing torque type all-metal hexagon nuts with flange —Product grades A and B
- [18] ISO 7719, Prevailing torque type all-metal hexagon nuts, style 1 —Property classes 5, 8 and 10
- [19] ISO 7720, Prevailing torque type all-metal hexagon nuts, style 2 —Property class 9
- [20] ISO 8673, Hexagon nuts, style 1, with metric fine pitch thread —Product grades A and B
- [21] ISO 8674, Hexagon nuts, style 2, with metric fine pitch thread —Product grades A and B
- [22] ISO 8675, Hexagon thin nuts (chamfered) with metric fine pitch thread —Product grades A and B
- [23] ISO 8676, Hexagon head screws with metric fine pitch thread —Product grades A and B
- [24] ISO 8765, Hexagon head bolts with metric fine pitch thread —Product grades A and B
- [25] ISO 10511, Prevailing torque type hexagon thin nuts (with non-metallic insert)

- [26] ISO 10512, Prevailing torque type hexagon nuts (with non-metallic insert), style 1, with metric fine pitch thread —Property classes 6, 8 and 10
- [27] ISO 10513, Prevailing torque type all-metal hexagon nuts, style 2, with metric fine pitch thread— Property classes 8, 10 and 12
- [28] ISO 10663, Hexagon nuts with flange —Fine pitch thread
- [29] ISO 12125, Prevailing torque type hexagon nuts with flange (with non-metallic insert) with metric fine pitch thread —Product grades A and B
- [30] ISO 12126, Prevailing torque type all-metal hexagon nuts with flange with metric fine pitch thread— Product grades A and B
- [31] ISO 15071, Hexagon bolts with flange —Small series —Product grade A
- [32] ISO 15072, Hexagon bolts with flange with metric fine pitch thread —Small series —Product grade A
- [33] ISO 21670, Hexagon weld nuts with flange





British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards -based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com
Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070 Email: copyright@bsigroup.com

